

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1804.5 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	59.8V x 62.2H
	At 50% of Imax	42.9V x 46.3H
	At 90% of Imax	30.7V x 34.4H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	897.4 lumens per klm.
	To 50% of Imax	724.6 lumens per klm.
	To 90% of Imax	412.4 lumens per klm.
	Upward LOR	1.3 %
	Downward LOR	98.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-01-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.13V I:0.5663A P:4.759W PF:0.6929 Freq:60.08Hz Lamp Flux:303.654x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:5W 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:WITH SHROUD

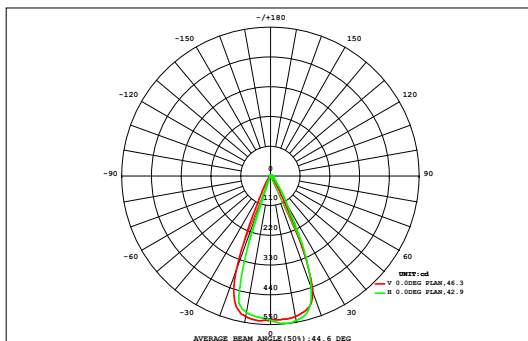

DATA OF LAMP		Eff:63.81lm/W	
MODEL	D3A2-5W-27K-BZ	Imax (cd)	547.9
NOMINAL POWER (W)	5	AVAILABILITY (%)	89.1
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	270.4
NOMINAL FLUX (lm)	303.654	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	303.7
TEST VOLTAGE (V)	12	θ @50% (H,V)	46,43DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.03	0.05	0.06	0.08	0.11	0.14	0.18	0.21	0.24	0.24	0.21	0.18	0.14	0.11	0.08	0.06	0.05	0.03	2.20	0.00
45	0.03	0.05	0.06	0.08	0.11	0.14	0.18	0.21	0.24	0.24	0.21	0.18	0.14	0.11	0.08	0.06	0.05	0.03	2.20	0.00
40	0.04	0.05	0.08	0.11	0.16	0.22	0.28	0.35	0.41	0.41	0.36	0.29	0.22	0.16	0.11	0.08	0.05	0.04	3.42	0.58
35	0.04	0.06	0.10	0.15	0.24	0.35	0.49	0.62	0.72	0.72	0.63	0.51	0.37	0.25	0.16	0.10	0.07	0.04	5.62	3.78
30	0.05	0.08	0.13	0.22	0.36	0.56	0.81	1.10	1.36	1.38	1.16	0.86	0.61	0.40	0.24	0.14	0.08	0.05	9.57	8.23
25	0.05	0.09	0.16	0.30	0.53	0.91	1.55	2.23	2.66	2.72	2.40	1.77	1.05	0.60	0.34	0.18	0.10	0.06	17.7	16.6
20	0.06	0.10	0.20	0.40	0.78	1.61	2.65	3.35	3.66	3.69	3.49	2.97	1.99	0.96	0.47	0.24	0.12	0.06	26.8	25.8
15	0.06	0.11	0.24	0.50	1.15	2.44	3.45	3.88	4.04	4.05	3.93	3.63	2.91	1.57	0.63	0.29	0.13	0.07	33.1	32.2
10	0.06	0.11	0.26	0.58	1.53	3.01	3.76	4.02	4.13	4.13	4.03	3.84	3.39	2.15	0.81	0.33	0.15	0.07	36.4	35.6
5	0.05	0.11	0.25	0.59	1.73	3.23	3.84	4.04	4.11	4.10	4.03	3.88	3.56	2.47	0.93	0.34	0.14	0.06	37.5	36.7
0	0.05	0.10	0.23	0.53	1.59	3.11	3.80	4.00	4.04	4.02	3.99	3.84	3.43	2.33	0.86	0.32	0.13	0.06	36.4	35.6
-5	0.04	0.08	0.19	0.41	1.15	2.55	3.58	3.90	3.96	3.96	3.91	3.66	2.93	1.77	0.64	0.26	0.11	0.05	33.1	32.3
-10	0.03	0.06	0.14	0.29	0.66	1.58	2.73	3.52	3.76	3.76	3.56	2.91	2.05	1.08	0.42	0.19	0.09	0.04	26.9	25.9
-15	0.03	0.05	0.09	0.18	0.34	0.70	1.29	1.92	2.27	2.31	2.06	1.61	1.08	0.52	0.25	0.13	0.06	0.03	14.9	13.8
-20	0.02	0.03	0.06	0.10	0.18	0.28	0.43	0.55	0.54	0.60	0.73	0.64	0.41	0.24	0.15	0.08	0.04	0.03	5.12	3.24
-25	0.02	0.02	0.04	0.06	0.09	0.12	0.15	0.15	0.13	0.15	0.21	0.20	0.17	0.12	0.08	0.05	0.03	0.02	1.81	0.00
-30	0.01	0.02	0.02	0.03	0.04	0.06	0.06	0.06	0.04	0.05	0.07	0.08	0.07	0.06	0.04	0.03	0.02	0.01	0.78	0.00
-35	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.36	0.00
-40	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.01	0.02	0.02	0.01	0.01	0.01	0.01	0.18	0.00
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	0.65	1.15	2.26	4.57	10.7	20.9	29.1	33.9	36.1	36.3	34.8	30.9	24.4	14.8	6.25	2.86	1.40	0.74	292	---
Φ a	0.00	0.00	0.00	2.81	9.36	19.8	28.1	33.1	35.3	35.5	34.0	30.0	23.4	13.6	4.73	0.59	0.00	0.00	---	270

one-half-peak spread: U:21.9,D:18.1 , L:17.0,R:18.4


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-01-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.13V I:0.5663A P:4.759W PF:0.6929 Freq:60.08Hz Lamp Flux:303.654x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:5W 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:WITH SHROUD

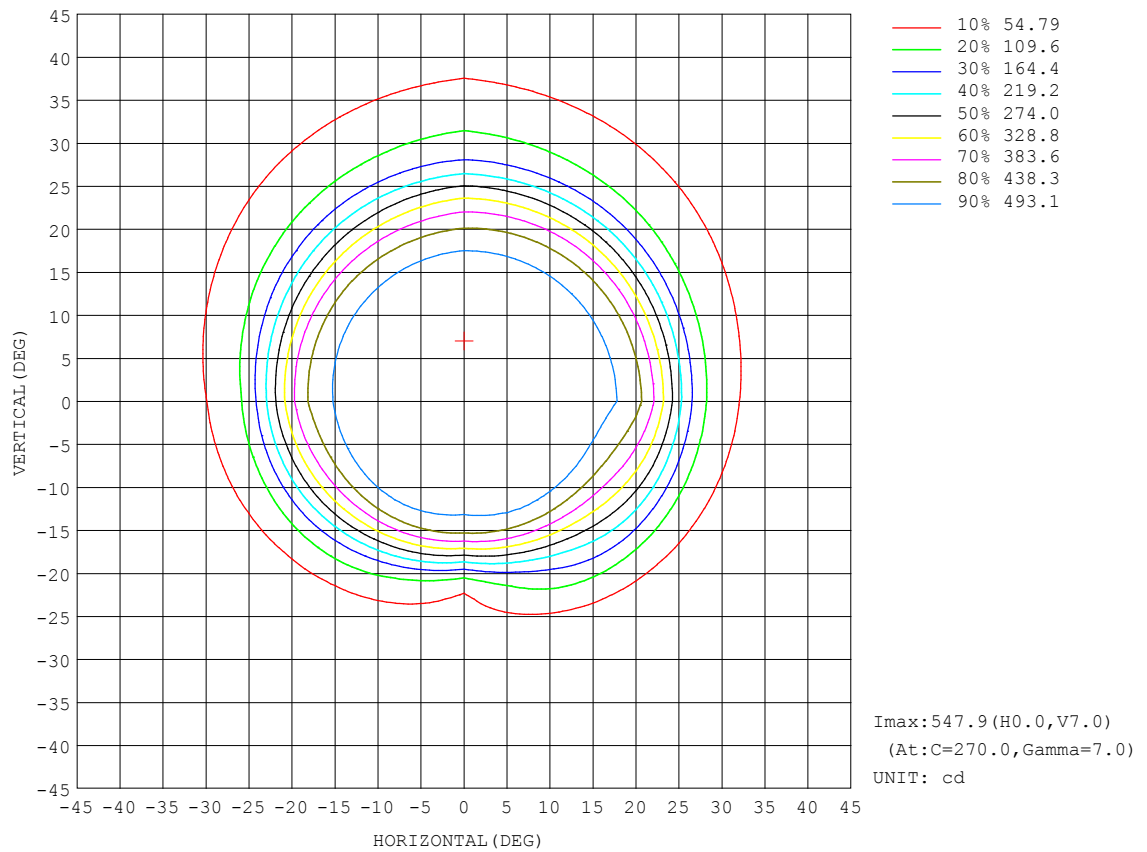


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-01-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.13V I:0.5663A P:4.759W PF:0.6929 Freq:60.08Hz Lamp Flux:303.654x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:5W 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:WITH SHROUD

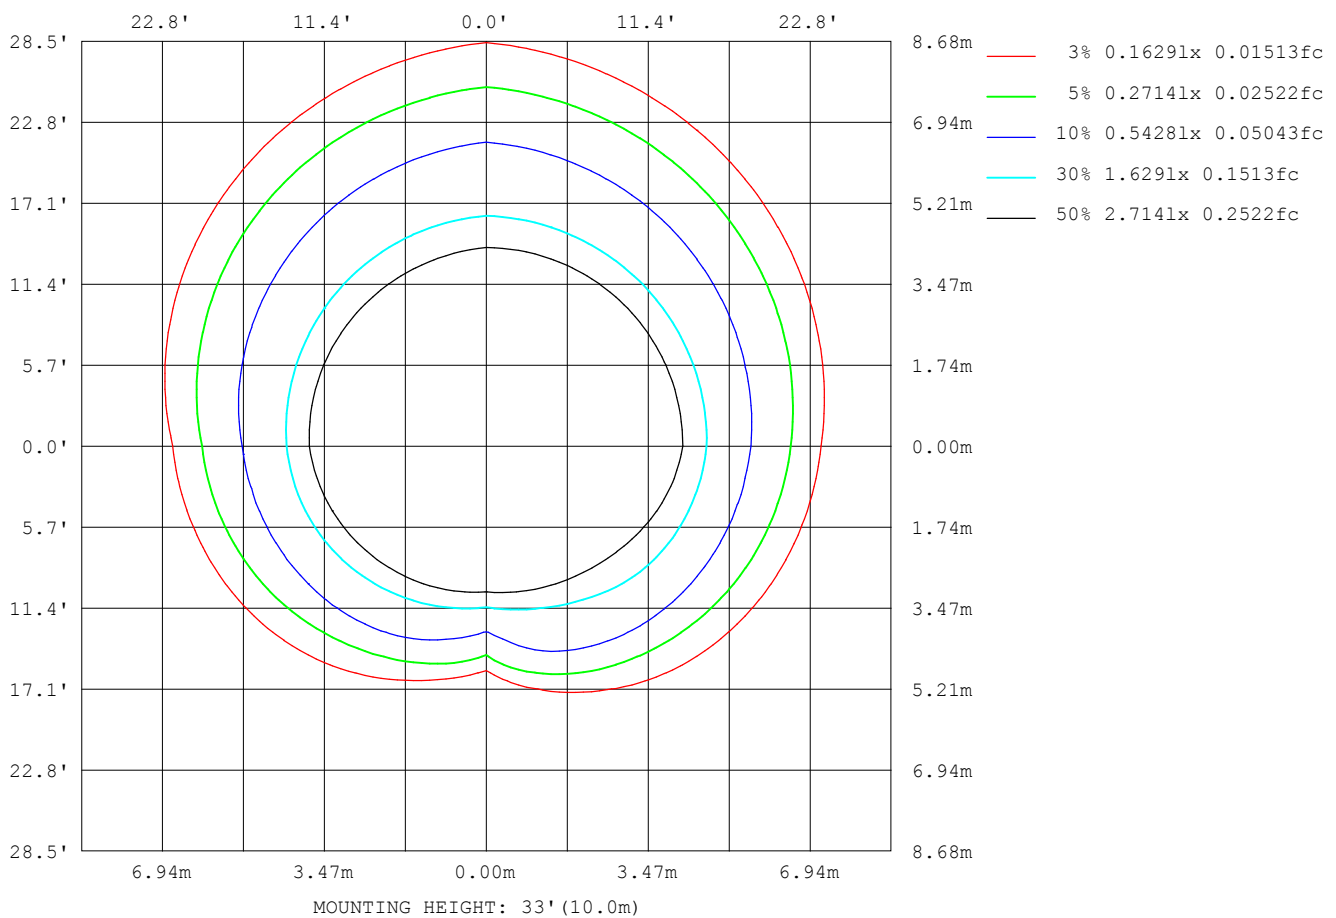

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-01-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

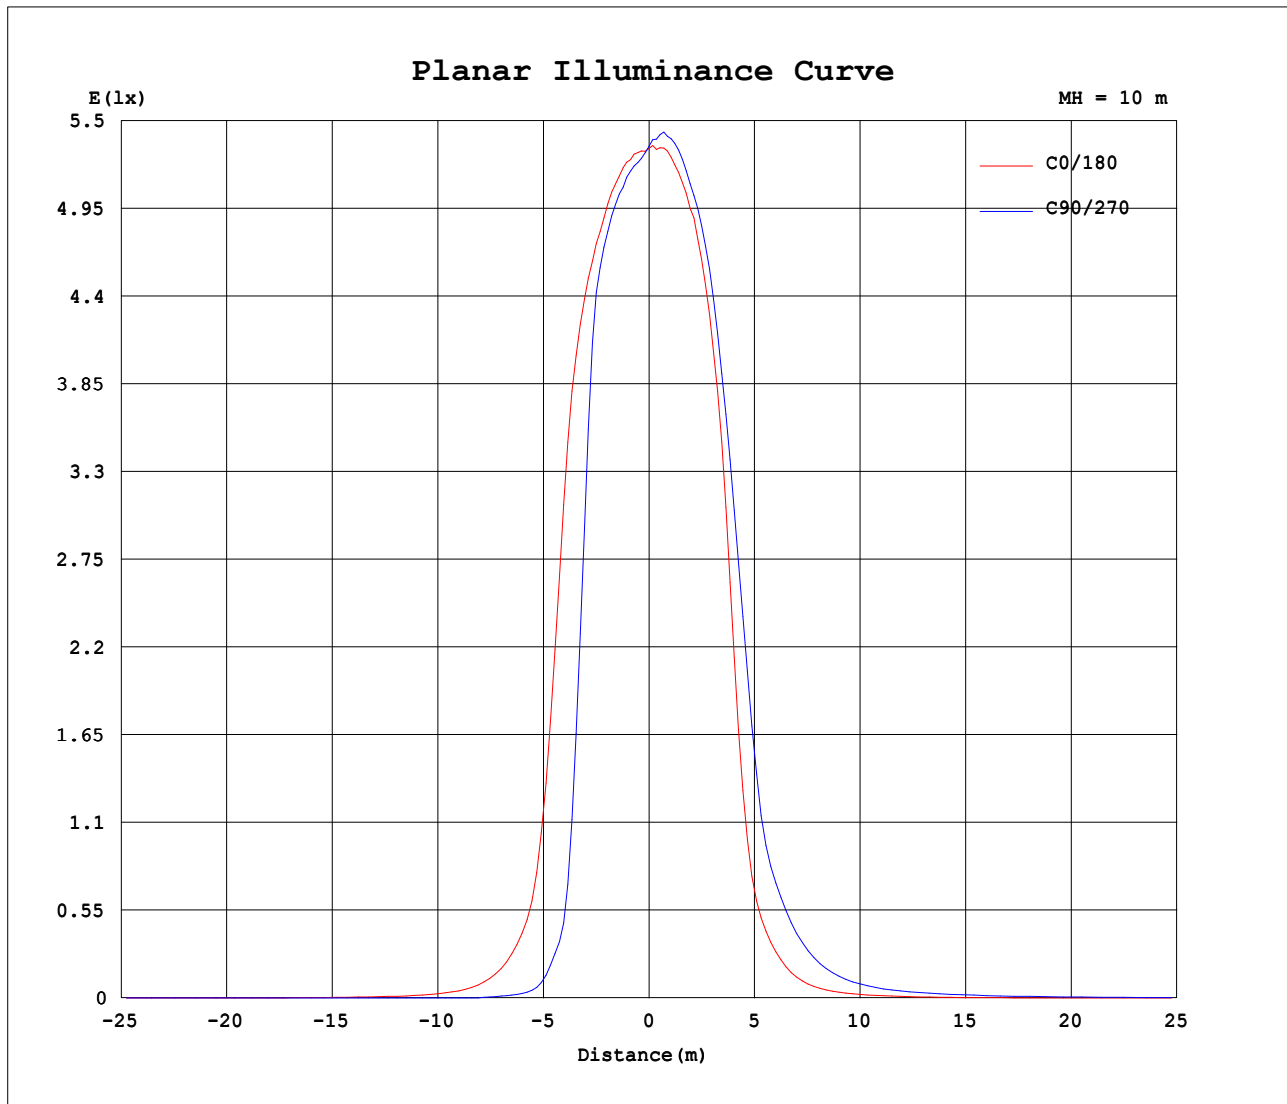


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-01-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.13V I:0.5663A P:4.759W PF:0.6929 Freq:60.08Hz Lamp Flux:303.654x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:5W 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:WITH SHROUD

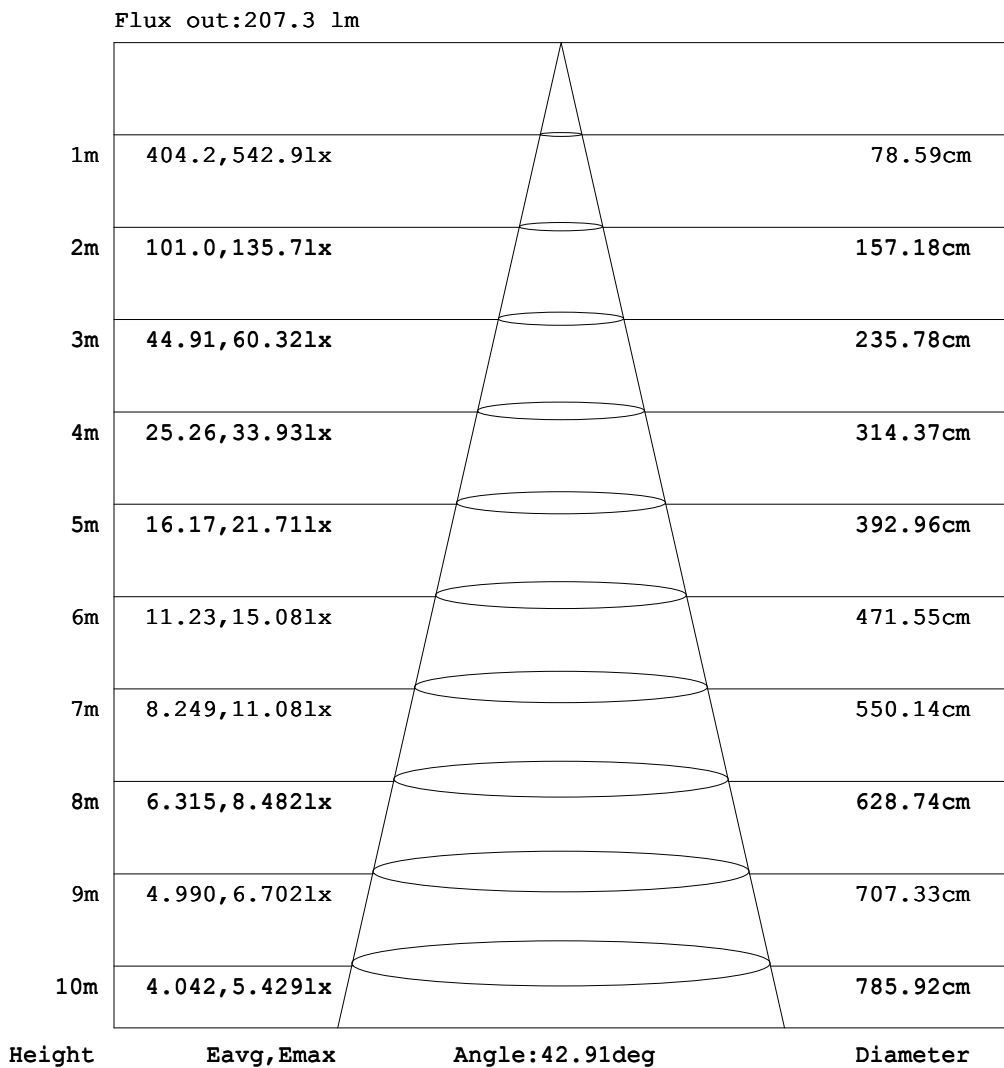

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-01-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.13V I:0.5663A P:4.759W PF:0.6929 Freq:60.08Hz Lamp Flux:303.654x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:5W 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:WITH SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.66	1.14	1.69	2.26	2.70	3.14	3.61	4.02	4.11
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.26	0.67	1.20	1.75	2.33	2.86	3.31	3.68	3.98	4.18
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.18	0.52	0.98	1.47	1.99	2.51	2.97	3.37	3.70	3.95
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.13	0.27	0.59	0.95	1.36	1.75	2.13	2.46	2.72	2.89
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.13	0.25	0.41	0.65	0.91	1.15	1.36	1.53	1.65
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.12	0.20	0.28	0.38	0.48	0.56	0.62
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.05	0.06
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.01	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.08	0.10	0.13	0.18	0.22	0.22	0.20	0.15	0.08	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.11	0.21	0.43	0.61	0.78	0.91	0.92	0.87	0.74	0.54	0.28
-40	0.00	0.00	0.00	0.00	0.00	0.09	0.15	0.39	0.79	1.22	1.60	1.89	2.14	2.30	2.31	2.15	1.69	0.94	0.00
-30	0.00	0.00	0.00	0.00	0.01	0.13	0.40	0.95	1.65	2.29	3.03	3.92	5.17	7.21	9.97	12.1	12.5	10.3	5.68
-20	0.00	0.00	0.00	0.00	0.09	0.22	0.76	1.59	2.53	3.66	5.32	8.45	15.1	26.7	42.8	76.6	116	144	135
-10	0.00	0.00	0.00	0.00	0.12	0.34	1.08	2.17	3.38	5.21	8.63	16.8	35.7	72.7	198	379	494	512	513
0	0.00	0.00	0.00	0.00	0.13	0.42	1.24	2.49	3.97	6.36	11.3	23.8	53.8	134	371	496	528	537	533
10	0.00	0.01	0.03	0.09	0.32	0.69	1.67	3.11	4.85	7.74	13.4	26.4	55.2	116	288	458	517	535	543
20	0.00	0.02	0.06	0.17	0.44	0.85	1.81	3.24	5.03	7.62	12.1	20.8	38.1	68.5	118	222	338	412	441
30	0.00	0.02	0.08	0.22	0.46	0.93	1.70	2.97	4.63	6.58	9.45	14.0	21.3	33.0	50.4	72.3	94.9	114	127
40	0.00	0.03	0.09	0.24	0.48	0.92	1.48	2.39	3.71	5.27	7.05	9.24	12.2	16.0	20.8	26.4	32.3	37.6	41.2
50	0.00	0.03	0.09	0.22	0.44	0.76	1.26	1.84	2.64	3.74	4.97	6.35	7.83	9.34	11.0	12.6	14.2	15.6	16.7
60	0.00	0.04	0.09	0.18	0.34	0.59	0.91	1.32	1.85	2.43	3.09	3.86	4.73	5.65	6.53	7.42	8.23	8.95	9.55
70	0.00	0.04	0.08	0.14	0.24	0.38	0.56	0.80	1.08	1.41	1.78	2.17	2.58	3.02	3.45	3.86	4.25	4.61	4.92
80	0.00	0.04	0.08	0.12	0.17	0.22	0.29	0.37	0.47	0.59	0.71	0.85	1.00	1.14	1.29	1.43	1.57	1.69	1.80
90	0.00	0.04	0.07	0.11	0.15	0.19	0.22	0.26	0.30	0.33	0.37	0.41	0.45	0.48	0.52	0.56	0.60	0.63	0.67
100	0.00	0.04	0.07	0.10	0.13	0.16	0.19	0.22	0.24	0.26	0.29	0.31	0.33	0.35	0.37	0.39	0.41	0.43	0.46
110	0.00	0.03	0.06	0.09	0.11	0.13	0.15	0.16	0.17	0.18	0.19	0.19	0.19	0.20	0.20	0.21	0.21	0.22	0.23
120	0.00	0.03	0.06	0.08	0.09	0.10	0.11	0.11	0.11	0.10	0.08	0.07	0.04	0.03	0.01	0.00	0.00	0.00	0.00
130	0.00	0.03	0.05	0.06	0.07	0.07	0.07	0.06	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.02	0.04	0.05	0.05	0.05	0.04	0.02	0.00	0.00	0.00	0.00	0.01	0.06	0.10	0.11	0.09	0.06	0.01
150	0.00	0.02	0.03	0.03	0.03	0.03	0.01	0.00	0.00	0.00	0.01	0.15	0.28	0.44	0.62	0.80	0.90	0.94	0.89
160	0.00	0.01	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.02	0.23	0.49	0.82	1.20	1.57	1.84	2.05	2.15	2.12
170	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.15	0.47	0.91	1.39	1.88	2.32	2.69	2.97	3.14	3.10
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.66	1.14	1.69	2.26	2.70	3.14	3.61	4.02	4.10

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-01-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.13V I:0.5663A P:4.759W PF:0.6929 Freq:60.08Hz Lamp Flux:303.654x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:5W 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:WITH SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.15	3.85	3.52	3.23	2.70	2.12	1.51	1.01	0.53	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	4.07	3.89	3.60	3.20	2.66	2.09	1.50	1.00	0.52	0.17	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	3.78	3.52	3.16	2.72	2.24	1.70	1.22	0.75	0.39	0.07	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	2.76	2.55	2.25	1.89	1.52	1.15	0.77	0.45	0.15	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	1.56	1.42	1.23	1.01	0.77	0.54	0.31	0.13	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.57	0.50	0.40	0.28	0.20	0.12	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.05	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.01	0.03	0.03	0.04	0.04	0.05	0.04	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.10	0.19	0.26	0.30	0.31	0.29	0.25	0.19	0.14	0.10	0.08	0.04	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.32	0.60	0.81	0.95	1.02	1.01	0.93	0.78	0.58	0.38	0.22	0.12	0.07	0.00	0.00	0.00	0.00	0.00	
-40	1.24	2.19	2.72	2.86	2.70	2.44	2.10	1.76	1.41	1.01	0.61	0.30	0.14	0.06	0.00	0.00	0.00	0.00	
-30	12.6	16.2	16.3	13.7	9.77	6.65	4.73	3.45	2.51	1.83	1.21	0.64	0.26	0.11	0.00	0.00	0.00	0.00	
-20	160	152	120	64.5	36.7	21.2	11.2	6.56	4.17	2.77	1.85	1.03	0.42	0.15	0.05	0.00	0.00	0.00	
-10	513	499	410	284	122	49.6	23.6	11.2	6.15	3.77	2.40	1.39	0.59	0.20	0.05	0.00	0.00	0.00	
0	532	529	513	459	234	75.7	33.9	14.9	7.63	4.46	2.75	1.59	0.68	0.23	0.06	0.00	0.00	0.00	
10	535	523	489	375	166	69.2	33.2	16.0	8.68	5.23	3.33	1.98	0.94	0.40	0.15	0.03	0.01	0.00	
20	428	375	266	140	78.5	44.1	23.6	13.3	8.13	5.27	3.50	2.08	1.05	0.51	0.22	0.06	0.02	0.00	
30	117	98.6	76.5	54.0	35.5	22.8	14.8	9.86	6.81	4.81	3.23	1.94	1.06	0.57	0.22	0.08	0.02	0.00	
40	37.9	32.8	27.0	21.4	16.4	12.5	9.45	7.22	5.46	3.93	2.62	1.63	0.98	0.54	0.24	0.09	0.03	0.00	
50	15.6	14.3	12.7	11.0	9.44	7.93	6.50	5.15	3.90	2.81	1.95	1.31	0.83	0.44	0.22	0.09	0.03	0.00	
60	8.97	8.27	7.48	6.61	5.74	4.84	3.98	3.19	2.49	1.89	1.39	0.95	0.59	0.34	0.18	0.09	0.04	0.00	
70	4.62	4.26	3.87	3.46	3.05	2.62	2.21	1.81	1.44	1.08	0.80	0.56	0.38	0.24	0.14	0.08	0.04	0.00	
80	1.69	1.57	1.43	1.29	1.14	1.00	0.85	0.71	0.59	0.47	0.37	0.29	0.22	0.17	0.12	0.08	0.04	0.00	
90	0.63	0.60	0.56	0.52	0.48	0.45	0.41	0.37	0.33	0.30	0.26	0.22	0.19	0.15	0.11	0.07	0.04	0.00	
100	0.43	0.41	0.39	0.37	0.35	0.33	0.31	0.29	0.26	0.24	0.22	0.19	0.16	0.13	0.10	0.07	0.04	0.00	
110	0.22	0.21	0.21	0.20	0.20	0.19	0.19	0.19	0.18	0.17	0.16	0.15	0.13	0.11	0.09	0.06	0.03	0.00	
120	0.00	0.00	0.00	0.01	0.03	0.04	0.07	0.08	0.10	0.11	0.11	0.11	0.10	0.09	0.08	0.06	0.03	0.00	
130	0.01	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.07	0.07	0.07	0.06	0.05	0.03	0.00	
140	0.09	0.16	0.19	0.20	0.18	0.14	0.06	0.00	0.00	0.00	0.02	0.04	0.05	0.05	0.05	0.04	0.02	0.00	
150	0.98	0.99	0.93	0.76	0.60	0.47	0.33	0.19	0.02	0.00	0.00	0.01	0.03	0.03	0.03	0.03	0.02	0.00	
160	2.22	2.19	2.03	1.78	1.44	1.06	0.74	0.45	0.23	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.01	0.00	
170	3.24	3.17	2.98	2.66	2.21	1.72	1.21	0.80	0.41	0.12	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	
180	4.15	3.85	3.52	3.23	2.70	2.12	1.51	1.01	0.53	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-01-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: