

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1080.8 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	101.6V x 101.4H
	At 50% of Imax	49.3V x 53.2H
	At 90% of Imax	14.5V x 18.3H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	951.0 lumens per klm.
	To 50% of Imax	463.1 lumens per klm.
	To 90% of Imax	68.3 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.07V I:0.7775A P:6.441W PF:0.6864 Freq:59.97Hz Lamp Flux:34.6855x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW WEIGHT:	
SPEC.:7W RED Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

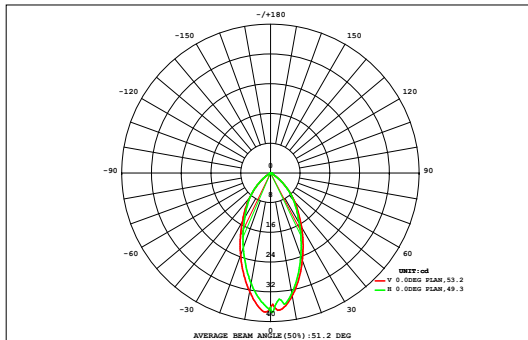

DATA OF LAMP		Eff:5.39lm/W	
MODEL	A9B1-7W-A	Imax (cd)	37.49
NOMINAL POWER (W)	7	AVAILABILITY (%)	94.9
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	32.90
NOMINAL FLUX (lm)	34.6855	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	34.69
TEST VOLTAGE (V)	12	θ @50% (H,V)	53,49DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
50	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.07	0.07	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.34	0.04
40	0.00	0.00	0.00	0.00	0.02	0.06	0.12	0.17	0.21	0.21	0.18	0.12	0.06	0.02	0.00	0.00	0.00	0.00	1.17	0.97
30	0.00	0.00	0.00	0.01	0.05	0.13	0.23	0.31	0.37	0.37	0.32	0.24	0.14	0.05	0.01	0.00	0.00	0.00	2.23	2.11
20	0.00	0.00	0.00	0.02	0.08	0.20	0.34	0.48	0.58	0.58	0.49	0.36	0.22	0.10	0.02	0.00	0.00	0.00	3.47	3.38
10	0.00	0.00	0.00	0.03	0.12	0.26	0.45	0.67	0.83	0.84	0.69	0.47	0.28	0.14	0.03	0.00	0.00	0.00	4.81	4.73
0	0.00	0.00	0.00	0.03	0.13	0.29	0.52	0.80	1.03	1.04	0.83	0.56	0.32	0.16	0.04	0.00	0.00	0.00	5.77	5.70
-10	0.00	0.00	0.00	0.03	0.13	0.29	0.52	0.79	1.00	1.01	0.82	0.55	0.32	0.15	0.04	0.00	0.00	0.00	5.66	5.59
-20	0.00	0.00	0.00	0.03	0.11	0.25	0.43	0.63	0.77	0.78	0.65	0.46	0.28	0.13	0.03	0.00	0.00	0.00	4.57	4.49
-30	0.00	0.00	0.00	0.02	0.08	0.19	0.32	0.45	0.53	0.53	0.46	0.34	0.21	0.09	0.02	0.00	0.00	0.00	3.25	3.15
-40	0.00	0.00	0.00	0.01	0.04	0.12	0.21	0.29	0.34	0.34	0.30	0.23	0.13	0.05	0.01	0.00	0.00	0.00	2.07	1.94
-50	0.00	0.00	0.00	0.00	0.01	0.05	0.10	0.15	0.18	0.19	0.16	0.11	0.05	0.02	0.00	0.00	0.00	0.00	1.03	0.79
-60	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.05	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.27	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.00	0.00	0.01	0.17	0.78	1.86	3.29	4.85	5.97	6.04	5.03	3.51	2.06	0.91	0.21	0.01	0.00	0.00	35	---
Φ a	0.00	0.00	0.00	0.00	0.57	1.72	3.16	4.72	5.85	5.92	4.90	3.38	1.92	0.74	0.02	0.00	0.00	0.00	---	33

one-half-peak spread: U:24.6,D:20.1 , L:24.0,R:23.7


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.07V I:0.7775A P:6.441W PF:0.6864 Freq:59.97Hz Lamp Flux:34.6855x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW WEIGHT:	
SPEC.:7W RED Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

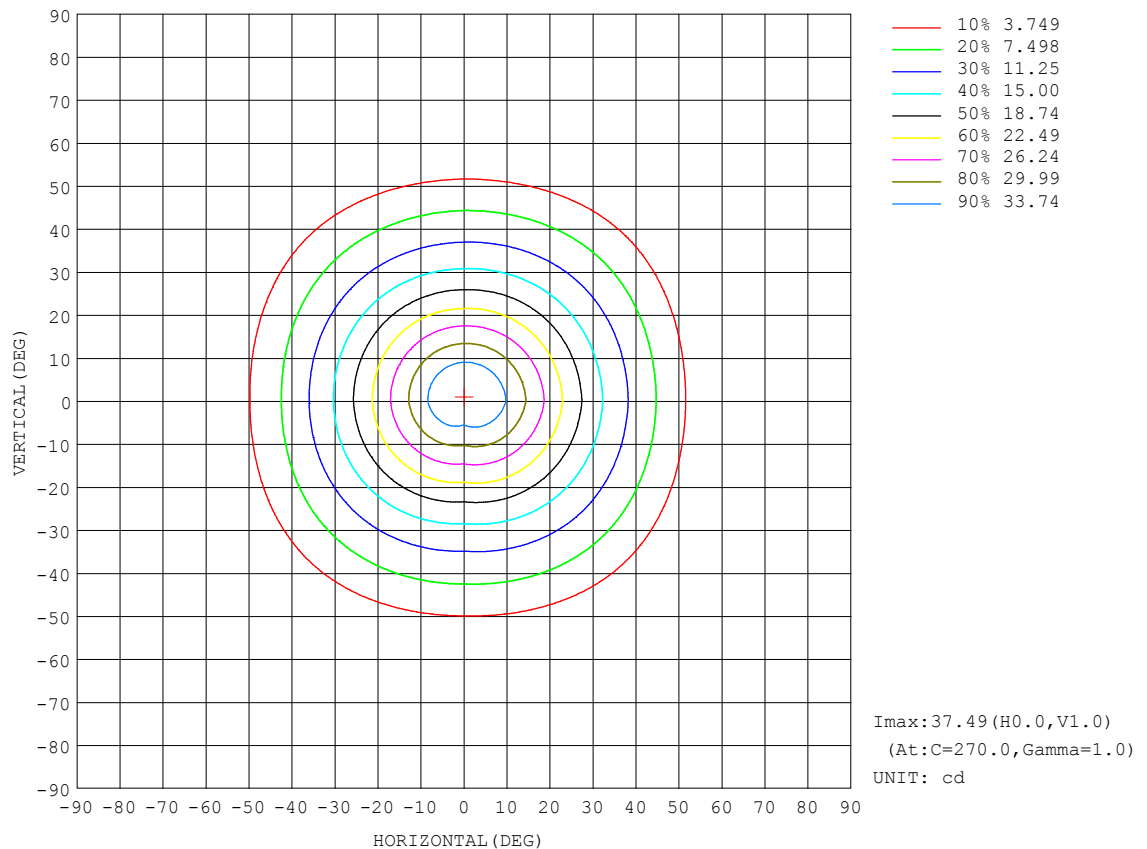


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.07V I:0.7775A P:6.441W PF:0.6864 Freq:59.97Hz Lamp Flux:34.6855x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW WEIGHT:	
SPEC.:7W RED Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

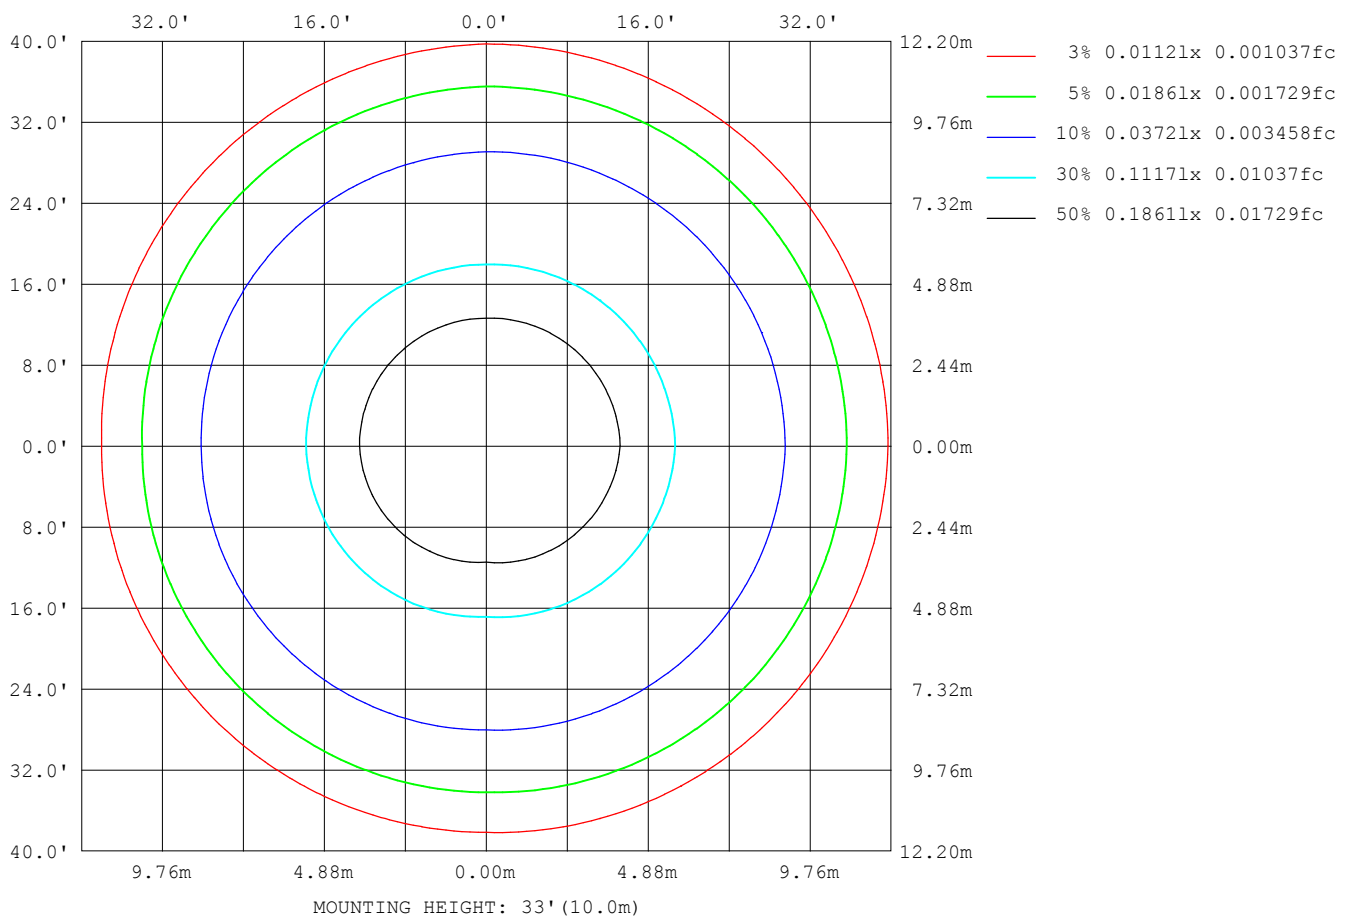

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

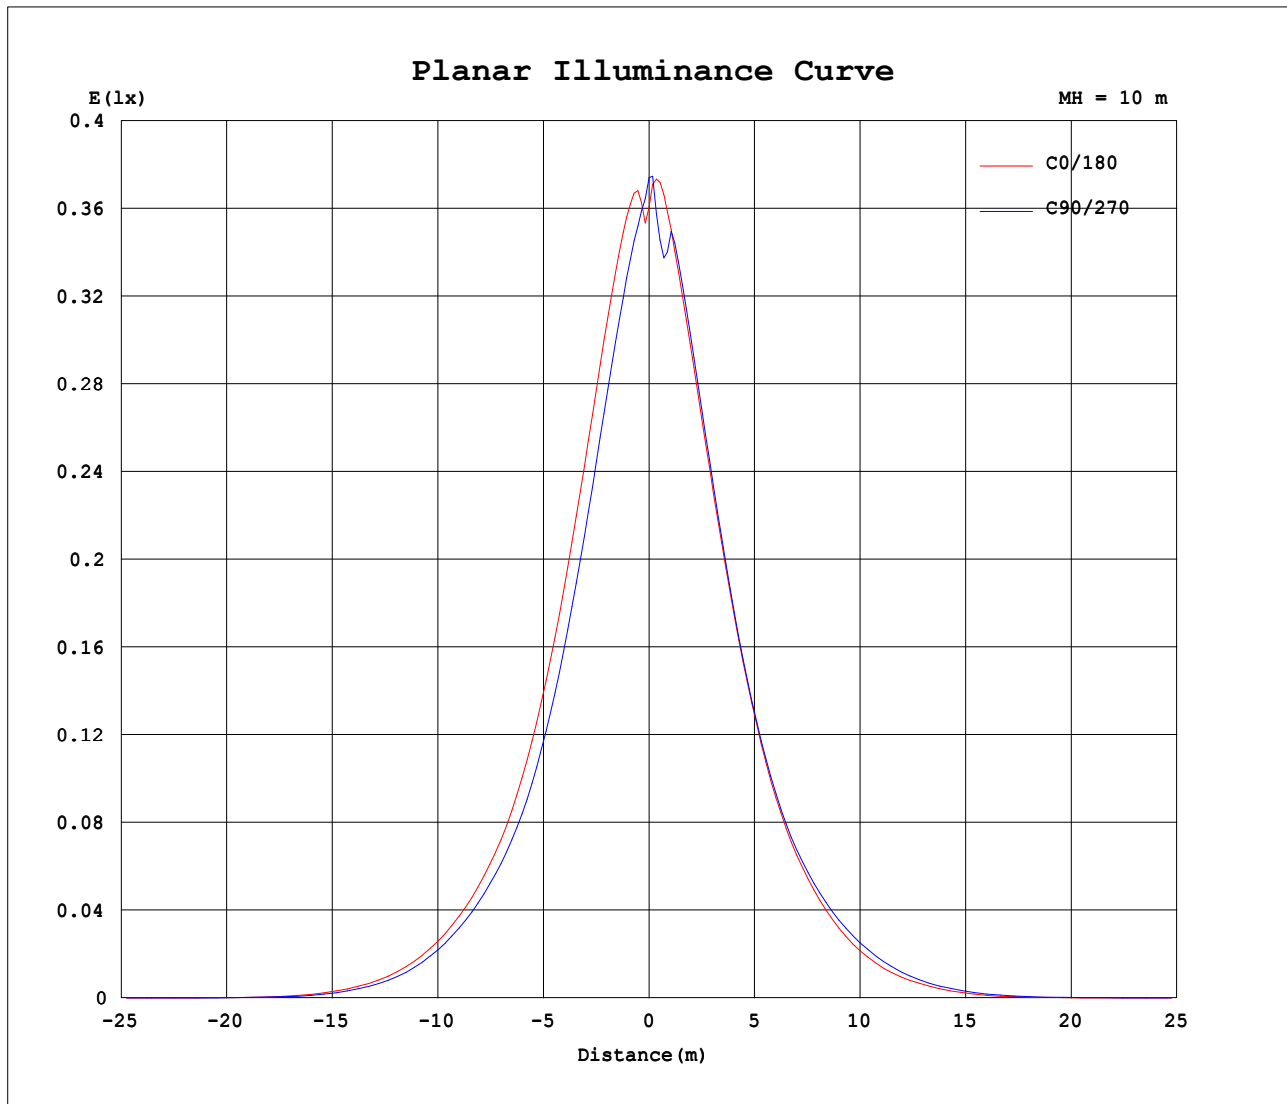


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.07V I:0.7775A P:6.441W PF:0.6864 Freq:59.97Hz Lamp Flux:34.6855x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW	WEIGHT:
SPEC.:7W RED Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

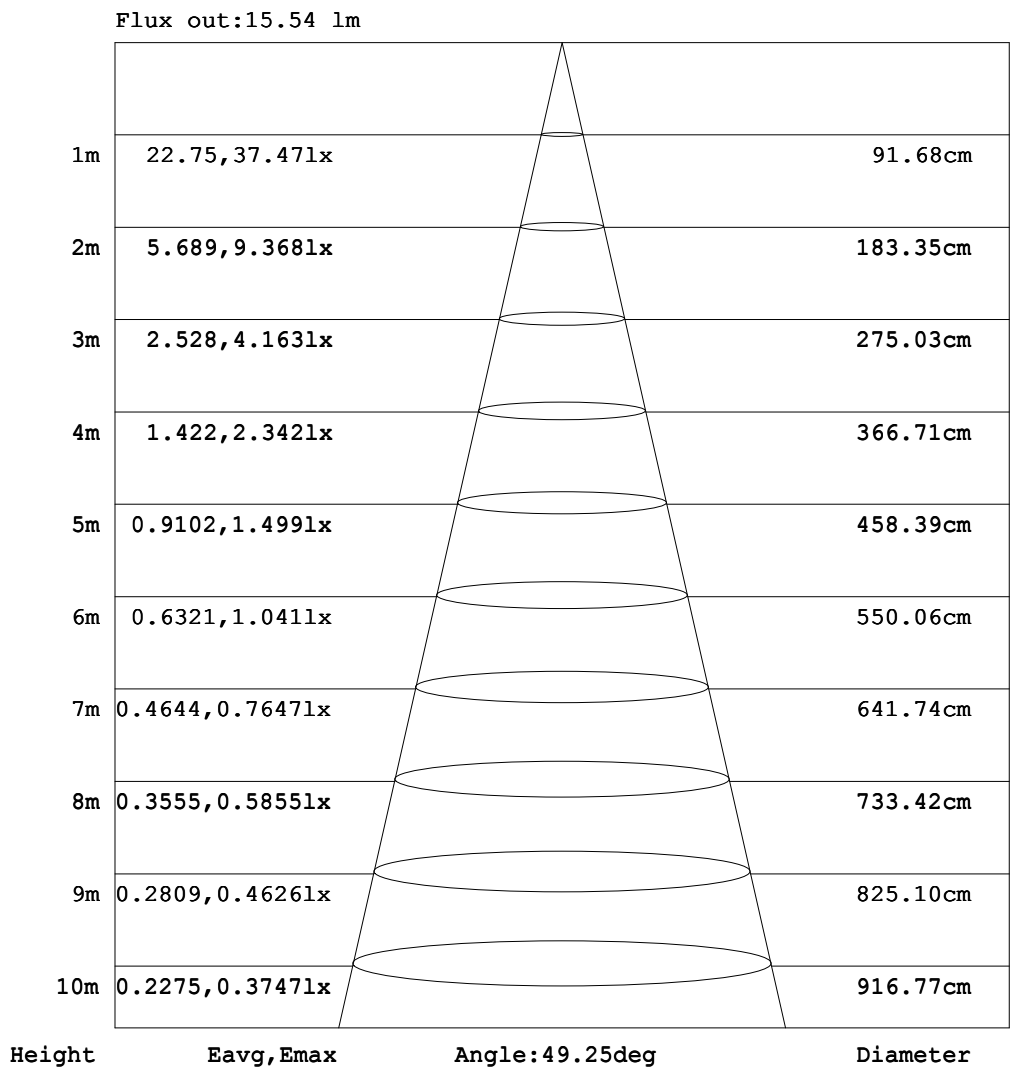

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.07V I:0.7775A P:6.441W PF:0.6864 Freq:59.97Hz Lamp Flux:34.6855x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW	WEIGHT:
SPEC.:7W RED Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.16	0.23	0.30	0.39	0.44	0.47	0.48
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.21	0.43	0.81	1.37	1.97	2.51	3.01	3.37	3.62	3.71
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	0.42	1.07	2.08	3.19	4.42	5.65	6.72	7.62	8.25	8.62	8.73
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.45	1.38	2.79	4.40	6.24	8.08	9.72	11.2	12.4	13.3	13.9	14.0
-20	0.00	0.00	0.00	0.00	0.00	0.01	0.29	1.03	2.55	4.42	6.68	9.03	11.3	13.7	16.1	18.4	20.2	21.4	21.5
-10	0.00	0.00	0.00	0.00	0.00	0.09	0.41	1.58	3.35	5.67	8.31	11.0	14.0	17.5	21.1	24.6	27.8	29.9	30.2
0	0.00	0.00	0.00	0.00	0.00	0.14	0.48	1.78	3.65	6.10	8.90	11.9	15.3	19.3	23.6	28.1	32.4	36.3	36.1
10	0.00	0.00	0.00	0.00	0.00	0.10	0.42	1.62	3.42	5.77	8.43	11.2	14.2	17.9	21.7	25.6	29.1	31.8	32.9
20	0.00	0.00	0.00	0.00	0.00	0.02	0.30	1.09	2.67	4.61	6.90	9.31	11.7	14.2	17.0	19.6	21.8	23.3	23.9
30	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.50	1.52	3.00	4.70	6.61	8.49	10.2	11.8	13.2	14.4	15.2	15.5
40	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.20	0.48	1.24	2.34	3.56	4.89	6.19	7.35	8.29	9.00	9.48	9.68
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.11	0.25	0.52	1.01	1.68	2.37	3.03	3.61	4.06	4.39	4.55
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.12	0.22	0.29	0.39	0.49	0.61	0.69	0.73
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-10-09

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.07V I:0.7775A P:6.441W PF:0.6864 Freq:59.97Hz Lamp Flux:34.6855x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW	WEIGHT:
SPEC.:7W RED Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.48	0.46	0.41	0.31	0.26	0.18	0.09	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	3.69	3.49	3.17	2.68	2.14	1.52	0.94	0.49	0.27	0.12	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	8.73	8.46	7.95	7.14	6.11	4.90	3.60	2.40	1.28	0.51	0.21	0.03	0.00	0.00	0.00	0.00	0.00	0.00	
-30	14.0	13.6	12.8	11.7	10.3	8.78	6.99	5.08	3.23	1.67	0.56	0.20	0.01	0.00	0.00	0.00	0.00	0.00	
-20	21.6	20.7	19.0	16.9	14.5	12.2	9.95	7.65	5.24	3.03	1.30	0.33	0.07	0.00	0.00	0.00	0.00	0.00	
-10	30.2	28.5	25.5	22.1	18.5	15.1	12.1	9.42	6.72	4.10	1.95	0.53	0.15	0.00	0.00	0.00	0.00	0.00	
0	36.7	33.6	29.5	25.0	20.7	16.7	13.2	10.2	7.33	4.55	2.22	0.62	0.18	0.00	0.00	0.00	0.00	0.00	
10	32.2	29.8	26.5	22.7	19.0	15.4	12.3	9.54	6.82	4.18	2.00	0.54	0.16	0.00	0.00	0.00	0.00	0.00	
20	23.5	22.2	20.2	17.7	15.1	12.6	10.2	7.88	5.43	3.16	1.37	0.34	0.09	0.00	0.00	0.00	0.00	0.00	
30	15.4	14.7	13.7	12.4	10.9	9.19	7.36	5.38	3.45	1.80	0.60	0.22	0.01	0.00	0.00	0.00	0.00	0.00	
40	9.59	9.22	8.62	7.77	6.66	5.38	3.98	2.65	1.45	0.57	0.24	0.05	0.00	0.00	0.00	0.00	0.00	0.00	
50	4.46	4.18	3.76	3.19	2.55	1.83	1.15	0.58	0.31	0.16	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.70	0.62	0.51	0.40	0.32	0.24	0.16	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: