

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	575.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	136.6V x 100.5H
	At 50% of Imax	92.9V x 72.5H
	At 90% of Imax	48.1V x 44.0H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	981.2 lumens per klm.
	To 50% of Imax	753.5 lumens per klm.
	To 90% of Imax	285.4 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-04-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.12V I:0.4497A P:3.514W PF:0.6448 Freq:59.98Hz Lamp Flux:24.0381x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Wall Light	WEIGHT:
SPEC.:3.5W BLUE	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:LAA-197 Shroud

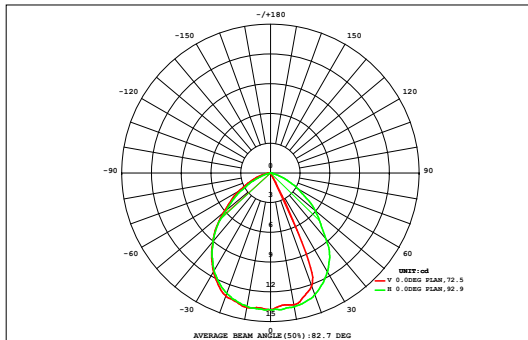

DATA OF LAMP		Eff:6.84lm/W	
MODEL	W9A6-3.5W-BK	Imax (cd)	13.83
NOMINAL POWER (W)	3.5	AVAILABILITY (%)	98.0
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	23.56
NOMINAL FLUX (lm)	24.0381	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	24.04
TEST VOLTAGE (V)	12	θ @50% (H,V)	73,93DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.02
70	0.00	0.00	0.01	0.02	0.03	0.05	0.07	0.08	0.07	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.39	0.34
60	0.00	0.00	0.01	0.03	0.06	0.09	0.12	0.14	0.14	0.13	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.79	0.77
50	0.00	0.00	0.02	0.05	0.09	0.14	0.19	0.22	0.22	0.21	0.15	0.01	0.00	0.00	0.00	0.00	0.00	0.00	1.31	1.29
40	0.00	0.01	0.02	0.06	0.12	0.19	0.25	0.29	0.31	0.30	0.26	0.05	0.00	0.00	0.00	0.00	0.00	0.00	1.86	1.85
30	0.00	0.01	0.03	0.07	0.14	0.22	0.30	0.35	0.37	0.37	0.33	0.11	0.00	0.00	0.00	0.00	0.00	0.00	2.30	2.29
	0.00	0.01	0.03	0.08	0.16	0.24	0.33	0.39	0.40	0.40	0.37	0.16	0.00	0.00	0.00	0.00	0.00	0.00	2.57	2.56
	0.00	0.01	0.03	0.09	0.17	0.26	0.34	0.40	0.41	0.41	0.38	0.18	0.00	0.00	0.00	0.00	0.00	0.00	2.67	2.66
	0.00	0.01	0.03	0.09	0.17	0.26	0.34	0.40	0.41	0.41	0.38	0.17	0.00	0.00	0.00	0.00	0.00	0.00	2.67	2.65
	0.00	0.01	0.03	0.08	0.16	0.25	0.33	0.38	0.40	0.40	0.36	0.15	0.00	0.00	0.00	0.00	0.00	0.00	2.55	2.54
	0.00	0.01	0.03	0.07	0.14	0.22	0.30	0.35	0.37	0.36	0.33	0.10	0.00	0.00	0.00	0.00	0.00	0.00	2.28	2.27
-30	0.00	0.01	0.02	0.06	0.12	0.19	0.25	0.29	0.31	0.30	0.25	0.05	0.00	0.00	0.00	0.00	0.00	0.00	1.86	1.84
-40	0.00	0.00	0.02	0.05	0.09	0.14	0.19	0.22	0.23	0.22	0.15	0.01	0.00	0.00	0.00	0.00	0.00	0.00	1.33	1.32
-50	0.00	0.00	0.01	0.03	0.06	0.10	0.13	0.15	0.14	0.13	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.81	0.79
-60	0.00	0.00	0.01	0.02	0.04	0.06	0.07	0.08	0.07	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.41	0.36
-70	0.00	0.00	0.00	0.01	0.01	0.02	0.03	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.02
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.00	0.07	0.32	0.81	1.56	2.45	3.27	3.78	3.92	3.75	3.10	1.00	0.01	0.00	0.00	0.00	0.00	0.00	24	---
Φ a	0.00	0.01	0.27	0.77	1.52	2.41	3.23	3.74	3.88	3.72	3.06	0.94	0.00	0.00	0.00	0.00	0.00	0.00	---	24


one-half-peak spread: U:39.3,D:37.0 , L:38.0,R:13.2,NEMA Beam Type: Type 6 x 7 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-04-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.12V I:0.4497A P:3.514W PF:0.6448 Freq:59.98Hz Lamp Flux:24.0381x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Wall Light	WEIGHT:
SPEC.:3.5W BLUE	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:LAA-197 Shroud

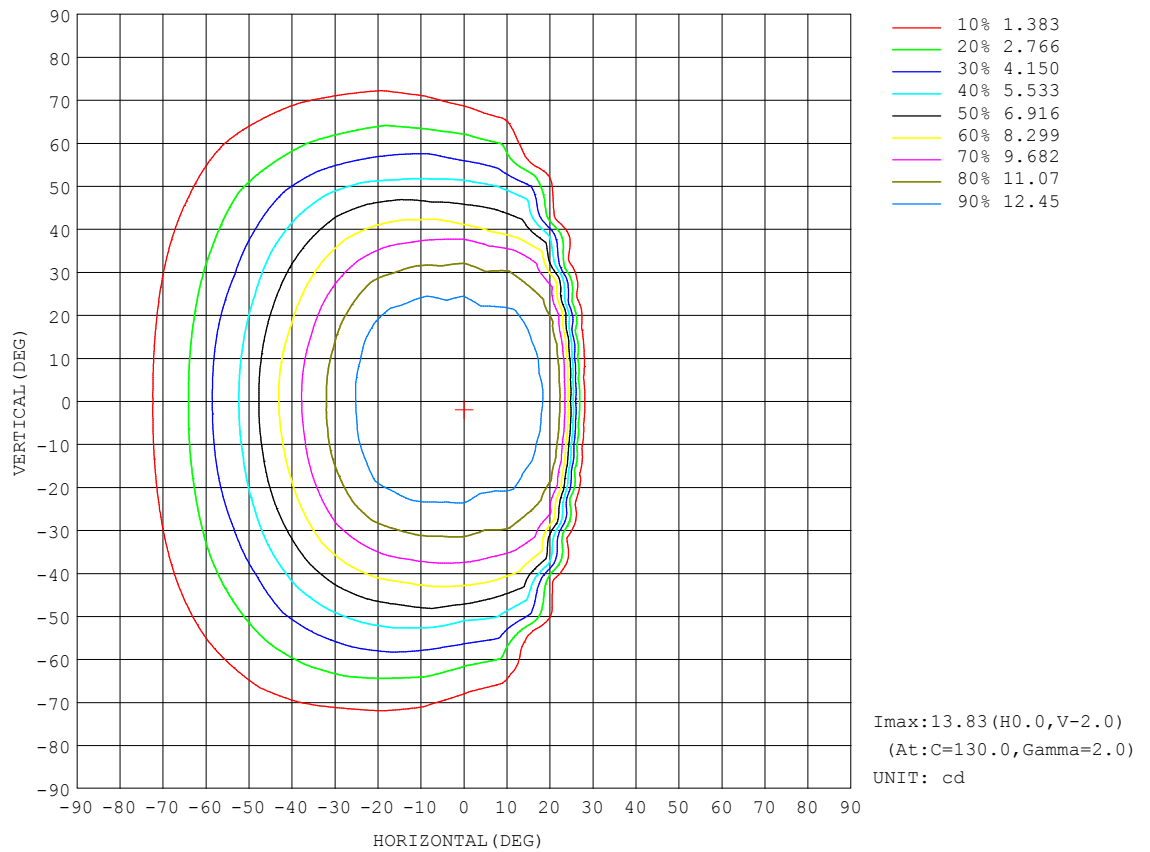


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-04-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.12V I:0.4497A P:3.514W PF:0.6448 Freq:59.98Hz Lamp Flux:24.0381x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Wall Light	WEIGHT:
SPEC.:3.5W BLUE	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:LAA-197 Shroud

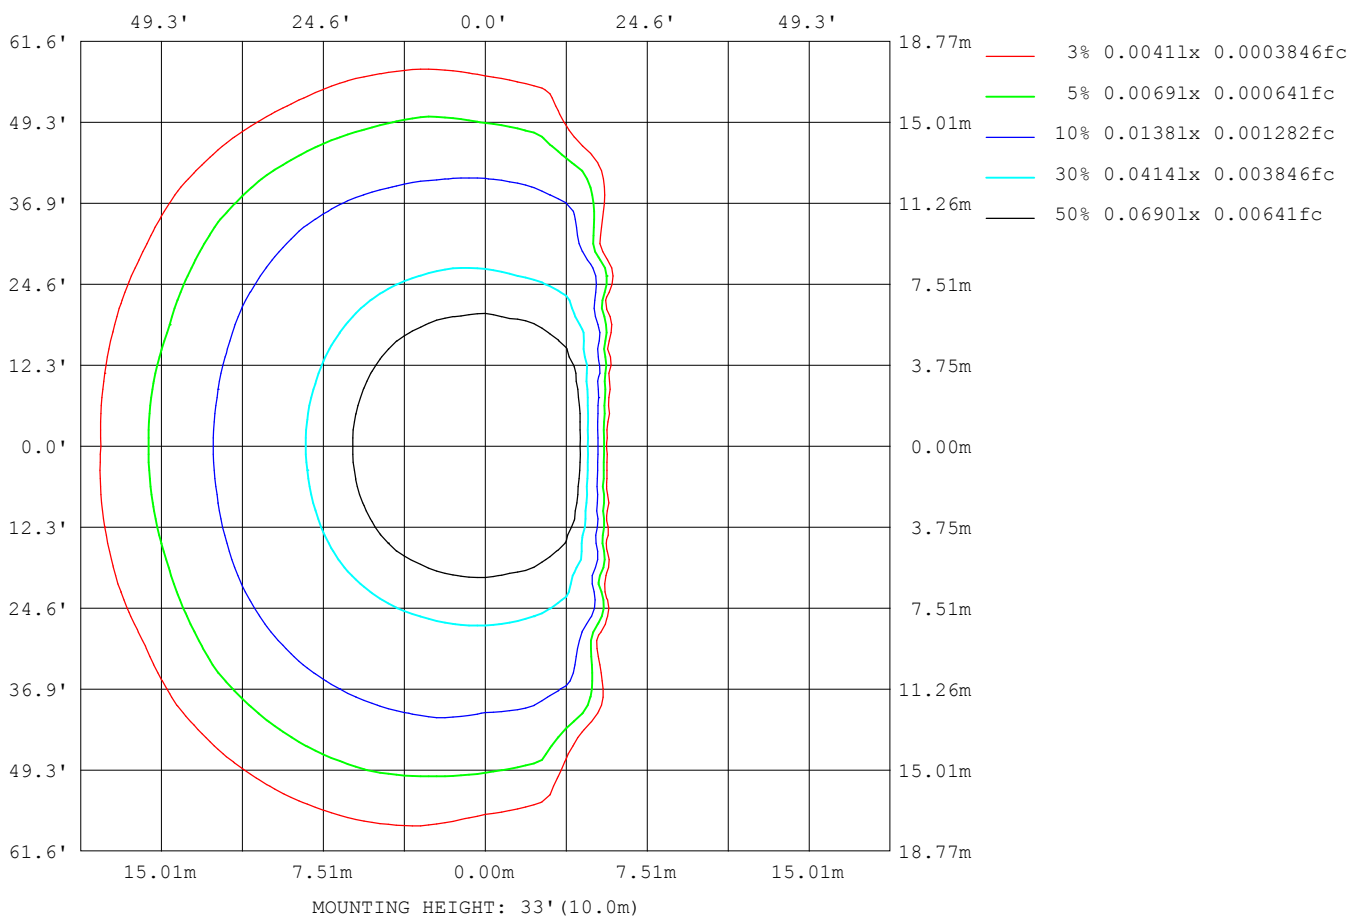

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-04-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

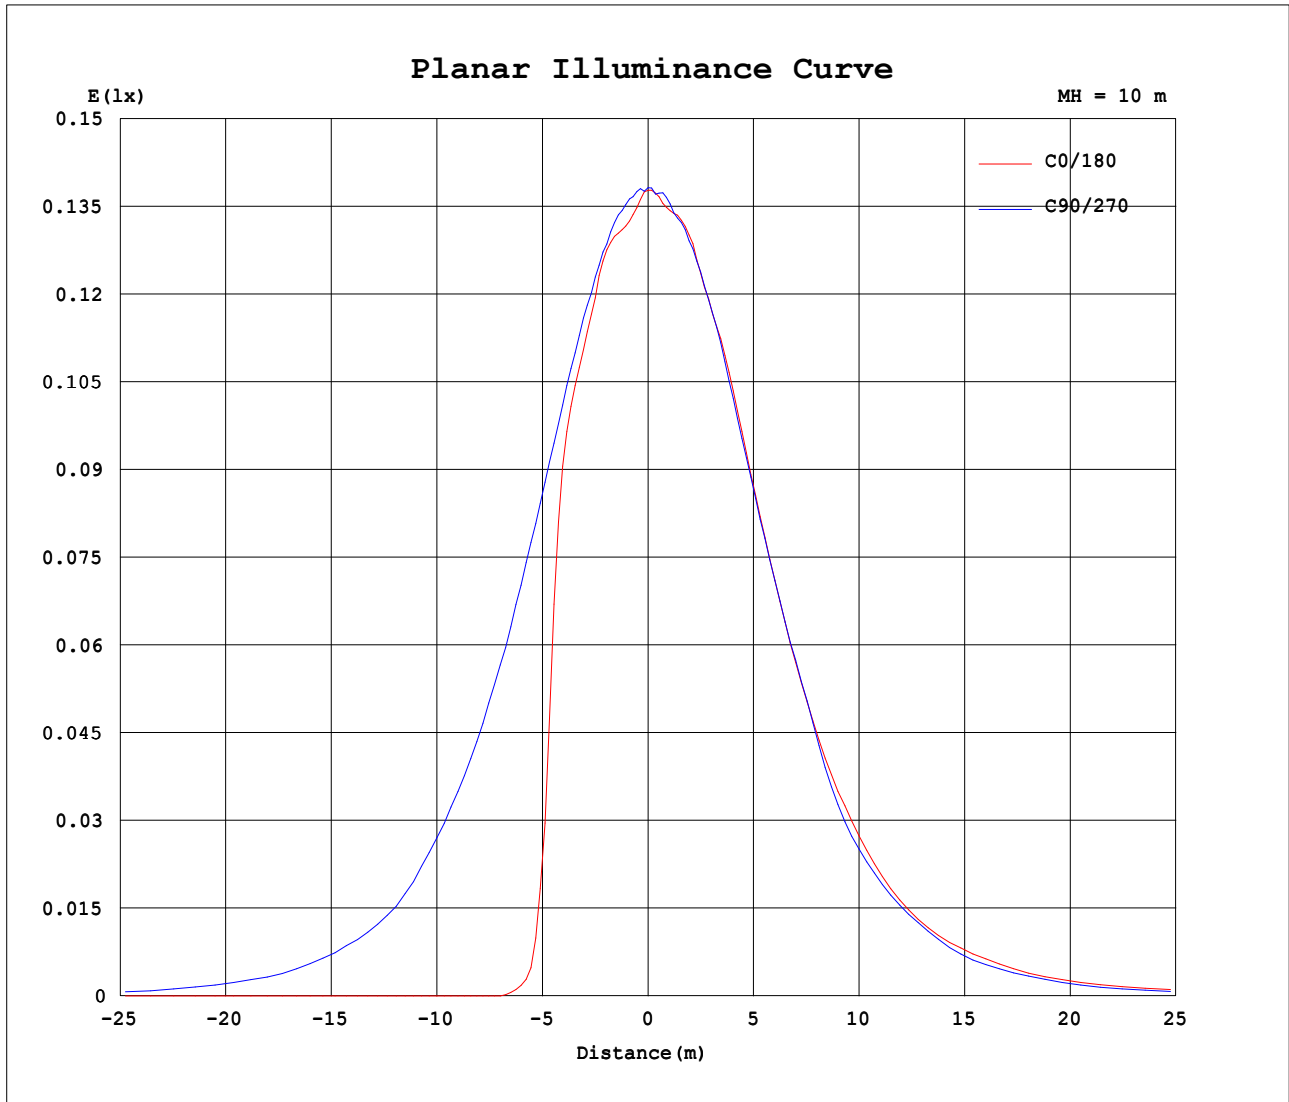


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-04-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.12V I:0.4497A P:3.514W PF:0.6448 Freq:59.98Hz Lamp Flux:24.0381x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Wall Light	WEIGHT:
SPEC.:3.5W BLUE	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:LAA-197 Shroud

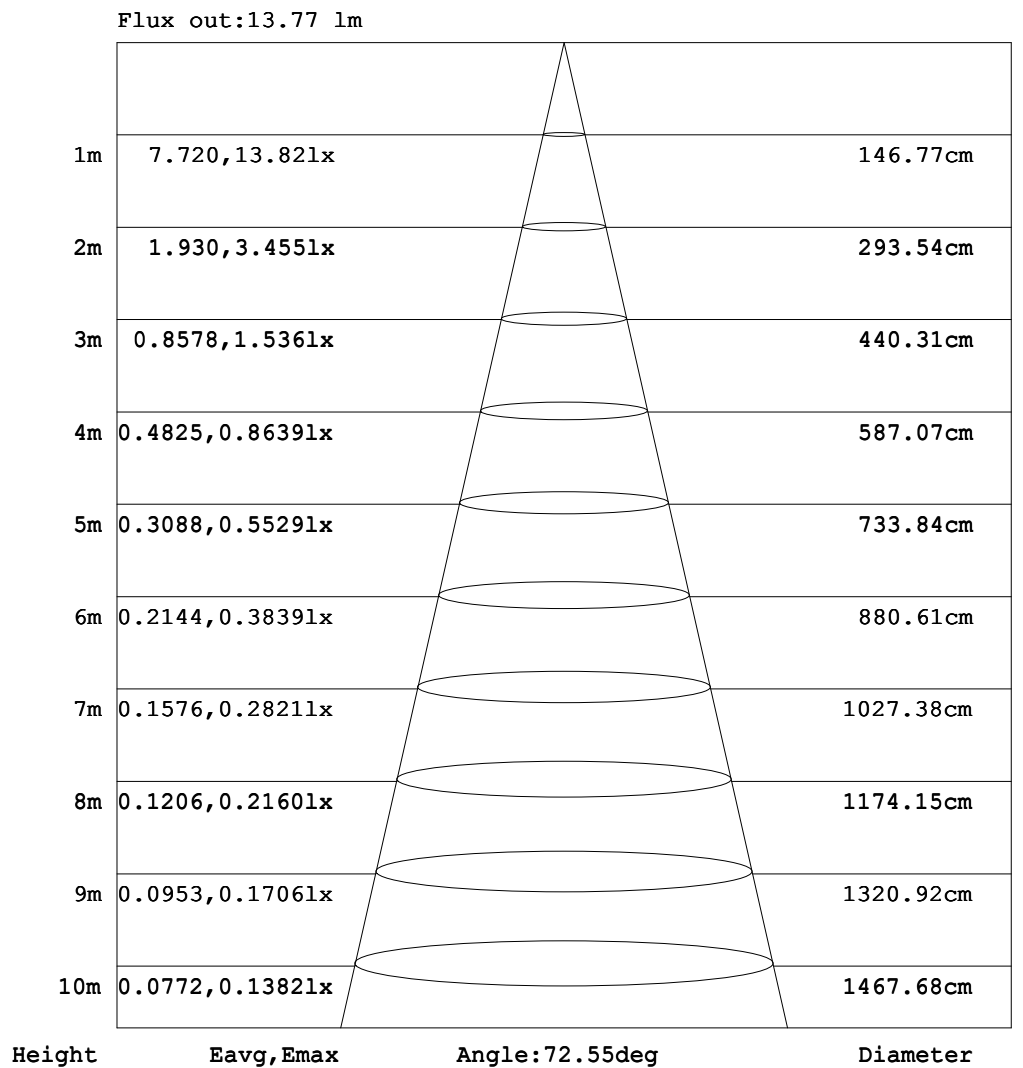

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-04-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:0.4497A P:3.514W PF:0.6448 Freq:59.98Hz Lamp Flux:24.0381x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Wall Light	WEIGHT:
SPEC.:3.5W BLUE	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:LAA-197 Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.08	0.13	0.23	0.28	0.30	0.31	0.28	0.23	0.18	0.10	0.00
-70	0.00	0.00	0.00	0.00	0.06	0.23	0.40	0.64	0.91	1.12	1.30	1.47	1.56	1.66	1.71	1.67	1.56	1.32	1.04
-60	0.00	0.00	0.00	0.10	0.39	0.71	1.04	1.45	1.87	2.32	2.71	3.08	3.36	3.58	3.70	3.75	3.68	3.43	3.08
-50	0.00	0.00	0.01	0.34	0.74	1.18	1.71	2.32	2.92	3.59	4.27	4.83	5.35	5.78	6.06	6.23	6.35	6.21	5.79
-40	0.00	0.00	0.10	0.53	1.07	1.67	2.34	3.14	3.91	4.86	5.80	6.67	7.48	8.09	8.56	8.81	8.99	9.09	9.04
-30	0.00	0.00	0.24	0.73	1.38	2.05	2.92	3.89	4.85	6.03	7.16	8.30	9.37	10.1	10.7	11.1	11.3	11.4	11.4
-20	0.00	0.00	0.31	0.89	1.58	2.33	3.34	4.44	5.57	6.96	8.20	9.50	10.6	11.6	12.3	12.7	12.9	12.9	12.9
-10	0.00	0.00	0.33	0.98	1.70	2.53	3.69	4.77	6.03	7.53	8.86	10.2	11.4	12.3	13.0	13.3	13.6	13.5	13.7
0	0.00	0.00	0.33	1.00	1.72	2.58	3.75	4.87	6.20	7.74	9.05	10.4	11.5	12.5	13.2	13.4	13.8	13.6	13.8
10	0.00	0.00	0.34	0.98	1.70	2.54	3.66	4.78	6.04	7.57	8.89	10.2	11.3	12.3	13.1	13.4	13.7	13.5	13.7
20	0.00	0.00	0.31	0.90	1.58	2.35	3.32	4.44	5.54	6.93	8.17	9.44	10.6	11.5	12.3	12.7	13.0	12.9	13.1
30	0.00	0.00	0.24	0.75	1.37	2.04	2.87	3.86	4.80	6.01	7.14	8.23	9.26	10.1	10.8	11.1	11.4	11.4	11.5
40	0.00	0.00	0.13	0.57	1.06	1.63	2.27	3.09	3.90	4.82	5.74	6.62	7.42	8.09	8.55	8.80	8.97	8.98	8.70
50	0.00	0.00	0.03	0.34	0.71	1.15	1.68	2.30	2.88	3.49	4.15	4.74	5.26	5.65	5.85	5.96	5.97	5.93	5.87
60	0.00	0.00	0.00	0.12	0.36	0.65	1.03	1.42	1.77	2.11	2.50	2.84	3.10	3.31	3.48	3.56	3.56	3.42	3.19
70	0.00	0.00	0.00	0.00	0.06	0.21	0.41	0.61	0.82	1.03	1.23	1.39	1.54	1.63	1.73	1.68	1.57	1.34	1.07
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.13	0.22	0.24	0.25	0.28	0.31	0.25	0.17	0.09	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-04-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:0.4497A P:3.514W PF:0.6448 Freq:59.98Hz Lamp Flux:24.0381x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Wall Light	WEIGHT:
SPEC.:3.5W BLUE	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:LAA-197 Shroud

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.58	0.13	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	2.90	2.30	0.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	5.68	5.18	4.04	1.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	8.87	8.49	7.24	2.96	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	11.0	11.0	10.3	7.46	1.46	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-20	12.6	12.6	12.0	10.7	3.77	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-10	13.2	13.3	12.7	11.9	5.44	0.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
0	13.4	13.5	12.9	12.2	6.40	0.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10	13.3	13.4	12.8	11.9	5.89	0.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
20	12.7	12.7	12.1	11.0	4.55	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
30	11.1	11.1	10.4	8.17	1.93	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
40	8.25	7.85	6.99	4.29	0.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	5.68	5.21	4.27	1.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	2.96	2.29	0.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.78	0.45	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-04-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: