

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1102.5 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	76.8V x 172.0H
	At 50% of Imax	46.5V x 162.6H
	At 90% of Imax	14.5V x 103.3H
Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	958.2 lumens per klm.
	To 50% of Imax	391.7 lumens per klm.
	To 90% of Imax	158.9 lumens per klm.
	Upward LOR	0.8 %
	Downward LOR	99.2 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2021-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:11.87V I:0.7268A P:5.777W PF:0.6693 Freq:59.97Hz Lamp Flux:124.83x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Step Light	WEIGHT:
SPEC.:6W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

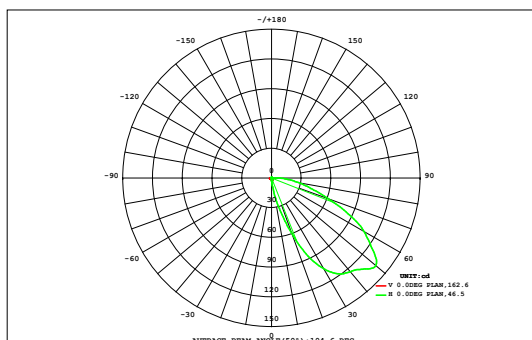

DATA OF LAMP		Eff:21.61lm/W	
MODEL	S3A4-6W-30K-BZ	Imax (cd)	137.6
NOMINAL POWER (W)	6W	AVAILABILITY (%)	93.6
RATED VOLTAGE (V)	12	Avai. FLUX(lm)	116.9
NOMINAL FLUX(lm)	124.83	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	124.8
TEST VOLTAGE (V)	12	θ @50% (H,V)	163,47DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.01	0.04	0.09	0.16	0.24	0.32	0.40	0.47	0.47	0.41	0.34	0.26	0.18	0.10	0.05	0.02	0.00	3.55	1.78
90	0.00	0.01	0.04	0.09	0.16	0.24	0.32	0.40	0.47	0.47	0.41	0.34	0.26	0.18	0.10	0.05	0.02	0.00	3.55	1.78
80	0.00	0.02	0.09	0.22	0.42	0.64	0.86	1.07	1.23	1.23	1.07	0.86	0.64	0.42	0.22	0.09	0.02	0.00	9.10	8.56
70	0.00	0.04	0.14	0.36	0.68	1.08	1.53	2.01	2.42	2.44	2.05	1.58	1.12	0.71	0.35	0.13	0.03	0.00	16.7	16.4
60	0.00	0.05	0.18	0.45	0.90	1.50	2.16	2.84	3.49	3.49	2.86	2.21	1.59	0.96	0.46	0.17	0.04	0.00	23.4	23.1
50	0.00	0.05	0.20	0.50	1.01	1.59	2.21	2.92	3.63	3.64	2.95	2.25	1.62	1.07	0.53	0.19	0.04	0.00	24.4	24.2
40	0.00	0.05	0.19	0.50	0.91	1.32	1.86	2.48	3.18	3.15	2.41	1.83	1.37	0.93	0.52	0.19	0.04	0.00	21.0	20.7
30	0.00	0.05	0.17	0.41	0.68	1.02	1.33	1.69	2.23	2.21	1.62	1.22	0.99	0.71	0.42	0.16	0.04	0.00	14.9	14.7
20	0.00	0.04	0.12	0.27	0.44	0.64	0.73	0.75	0.91	0.90	0.71	0.67	0.58	0.44	0.27	0.11	0.03	0.00	7.59	7.11
10	0.00	0.02	0.06	0.11	0.16	0.23	0.24	0.21	0.16	0.17	0.20	0.22	0.21	0.16	0.10	0.04	0.01	0.00	2.32	0.27
0	0.00	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.35	0.00
-10	0.00	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.20	0.00
-20	0.00	0.01	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.12	0.00
-30	0.00	0.01	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.08	0.00
-40	0.00	0.01	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.07	0.00
-50	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.00
-60	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
-70	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.04	0.41	1.31	3.01	5.45	8.30	11.3	14.4	17.8	17.7	14.3	11.2	8.44	5.63	3.02	1.19	0.31	0.02	124	---
Φ a	0.00	0.00	0.51	2.50	5.03	7.93	10.9	14.0	17.4	17.4	13.9	10.8	8.05	5.23	2.55	0.48	0.00	0.00	---	117


one-half-peak spread: U:27.4,D:19.4 , L:13.4,R:3NEMA Beam Type: Type 7 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2021-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:11.87V I:0.7268A P:5.777W PF:0.6693 Freq:59.97Hz Lamp Flux:124.83x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Step Light	WEIGHT:
SPEC.:6W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

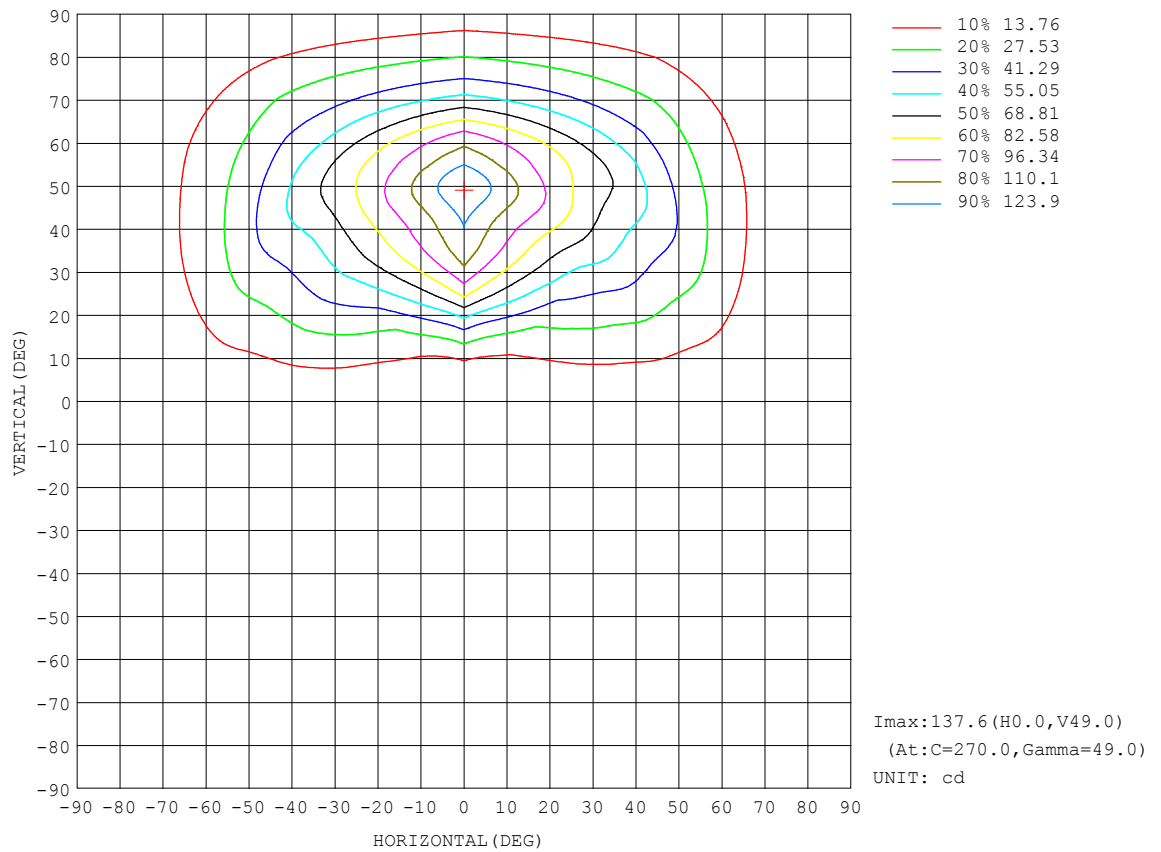


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2021-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:11.87V I:0.7268A P:5.777W PF:0.6693 Freq:59.97Hz Lamp Flux:124.83x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Step Light	WEIGHT:
SPEC.:6W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

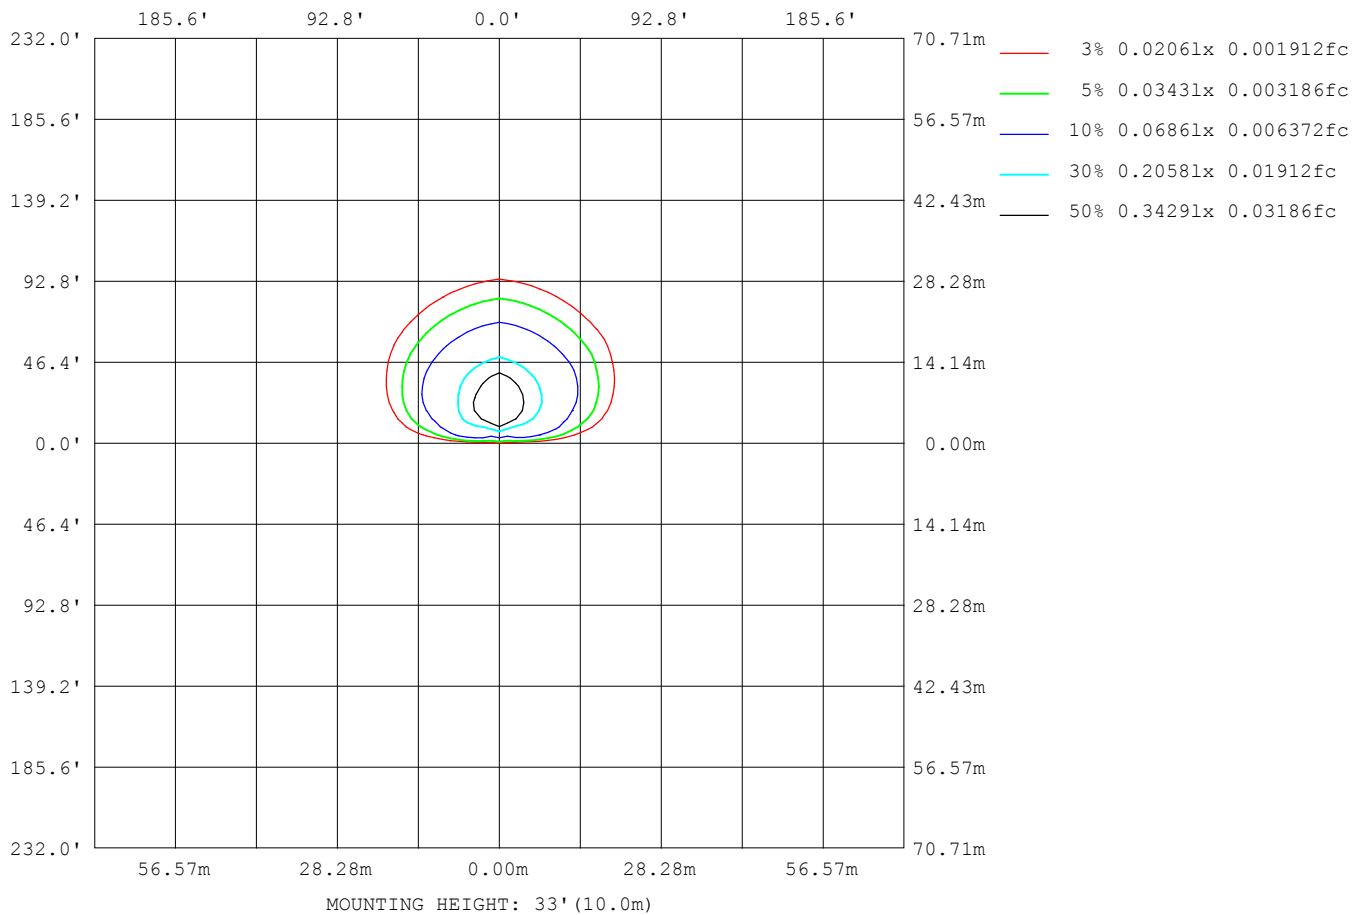

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2021-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

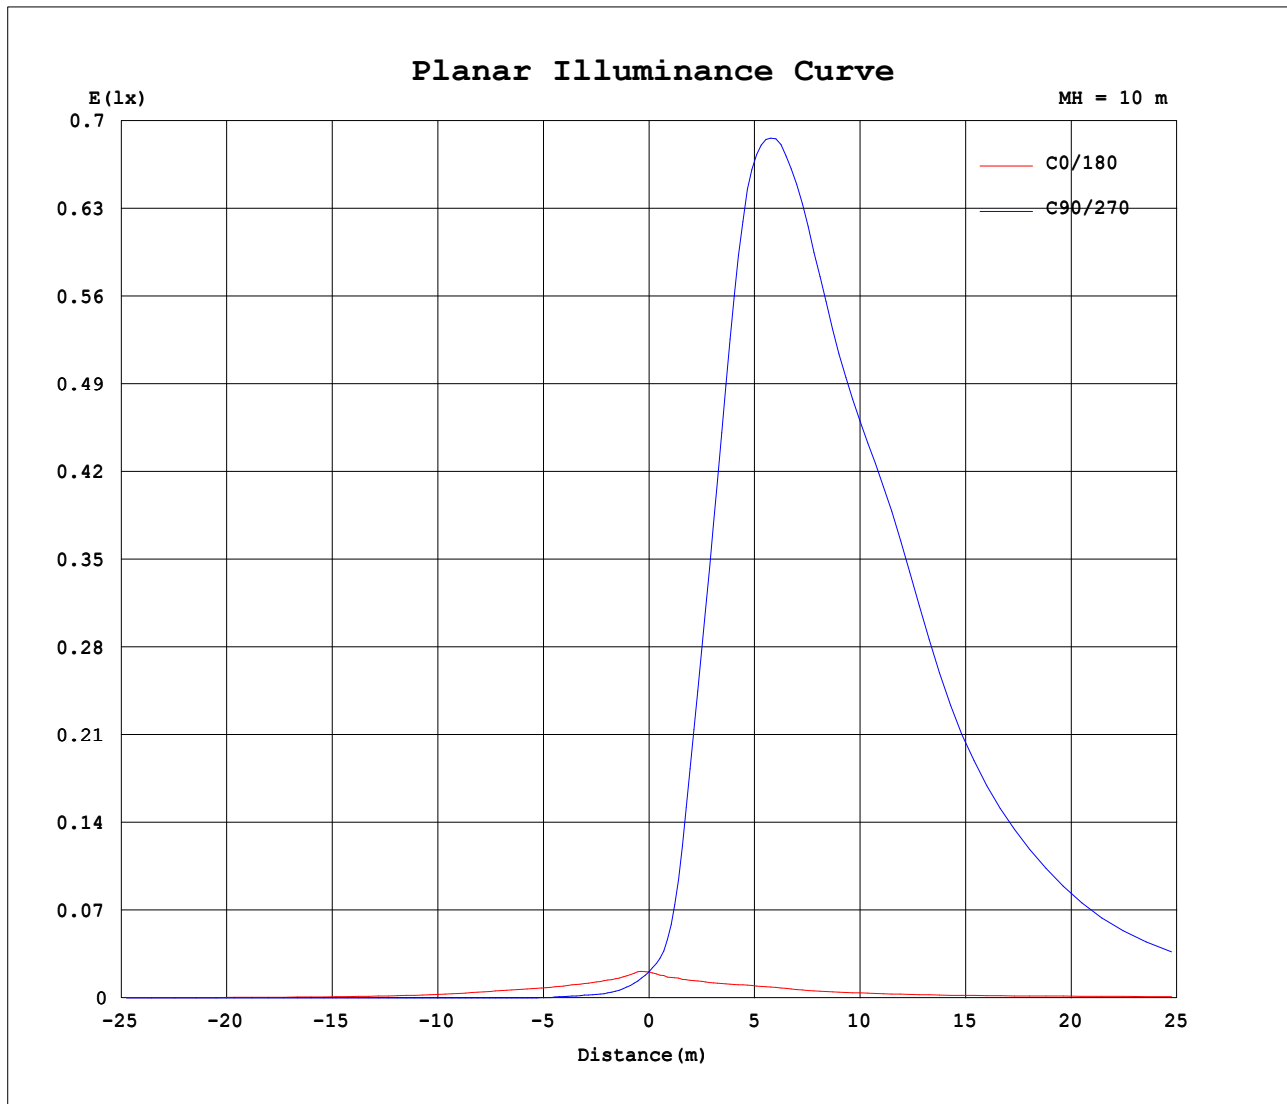


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2021-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:11.87V I:0.7268A P:5.777W PF:0.6693 Freq:59.97Hz Lamp Flux:124.83x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Step Light	WEIGHT:
SPEC.:6W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

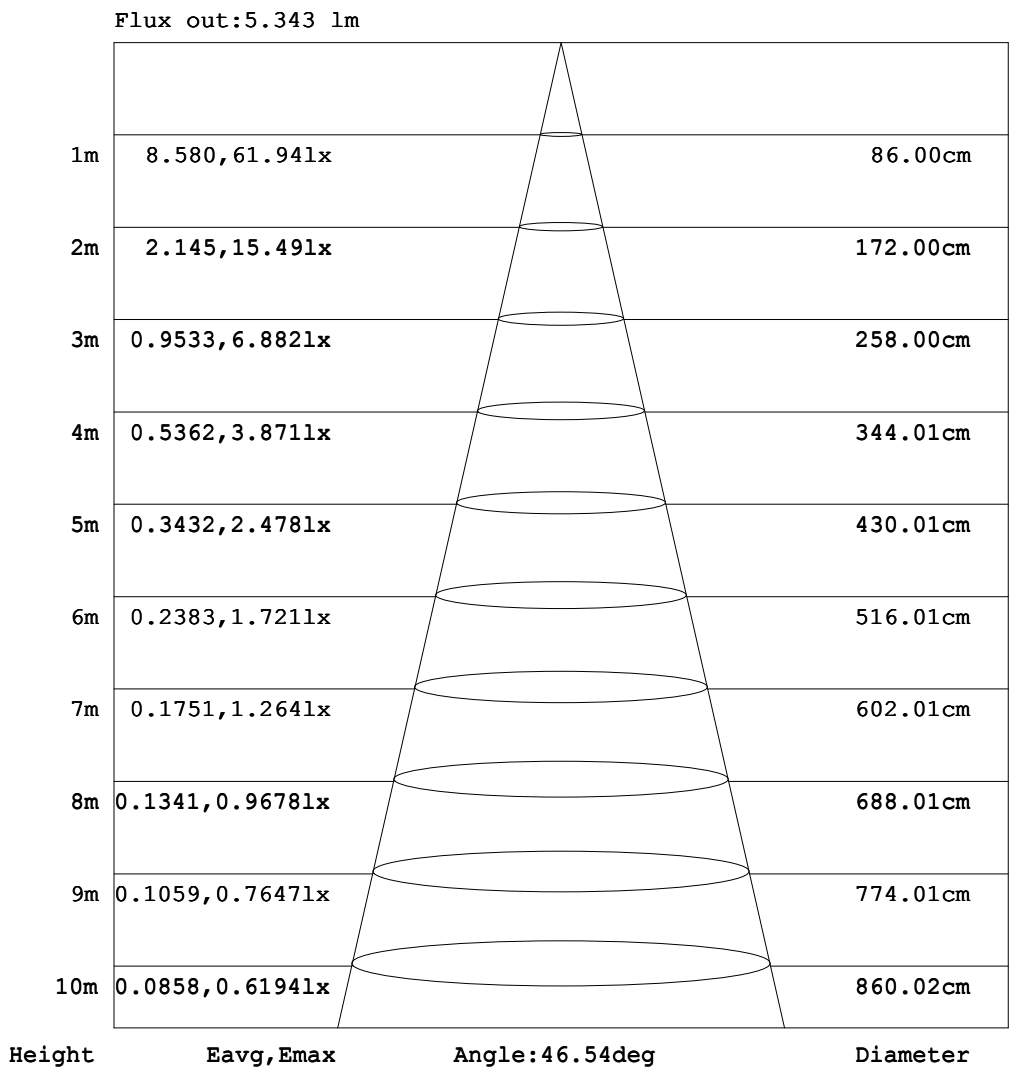

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2021-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:11.87V I:0.7268A P:5.777W PF:0.6693 Freq:59.97Hz Lamp Flux:124.83x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Step Light	WEIGHT:
SPEC.:6W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.00	0.00	0.01	0.01	0.02	0.03	0.05	0.06	0.07	0.08	0.08	0.09	0.10	0.09	0.08	0.08	0.06	0.03	0.04
-160	0.00	0.00	0.01	0.02	0.04	0.06	0.09	0.11	0.14	0.15	0.16	0.17	0.20	0.23	0.21	0.18	0.19	0.19	0.22
-150	0.00	0.00	0.01	0.03	0.06	0.09	0.12	0.15	0.18	0.23	0.25	0.28	0.29	0.30	0.34	0.36	0.37	0.39	0.41
-140	0.00	0.00	0.01	0.03	0.07	0.10	0.14	0.19	0.22	0.27	0.33	0.35	0.39	0.44	0.47	0.50	0.53	0.58	0.63
-130	0.00	0.00	0.01	0.03	0.06	0.10	0.14	0.19	0.24	0.29	0.33	0.39	0.45	0.53	0.59	0.65	0.70	0.77	0.83
-120	0.00	0.00	0.01	0.02	0.05	0.09	0.13	0.17	0.20	0.26	0.31	0.38	0.45	0.50	0.56	0.62	0.68	0.74	0.80
-110	0.00	0.00	0.01	0.01	0.03	0.06	0.08	0.11	0.15	0.20	0.24	0.30	0.35	0.40	0.44	0.48	0.53	0.57	0.61
-100	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.07	0.11	0.15	0.17	0.20	0.22	0.25	0.28	0.30	0.32
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.05
-80	0.00	0.00	0.08	0.18	0.25	0.27	0.25	0.21	0.12	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.09	0.35	0.52	0.62	0.62	0.57	0.45	0.30	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.23	0.60	0.83	0.95	0.98	0.87	0.69	0.45	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.37	0.84	1.12	1.30	1.23	1.05	0.78	0.52	0.28	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.49	1.03	1.39	1.52	1.40	1.12	0.81	0.54	0.35	0.20	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	0.00	0.59	1.22	1.68	1.75	1.49	1.14	0.82	0.62	0.48	0.36	0.24	0.11	0.00	0.00	0.00	0.01	0.01	0.00
-20	0.00	0.66	1.38	1.86	1.88	1.58	1.16	0.90	0.76	0.66	0.58	0.50	0.39	0.28	0.17	0.14	0.17	0.20	0.19
-10	0.00	0.72	1.49	2.00	2.00	1.68	1.27	1.04	0.94	0.89	0.87	0.84	0.85	0.81	0.70	0.57	0.44	0.52	0.50
0	0.00	0.74	1.57	2.13	2.15	1.83	1.43	1.21	1.16	1.14	1.19	1.22	1.36	1.37	1.38	1.42	1.55	1.70	2.08
10	0.00	0.90	2.20	3.70	5.08	6.67	8.81	10.9	12.2	14.0	16.1	17.4	17.7	16.9	15.4	14.4	12.8	12.8	15.9
20	0.00	1.01	2.71	5.06	7.61	10.8	15.1	20.0	23.0	25.9	30.0	34.0	36.1	37.0	36.7	39.7	44.2	49.9	58.9
30	0.00	1.06	3.00	5.97	9.35	13.7	19.4	26.5	33.1	37.1	41.5	47.4	53.6	59.3	65.7	73.1	82.2	92.8	106
40	0.00	1.03	3.04	6.13	10.1	15.0	21.1	28.7	37.9	46.8	53.2	58.0	65.4	74.4	83.3	92.2	102	112	124
50	0.00	0.92	2.88	5.70	9.86	14.5	20.3	27.3	35.5	45.3	55.9	65.8	74.1	82.8	92.7	104	115	126	137
60	0.00	0.76	2.44	4.80	8.06	12.5	17.5	23.0	29.5	37.0	44.7	52.0	60.3	69.1	77.9	86.2	94.0	101	108
70	0.00	0.56	1.78	3.58	5.84	8.64	12.2	16.4	21.3	26.4	30.3	34.0	38.0	42.1	46.3	50.3	54.1	57.5	60.3
80	0.00	0.39	1.07	2.02	3.24	4.76	6.54	8.50	10.6	12.9	14.8	16.7	18.7	20.5	22.2	23.8	25.3	26.6	27.7
90	0.00	0.29	0.59	0.88	1.17	1.46	1.76	2.05	2.34	2.63	2.95	3.28	3.60	3.92	4.24	4.56	4.89	5.21	5.53
100	0.00	0.14	0.09	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2021-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:11.87V I:0.7268A P:5.777W PF:0.6693 Freq:59.97Hz Lamp Flux:124.83x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Step Light	WEIGHT:
SPEC.:6W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.02	0.00	0.02	0.06	0.07	0.06	0.08	0.07	0.07	0.07	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	
-160	0.17	0.16	0.17	0.14	0.14	0.17	0.16	0.14	0.14	0.13	0.11	0.09	0.07	0.04	0.02	0.01	0.00	0.00	
-150	0.36	0.32	0.30	0.31	0.28	0.25	0.23	0.23	0.21	0.18	0.15	0.12	0.09	0.06	0.03	0.01	0.00	0.00	
-140	0.57	0.52	0.48	0.44	0.41	0.37	0.33	0.29	0.26	0.22	0.19	0.14	0.10	0.06	0.03	0.01	0.00	0.00	
-130	0.76	0.70	0.64	0.57	0.51	0.44	0.38	0.33	0.29	0.24	0.19	0.14	0.10	0.06	0.03	0.01	0.00	0.00	
-120	0.74	0.68	0.62	0.56	0.50	0.45	0.39	0.32	0.26	0.21	0.17	0.12	0.08	0.05	0.02	0.01	0.00	0.00	
-110	0.57	0.53	0.49	0.44	0.40	0.35	0.29	0.24	0.18	0.15	0.11	0.08	0.05	0.03	0.02	0.00	0.00	0.00	
-100	0.30	0.28	0.25	0.22	0.18	0.16	0.13	0.10	0.07	0.06	0.05	0.03	0.02	0.01	0.00	0.00	0.00	0.00	
-90	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.10	0.16	0.19	0.19	0.13	0.03	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.15	0.23	0.30	0.33	0.31	0.21	0.03	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.10	0.17	0.28	0.35	0.42	0.44	0.37	0.15	0.00	0.00	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.11	0.17	0.21	0.27	0.38	0.48	0.53	0.48	0.28	0.00	0.00	
-30	0.01	0.01	0.00	0.00	0.00	0.08	0.18	0.24	0.28	0.30	0.33	0.38	0.53	0.58	0.57	0.37	0.01	0.00	
-20	0.20	0.17	0.14	0.16	0.23	0.35	0.41	0.44	0.44	0.43	0.42	0.42	0.51	0.64	0.64	0.44	0.03	0.00	
-10	0.50	0.44	0.55	0.63	0.68	0.71	0.74	0.70	0.64	0.58	0.53	0.50	0.54	0.69	0.70	0.49	0.04	0.00	
0	1.89	1.55	1.39	1.26	1.16	1.12	1.10	0.98	0.84	0.72	0.64	0.57	0.59	0.75	0.75	0.53	0.04	0.00	
10	12.8	12.2	13.4	14.6	15.7	16.0	15.7	15.1	14.3	12.3	10.6	8.58	5.96	3.91	2.41	1.21	0.24	0.00	
20	49.4	43.3	38.1	33.9	33.6	32.7	31.3	30.2	27.1	23.2	20.1	15.5	10.5	6.61	3.82	1.78	0.41	0.00	
30	91.9	80.4	70.4	61.7	54.5	51.2	48.7	43.6	37.8	33.4	27.7	20.1	13.5	8.49	4.78	2.18	0.55	0.00	
40	112	101	91.4	83.8	76.6	68.4	60.3	53.6	47.9	40.2	30.5	21.8	14.6	9.32	5.15	2.36	0.64	0.00	
50	127	116	104	93.4	83.2	75.0	68.3	59.8	48.9	38.1	28.5	20.4	14.1	8.84	4.95	2.31	0.69	0.00	
60	102	95.0	87.9	80.2	72.0	63.6	55.5	47.9	38.7	30.5	23.4	17.0	11.7	7.42	4.32	2.07	0.69	0.00	
70	57.7	54.5	50.9	47.0	43.0	38.9	34.9	30.9	26.1	20.7	15.9	11.8	8.35	5.61	3.39	1.75	0.64	0.00	
80	26.6	25.3	23.8	22.2	20.5	18.8	17.0	15.2	13.4	11.1	8.94	6.95	5.17	3.66	2.39	1.34	0.54	0.00	
90	5.35	5.16	4.98	4.79	4.61	4.42	4.24	4.05	3.87	3.44	3.01	2.58	2.15	1.72	1.29	0.86	0.43	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.02	0.02	0.06	0.15	0.21	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.08	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:ADMIN

Test Date:2021-06-07

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352

Humidity:65.0%

Test Distance:13.563m [K=1.0000]

Remarks: