

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	697.3 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	88.6V x 139.6H
	At 50% of Imax	43.9V x 89.8H
	At 90% of Imax	35.7V x 37.7H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	935.4 lumens per klm.
	To 50% of Imax	618.6 lumens per klm.
	To 90% of Imax	192.0 lumens per klm.

Upward LOR	1.9 %
Downward LOR	98.1 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.12V I:0.7482A P:5.977W PF:0.6592 Freq:59.97Hz Lamp Flux:360.547x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	RGBWEIGHT:
SPEC.:6W 5700K Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

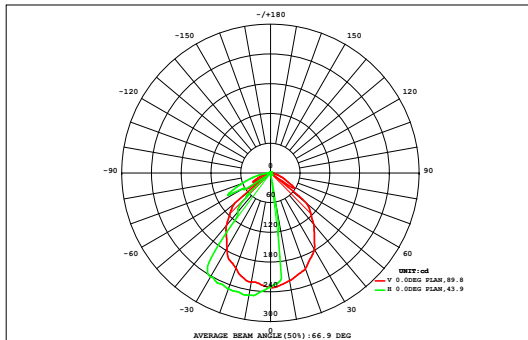

DATA OF LAMP		Eff:60.33lm/W	
MODEL	A9A3-6W-BZ	Imax (cd)	251.4
NOMINAL POWER (W)	6	AVAILABILITY (%)	91.5
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	329.8
NOMINAL FLUX (lm)	360.547	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	360.5
TEST VOLTAGE (V)	12	θ @50% (H,V)	90,44DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.11	0.00
90	0.00	0.00	0.02	0.03	0.06	0.08	0.08	0.06	0.02	0.02	0.06	0.09	0.09	0.08	0.05	0.02	0.01	0.00	0.79	0.00
80	0.00	0.01	0.05	0.12	0.20	0.25	0.24	0.17	0.06	0.06	0.17	0.23	0.24	0.20	0.13	0.07	0.02	0.00	2.23	0.00
70	0.00	0.02	0.11	0.25	0.39	0.32	0.25	0.14	0.06	0.10	0.23	0.42	0.48	0.38	0.25	0.12	0.03	0.00	3.54	0.04
60	0.00	0.04	0.18	0.40	0.33	0.38	0.70	0.72	0.33	0.33	0.73	0.72	0.49	0.62	0.38	0.18	0.05	0.00	6.57	3.35
50	0.00	0.06	0.26	0.37	0.44	1.33	1.59	1.27	0.53	0.53	1.25	1.56	1.36	0.56	0.56	0.25	0.07	0.01	12.0	10.3
40	0.00	0.08	0.33	0.38	1.08	2.12	2.32	1.91	0.77	0.76	1.90	2.31	2.09	1.12	0.65	0.32	0.09	0.01	18.3	17.2
30	0.00	0.10	0.39	0.34	1.84	2.84	3.36	3.05	1.43	1.41	3.02	3.34	2.80	1.87	0.59	0.38	0.10	0.01	26.9	26.1
20	0.01	0.11	0.41	0.43	2.36	3.57	4.66	5.07	5.27	5.26	4.99	4.61	3.54	2.33	0.69	0.43	0.11	0.01	43.8	43.3
10	0.01	0.11	0.43	0.44	2.43	3.92	5.46	6.52	7.13	7.13	6.44	5.41	3.90	2.40	0.71	0.46	0.12	0.01	53.0	52.5
0	0.01	0.11	0.47	0.40	2.00	3.63	5.51	6.60	7.35	7.33	6.58	5.49	3.59	2.03	0.65	0.46	0.12	0.01	52.3	51.8
-10	0.01	0.10	0.46	0.56	1.16	2.90	4.74	6.44	7.21	7.20	6.43	4.72	2.86	1.21	0.83	0.44	0.11	0.01	47.4	46.8
-20	0.00	0.08	0.40	0.71	0.58	1.69	2.97	4.20	5.32	5.31	4.19	2.95	1.72	0.70	0.90	0.39	0.09	0.01	32.2	31.5
-30	0.00	0.06	0.31	0.81	0.90	0.64	0.95	1.68	1.98	1.97	1.69	0.98	0.75	1.19	0.80	0.31	0.08	0.01	15.1	13.7
-40	0.00	0.04	0.22	0.58	1.15	1.42	1.31	0.96	0.83	0.86	1.06	1.48	1.57	1.13	0.58	0.23	0.05	0.00	13.5	12.3
-50	0.00	0.03	0.12	0.34	0.69	1.14	1.65	2.08	2.33	2.33	2.08	1.65	1.14	0.69	0.35	0.14	0.03	0.00	16.8	15.8
-60	0.00	0.01	0.05	0.14	0.30	0.50	0.73	0.95	1.12	1.12	0.95	0.74	0.52	0.32	0.16	0.06	0.01	0.00	7.67	4.90
-70	0.00	0.00	0.01	0.03	0.06	0.10	0.14	0.19	0.23	0.23	0.19	0.15	0.10	0.06	0.03	0.01	0.00	0.00	1.53	0.00
-80	0.00	0.00	0.01	0.03	0.06	0.10	0.14	0.19	0.23	0.23	0.19	0.15	0.10	0.06	0.03	0.01	0.00	0.00	1.53	0.00
-90	0.00	0.00	0.01	0.03	0.06	0.10	0.14	0.19	0.23	0.23	0.19	0.15	0.10	0.06	0.03	0.01	0.00	0.00	1.53	0.00
HORIZONTAL (DEG)																				
Φ t	0.05	0.97	4.20	6.33	16.0	26.8	36.7	42.0	42.0	42.0	42.0	36.9	27.2	16.9	8.33	4.29	1.10	0.08	354	---
Φ a	0.00	0.00	2.68	4.38	14.2	25.4	35.4	40.8	40.3	40.2	40.6	35.5	25.7	15.3	6.72	2.70	0.00	0.00	---	330


one-half-peak spread: U:6.8,D:7.1 , L:34.4,R:44.NEMA Beam Type: Type 7 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.12V I:0.7482A P:5.977W PF:0.6592 Freq:59.97Hz Lamp Flux:360.547x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	RGBWEIGHT:
SPEC.:6W 5700K Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

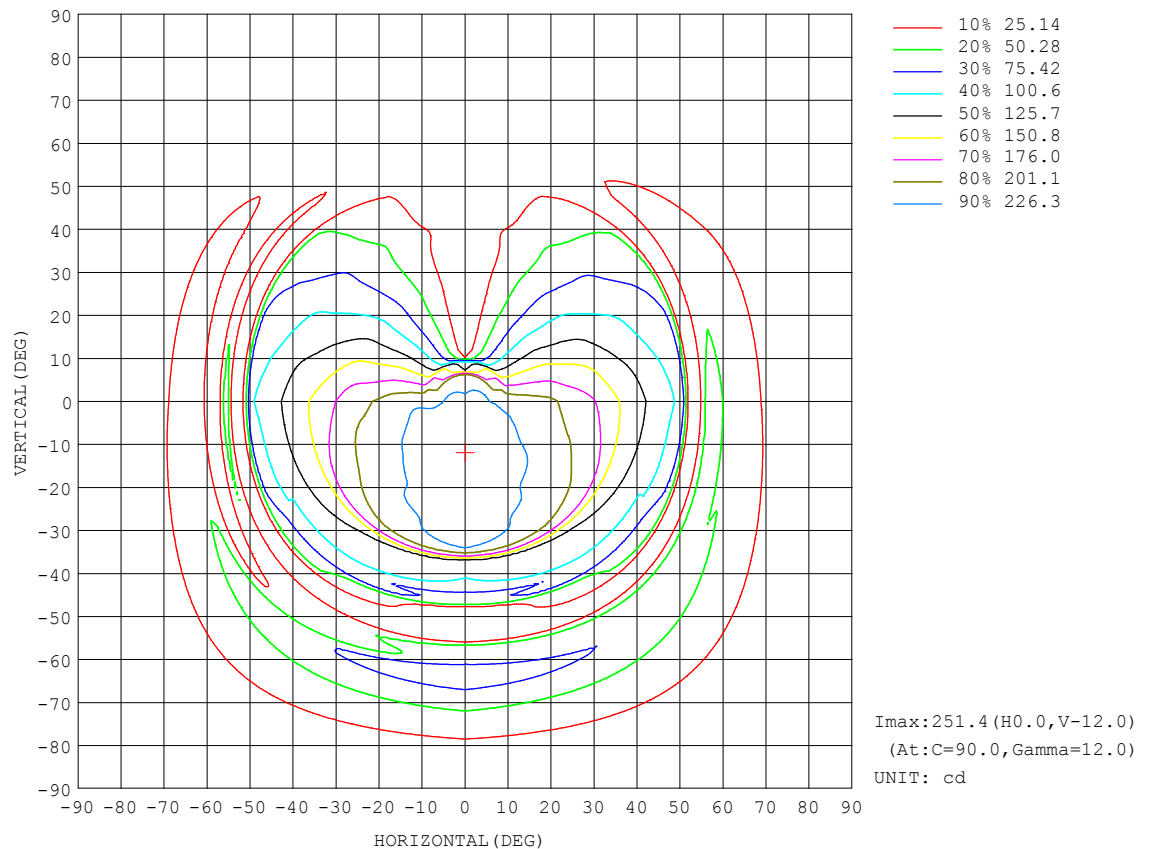


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.12V I:0.7482A P:5.977W PF:0.6592 Freq:59.97Hz Lamp Flux:360.547x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light RGBWEIGHT:	
SPEC.:6W 5700K Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

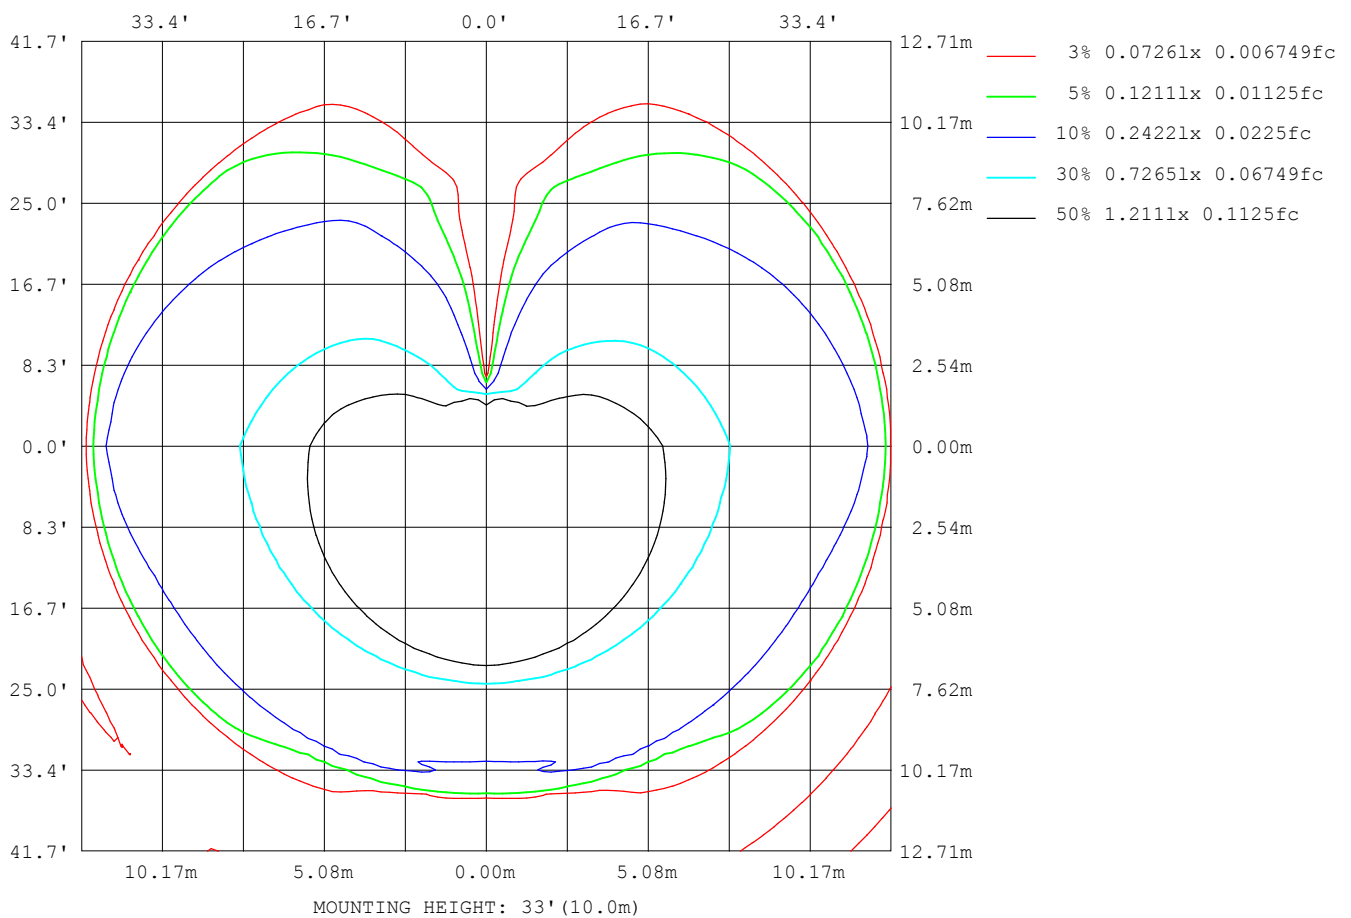

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

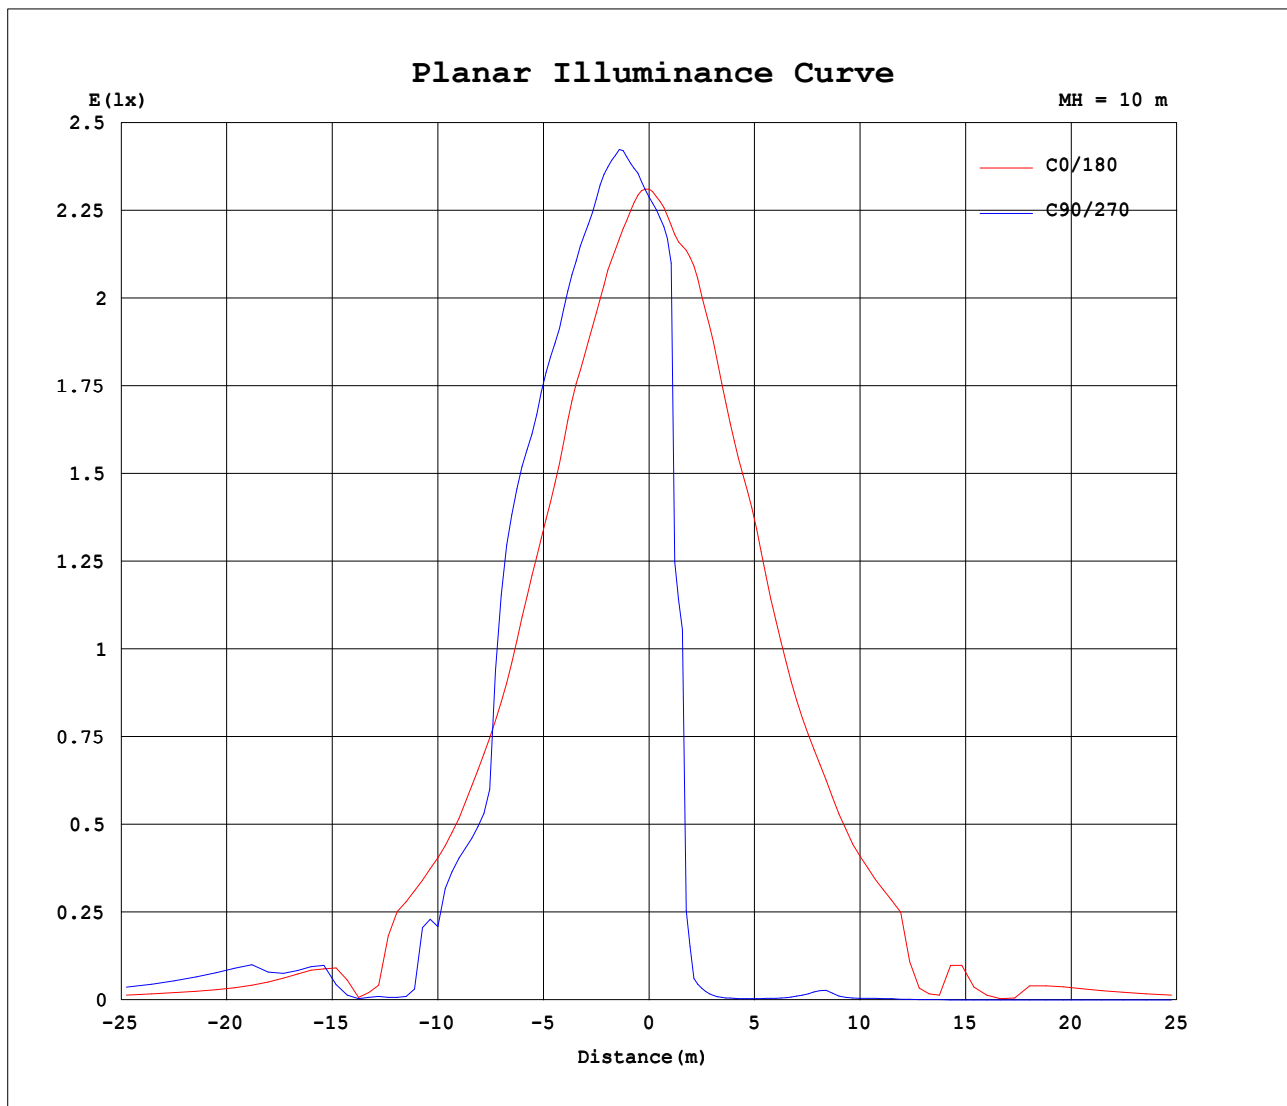


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.12V I:0.7482A P:5.977W PF:0.6592 Freq:59.97Hz Lamp Flux:360.547x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light RGBWEIGHT:	
SPEC.:6W 5700K Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

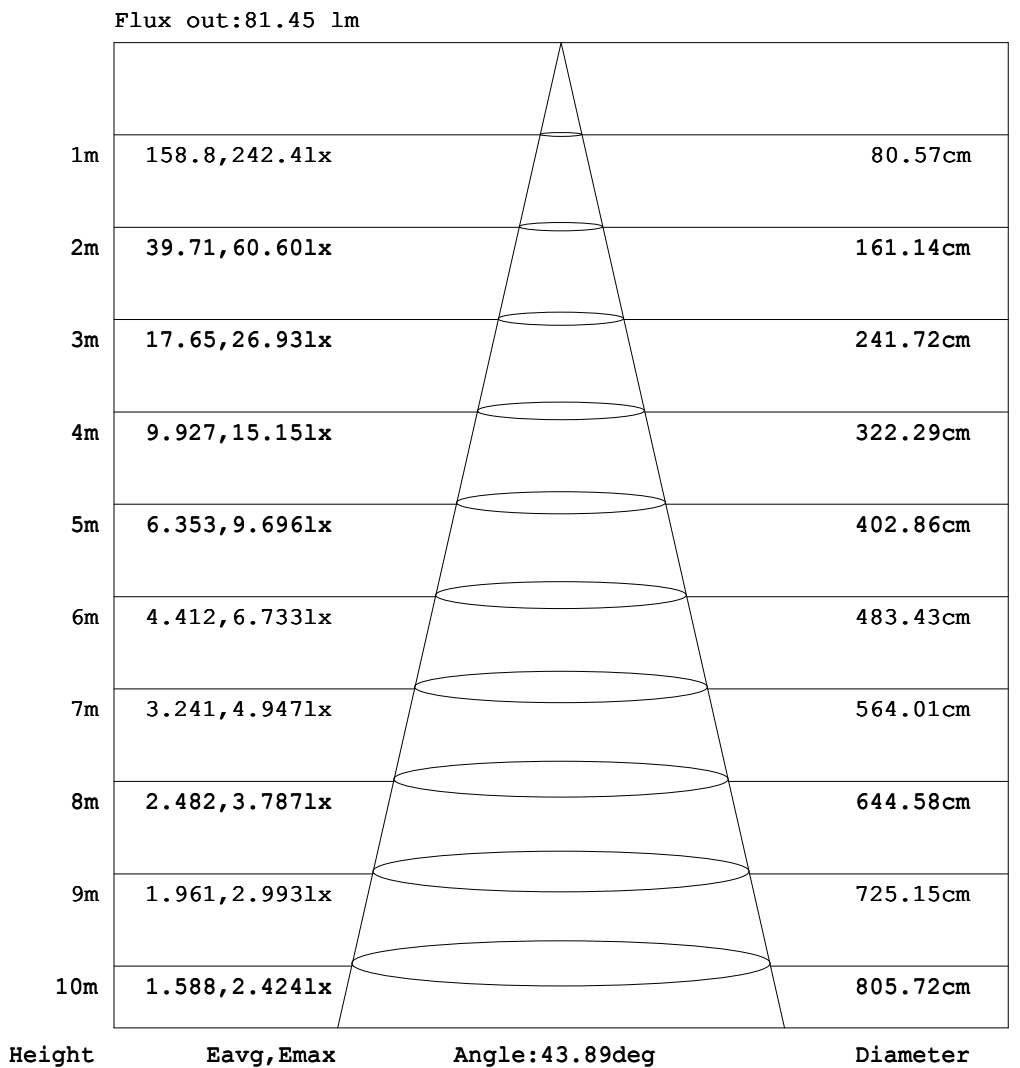

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:0.7482A P:5.977W PF:0.6592 Freq:59.97Hz Lamp Flux:360.547x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	RGBWEIGHT:
SPEC.:6W 5700K Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.59	0.66	0.76	0.36	0.99	0.68	0.90	1.13	1.35	1.52	1.72	1.95	2.15	2.34	2.10	2.63	2.61	2.47
-170	0.00	0.59	0.65	0.75	0.37	0.98	0.70	0.94	1.18	1.39	1.54	1.69	1.87	2.01	2.11	2.19	2.11	2.28	2.23
-160	0.00	0.59	0.64	0.73	0.35	0.68	1.06	0.93	1.16	1.37	1.52	1.62	1.74	1.85	1.92	1.91	1.92	1.92	1.87
-150	0.00	0.59	0.63	0.69	0.63	0.45	1.04	0.83	1.07	1.31	1.47	1.59	1.67	1.72	1.77	1.82	1.83	1.83	1.82
-140	0.00	0.59	0.62	0.65	0.73	0.40	0.53	1.07	0.89	1.11	1.31	1.50	1.62	1.71	1.77	1.82	1.83	1.84	1.86
-130	0.00	0.56	0.59	0.63	0.67	0.73	0.42	0.54	0.99	1.11	1.00	1.19	1.36	1.50	1.64	1.76	1.85	1.91	1.97
-120	0.00	0.53	0.57	0.60	0.62	0.64	0.69	0.70	0.48	0.57	0.67	0.99	1.07	1.15	1.21	1.22	1.30	1.37	1.43
-110	0.00	0.50	0.55	0.56	0.58	0.59	0.60	0.61	0.62	0.64	0.66	0.67	0.64	0.57	0.62	0.66	0.71	0.75	0.78
-100	0.00	0.38	0.49	0.51	0.52	0.53	0.52	0.52	0.52	0.53	0.53	0.52	0.51	0.51	0.50	0.50	0.49	0.49	0.48
-90	0.00	0.02	0.03	0.04	0.06	0.07	0.09	0.10	0.12	0.13	0.14	0.16	0.17	0.19	0.20	0.22	0.23	0.24	0.26
-80	0.00	0.03	0.20	0.66	1.27	1.99	2.89	4.02	5.31	6.72	8.29	9.93	11.7	13.4	15.1	16.6	18.0	19.3	20.3
-70	0.00	0.12	0.90	2.01	3.69	5.96	9.01	12.8	17.2	21.9	26.7	31.6	36.5	41.2	45.8	50.0	53.8	57.1	59.6
-60	0.00	0.37	1.60	3.69	7.08	12.2	18.7	25.9	33.6	42.0	51.3	61.3	70.8	79.2	82.2	66.3	59.5	58.3	60.6
-50	0.00	0.64	2.39	5.72	11.8	20.0	29.0	39.5	52.1	64.1	41.4	37.4	39.3	10.9	5.11	8.70	11.0	9.01	3.07
-40	0.00	0.82	3.07	8.04	16.7	26.7	38.7	53.0	34.4	35.3	6.88	22.7	52.0	86.1	97.0	105	106	105	103
-30	0.00	0.97	3.69	10.3	20.6	32.0	46.8	22.2	45.9	10.5	70.4	95.8	117	126	177	211	225	234	242
-20	0.00	1.07	4.15	12.0	22.8	35.7	46.3	24.4	8.07	83.4	111	130	167	198	213	225	232	241	249
-10	0.00	1.10	4.32	12.8	23.5	37.0	23.0	52.3	52.8	108	130	153	183	203	213	225	235	243	250
0	0.00	1.08	4.15	12.6	22.7	35.5	4.46	52.6	94.4	116	139	155	176	195	205	218	224	226	231
10	0.00	1.04	3.93	11.7	21.1	32.6	18.9	50.9	52.6	101	117	128	138	147	143	134	113	76.7	26.7
20	0.00	0.95	3.44	10.0	18.5	27.9	34.3	15.2	7.53	82.0	90.7	102	102	101	96.8	82.9	60.9	33.0	0.76
30	0.00	0.82	2.79	7.76	15.3	22.2	30.6	8.84	38.0	9.38	68.3	71.2	73.9	72.0	62.9	51.8	37.3	19.9	0.76
40	0.00	0.66	2.13	5.32	11.1	16.6	22.2	28.0	13.8	12.9	6.12	21.6	48.8	45.8	40.4	34.1	26.7	17.1	6.09
50	0.00	0.50	1.54	3.27	6.65	11.1	14.8	18.1	21.5	23.6	10.7	3.95	21.1	8.58	2.95	6.11	9.08	7.08	1.03
60	0.00	0.25	0.97	1.87	3.23	5.43	8.10	10.5	12.1	13.2	14.0	14.4	14.0	12.7	9.97	6.99	2.67	0.64	0.12
70	0.00	0.04	0.51	0.94	1.44	1.99	2.74	3.64	4.63	5.45	6.03	6.22	6.05	5.53	4.75	3.76	2.62	1.35	0.02
80	0.00	0.00	0.04	0.25	0.45	0.58	0.72	0.85	0.94	1.00	1.03	1.03	1.00	0.92	0.81	0.65	0.45	0.23	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.36	0.45	0.46	0.45	0.45	0.44	0.42	0.41	0.39	0.37	0.35	0.33	0.30	0.28	0.26	0.23	0.21	0.18
110	0.00	0.48	0.52	0.52	0.52	0.51	0.51	0.50	0.49	0.49	0.47	0.44	0.37	0.26	0.26	0.26	0.26	0.25	0.24
120	0.00	0.52	0.55	0.56	0.56	0.57	0.59	0.56	0.29	0.31	0.33	0.57	0.56	0.53	0.50	0.39	0.41	0.43	0.42
130	0.00	0.54	0.57	0.59	0.61	0.65	0.30	0.34	0.72	0.74	0.52	0.60	0.70	0.75	0.83	0.85	0.87	0.89	0.89
140	0.00	0.57	0.60	0.62	0.68	0.31	0.38	0.84	0.57	0.70	0.84	0.95	1.08	1.17	1.24	1.28	1.38	1.38	1.38
150	0.00	0.58	0.61	0.66	0.58	0.37	0.89	0.61	0.79	0.97	1.13	1.26	1.40	1.51	1.58	1.62	1.64	1.65	1.64
160	0.00	0.59	0.63	0.71	0.32	0.61	0.95	0.76	0.96	1.16	1.33	1.49	1.63	1.75	1.85	1.89	1.91	1.97	1.98
170	0.00	0.59	0.65	0.74	0.35	0.94	0.64	0.86	1.08	1.29	1.47	1.64	1.82	1.99	2.10	2.22	2.21	2.41	2.41
180	0.00	0.59	0.66	0.76	0.36	0.99	0.68	0.90	1.13	1.35	1.52	1.72	1.95	2.15	2.34	2.10	2.63	2.61	2.50

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:0.7482A P:5.977W PF:0.6592 Freq:59.97Hz Lamp Flux:360.547x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	RGBWEIGHT:
SPEC.:6W 5700K Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.66	2.64	2.28	2.56	2.40	2.26	2.00	1.81	1.55	1.37	1.07	0.85	1.17	0.45	0.84	0.77	0.61	0.08	
-170	2.29	2.19	2.35	2.26	2.20	2.08	1.97	1.81	1.57	1.39	1.12	0.89	1.14	0.46	0.82	0.76	0.61	0.08	
-160	1.95	1.99	2.02	2.06	2.01	1.94	1.83	1.74	1.54	1.31	1.09	1.32	0.82	0.48	0.77	0.74	0.61	0.08	
-150	1.86	1.89	1.91	1.90	1.87	1.83	1.73	1.61	1.44	1.23	0.97	1.18	0.57	0.78	0.75	0.72	0.61	0.08	
-140	1.86	1.88	1.88	1.87	1.79	1.72	1.62	1.41	1.25	1.02	1.19	0.66	0.50	0.81	0.74	0.67	0.60	0.08	
-130	1.93	1.88	1.80	1.69	1.56	1.45	1.26	1.11	1.22	1.09	0.64	0.52	0.81	0.73	0.72	0.61	0.61	0.08	
-120	1.38	1.32	1.26	1.28	1.21	1.14	1.05	0.75	0.62	0.56	0.80	0.74	0.71	0.71	0.64	0.59	0.60	0.08	
-110	0.75	0.72	0.69	0.65	0.61	0.70	0.72	0.70	0.67	0.66	0.67	0.68	0.66	0.59	0.58	0.59	0.59	0.08	
-100	0.49	0.51	0.52	0.53	0.53	0.55	0.56	0.55	0.54	0.53	0.53	0.53	0.54	0.56	0.57	0.57	0.52	0.08	
-90	0.25	0.24	0.23	0.22	0.21	0.20	0.19	0.18	0.17	0.16	0.15	0.14	0.13	0.12	0.11	0.10	0.09	0.08	
-80	19.4	18.3	17.0	15.5	13.9	12.3	10.6	8.94	7.27	5.75	4.37	3.18	2.29	1.59	1.00	0.47	0.11	0.08	
-70	57.1	53.8	50.0	45.8	41.2	36.5	31.7	27.0	22.4	18.1	14.2	10.6	7.28	4.42	2.39	1.28	0.40	0.08	
-60	61.0	63.1	67.9	82.7	78.3	69.7	60.6	51.1	42.0	33.5	26.0	19.3	13.6	8.90	4.82	2.00	0.75	0.08	
-50	9.43	14.0	11.5	5.72	7.32	40.3	60.2	56.0	62.6	51.0	39.3	29.0	20.2	13.1	7.62	3.12	1.04	0.08	
-40	105	106	104	96.5	85.7	51.5	36.3	4.22	57.8	53.2	50.8	38.3	26.7	17.2	9.94	4.42	1.22	0.08	
-30	234	225	211	176	124	116	95.1	69.7	12.6	47.6	51.9	44.6	31.9	20.6	11.7	5.50	1.38	0.08	
-20	242	232	223	212	198	166	127	110	82.6	9.86	57.0	48.2	34.9	22.7	13.0	6.21	1.49	0.08	
-10	242	232	224	212	200	184	152	127	107	72.2	41.9	48.8	35.2	23.4	13.5	6.52	1.54	0.08	
0	227	221	213	206	191	177	155	136	115	94.8	30.2	50.0	33.3	22.6	13.1	6.44	1.52	0.08	
10	75.4	110	133	142	144	139	127	115	100.0	72.0	40.5	44.6	30.8	21.1	12.4	6.14	1.47	0.08	
20	33.1	60.6	81.2	95.7	102	101	99.1	89.6	81.2	9.32	47.7	36.2	27.0	18.5	11.0	5.51	1.38	0.08	
30	20.1	37.5	51.6	62.4	70.6	72.2	70.4	67.6	11.5	39.8	38.5	28.3	22.0	15.2	9.15	4.60	1.23	0.08	
40	16.8	26.1	33.4	39.9	45.5	48.3	35.2	3.45	35.5	32.7	25.8	21.7	16.6	11.5	7.21	3.47	1.06	0.08	
50	7.50	12.2	8.94	3.57	4.99	22.0	26.8	25.3	22.1	20.4	18.0	14.8	11.3	7.99	5.18	2.27	0.90	0.08	
60	3.27	6.18	8.63	10.5	11.8	13.0	13.7	13.8	13.2	12.1	10.5	8.68	6.81	5.04	3.00	1.36	0.63	0.08	
70	1.35	2.61	3.76	4.74	5.52	6.03	6.28	6.25	6.00	5.56	5.01	4.28	3.31	2.18	1.32	0.88	0.33	0.08	
80	0.36	0.71	1.02	1.29	1.50	1.65	1.71	1.68	1.55	1.39	1.20	1.01	0.89	0.77	0.59	0.31	0.08	0.08	
90	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.04	0.04	0.05	0.05	0.06	0.06	0.06	0.07	0.07	0.08	
100	0.21	0.25	0.28	0.31	0.33	0.36	0.38	0.40	0.40	0.42	0.44	0.45	0.46	0.49	0.51	0.54	0.50	0.08	
110	0.25	0.27	0.28	0.29	0.29	0.43	0.50	0.52	0.51	0.53	0.56	0.58	0.58	0.53	0.54	0.56	0.57	0.08	
120	0.44	0.43	0.44	0.57	0.59	0.63	0.64	0.42	0.36	0.37	0.66	0.64	0.64	0.65	0.60	0.56	0.58	0.08	
130	0.91	0.91	0.89	0.88	0.81	0.78	0.66	0.63	0.85	0.82	0.45	0.40	0.73	0.68	0.68	0.59	0.59	0.08	
140	1.41	1.43	1.35	1.34	1.25	1.18	1.07	0.93	0.83	0.70	0.97	0.51	0.42	0.76	0.71	0.65	0.59	0.08	
150	1.68	1.69	1.72	1.71	1.66	1.56	1.39	1.27	1.10	0.94	0.76	1.03	0.48	0.73	0.73	0.70	0.60	0.08	
160	2.00	1.97	1.99	1.99	1.91	1.83	1.69	1.55	1.33	1.11	0.92	1.20	0.75	0.44	0.76	0.73	0.60	0.08	
170	2.42	2.29	2.39	2.26	2.18	2.04	1.92	1.74	1.47	1.29	1.03	0.82	1.10	0.44	0.81	0.76	0.61	0.08	
180	2.66	2.64	2.28	2.56	2.40	2.26	2.00	1.81	1.55	1.37	1.07	0.85	1.17	0.45	0.84	0.77	0.61	0.08	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: