

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		587.5 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	95.2V x 152.8H
	At 50% of Imax	79.9V x 101.5H
	At 90% of Imax	42.4V x 48.4H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	962.6 lumens per klm.
	To 50% of Imax	663.6 lumens per klm.
	To 90% of Imax	177.8 lumens per klm.
	Upward LOR	0.5 %
	Downward LOR	99.5 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.12V I:0.7513A P:6.002W PF:0.6591 Freq:59.99Hz Lamp Flux:77.8264x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	RGBWEIGHT:
SPEC.:6W BLUE Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

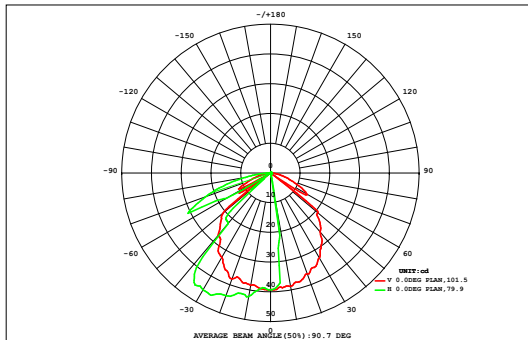

DATA OF LAMP		Eff:12.97lm/W	
MODEL	A9A3-6W-BZ	Imax(cd)	45.72
NOMINAL POWER(W)	6	AVAILABILITY(%)	94.7
RATED VOLTAGE(V)	12	Avai. FLUX(lm)	73.71
NOMINAL FLUX(lm)	77.8264	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	77.83
TEST VOLTAGE(V)	12	θ @50%(H,V)	102,80DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
90	0.00	0.00	0.01	0.02	0.03	0.03	0.03	0.02	0.01	0.01	0.02	0.03	0.03	0.03	0.02	0.01	0.00	0.00	0.30	0.00
80	0.00	0.00	0.02	0.04	0.07	0.08	0.08	0.05	0.02	0.02	0.05	0.08	0.08	0.07	0.05	0.03	0.01	0.00	0.74	0.00
70	0.00	0.01	0.04	0.08	0.12	0.09	0.06	0.03	0.01	0.02	0.06	0.10	0.14	0.12	0.08	0.04	0.01	0.00	1.02	0.54
60	0.00	0.02	0.06	0.12	0.08	0.09	0.16	0.15	0.07	0.06	0.15	0.17	0.11	0.16	0.12	0.06	0.02	0.00	1.63	1.24
50	0.00	0.02	0.08	0.10	0.11	0.29	0.31	0.23	0.09	0.09	0.23	0.31	0.30	0.13	0.17	0.08	0.03	0.00	2.58	2.36
40	0.00	0.03	0.10	0.09	0.26	0.42	0.44	0.36	0.14	0.14	0.35	0.44	0.41	0.27	0.15	0.10	0.03	0.00	3.74	3.59
30	0.00	0.03	0.12	0.08	0.40	0.55	0.63	0.56	0.28	0.27	0.54	0.62	0.54	0.40	0.15	0.12	0.04	0.00	5.34	5.24
20	0.00	0.04	0.11	0.12	0.48	0.69	0.86	0.89	0.91	0.91	0.88	0.84	0.68	0.47	0.18	0.14	0.04	0.00	8.26	8.20
10	0.00	0.04	0.12	0.13	0.50	0.77	1.01	1.13	1.20	1.20	1.13	0.99	0.76	0.49	0.18	0.14	0.04	0.00	9.84	9.78
0	0.00	0.04	0.14	0.09	0.45	0.75	1.03	1.19	1.26	1.26	1.17	1.02	0.75	0.45	0.16	0.15	0.04	0.00	9.96	9.90
-10	0.00	0.04	0.15	0.12	0.29	0.63	1.00	1.21	1.33	1.32	1.20	0.99	0.62	0.30	0.18	0.15	0.04	0.00	9.57	9.50
-20	0.00	0.03	0.13	0.19	0.13	0.41	0.69	0.99	1.22	1.22	0.99	0.69	0.42	0.15	0.25	0.13	0.04	0.00	7.69	7.61
-30	0.00	0.03	0.11	0.26	0.20	0.12	0.26	0.45	0.52	0.52	0.45	0.27	0.14	0.28	0.26	0.11	0.03	0.00	4.03	3.90
-40	0.00	0.02	0.08	0.21	0.37	0.36	0.25	0.16	0.12	0.12	0.18	0.29	0.42	0.37	0.21	0.09	0.02	0.00	3.27	3.04
-50	0.00	0.01	0.05	0.14	0.26	0.42	0.57	0.66	0.72	0.72	0.66	0.57	0.42	0.26	0.14	0.06	0.01	0.00	5.66	5.58
-60	0.00	0.00	0.02	0.06	0.13	0.21	0.30	0.39	0.46	0.46	0.39	0.30	0.21	0.13	0.07	0.02	0.00	0.00	3.16	2.98
-70	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.09	0.09	0.08	0.06	0.04	0.02	0.01	0.00	0.00	0.00	0.61	0.24
-80	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.09	0.09	0.08	0.06	0.04	0.02	0.01	0.00	0.00	0.00	0.61	0.24
-90	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.09	0.09	0.08	0.06	0.04	0.02	0.01	0.00	0.00	0.00	0.61	0.24
HORIZONTAL (DEG)																				
Φ t	0.02	0.37	1.36	1.86	3.89	5.96	7.74	8.56	8.44	8.45	8.56	7.77	6.08	4.13	2.39	1.44	0.41	0.03	77	---
Φ a	0.00	0.17	1.21	1.58	3.66	5.73	7.49	8.34	8.15	8.15	8.31	7.51	5.86	3.91	2.17	1.29	0.20	0.00	---	74


one-half-peak spread: U:7.6,D:9.2 , L:29.4,R:1.2NEMA Beam Type: Type 7 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.12V I:0.7513A P:6.002W PF:0.6591 Freq:59.99Hz Lamp Flux:77.8264x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light RGBWEIGHT:	
SPEC.:6W BLUE Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

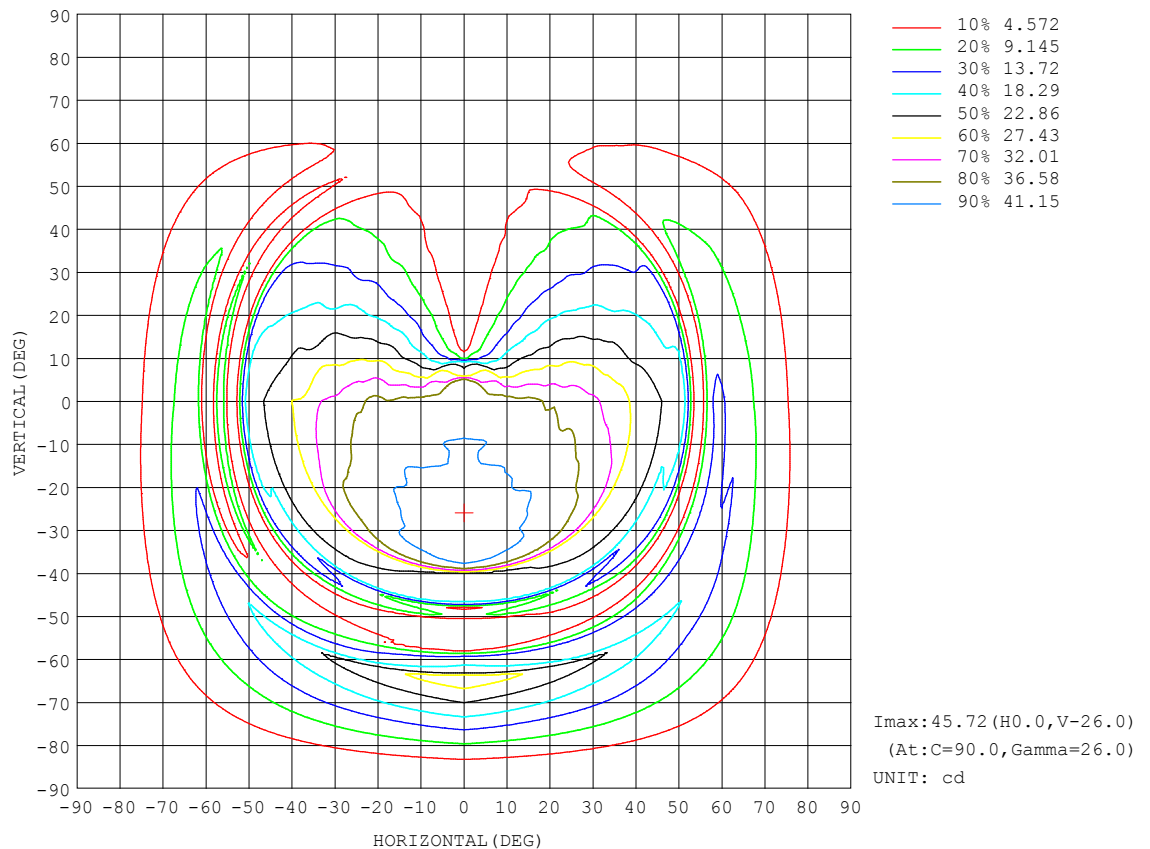


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.12V I:0.7513A P:6.002W PF:0.6591 Freq:59.99Hz Lamp Flux:77.8264x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light RGBWEIGHT:	
SPEC.:6W BLUE Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

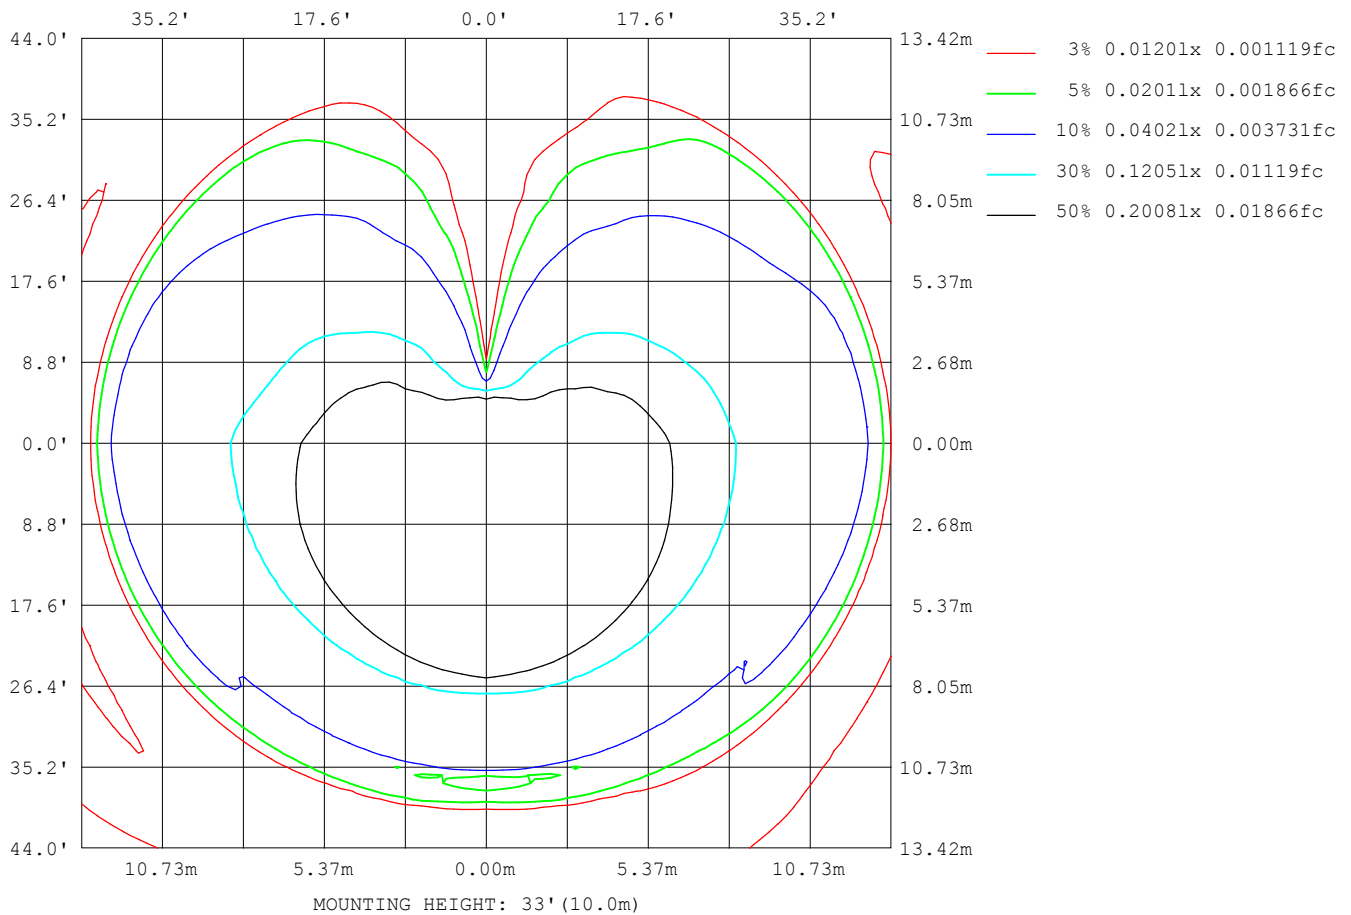

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

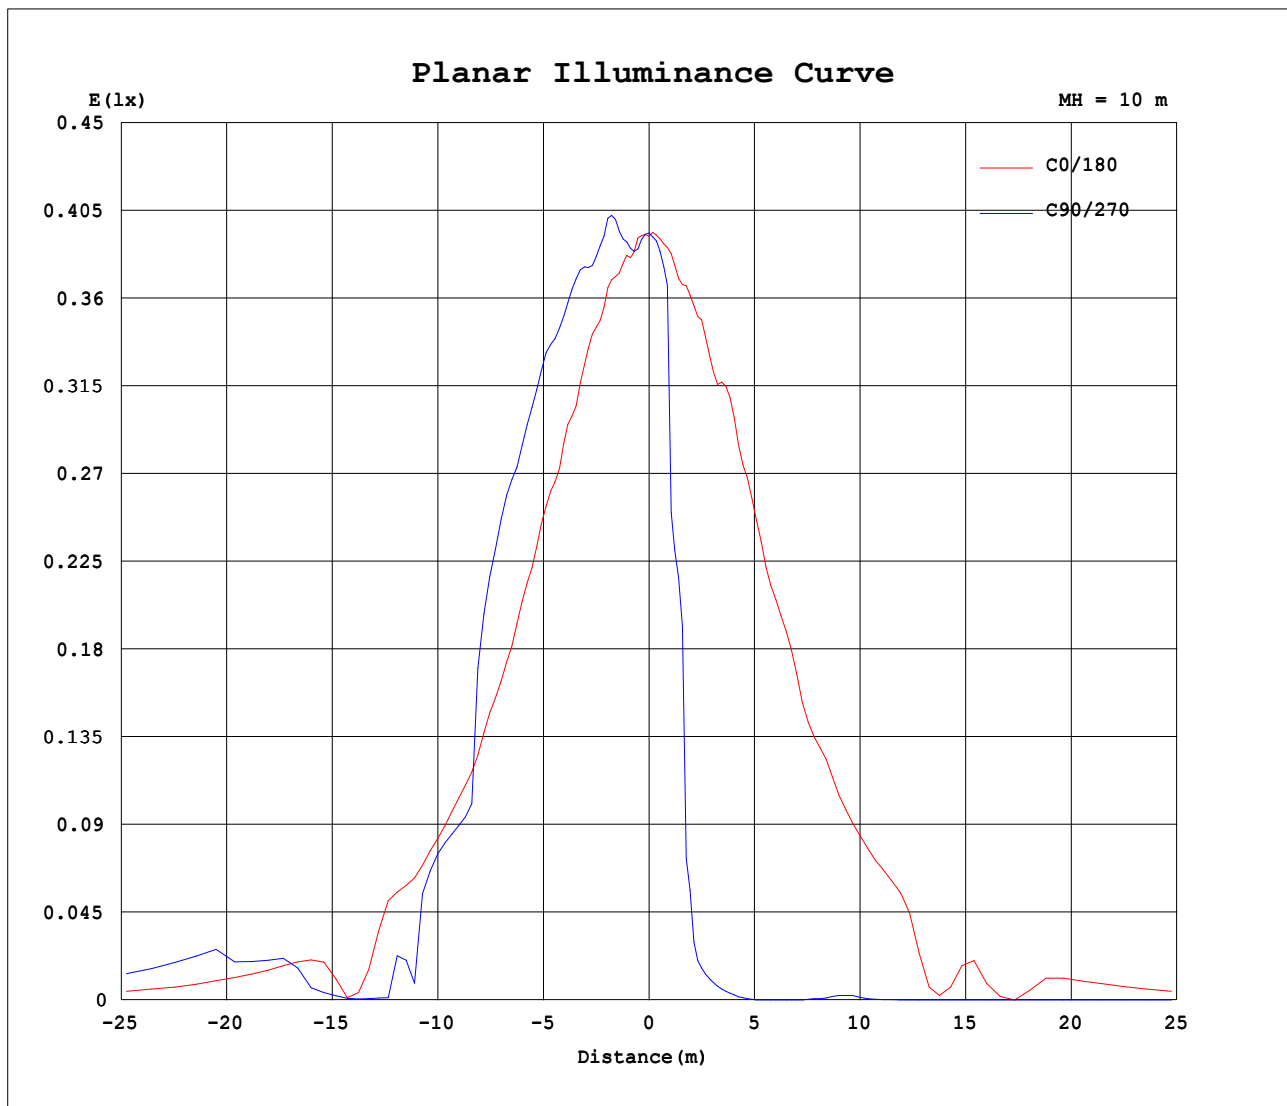


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.12V I:0.7513A P:6.002W PF:0.6591 Freq:59.99Hz Lamp Flux:77.8264x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	RGBWEIGHT:
SPEC.:6W BLUE Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

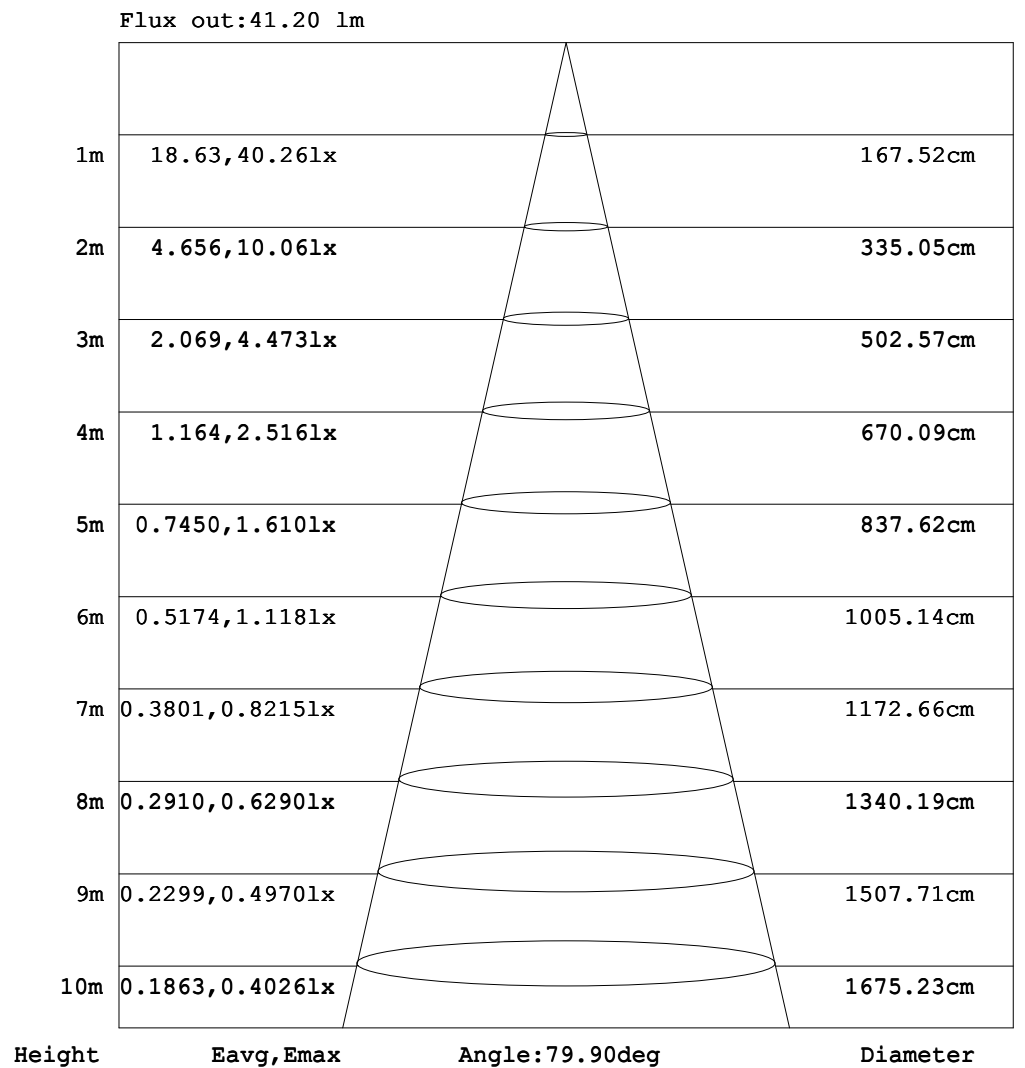

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:0.7513A P:6.002W PF:0.6591 Freq:59.99Hz Lamp Flux:77.8264x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	RGBWEIGHT:
SPEC.:6W BLUE Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.09	0.13	0.16	0.19	0.20	0.23	0.17	0.28	0.27	0.23
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.08	0.12	0.14	0.17	0.18	0.20	0.17	0.17	0.20	0.18
-160	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.08	0.11	0.14	0.15	0.16	0.17	0.15	0.15	0.14	0.11
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.05	0.07	0.09	0.12	0.14	0.15	0.15	0.15	0.14	0.14	0.13
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.07	0.08	0.11	0.11	0.12	0.14	0.15	0.15	0.15	0.15
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.08	0.11	0.12	0.13	0.15	0.16	0.17	0.17	0.18
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.09	0.10	0.13	0.15	0.17	0.18
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.04	0.13	0.31	0.60	1.05	1.60	2.21	2.87	3.58	4.30	5.04	5.77	6.48	7.14	7.74	8.26	8.69
-70	0.00	0.02	0.15	0.65	1.52	2.63	4.01	5.57	7.22	8.93	10.7	12.6	14.5	16.3	17.9	19.4	20.8	22.0	23.0
-60	0.00	0.04	0.46	1.59	3.21	5.21	7.38	9.93	12.6	15.1	18.0	20.9	23.4	18.5	16.9	15.6	15.6	16.2	17.2
-50	0.00	0.05	0.92	2.62	4.91	7.52	10.6	13.7	17.4	15.7	9.44	5.39	5.17	0.95	1.43	3.19	5.00	8.04	8.58
-40	0.00	0.06	1.35	3.58	6.24	9.49	13.0	16.7	7.05	8.11	0.89	9.12	12.8	21.1	22.6	22.7	22.7	22.7	22.4
-30	0.00	0.13	1.71	4.25	7.33	10.7	14.9	4.48	8.22	6.14	16.1	22.9	24.2	33.7	38.4	41.1	42.3	43.9	45.4
-20	0.00	0.20	1.96	4.61	7.82	11.6	11.8	8.90	3.53	18.4	23.7	27.4	34.6	37.5	39.6	41.2	42.0	43.0	43.9
-10	0.00	0.22	2.06	4.66	7.79	11.8	3.19	7.01	17.2	22.9	26.0	30.9	34.8	37.3	39.2	39.2	39.9	41.1	42.1
0	0.00	0.22	2.01	4.45	7.35	11.1	0.03	3.55	20.6	23.8	27.5	30.4	32.7	36.0	37.9	37.8	38.4	39.1	39.2
10	0.00	0.20	1.90	4.21	6.88	10.3	2.07	6.94	16.9	20.8	23.2	24.2	26.4	27.0	26.8	23.6	20.1	15.2	7.60
20	0.00	0.15	1.66	3.77	6.13	8.83	9.44	8.44	3.47	17.5	18.5	19.6	19.5	19.4	17.8	15.3	11.5	6.46	0.54
30	0.00	0.07	1.32	3.16	5.12	7.10	9.40	0.76	7.86	6.02	14.5	14.7	14.5	13.3	11.8	10.0	7.01	3.61	0.00
40	0.00	0.00	0.94	2.42	3.89	5.48	7.03	8.50	1.52	7.11	0.77	8.91	10.3	9.40	8.42	6.83	4.90	2.62	0.25
50	0.00	0.00	0.55	1.58	2.75	3.82	4.89	5.78	6.80	7.03	1.17	2.22	4.32	0.71	1.19	2.83	2.72	1.50	0.05
60	0.00	0.00	0.19	0.80	1.56	2.32	2.96	3.55	3.99	4.25	4.45	4.55	4.29	3.79	2.73	0.99	0.28	0.04	0.00
70	0.00	0.00	0.00	0.20	0.55	0.93	1.32	1.67	1.91	2.06	2.12	2.12	2.03	1.84	1.56	1.23	0.85	0.43	0.00
80	0.00	0.00	0.00	0.00	0.00	0.03	0.14	0.25	0.34	0.41	0.45	0.48	0.47	0.44	0.39	0.31	0.22	0.11	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.03	0.04	0.04	0.06	0.09	0.11
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.05	0.08	0.12	0.13	0.13	0.13	0.12	0.11
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.07	0.12	0.14	0.16	0.15	0.16	0.17	0.17	0.16
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.11	0.14	0.17	0.18	0.21	0.18	0.19	0.22	0.21
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.09	0.13	0.16	0.19	0.20	0.23	0.17	0.28	0.27	0.22

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:0.7513A P:6.002W PF:0.6591 Freq:59.99Hz Lamp Flux:77.8264x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	RGBWEIGHT:
SPEC.:6W BLUE Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.28	0.28	0.19	0.27	0.24	0.18	0.16	0.15	0.12	0.01	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	
-170	0.20	0.17	0.23	0.22	0.21	0.16	0.16	0.15	0.12	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	
-160	0.14	0.16	0.17	0.17	0.15	0.16	0.16	0.14	0.07	0.04	0.03	0.07	0.01	0.00	0.00	0.00	0.00	0.00	
-150	0.14	0.14	0.14	0.15	0.16	0.15	0.14	0.08	0.06	0.05	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.16	0.16	0.16	0.15	0.14	0.11	0.10	0.08	0.07	0.05	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.17	0.16	0.16	0.14	0.13	0.12	0.11	0.08	0.08	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.17	0.15	0.13	0.12	0.10	0.06	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	8.29	7.80	7.23	6.60	5.92	5.22	4.50	3.79	3.09	2.43	1.81	1.26	0.80	0.43	0.17	0.04	0.00	0.00	
-70	22.0	20.8	19.4	17.9	16.3	14.6	12.7	10.8	9.10	7.44	5.86	4.36	3.01	1.85	0.92	0.29	0.02	0.00	
-60	17.1	17.1	17.2	17.5	18.6	23.5	20.7	17.9	15.0	12.5	10.1	7.60	5.52	3.63	1.99	0.74	0.07	0.00	
-50	8.09	5.28	4.06	2.63	0.73	3.78	9.74	15.6	15.9	17.2	13.6	10.5	7.70	5.23	3.08	1.28	0.17	0.00	
-40	22.6	22.5	22.7	22.5	20.9	12.3	10.7	1.17	8.88	15.0	16.8	13.0	9.41	6.47	3.98	1.79	0.29	0.00	
-30	43.9	42.2	40.7	38.4	33.7	23.8	22.7	15.4	9.50	5.71	14.7	14.9	10.6	7.46	4.59	2.20	0.41	0.00	
-20	42.7	41.5	40.8	39.4	37.2	34.5	26.5	23.5	17.4	7.02	11.3	13.7	11.5	7.74	4.92	2.46	0.49	0.00	
-10	41.2	39.8	39.3	38.0	37.1	34.5	31.4	25.1	22.6	18.9	3.73	14.0	11.5	7.64	4.96	2.57	0.53	0.00	
0	38.5	38.7	37.9	36.1	35.0	33.0	29.8	26.0	23.5	20.8	0.63	14.1	10.8	7.16	4.74	2.53	0.53	0.00	
10	15.3	20.0	23.6	25.6	26.7	26.1	24.7	22.4	20.5	18.7	3.66	12.9	9.95	6.73	4.50	2.41	0.50	0.00	
20	6.18	11.0	14.9	17.6	19.1	19.5	18.7	18.3	16.5	6.96	10.8	11.3	8.68	6.06	4.08	2.16	0.44	0.00	
30	3.61	6.92	9.61	11.8	13.3	14.1	14.5	13.8	9.37	5.34	11.0	9.44	6.99	5.25	3.51	1.81	0.34	0.00	
40	2.50	4.74	6.75	8.34	9.25	9.77	10.4	1.05	7.89	9.45	8.68	7.01	5.40	4.13	2.82	1.38	0.23	0.00	
50	1.55	3.00	3.70	2.39	0.49	2.94	6.58	7.30	7.23	6.57	5.72	4.83	4.01	3.07	2.03	0.91	0.11	0.00	
60	0.90	1.76	2.57	3.28	3.88	4.31	4.39	4.44	4.14	3.94	3.68	3.18	2.63	1.98	1.20	0.47	0.04	0.00	
70	0.42	0.83	1.21	1.55	1.84	2.08	2.20	2.24	2.23	2.14	1.96	1.68	1.30	0.88	0.47	0.14	0.00	0.00	
80	0.14	0.28	0.40	0.51	0.59	0.65	0.67	0.67	0.63	0.56	0.46	0.35	0.23	0.12	0.04	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.10	0.06	0.05	0.06	0.05	0.02	0.01	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.12	0.13	0.13	0.13	0.13	0.10	0.08	0.03	0.01	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.17	0.18	0.17	0.16	0.15	0.14	0.14	0.11	0.04	0.00	0.00	0.06	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.22	0.19	0.24	0.23	0.21	0.16	0.16	0.13	0.10	0.01	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	
180	0.28	0.28	0.19	0.27	0.24	0.18	0.16	0.15	0.12	0.01	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: