

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	664.0 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	89.4V x 145.9H
	At 50% of Imax	45.1V x 81.7H
	At 90% of Imax	36.4V x 29.6H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	952.9 lumens per klm.
	To 50% of Imax	621.1 lumens per klm.
	To 90% of Imax	203.7 lumens per klm.

Upward LOR	1.1 %
Downward LOR	98.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.12V I:0.7366A P:5.913W PF:0.6623 Freq:59.97Hz Lamp Flux:139.274x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	RGBWEIGHT:
SPEC.:6W RED Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

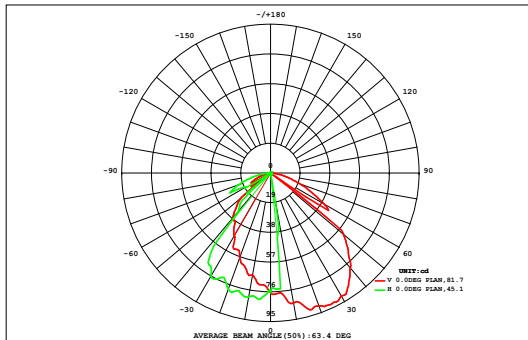

DATA OF LAMP		Eff:23.55lm/W	
MODEL	A9A3-6W-BZ	Imax (cd)	92.47
NOMINAL POWER (W)	6	AVAILABILITY (%)	92.8
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	129.2
NOMINAL FLUX (lm)	139.274	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	139.3
TEST VOLTAGE (V)	12	θ @50% (H,V)	82,45DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.07	0.00
90	0.00	0.00	0.01	0.02	0.03	0.04	0.03	0.02	0.01	0.02	0.06	0.08	0.08	0.07	0.05	0.02	0.01	0.00	0.56	0.00
80	0.00	0.01	0.02	0.05	0.08	0.09	0.09	0.06	0.02	0.05	0.14	0.20	0.21	0.17	0.12	0.06	0.02	0.00	1.39	0.20
70	0.00	0.01	0.05	0.09	0.14	0.10	0.07	0.04	0.02	0.06	0.17	0.30	0.39	0.32	0.21	0.11	0.03	0.00	2.11	1.26
60	0.00	0.02	0.07	0.14	0.10	0.11	0.20	0.20	0.09	0.18	0.45	0.49	0.34	0.48	0.33	0.16	0.05	0.00	3.40	2.43
50	0.00	0.03	0.09	0.12	0.13	0.37	0.43	0.32	0.12	0.26	0.68	0.92	0.87	0.39	0.46	0.22	0.06	0.00	5.48	4.92
40	0.00	0.03	0.12	0.11	0.31	0.57	0.60	0.51	0.20	0.36	0.96	1.27	1.24	0.77	0.47	0.27	0.08	0.01	7.88	7.53
30	0.00	0.04	0.13	0.10	0.51	0.75	0.90	0.84	0.41	0.57	1.37	1.70	1.60	1.19	0.43	0.33	0.09	0.01	11.0	10.7
20	0.00	0.04	0.13	0.14	0.63	0.94	1.26	1.46	1.60	1.79	2.09	2.23	1.98	1.42	0.52	0.36	0.10	0.01	16.7	16.6
10	0.00	0.04	0.14	0.15	0.66	1.06	1.51	1.92	2.26	2.45	2.55	2.48	2.10	1.45	0.52	0.37	0.10	0.01	19.8	19.6
0	0.00	0.04	0.16	0.11	0.57	1.05	1.57	1.95	2.29	2.46	2.47	2.37	1.90	1.25	0.44	0.35	0.09	0.01	19.1	18.9
-10	0.00	0.04	0.16	0.14	0.35	0.85	1.45	1.91	2.19	2.35	2.37	2.12	1.51	0.81	0.50	0.31	0.09	0.01	17.2	17.0
-20	0.00	0.04	0.14	0.20	0.15	0.52	0.93	1.42	1.82	1.96	1.78	1.42	1.03	0.41	0.55	0.26	0.07	0.01	12.7	12.5
-30	0.00	0.03	0.12	0.27	0.23	0.15	0.32	0.58	0.69	0.79	0.83	0.61	0.37	0.61	0.46	0.20	0.06	0.00	6.32	5.83
-40	0.00	0.02	0.08	0.21	0.37	0.39	0.28	0.19	0.14	0.19	0.32	0.51	0.67	0.56	0.33	0.15	0.04	0.00	4.45	3.92
-50	0.00	0.01	0.05	0.13	0.25	0.40	0.55	0.63	0.69	0.72	0.72	0.66	0.52	0.35	0.20	0.09	0.02	0.00	5.99	5.67
-60	0.00	0.00	0.02	0.06	0.12	0.19	0.27	0.35	0.41	0.42	0.38	0.32	0.24	0.16	0.09	0.04	0.01	0.00	3.09	2.12
-70	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.07	0.08	0.09	0.08	0.06	0.04	0.03	0.01	0.00	0.00	0.00	0.59	0.00
-80	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.07	0.08	0.09	0.08	0.06	0.04	0.03	0.01	0.00	0.00	0.00	0.59	0.00
-90	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.07	0.08	0.09	0.08	0.06	0.04	0.03	0.01	0.00	0.00	0.00	0.59	0.00
HORIZONTAL (DEG)																				
Φ t	0.03	0.41	1.50	2.07	4.64	7.61	10.5	12.5	13.1	14.7	17.4	17.7	15.1	10.4	5.70	3.31	0.91	0.07	138	---
Φ a	0.00	0.00	0.89	1.23	3.85	6.98	9.99	11.9	12.5	14.1	16.9	17.3	14.7	10.0	5.31	3.00	0.54	0.00	---	129


one-half-peak spread: U:10.0,D:2.6 , L:4.9,R:20.0 NEMA Beam Type: Type 7 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.12V I:0.7366A P:5.913W PF:0.6623 Freq:59.97Hz Lamp Flux:139.274x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light RGBWEIGHT:	
SPEC.:6W RED Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

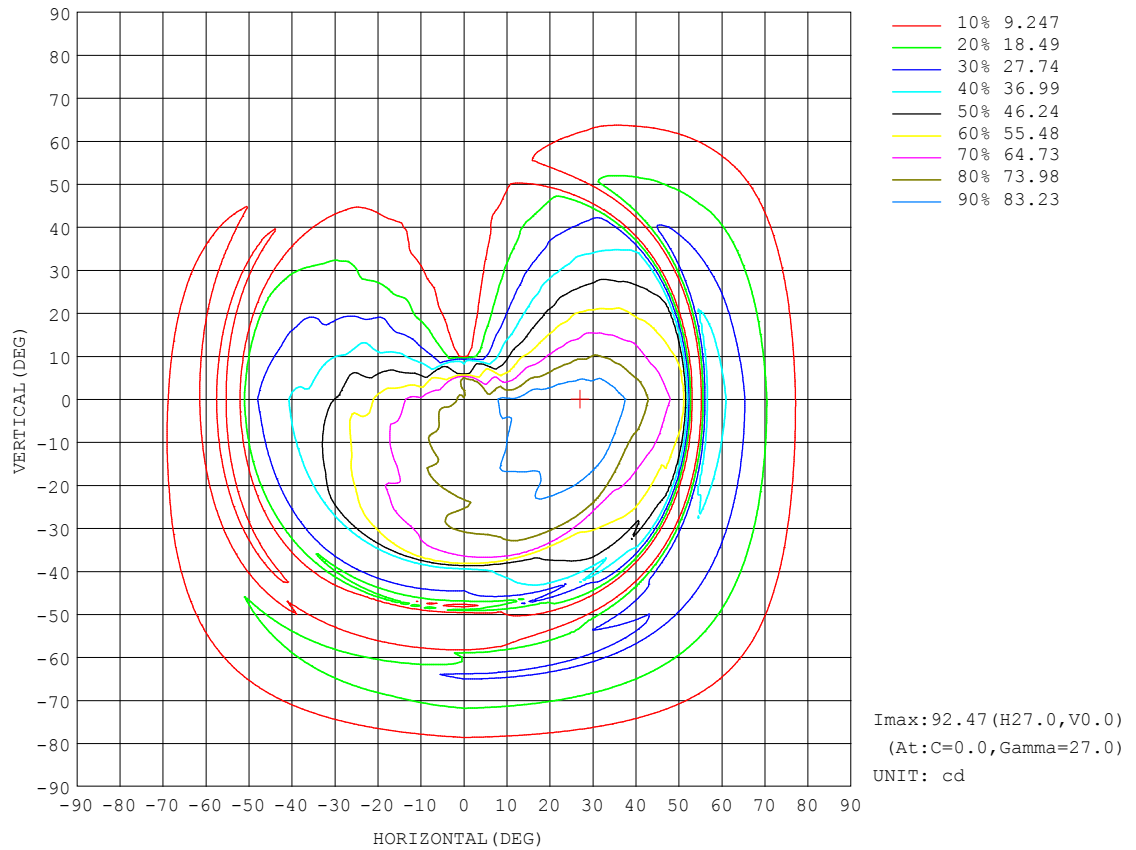


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.12V I:0.7366A P:5.913W PF:0.6623 Freq:59.97Hz Lamp Flux:139.274x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	RGBWEIGHT:
SPEC.:6W RED Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

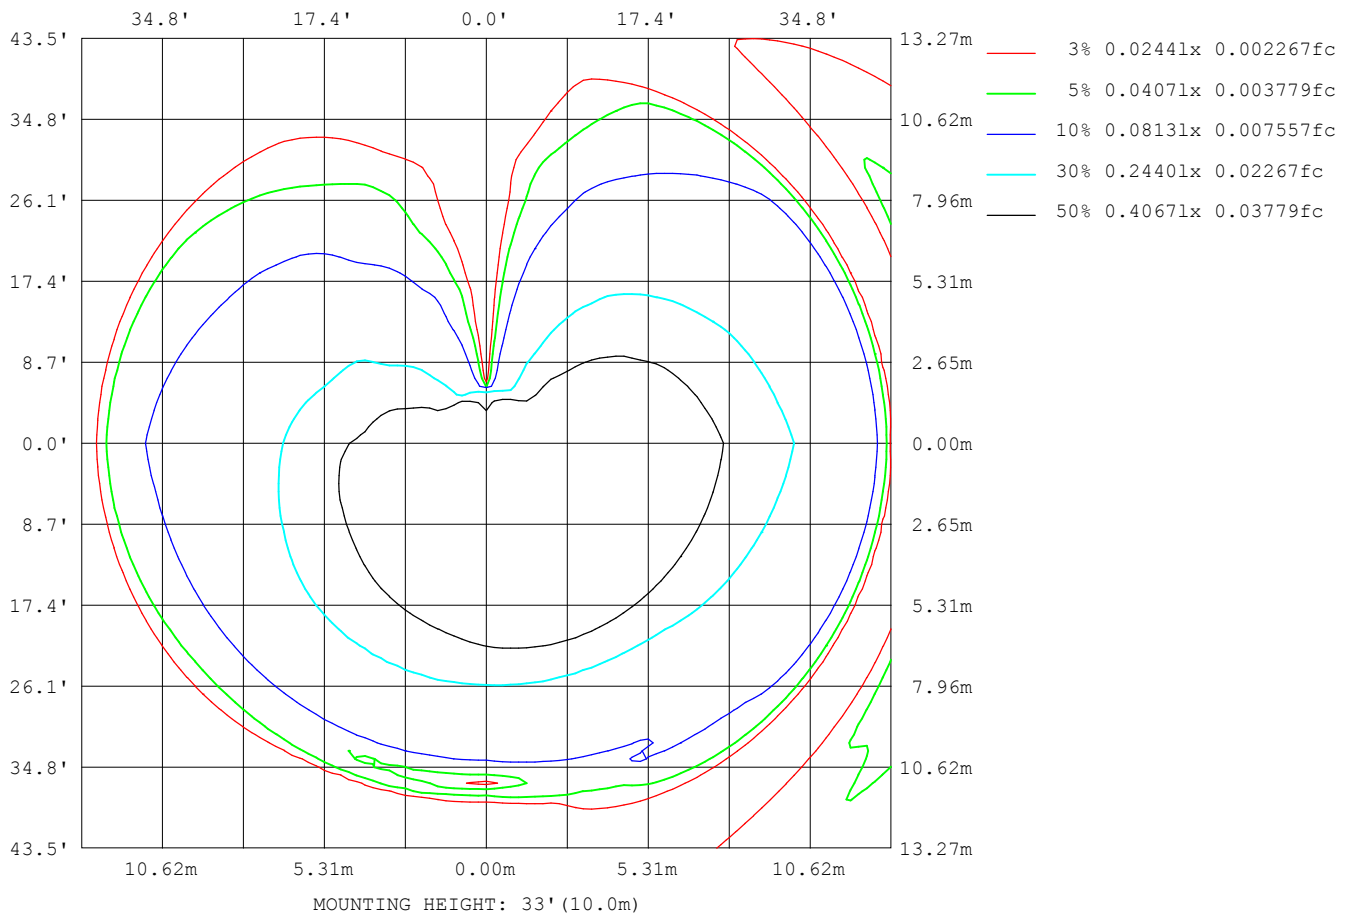

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

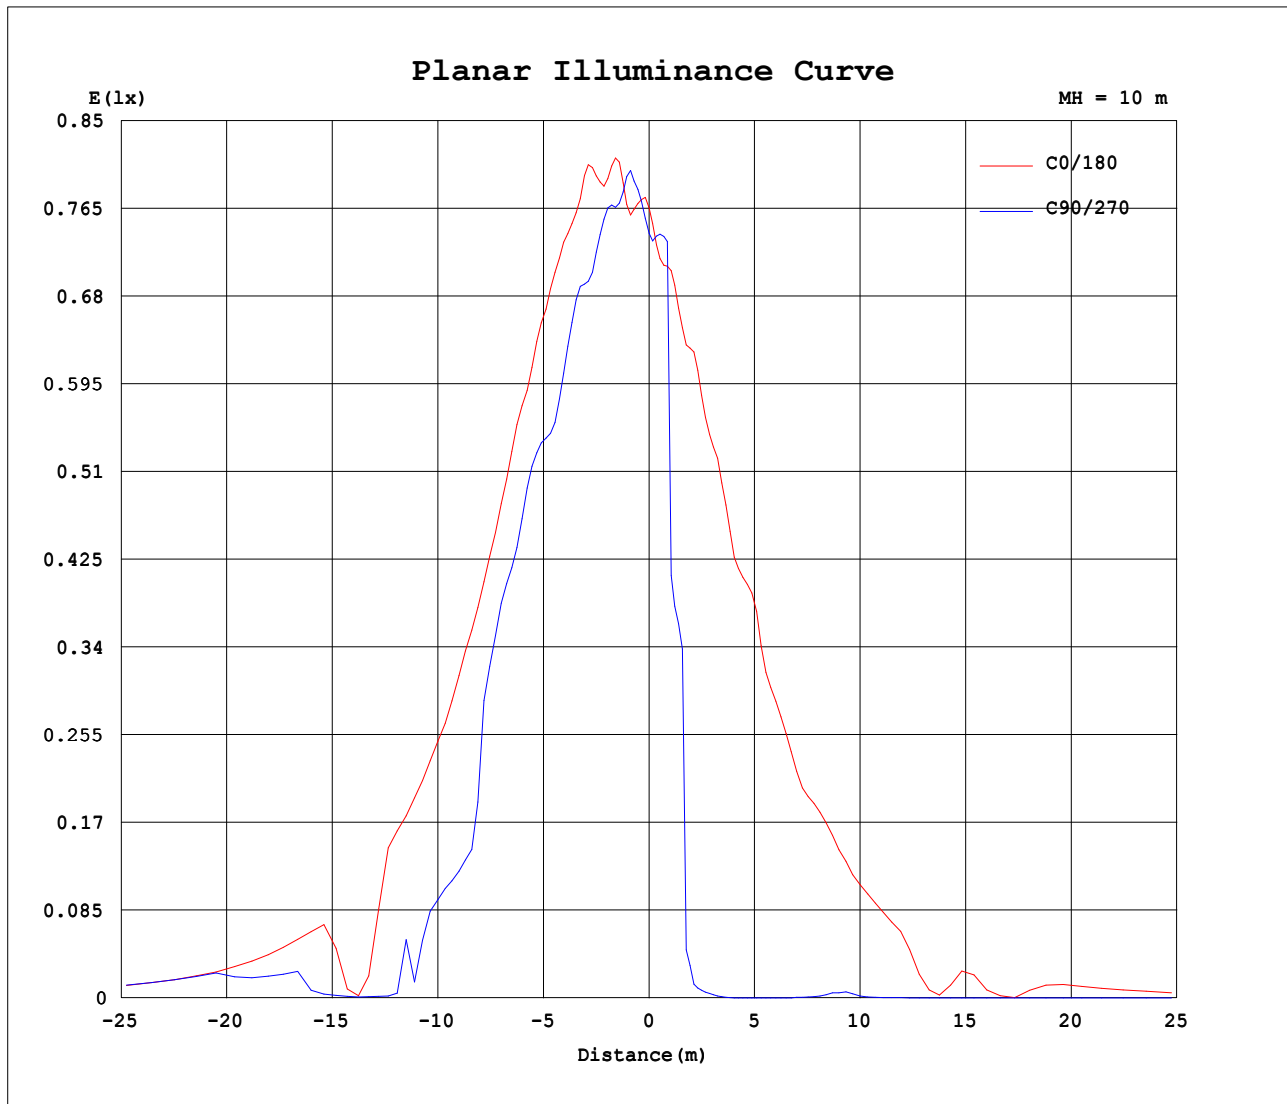


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.12V I:0.7366A P:5.913W PF:0.6623 Freq:59.97Hz Lamp Flux:139.274x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light RGBWEIGHT:	
SPEC.:6W RED Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

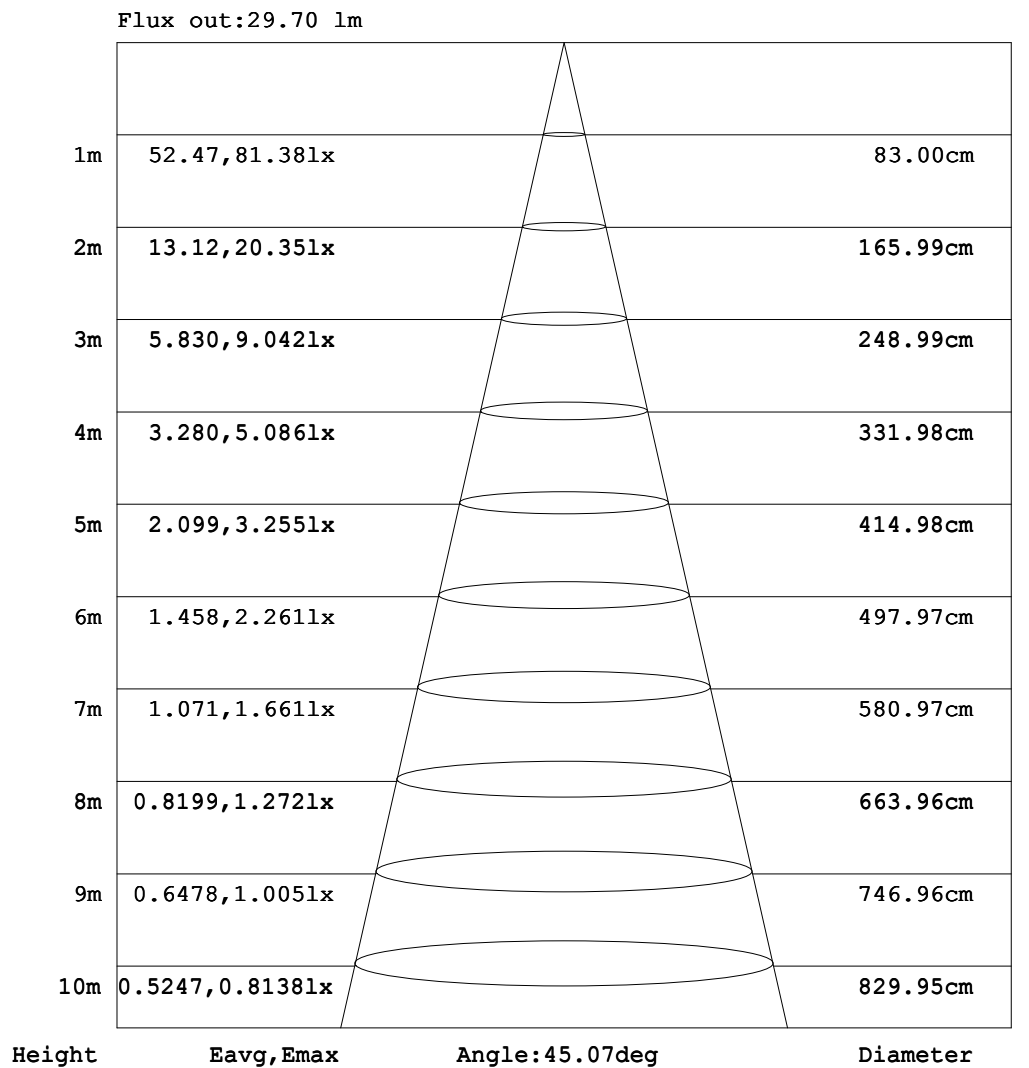

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:0.7366A P:5.913W PF:0.6623 Freq:59.97Hz Lamp Flux:139.274x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	RGBWEIGHT:
SPEC.:6W RED Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.22	0.23	0.28	0.03	0.41	0.20	0.28	0.36	0.47	0.53	0.58	0.65	0.69	0.76	0.68	0.75	0.81	0.63
-170	0.00	0.22	0.23	0.27	0.02	0.39	0.18	0.27	0.36	0.43	0.50	0.54	0.59	0.62	0.64	0.64	0.60	0.60	0.55
-160	0.00	0.21	0.22	0.25	0.01	0.19	0.39	0.24	0.33	0.40	0.46	0.48	0.51	0.54	0.55	0.53	0.51	0.49	0.45
-150	0.00	0.20	0.22	0.23	0.18	0.05	0.39	0.21	0.27	0.35	0.39	0.43	0.45	0.46	0.46	0.47	0.45	0.44	0.42
-140	0.00	0.19	0.21	0.21	0.24	0.02	0.08	0.38	0.21	0.27	0.33	0.38	0.39	0.39	0.40	0.39	0.39	0.38	0.36
-130	0.00	0.19	0.20	0.20	0.20	0.23	0.02	0.07	0.31	0.36	0.22	0.27	0.31	0.34	0.36	0.39	0.39	0.38	0.38
-120	0.00	0.18	0.20	0.20	0.19	0.18	0.19	0.19	0.03	0.06	0.10	0.26	0.29	0.30	0.28	0.24	0.26	0.27	0.28
-110	0.00	0.15	0.18	0.18	0.18	0.17	0.16	0.15	0.14	0.14	0.14	0.13	0.10	0.03	0.04	0.05	0.06	0.06	0.07
-100	0.00	0.11	0.14	0.16	0.16	0.15	0.15	0.13	0.12	0.12	0.10	0.09	0.08	0.06	0.05	0.04	0.03	0.01	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.04	0.20	0.44	0.73	1.16	1.61	2.13	2.70	3.33	3.97	4.61	5.24	5.83	6.38	6.86	7.28	7.62
-70	0.00	0.02	0.31	0.86	1.62	2.68	3.91	5.31	6.84	8.39	9.99	11.7	13.4	15.0	16.6	17.9	19.1	20.1	20.9
-60	0.00	0.11	0.71	1.76	3.28	5.16	7.28	9.66	12.2	14.8	17.7	20.3	22.8	19.7	17.2	16.5	16.7	17.5	18.6
-50	0.00	0.22	1.13	2.80	5.02	7.61	10.6	14.0	17.5	17.3	10.6	6.54	7.06	1.65	1.80	3.48	3.90	3.21	1.81
-40	0.00	0.29	1.60	3.76	6.50	9.74	13.7	17.4	8.27	8.83	1.35	9.73	18.8	27.0	29.8	31.0	32.0	32.3	32.1
-30	0.00	0.40	1.99	4.54	7.72	11.5	15.8	5.30	11.5	6.11	21.8	29.7	33.6	46.4	56.4	62.0	66.8	72.0	76.1
-20	0.00	0.49	2.26	5.06	8.36	12.7	13.0	9.54	3.90	23.7	31.3	37.1	48.9	56.1	62.6	65.1	68.9	74.7	78.9
-10	0.00	0.53	2.38	5.21	8.45	13.0	4.49	11.0	18.6	29.7	35.9	42.6	50.3	58.3	59.8	67.9	71.3	76.6	80.4
0	0.00	0.53	2.34	5.08	8.12	12.6	0.27	6.71	24.3	31.1	37.8	40.0	46.3	53.8	57.6	62.5	66.2	71.7	76.5
10	0.00	0.51	2.23	4.81	7.63	11.6	3.31	10.9	18.5	27.0	32.0	32.5	36.8	41.1	38.4	38.6	32.6	21.9	4.89
20	0.00	0.44	1.99	4.32	6.83	10.1	10.6	9.02	3.78	21.5	24.6	27.2	25.9	26.9	25.8	22.7	16.2	9.05	0.10
30	0.00	0.34	1.65	3.58	5.75	8.10	10.7	1.32	11.1	5.90	17.8	19.2	20.2	18.6	15.8	13.5	9.76	5.08	0.00
40	0.00	0.24	1.24	2.75	4.43	6.11	8.11	9.77	2.42	7.75	1.09	9.38	12.7	12.2	11.3	9.72	7.21	3.99	0.71
50	0.00	0.17	0.81	1.88	3.12	4.33	5.45	6.62	7.69	8.16	1.87	2.12	6.10	1.19	1.32	2.91	3.04	1.82	0.14
60	0.00	0.07	0.48	1.07	1.83	2.64	3.38	4.01	4.45	4.78	5.13	5.14	4.89	4.40	3.07	1.42	0.45	0.07	0.00
70	0.00	0.00	0.18	0.46	0.78	1.18	1.56	1.90	2.17	2.36	2.41	2.39	2.28	2.05	1.74	1.37	0.94	0.48	0.00
80	0.00	0.00	0.00	0.07	0.15	0.23	0.35	0.43	0.50	0.56	0.60	0.61	0.59	0.54	0.47	0.37	0.26	0.13	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.11	0.14	0.16	0.16	0.15	0.15	0.13	0.12	0.12	0.10	0.09	0.08	0.06	0.05	0.04	0.03	0.01	0.00
110	0.00	0.15	0.18	0.18	0.18	0.17	0.16	0.15	0.14	0.14	0.13	0.11	0.07	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.18	0.20	0.20	0.19	0.18	0.19	0.17	0.00	0.02	0.03	0.17	0.16	0.14	0.10	0.04	0.02	0.01	0.00
130	0.00	0.19	0.20	0.20	0.20	0.22	0.01	0.03	0.25	0.27	0.09	0.10	0.10	0.10	0.11	0.13	0.15	0.15	0.13
140	0.00	0.19	0.21	0.21	0.24	0.01	0.05	0.33	0.12	0.14	0.17	0.23	0.27	0.27	0.27	0.27	0.28	0.27	0.26
150	0.00	0.20	0.22	0.23	0.18	0.04	0.36	0.15	0.18	0.25	0.32	0.35	0.38	0.41	0.40	0.40	0.38	0.34	0.31
160	0.00	0.21	0.22	0.25	0.01	0.18	0.36	0.19	0.26	0.35	0.42	0.46	0.48	0.50	0.50	0.51	0.52	0.51	0.47
170	0.00	0.22	0.23	0.27	0.02	0.38	0.17	0.24	0.33	0.41	0.48	0.53	0.57	0.60	0.65	0.64	0.63	0.65	0.61
180	0.00	0.22	0.23	0.28	0.03	0.41	0.20	0.28	0.36	0.47	0.53	0.58	0.65	0.69	0.76	0.68	0.75	0.81	0.63

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:0.7366A P:5.913W PF:0.6623 Freq:59.97Hz Lamp Flux:139.274x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	RGBWEIGHT:
SPEC.:6W RED Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.64	0.76	0.49	0.72	0.61	0.61	0.48	0.46	0.33	0.29	0.19	0.16	0.19	0.01	0.14	0.11	0.00	0.00	
-170	0.59	0.50	0.64	0.57	0.57	0.56	0.45	0.45	0.32	0.30	0.19	0.17	0.18	0.01	0.14	0.10	0.00	0.00	
-160	0.48	0.48	0.50	0.52	0.51	0.44	0.43	0.35	0.31	0.26	0.19	0.26	0.09	0.01	0.13	0.08	0.00	0.00	
-150	0.44	0.44	0.44	0.42	0.41	0.41	0.34	0.32	0.30	0.22	0.18	0.21	0.02	0.11	0.13	0.05	0.00	0.00	
-140	0.37	0.38	0.37	0.35	0.34	0.34	0.34	0.28	0.23	0.19	0.22	0.05	0.02	0.12	0.10	0.02	0.00	0.00	
-130	0.38	0.38	0.37	0.34	0.31	0.28	0.25	0.21	0.24	0.17	0.04	0.02	0.12	0.11	0.08	0.01	0.00	0.00	
-120	0.27	0.25	0.24	0.24	0.23	0.20	0.17	0.08	0.04	0.03	0.11	0.10	0.09	0.08	0.02	0.00	0.00	0.00	
-110	0.06	0.06	0.05	0.04	0.04	0.07	0.07	0.07	0.07	0.08	0.07	0.07	0.03	0.01	0.00	0.00	0.00	0.00	
-100	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	7.49	7.26	6.96	6.57	6.10	5.57	4.98	4.35	3.69	3.05	2.40	1.75	1.18	0.67	0.27	0.04	0.00	0.00	
-70	20.7	20.3	19.7	18.9	17.7	16.3	14.7	13.1	11.5	9.87	8.10	6.34	4.62	3.05	1.65	0.58	0.02	0.00	
-60	19.9	21.1	22.0	22.9	25.5	28.9	26.8	24.5	21.3	18.0	14.7	11.7	8.92	6.14	3.61	1.51	0.17	0.00	
-50	5.90	9.47	10.3	4.50	1.31	13.5	24.6	28.9	28.2	27.2	22.9	17.7	13.2	9.38	5.75	2.64	0.43	0.00	
-40	35.9	39.1	41.2	42.7	42.4	36.0	29.7	1.09	29.0	31.9	29.8	24.4	17.7	12.3	7.79	3.71	0.75	0.00	
-30	76.9	76.7	76.5	75.2	67.1	56.1	53.5	46.0	21.7	23.2	34.4	29.4	22.4	15.0	9.50	4.67	1.04	0.00	
-20	80.1	80.5	81.4	84.9	83.6	79.9	66.7	61.0	52.7	11.8	37.7	32.6	25.6	17.3	10.7	5.41	1.26	0.00	
-10	81.8	83.2	86.4	87.3	88.6	87.7	81.9	72.1	64.1	53.8	17.2	36.8	27.6	18.8	11.5	5.86	1.39	0.00	
0	76.7	84.4	89.3	90.4	92.3	90.6	87.1	79.3	70.4	61.0	4.62	39.2	28.4	19.2	11.7	5.99	1.42	0.00	
10	27.1	44.5	57.2	65.9	71.4	74.2	71.8	68.2	61.4	53.7	17.1	35.6	26.2	17.9	11.1	5.71	1.36	0.00	
20	14.5	27.9	39.1	48.0	54.4	56.8	56.8	54.3	50.6	11.7	37.2	30.3	23.1	15.7	9.95	5.14	1.21	0.00	
30	10.0	19.7	28.0	34.6	39.3	42.8	43.0	42.0	21.5	22.8	30.4	24.3	19.0	13.0	8.54	4.33	0.98	0.00	
40	7.57	14.3	19.9	24.3	27.6	29.8	29.3	0.83	27.9	26.1	22.2	18.8	14.1	10.2	6.77	3.35	0.69	0.00	
50	4.51	8.61	9.71	4.02	0.85	12.5	20.2	20.1	19.0	17.3	15.5	12.6	9.88	7.47	4.83	2.32	0.38	0.00	
60	2.50	4.87	6.99	8.76	10.2	11.1	11.6	11.9	11.3	10.3	9.07	7.81	6.39	4.70	2.93	1.28	0.14	0.00	
70	1.13	2.21	3.18	4.02	4.69	5.16	5.43	5.55	5.44	5.20	4.70	3.98	3.13	2.21	1.25	0.45	0.00	0.00	
80	0.34	0.66	0.95	1.20	1.40	1.55	1.62	1.62	1.55	1.42	1.22	0.95	0.68	0.39	0.14	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.04	0.06	0.07	0.07	0.08	0.07	0.07	0.03	0.01	0.00	0.00	0.00	0.00	
120	0.01	0.02	0.03	0.07	0.08	0.08	0.08	0.01	0.01	0.01	0.09	0.10	0.09	0.08	0.02	0.00	0.00	0.00	
130	0.14	0.14	0.11	0.08	0.07	0.07	0.08	0.08	0.15	0.11	0.01	0.01	0.11	0.11	0.08	0.01	0.00	0.00	
140	0.27	0.27	0.26	0.22	0.22	0.22	0.20	0.12	0.11	0.11	0.16	0.02	0.01	0.12	0.10	0.02	0.00	0.00	
150	0.34	0.37	0.38	0.36	0.37	0.34	0.27	0.25	0.19	0.13	0.13	0.17	0.01	0.10	0.13	0.05	0.00	0.00	
160	0.51	0.49	0.47	0.47	0.48	0.41	0.40	0.30	0.27	0.20	0.14	0.23	0.08	0.01	0.13	0.08	0.00	0.00	
170	0.64	0.54	0.64	0.57	0.55	0.54	0.43	0.43	0.30	0.27	0.17	0.15	0.17	0.01	0.14	0.10	0.00	0.00	
180	0.64	0.76	0.49	0.72	0.61	0.61	0.48	0.46	0.33	0.29	0.19	0.16	0.19	0.01	0.14	0.11	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: