

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	581.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	133.2V x 132.9H
	At 50% of Imax	76.5V x 75.5H
	At 90% of Imax	35.1V x 34.1H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	932.8 lumens per klm.
	To 50% of Imax	584.6 lumens per klm.
	To 90% of Imax	156.7 lumens per klm.

Upward LOR	1.2 %
Downward LOR	98.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.14V I:1.211A P:10.81W PF:0.7357 Freq:59.98Hz Lamp Flux:804.487x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	WEIGHT:
SPEC.:12W 3000K Flat matted glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:TYPE A SHROUD

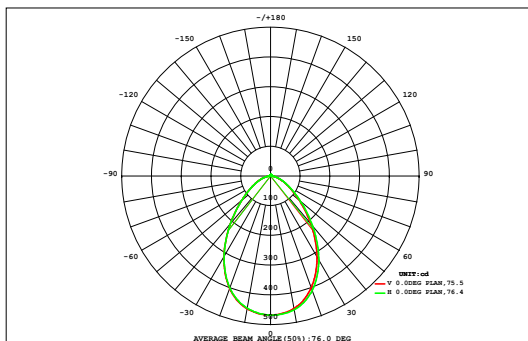

DATA OF LAMP		Eff:74.39lm/W	
MODEL	A3A4-12W-30K-BZ	Imax (cd)	467.9
NOMINAL POWER (W)	12	AVAILABILITY (%)	93.2
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	749.5
NOMINAL FLUX (lm)	804.487	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	804.5
TEST VOLTAGE (V)	12	θ @50% (H,V)	76,76DEG

		AREA FLUX DIAGRAM															UNIT: lm		Φ t	Φ a		
		0.00	0.01	0.02	0.05	0.07	0.10	0.13	0.15	0.16	0.16	0.14	0.12	0.09	0.06	0.03	0.01	0.00	0.00	1.31	0.00	
VERTICAL (DEG)	90	0.00	0.03	0.09	0.19	0.31	0.45	0.57	0.67	0.72	0.72	0.66	0.56	0.43	0.29	0.17	0.08	0.02	0.00	5.96	0.00	
	80	0.01	0.06	0.18	0.39	0.65	0.94	1.23	1.46	1.59	1.59	1.45	1.22	0.92	0.63	0.37	0.17	0.05	0.00	12.9	5.66	
	70	0.01	0.09	0.29	0.61	1.06	1.60	2.16	2.66	2.95	2.95	2.65	2.15	1.58	1.04	0.59	0.27	0.08	0.01	22.7	20.0	
	60	0.01	0.12	0.40	0.86	1.56	2.48	3.55	4.54	5.16	5.16	4.54	3.54	2.46	1.53	0.84	0.38	0.11	0.01	37.2	35.6	
	50	0.02	0.15	0.50	1.12	2.14	3.62	5.42	7.10	8.13	8.13	7.10	5.42	3.61	2.12	1.10	0.48	0.14	0.01	56.3	55.1	
	40	0.02	0.18	0.59	1.37	2.75	4.86	7.42	9.70	11.0	11.0	9.68	7.42	4.86	2.74	1.35	0.57	0.16	0.01	75.7	74.8	
	30	0.02	0.19	0.65	1.57	3.26	5.91	9.01	11.6	13.0	13.0	11.6	8.99	5.91	3.26	1.55	0.63	0.18	0.02	90.5	89.6	
	-30	0.02	0.20	0.69	1.68	3.55	6.48	9.84	12.6	13.9	13.9	12.5	9.79	6.48	3.55	1.66	0.67	0.19	0.02	97.7	97.0	
		0.02	0.20	0.69	1.68	3.54	6.46	9.80	12.5	13.9	13.9	12.5	9.75	6.45	3.54	1.66	0.67	0.19	0.02	97.4	96.6	
		0.02	0.19	0.65	1.57	3.24	5.85	8.91	11.5	12.9	12.9	11.4	8.88	5.85	3.23	1.55	0.63	0.18	0.02	89.4	88.6	
		0.02	0.18	0.59	1.37	2.72	4.78	7.27	9.47	10.7	10.7	9.46	7.27	4.78	2.71	1.34	0.57	0.16	0.01	74.1	73.2	
		-40	0.02	0.15	0.50	1.12	2.11	3.55	5.28	6.87	7.81	7.81	6.87	5.28	3.54	2.10	1.10	0.48	0.14	0.01	54.7	53.5
		-50	0.01	0.12	0.40	0.86	1.54	2.44	3.46	4.39	4.95	4.95	4.39	3.45	2.43	1.52	0.84	0.38	0.11	0.01	36.2	34.6
		-60	0.01	0.09	0.29	0.61	1.06	1.58	2.13	2.60	2.87	2.87	2.59	2.12	1.56	1.03	0.59	0.27	0.08	0.01	22.4	19.6
		-70	0.01	0.06	0.18	0.39	0.65	0.94	1.23	1.45	1.58	1.58	1.44	1.21	0.92	0.63	0.37	0.17	0.05	0.00	12.9	5.52
	-80	0.00	0.03	0.09	0.19	0.31	0.45	0.57	0.67	0.72	0.72	0.66	0.56	0.43	0.29	0.17	0.08	0.02	0.00	5.98	0.00	
-90	0.00	0.01	0.02	0.05	0.07	0.10	0.13	0.15	0.16	0.16	0.14	0.12	0.09	0.06	0.03	0.01	0.00	0.00	1.32	0.00		
		-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)		20	30	40	50	60	70	80	90			
Φ t	0.22	2.06	6.82	15.7	30.6	52.6	78.1	100	112	112	99.8	77.8	52.4	30.3	15.3	6.49	1.86	0.16	795	---		
Φ a	0.00	0.00	2.80	12.7	27.8	49.9	75.4	97.4	110	110	97.1	75.2	49.7	27.6	12.3	2.40	0.00	0.00	---	749		

one-half-peak spread: U:38.9,D:38.0 , L:38.0,R:38.0


NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.14V I:1.211A P:10.81W PF:0.7357 Freq:59.98Hz Lamp Flux:804.487x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	WEIGHT:
SPEC.:12W 3000K Flat matted glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:TYPE A SHROUD

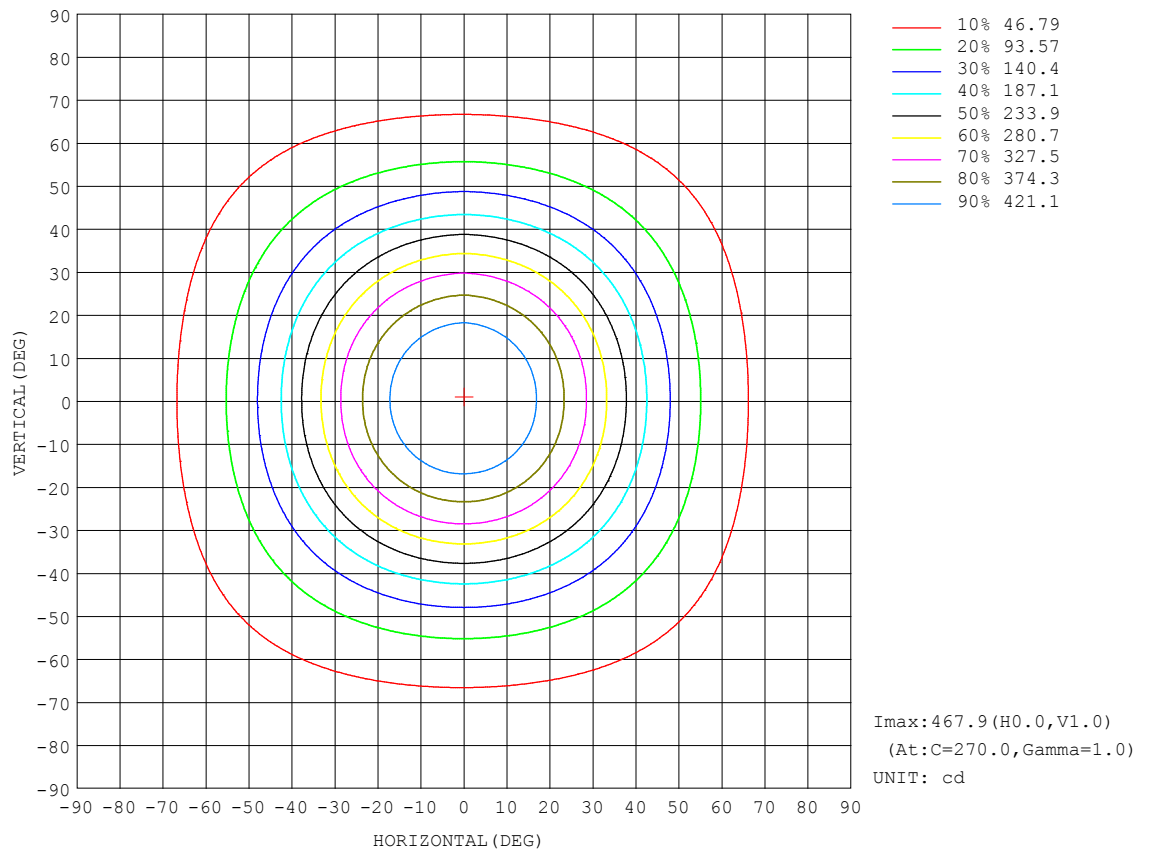


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.14V I:1.211A P:10.81W PF:0.7357 Freq:59.98Hz Lamp Flux:804.487x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	WEIGHT:
SPEC.:12W 3000K Flat matted glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:TYPE A SHROUD

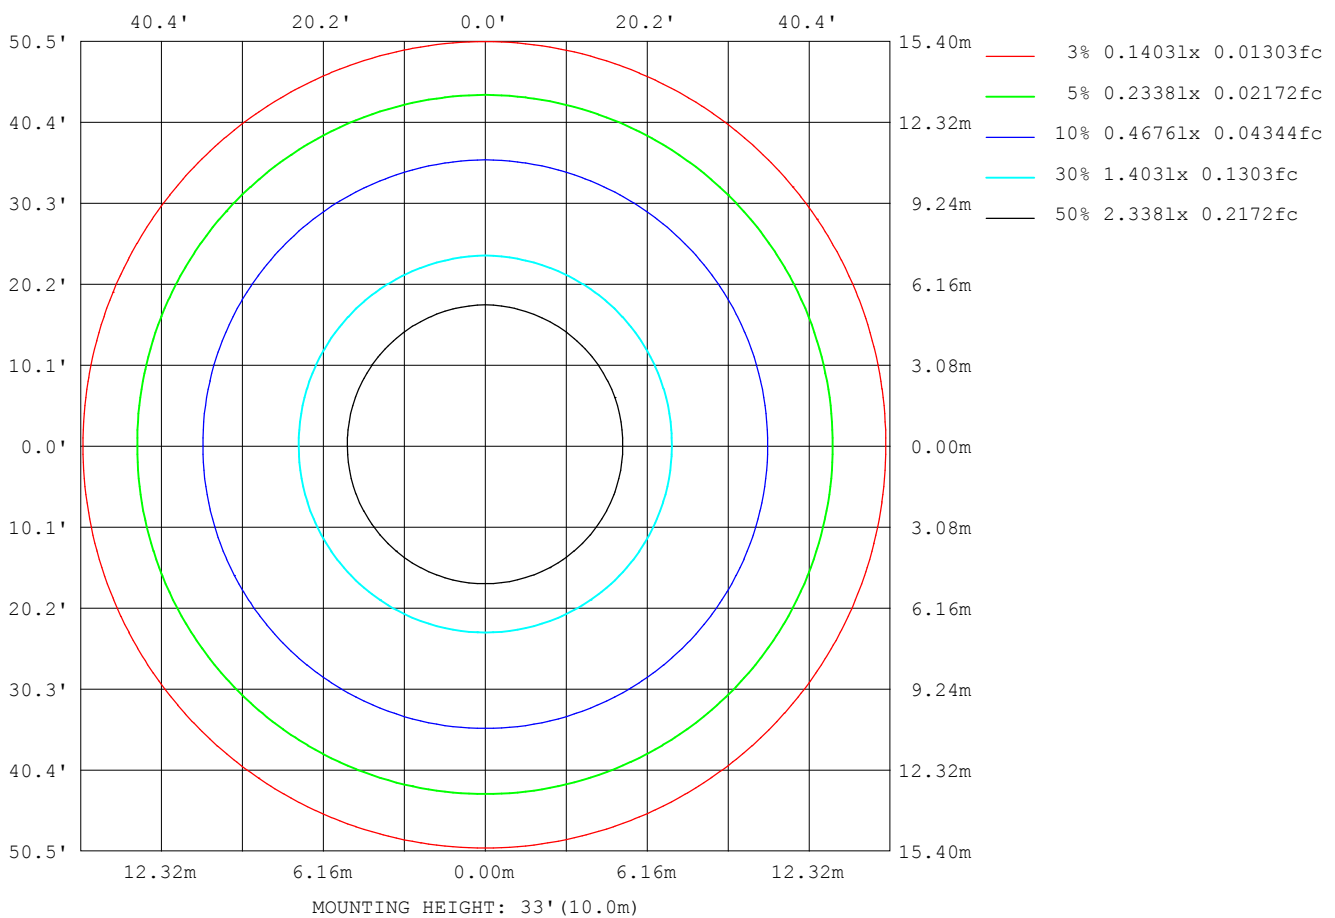

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

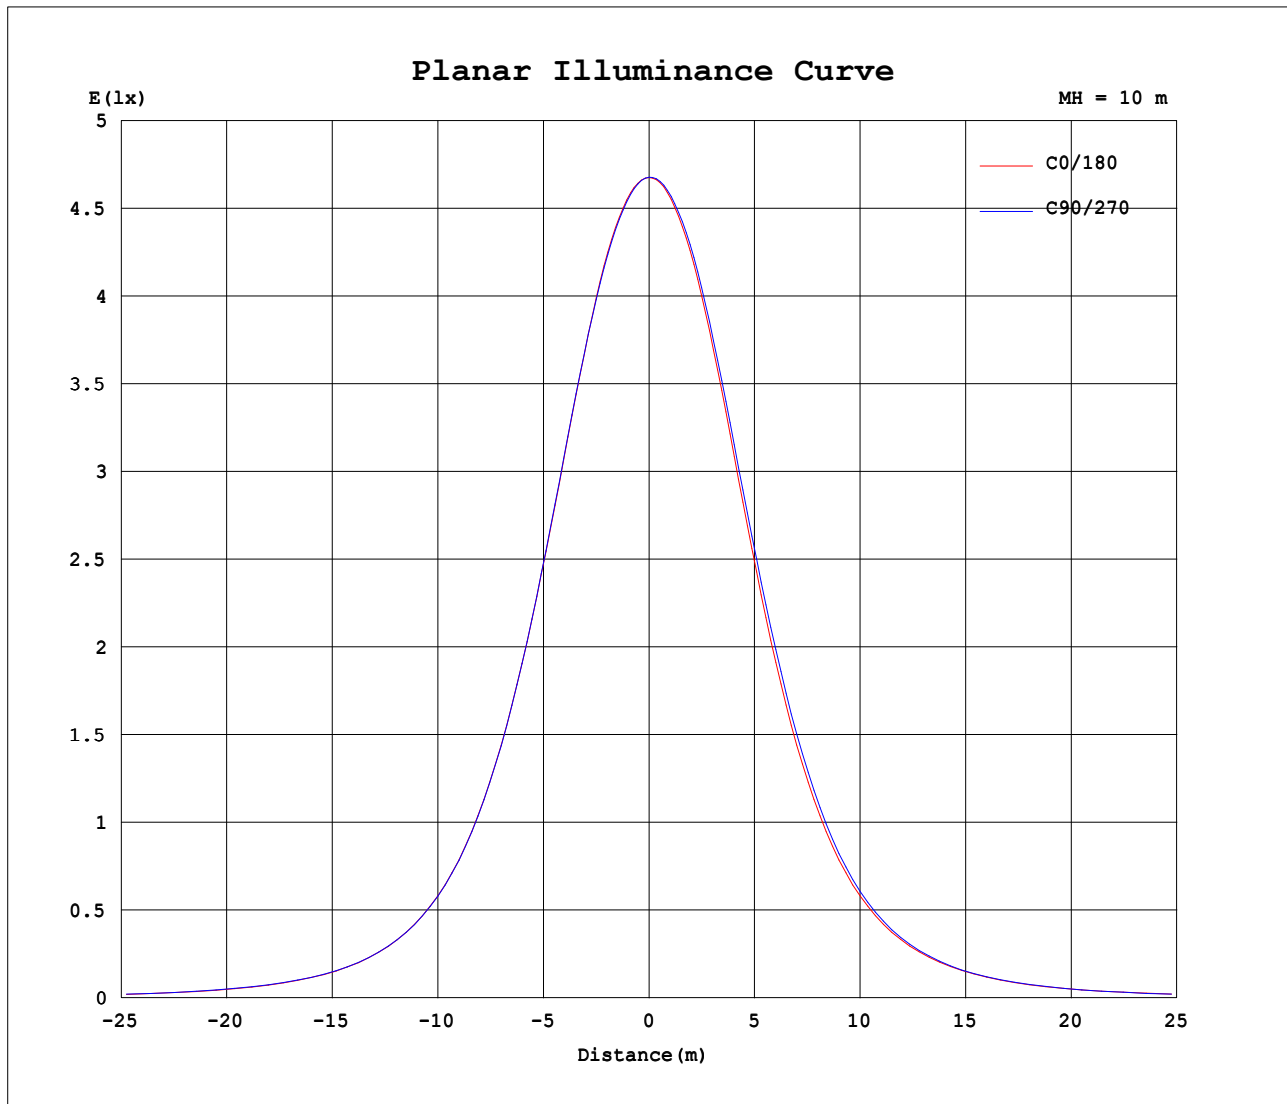


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.14V I:1.211A P:10.81W PF:0.7357 Freq:59.98Hz Lamp Flux:804.487x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	WEIGHT:
SPEC.:12W 3000K Flat matted glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:TYPE A SHROUD

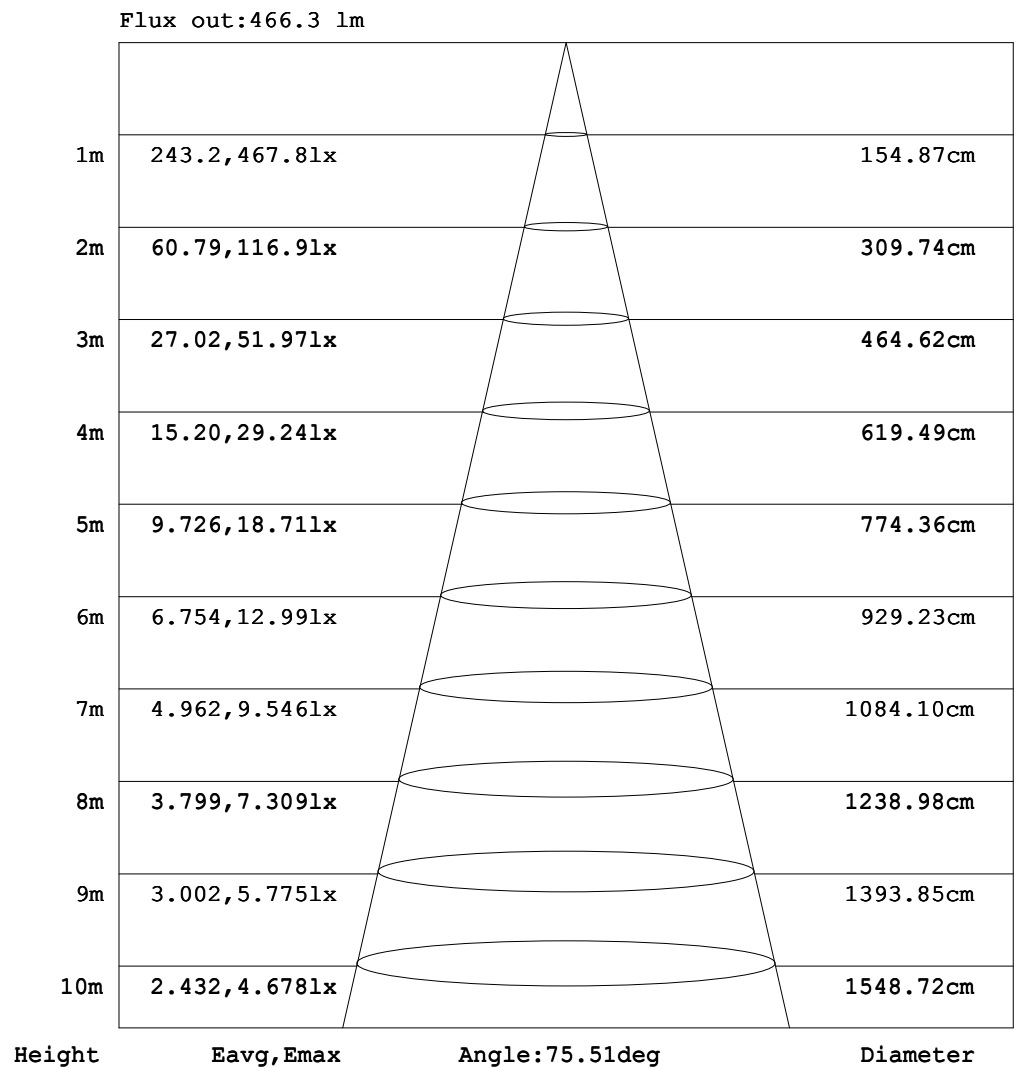

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.14V I:1.211A P:10.81W PF:0.7357 Freq:59.98Hz Lamp Flux:804.487x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	WEIGHT:
SPEC.:12W 3000K Flat matted glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:TYPE A SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.45	0.00	0.03	0.19	0.35	0.56	0.83	1.16	1.53	1.90	2.32	2.72	3.12	3.48	3.87	4.24	4.60	4.89	5.03
-170	0.45	0.00	0.03	0.19	0.36	0.57	0.85	1.16	1.53	1.92	2.34	2.75	3.12	3.50	3.88	4.25	4.55	4.77	4.91
-160	0.45	0.00	0.03	0.16	0.34	0.54	0.80	1.10	1.43	1.80	2.18	2.56	2.94	3.27	3.61	3.90	4.16	4.36	4.50
-150	0.45	0.00	0.02	0.15	0.29	0.48	0.70	0.94	1.23	1.55	1.88	2.22	2.55	2.86	3.14	3.37	3.57	3.74	3.85
-140	0.45	0.00	0.01	0.10	0.23	0.38	0.56	0.77	0.98	1.24	1.49	1.76	2.01	2.26	2.49	2.69	2.86	2.99	3.08
-130	0.45	0.00	0.02	0.05	0.16	0.27	0.40	0.55	0.70	0.88	1.06	1.25	1.43	1.62	1.78	1.93	2.05	2.15	2.21
-120	0.45	0.10	0.01	0.03	0.08	0.16	0.25	0.34	0.45	0.56	0.68	0.78	0.90	1.01	1.12	1.20	1.27	1.33	1.38
-110	0.45	0.22	0.01	0.02	0.04	0.06	0.11	0.17	0.23	0.28	0.34	0.39	0.46	0.53	0.58	0.62	0.67	0.70	0.73
-100	0.45	0.32	0.23	0.10	0.02	0.03	0.04	0.06	0.08	0.10	0.11	0.13	0.15	0.18	0.20	0.23	0.25	0.27	0.29
-90	0.45	0.45	0.46	0.47	0.47	0.48	0.49	0.49	0.50	0.51	0.51	0.52	0.52	0.53	0.54	0.54	0.55	0.56	0.56
-80	0.45	0.84	1.42	2.14	2.97	3.89	4.87	5.89	6.92	7.92	8.90	9.79	10.6	11.3	11.9	12.4	12.7	12.9	12.9
-70	0.45	1.42	3.01	5.10	7.55	10.2	13.1	15.9	18.8	21.7	24.5	27.1	29.4	31.5	33.3	34.8	35.8	36.4	36.6
-60	0.45	2.10	4.99	8.79	13.1	17.9	22.9	28.2	33.5	38.9	44.3	49.5	54.5	59.0	63.0	66.3	68.8	70.3	70.8
-50	0.45	2.82	7.13	12.7	19.0	26.0	33.6	41.7	50.4	59.5	69.0	78.8	88.8	98.4	107	115	121	124	125
-40	0.45	3.52	9.19	16.4	24.7	34.0	44.4	56.1	69.1	83.8	100	118	137	156	174	189	201	208	211
-30	0.45	4.15	11.0	19.6	29.8	41.3	54.7	70.3	88.9	111	137	166	197	228	257	280	298	309	313
-20	0.45	4.65	12.4	22.2	33.7	47.3	63.3	83.0	107	138	174	214	257	297	333	363	384	397	401
-10	0.45	4.95	13.3	23.8	36.3	51.2	69.2	91.9	121	157	201	250	299	345	385	416	437	448	451
0	0.45	5.06	13.6	24.3	37.2	52.5	71.3	95.2	126	165	211	262	314	362	403	433	453	464	468
10	0.45	4.95	13.3	23.8	36.3	51.2	69.3	92.1	121	158	202	251	301	348	388	419	440	452	457
20	0.45	4.65	12.4	22.2	33.7	47.3	63.4	83.3	108	139	176	217	261	302	339	369	391	405	410
30	0.45	4.15	11.0	19.6	29.8	41.3	54.8	70.6	89.5	112	139	169	202	234	264	289	308	320	325
40	0.45	3.52	9.18	16.4	24.7	34.0	44.5	56.2	69.4	84.5	101	120	140	160	179	196	209	218	221
50	0.45	2.82	7.12	12.7	19.0	26.0	33.6	41.8	50.5	59.7	69.5	79.8	90.1	100	110	118	125	129	130
60	0.45	2.10	4.98	8.77	13.1	17.9	22.9	28.2	33.5	39.0	44.4	49.7	54.8	59.4	63.6	67.1	69.8	71.5	72.1
70	0.45	1.42	3.01	5.09	7.53	10.2	13.0	15.9	18.8	21.7	24.4	27.0	29.4	31.5	33.3	34.8	35.8	36.4	36.6
80	0.45	0.84	1.42	2.14	2.97	3.88	4.85	5.88	6.89	7.87	8.83	9.71	10.5	11.2	11.8	12.3	12.6	12.8	12.8
90	0.45	0.45	0.46	0.46	0.46	0.47	0.47	0.48	0.48	0.48	0.49	0.49	0.49	0.50	0.50	0.51	0.51	0.51	0.52
100	0.45	0.32	0.22	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.45	0.22	0.00	0.00	0.00	0.00	0.02	0.06	0.11	0.14	0.18	0.19	0.24	0.28	0.30	0.31	0.32	0.32	0.32
120	0.45	0.09	0.00	0.00	0.02	0.09	0.16	0.22	0.30	0.37	0.45	0.51	0.60	0.63	0.74	0.76	0.79	0.81	0.82
130	0.45	0.00	0.00	0.02	0.11	0.20	0.30	0.42	0.53	0.65	0.80	0.93	1.07	1.16	1.28	1.39	1.44	1.49	1.50
140	0.45	0.00	0.00	0.07	0.19	0.31	0.46	0.63	0.81	1.02	1.20	1.42	1.62	1.81	1.98	2.10	2.17	2.26	2.29
150	0.45	0.00	0.01	0.12	0.25	0.42	0.61	0.82	1.07	1.35	1.63	1.90	2.18	2.42	2.65	2.85	2.94	3.02	3.04
160	0.45	0.00	0.02	0.15	0.31	0.49	0.74	1.00	1.30	1.64	1.99	2.33	2.67	2.95	3.23	3.46	3.64	3.77	3.81
170	0.45	0.00	0.03	0.18	0.34	0.54	0.81	1.11	1.47	1.83	2.23	2.62	2.97	3.33	3.67	4.01	4.29	4.47	4.54
180	0.45	0.00	0.03	0.19	0.35	0.56	0.83	1.16	1.53	1.90	2.32	2.72	3.12	3.48	3.87	4.24	4.60	4.89	5.03

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.14V I:1.211A P:10.81W PF:0.7357 Freq:59.98Hz Lamp Flux:804.487x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	WEIGHT:
SPEC.:12W 3000K Flat matted glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:TYPE A SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	5.04	4.86	4.69	4.39	4.08	3.71	3.36	2.95	2.55	2.12	1.66	1.35	0.93	0.66	0.45	0.27	0.28	0.41	
-170	4.86	4.77	4.54	4.27	3.97	3.62	3.28	2.90	2.45	2.04	1.65	1.28	0.92	0.65	0.44	0.26	0.28	0.41	
-160	4.44	4.32	4.16	3.92	3.64	3.36	3.01	2.64	2.26	1.87	1.51	1.17	0.89	0.61	0.43	0.24	0.29	0.41	
-150	3.80	3.70	3.57	3.39	3.16	2.89	2.61	2.27	1.97	1.63	1.33	1.02	0.78	0.57	0.34	0.21	0.30	0.41	
-140	3.05	2.97	2.85	2.69	2.50	2.29	2.05	1.80	1.55	1.30	1.07	0.83	0.62	0.45	0.31	0.18	0.32	0.41	
-130	2.19	2.13	2.05	1.93	1.80	1.65	1.48	1.31	1.12	0.94	0.79	0.62	0.47	0.33	0.25	0.22	0.34	0.41	
-120	1.37	1.33	1.28	1.22	1.14	1.05	0.95	0.85	0.75	0.63	0.53	0.44	0.32	0.26	0.18	0.26	0.36	0.41	
-110	0.72	0.70	0.68	0.65	0.62	0.57	0.51	0.46	0.43	0.35	0.31	0.27	0.20	0.20	0.25	0.32	0.37	0.41	
-100	0.28	0.28	0.27	0.25	0.24	0.22	0.20	0.19	0.19	0.21	0.22	0.23	0.26	0.29	0.34	0.37	0.39	0.41	
-90	0.56	0.55	0.54	0.53	0.52	0.51	0.50	0.50	0.49	0.48	0.47	0.46	0.45	0.45	0.44	0.43	0.42	0.41	
-80	12.8	12.5	12.1	11.5	10.9	10.1	9.21	8.25	7.23	6.20	5.16	4.10	2.42	1.44	0.88	0.55	0.41	0.41	
-70	36.3	35.6	34.4	32.9	31.0	28.8	26.3	23.6	20.8	17.9	14.9	12.0	9.14	6.50	4.14	1.25	0.51	0.41	
-60	70.2	68.6	66.0	62.5	58.4	53.7	48.7	43.3	37.9	32.4	27.0	21.7	16.6	11.9	7.58	3.95	0.72	0.41	
-50	124	120	115	107	97.9	88.2	78.1	68.1	58.4	49.1	40.4	32.2	24.6	17.6	11.3	5.96	1.02	0.41	
-40	208	201	189	174	156	137	118	99.5	82.8	67.9	54.7	42.9	32.5	23.2	14.9	7.86	1.43	0.41	
-30	309	298	280	257	228	197	166	137	110	87.9	69.0	53.1	39.7	28.1	18.1	9.55	2.32	0.41	
-20	396	383	362	332	297	257	215	174	137	107	81.7	61.7	45.5	32.0	20.5	10.9	3.21	0.41	
-10	448	436	414	383	343	298	250	201	157	120	90.7	67.6	49.3	34.5	22.1	11.7	3.75	0.41	
0	464	453	432	400	360	313	262	211	165	125	93.9	69.6	50.6	35.3	22.6	12.0	3.93	0.41	
10	452	440	417	386	346	300	251	203	158	121	90.9	67.7	49.3	34.5	22.1	11.7	3.75	0.41	
20	404	390	368	338	302	261	218	176	139	107	82.0	61.8	45.5	32.0	20.5	10.9	3.21	0.41	
30	320	308	289	264	234	202	169	139	112	88.5	69.2	53.2	39.7	28.1	18.0	9.54	2.32	0.41	
40	218	209	196	179	160	140	120	101	83.6	68.3	54.8	43.0	32.5	23.2	14.9	7.85	1.42	0.41	
50	129	124	118	110	99.9	89.5	79.0	68.6	58.6	49.2	40.4	32.2	24.6	17.6	11.3	5.95	1.02	0.41	
60	71.4	69.6	66.8	63.2	58.9	54.0	48.8	43.4	37.9	32.4	27.0	21.7	16.6	11.9	7.56	3.94	0.71	0.41	
70	36.3	35.6	34.4	32.9	31.0	28.7	26.3	23.6	20.7	17.8	14.9	12.0	9.11	6.48	4.13	1.25	0.51	0.41	
80	12.7	12.4	12.0	11.5	10.8	10.0	9.13	8.19	7.18	6.17	5.14	4.08	2.41	1.43	0.88	0.55	0.41	0.41	
90	0.51	0.51	0.50	0.49	0.49	0.48	0.48	0.47	0.46	0.46	0.45	0.45	0.44	0.44	0.43	0.42	0.42	0.41	
100	0.01	0.03	0.04	0.05	0.06	0.07	0.07	0.08	0.09	0.12	0.16	0.19	0.23	0.27	0.32	0.36	0.39	0.41	
110	0.34	0.35	0.36	0.37	0.37	0.35	0.31	0.30	0.29	0.23	0.20	0.18	0.14	0.16	0.23	0.31	0.37	0.41	
120	0.85	0.85	0.84	0.84	0.76	0.75	0.68	0.63	0.56	0.48	0.41	0.35	0.25	0.21	0.16	0.25	0.35	0.41	
130	1.53	1.52	1.51	1.43	1.35	1.29	1.16	1.05	0.89	0.77	0.66	0.53	0.40	0.29	0.22	0.20	0.34	0.41	
140	2.31	2.28	2.25	2.18	2.04	1.90	1.71	1.51	1.33	1.13	0.93	0.73	0.55	0.41	0.28	0.17	0.32	0.41	
150	3.08	3.07	3.04	2.90	2.72	2.52	2.29	2.02	1.76	1.47	1.21	0.94	0.72	0.53	0.32	0.19	0.30	0.41	
160	3.85	3.80	3.71	3.55	3.32	3.08	2.78	2.45	2.11	1.75	1.42	1.11	0.84	0.58	0.41	0.23	0.29	0.41	
170	4.55	4.50	4.31	4.06	3.80	3.47	3.15	2.79	2.37	1.98	1.60	1.25	0.90	0.63	0.44	0.26	0.28	0.41	
180	5.04	4.86	4.69	4.39	4.08	3.71	3.36	2.95	2.55	2.12	1.66	1.35	0.93	0.66	0.45	0.27	0.28	0.41	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: