

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2625.7 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	54.3V x 54.4H
	At 50% of Imax	35.4V x 37.5H
	At 90% of Imax	19.6V x 20.1H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	905.6 lumens per klm.
	To 50% of Imax	636.2 lumens per klm.
	To 90% of Imax	228.3 lumens per klm.
	Upward LOR	1.5 %
	Downward LOR	98.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.16V I:0.6571A P:7.273W PF:0.9105 Freq:59.98Hz Lamp Flux:576.432x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	WEIGHT:
SPEC.:8W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

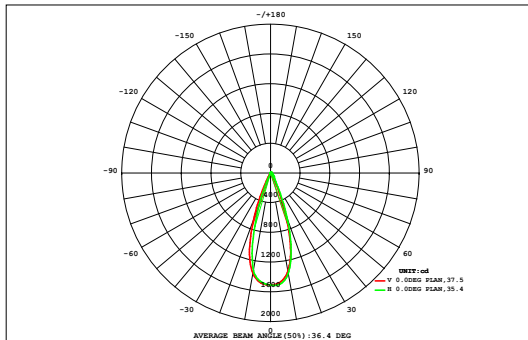

DATA OF LAMP		Eff:79.25lm/W	
MODEL	D5A2-8W-30K-BZ	Imax (cd)	1514
NOMINAL POWER (W)	8	AVAILABILITY (%)	89.9
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	518.1
NOMINAL FLUX (lm)	576.432	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	576.4
TEST VOLTAGE (V)	12	θ @50% (H,V)	37,35DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.03	0.05	0.08	0.11	0.15	0.20	0.26	0.31	0.35	0.35	0.31	0.25	0.20	0.15	0.11	0.07	0.05	0.03	3.05	0.00
45	0.03	0.05	0.08	0.11	0.15	0.20	0.26	0.31	0.35	0.35	0.31	0.25	0.20	0.15	0.11	0.07	0.05	0.03	3.05	0.00
40	0.04	0.06	0.10	0.15	0.22	0.30	0.39	0.47	0.55	0.54	0.47	0.38	0.29	0.21	0.15	0.10	0.06	0.04	4.51	0.00
35	0.05	0.08	0.13	0.20	0.30	0.44	0.60	0.77	0.89	0.89	0.75	0.59	0.43	0.29	0.19	0.12	0.08	0.04	6.85	0.00
30	0.05	0.09	0.16	0.27	0.44	0.70	1.05	1.44	1.72	1.71	1.41	1.02	0.67	0.42	0.25	0.15	0.09	0.05	11.7	6.61
25	0.06	0.10	0.19	0.36	0.68	1.29	2.18	3.08	3.63	3.60	2.99	2.07	1.21	0.63	0.33	0.18	0.10	0.05	22.7	19.4
20	0.06	0.11	0.23	0.50	1.16	2.47	4.18	5.69	6.54	6.49	5.56	3.98	2.28	1.05	0.45	0.21	0.10	0.05	41.1	38.5
15	0.06	0.12	0.27	0.71	1.92	4.07	6.48	8.35	9.29	9.25	8.22	6.23	3.77	1.71	0.62	0.23	0.10	0.05	61.5	59.4
10	0.05	0.11	0.30	0.95	2.73	5.51	8.27	10.1	10.9	10.9	9.97	8.02	5.14	2.41	0.81	0.25	0.09	0.04	76.5	74.7
5	0.04	0.10	0.31	1.10	3.23	6.34	9.15	10.8	11.4	11.4	10.7	8.88	5.91	2.82	0.91	0.24	0.07	0.03	83.4	81.8
0	0.03	0.08	0.27	1.02	3.12	6.20	9.05	10.7	11.3	11.3	10.6	8.78	5.77	2.71	0.83	0.21	0.06	0.02	82.1	80.5
-5	0.03	0.07	0.21	0.73	2.39	5.09	7.89	9.86	10.7	10.7	9.75	7.63	4.73	2.07	0.60	0.16	0.05	0.02	72.6	71.0
-10	0.02	0.05	0.14	0.43	1.38	3.42	5.67	7.60	8.59	8.55	7.46	5.43	3.13	1.17	0.34	0.10	0.03	0.01	53.5	51.8
-15	0.01	0.03	0.08	0.22	0.58	1.59	3.15	4.41	5.01	4.96	4.28	2.96	1.40	0.47	0.17	0.06	0.02	0.01	29.4	27.3
-20	0.01	0.02	0.04	0.10	0.22	0.45	0.94	1.62	1.97	1.93	1.53	0.83	0.36	0.17	0.07	0.03	0.01	0.01	10.3	7.15
-25	0.01	0.01	0.02	0.04	0.08	0.13	0.18	0.19	0.14	0.13	0.15	0.14	0.10	0.06	0.03	0.02	0.01	0.01	1.45	0.00
-30	0.01	0.01	0.01	0.02	0.03	0.04	0.05	0.04	0.02	0.01	0.03	0.04	0.03	0.02	0.01	0.01	0.01	0.00	0.40	0.00
-35	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.01	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.15	0.00
-40	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	0.54	1.10	2.55	6.92	18.7	38.3	59.5	75.4	83.0	82.6	74.2	57.3	35.4	16.4	5.89	2.14	0.94	0.46	561	---
Φ a	0.00	0.00	0.00	2.15	15.3	35.5	57.0	73.2	80.9	80.5	71.9	54.8	32.6	13.0	1.24	0.00	0.00	0.00	---	518

one-half-peak spread: U:18.5,D:17.0 , L:18.2,R:19.4


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.16V I:0.6571A P:7.273W PF:0.9105 Freq:59.98Hz Lamp Flux:576.432x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	WEIGHT:
SPEC.:8W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

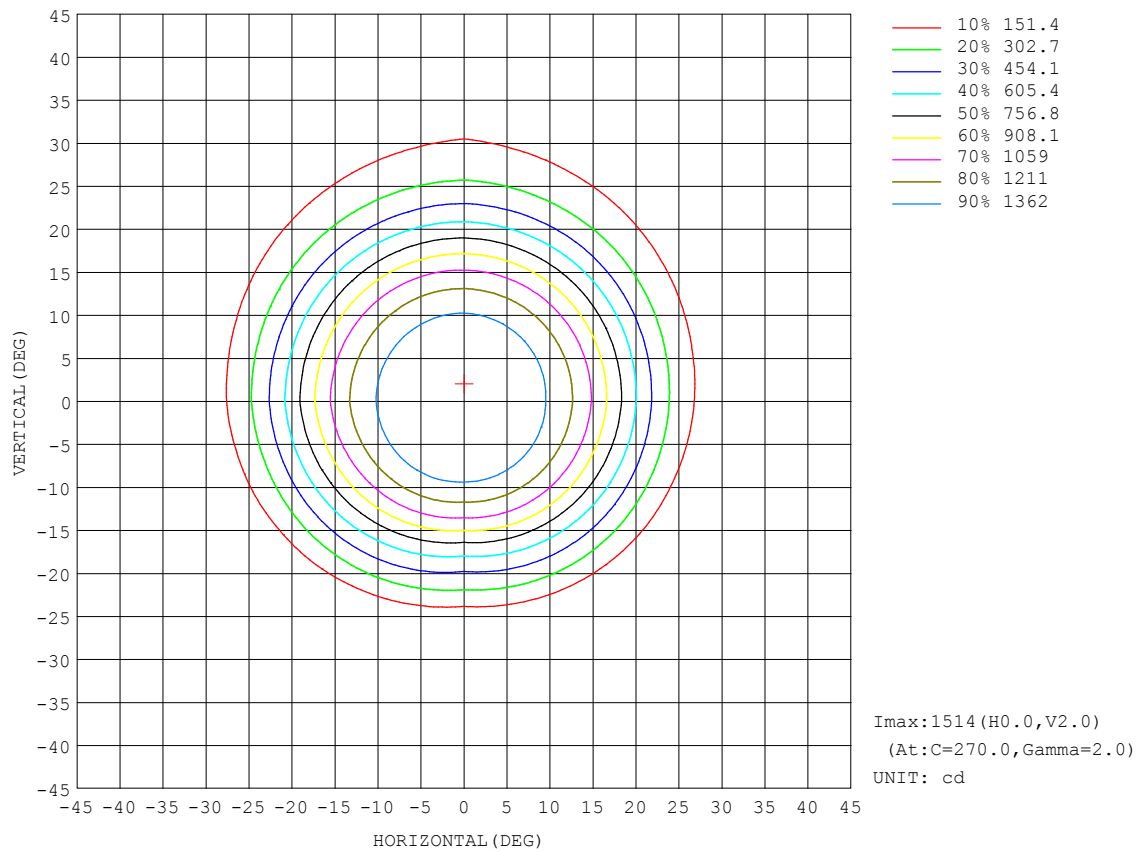


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.16V I:0.6571A P:7.273W PF:0.9105 Freq:59.98Hz Lamp Flux:576.432x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	WEIGHT:
SPEC.:8W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

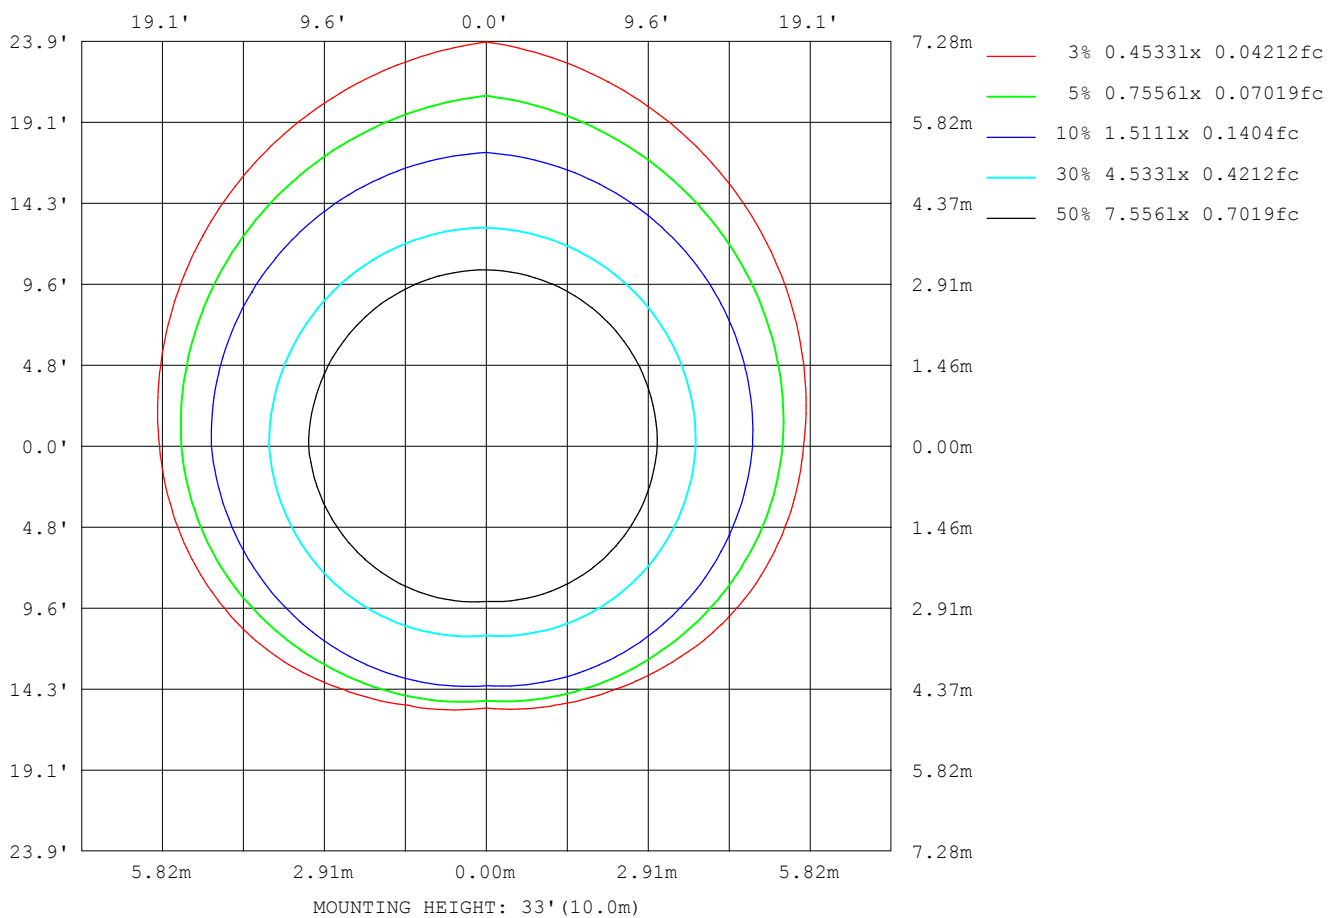

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

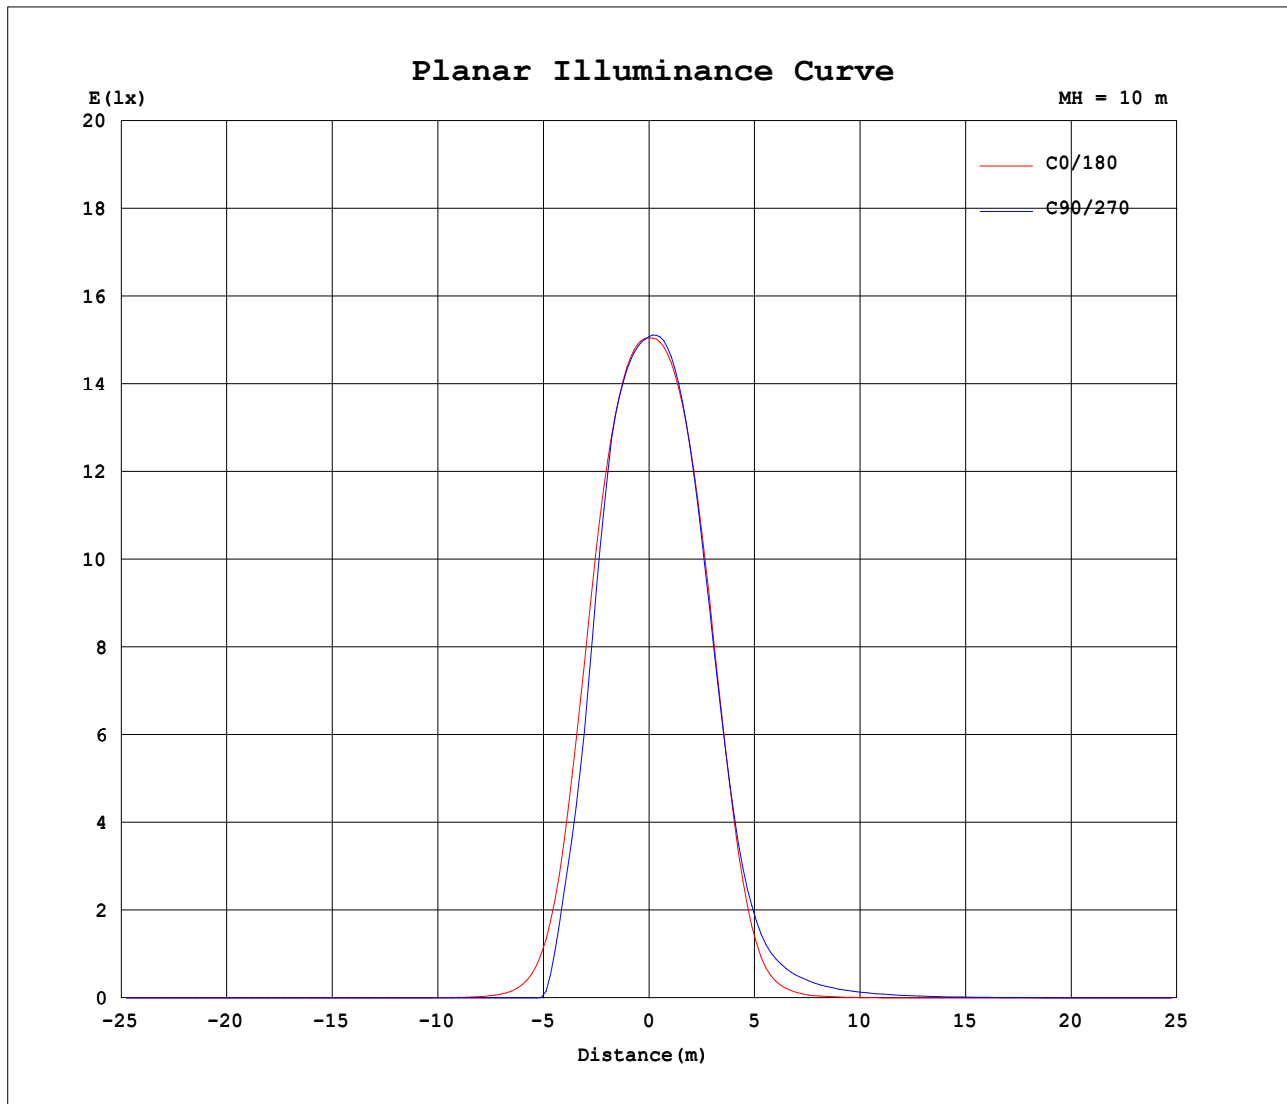


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.16V I:0.6571A P:7.273W PF:0.9105 Freq:59.98Hz Lamp Flux:576.432x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	WEIGHT:
SPEC.:8W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

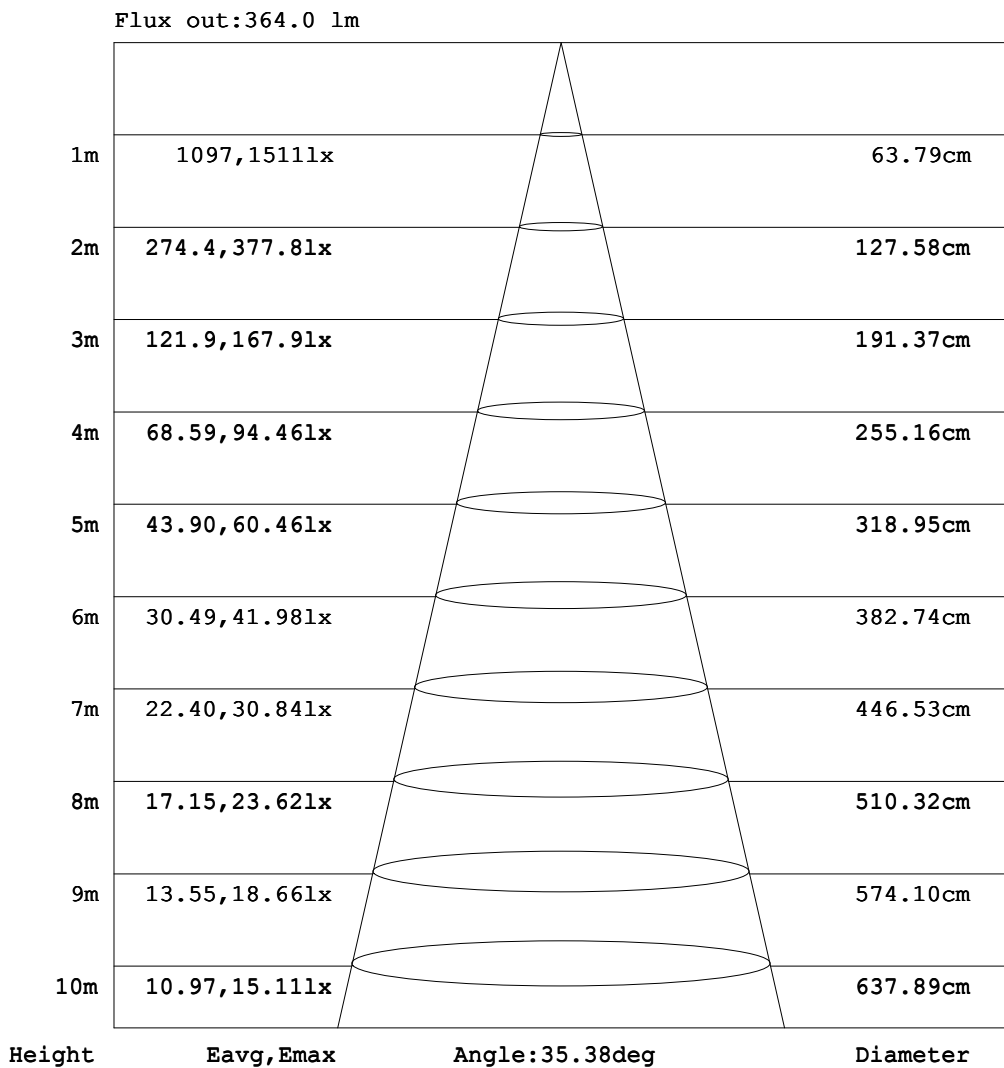

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.16V I:0.6571A P:7.273W PF:0.9105 Freq:59.98Hz Lamp Flux:576.432x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	WEIGHT:
SPEC.:8W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.86	1.85	3.12	4.50	5.79	6.84	7.68	8.36	8.71
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.08	0.30	0.96	1.93	3.19	4.59	5.98	7.14	7.97	8.54	8.95
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.11	0.25	0.73	1.51	2.53	3.71	4.94	6.08	7.07	7.82	8.33
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.09	0.20	0.40	0.86	1.51	2.30	3.14	3.98	4.72	5.32	5.71
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.11	0.22	0.38	0.62	0.99	1.43	1.89	2.31	2.65	2.89
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.14	0.22	0.33	0.46	0.59	0.73	0.86	0.95
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.09	0.11	0.15	0.18	0.20
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.03	0.03	0.03	0.02	0.01	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.08	0.12	0.14	0.16	0.16	0.18	0.15	0.12	0.08	0.05	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.04	0.09	0.18	0.24	0.33	0.35	0.38	0.39	0.37	0.34	0.29	0.21	0.11	0.00
-40	0.00	0.00	0.00	0.00	0.02	0.11	0.21	0.32	0.46	0.55	0.64	0.73	0.90	1.12	1.34	1.40	1.18	0.68	0.00
-30	0.00	0.00	0.00	0.00	0.10	0.22	0.35	0.55	0.70	0.90	1.27	2.11	3.55	5.34	8.27	11.1	11.8	7.94	0.00
-20	0.00	0.00	0.00	0.00	0.12	0.29	0.52	0.73	0.99	1.54	3.09	6.22	13.6	31.5	70.7	174	339	433	438
-10	0.00	0.00	0.00	0.01	0.15	0.37	0.62	0.91	1.31	2.58	6.03	14.7	44.4	144	425	764	1084	1274	1336
0	0.00	0.00	0.00	0.02	0.17	0.40	0.72	1.03	1.55	3.36	8.23	23.3	78.7	284	675	1101	1371	1486	1505
10	0.00	0.01	0.03	0.06	0.24	0.57	1.10	1.98	3.41	6.45	13.1	27.6	69.5	201	489	849	1151	1319	1373
20	0.00	0.02	0.05	0.09	0.28	0.63	1.28	2.41	4.32	7.50	13.4	23.9	44.1	85.1	172	324	496	625	672
30	0.00	0.03	0.07	0.12	0.31	0.61	1.15	2.20	3.99	6.76	10.9	17.4	27.4	41.5	61.9	88.1	118	144	160
40	0.00	0.04	0.08	0.15	0.26	0.49	0.90	1.60	2.80	4.72	7.49	11.2	16.0	22.0	29.4	37.8	46.1	53.7	59.3
50	0.00	0.04	0.10	0.16	0.25	0.40	0.64	1.04	1.63	2.57	3.85	5.71	8.05	10.8	13.8	16.8	19.8	22.4	24.4
60	0.00	0.05	0.10	0.17	0.25	0.35	0.46	0.67	0.90	1.25	1.69	2.27	2.98	3.83	4.74	5.67	6.57	7.34	7.91
70	0.00	0.05	0.10	0.17	0.24	0.32	0.41	0.51	0.61	0.73	0.87	1.04	1.21	1.39	1.60	1.80	2.00	2.17	2.32
80	0.00	0.05	0.10	0.16	0.22	0.28	0.35	0.42	0.49	0.57	0.65	0.73	0.81	0.90	0.98	1.06	1.15	1.23	1.30
90	0.00	0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70	0.75	0.80	0.85	0.90
100	0.00	0.05	0.09	0.14	0.18	0.21	0.25	0.29	0.32	0.35	0.38	0.41	0.44	0.47	0.51	0.54	0.58	0.61	0.65
110	0.00	0.04	0.08	0.12	0.15	0.18	0.21	0.22	0.25	0.26	0.27	0.29	0.31	0.32	0.33	0.35	0.37	0.39	0.41
120	0.00	0.04	0.07	0.10	0.13	0.14	0.16	0.17	0.17	0.18	0.18	0.19	0.18	0.19	0.18	0.19	0.20	0.20	0.21
130	0.00	0.03	0.06	0.08	0.10	0.11	0.12	0.12	0.12	0.11	0.11	0.09	0.08	0.07	0.05	0.05	0.03	0.02	0.02
140	0.00	0.03	0.05	0.07	0.07	0.08	0.08	0.08	0.07	0.06	0.04	0.02	0.00	0.05	0.14	0.25	0.33	0.40	0.40
150	0.00	0.02	0.04	0.05	0.05	0.05	0.05	0.05	0.04	0.02	0.00	0.15	0.46	0.89	1.38	1.88	2.26	2.51	2.55
160	0.00	0.01	0.03	0.03	0.03	0.03	0.03	0.02	0.01	0.00	0.26	0.79	1.53	2.45	3.40	4.26	4.94	5.35	5.45
170	0.00	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.00	0.12	0.65	1.48	2.61	3.87	5.11	6.14	6.86	7.27	7.34
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.86	1.85	3.12	4.50	5.79	6.84	7.68	8.36	8.71

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.16V I:0.6571A P:7.273W PF:0.9105 Freq:59.98Hz Lamp Flux:576.432x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	WEIGHT:
SPEC.:8W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	8.72	8.55	8.27	7.65	6.52	5.11	3.66	2.36	1.27	0.56	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	8.84	8.66	8.22	7.37	6.16	4.79	3.42	2.19	1.17	0.48	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-160	8.11	7.66	6.94	5.99	4.88	3.71	2.59	1.61	0.81	0.28	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-150	5.53	5.14	4.57	3.85	3.07	2.27	1.50	0.86	0.39	0.09	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-140	2.78	2.55	2.22	1.81	1.37	0.95	0.58	0.28	0.11	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.89	0.79	0.66	0.51	0.36	0.22	0.14	0.08	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.18	0.15	0.11	0.09	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.03	0.06	0.09	0.10	0.11	0.11	0.09	0.07	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.10	0.18	0.25	0.30	0.33	0.33	0.30	0.26	0.21	0.14	0.08	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.46	0.77	0.88	0.84	0.78	0.71	0.65	0.56	0.46	0.34	0.23	0.12	0.02	0.00	0.00	0.00	0.00	0.00	
-30	6.34	9.21	8.21	5.85	3.82	2.29	1.38	1.00	0.79	0.59	0.40	0.24	0.09	0.00	0.00	0.00	0.00	0.00	
-20	422	319	153	57.5	24.6	9.63	4.30	1.94	1.21	0.88	0.60	0.35	0.16	0.02	0.00	0.00	0.00	0.00	
-10	1264	1061	723	378	118	34.7	10.5	3.93	1.78	1.15	0.77	0.47	0.22	0.05	0.00	0.00	0.00	0.00	
0	1477	1344	1046	608	236	63.1	16.4	5.63	2.21	1.34	0.88	0.53	0.25	0.06	0.00	0.00	0.00	0.00	
10	1310	1127	807	442	174	59.8	23.4	11.0	5.64	3.26	1.84	0.94	0.42	0.14	0.05	0.03	0.01	0.00	
20	615	476	303	159	78.2	40.1	22.0	12.2	7.17	4.20	2.28	1.12	0.50	0.18	0.09	0.05	0.02	0.00	
30	143	115	85.2	59.5	40.0	26.1	16.7	10.6	6.65	3.88	2.06	1.04	0.49	0.21	0.12	0.07	0.03	0.00	
40	53.5	45.7	37.3	28.9	21.7	15.8	11.1	7.41	4.63	2.68	1.51	0.80	0.41	0.23	0.15	0.08	0.04	0.00	
50	22.4	19.8	16.8	13.7	10.7	7.98	5.63	3.77	2.45	1.54	0.94	0.56	0.36	0.25	0.16	0.10	0.04	0.00	
60	7.32	6.55	5.64	4.69	3.76	2.93	2.20	1.62	1.18	0.83	0.61	0.46	0.35	0.25	0.17	0.10	0.05	0.00	
70	2.17	1.99	1.79	1.57	1.35	1.17	1.01	0.86	0.73	0.61	0.51	0.41	0.32	0.24	0.17	0.10	0.05	0.00	
80	1.23	1.15	1.06	0.98	0.90	0.81	0.73	0.65	0.57	0.49	0.42	0.35	0.28	0.22	0.16	0.10	0.05	0.00	
90	0.85	0.80	0.75	0.70	0.65	0.60	0.55	0.50	0.45	0.40	0.35	0.30	0.25	0.20	0.15	0.10	0.05	0.00	
100	0.61	0.58	0.54	0.51	0.47	0.44	0.41	0.38	0.35	0.32	0.29	0.25	0.21	0.18	0.14	0.09	0.05	0.00	
110	0.39	0.37	0.35	0.33	0.32	0.31	0.29	0.27	0.26	0.25	0.22	0.21	0.18	0.15	0.12	0.08	0.04	0.00	
120	0.20	0.20	0.19	0.18	0.19	0.18	0.19	0.18	0.18	0.17	0.17	0.16	0.14	0.13	0.10	0.07	0.04	0.00	
130	0.06	0.10	0.12	0.11	0.11	0.08	0.09	0.11	0.11	0.12	0.12	0.12	0.11	0.10	0.08	0.06	0.03	0.00	
140	0.53	0.57	0.58	0.52	0.43	0.33	0.23	0.11	0.06	0.07	0.08	0.08	0.08	0.07	0.07	0.05	0.03	0.00	
150	2.73	2.69	2.47	2.10	1.66	1.21	0.80	0.46	0.21	0.04	0.05	0.05	0.05	0.05	0.05	0.04	0.02	0.00	
160	5.65	5.52	5.12	4.45	3.62	2.71	1.87	1.13	0.56	0.18	0.02	0.03	0.03	0.03	0.03	0.03	0.01	0.00	
170	7.57	7.55	7.23	6.50	5.43	4.21	2.97	1.88	0.99	0.41	0.04	0.01	0.02	0.02	0.02	0.01	0.01	0.00	
180	8.72	8.55	8.27	7.65	6.52	5.11	3.66	2.36	1.27	0.56	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: