

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		4608.1 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	43.8V x 43.7H
	At 50% of Imax	23.9V x 25.1H
	At 90% of Imax	10.2V x 9.9H
Beam Flux	Total	1000.7 lumens per klm.
	To 10% of Imax	837.9 lumens per klm.
	To 50% of Imax	473.5 lumens per klm.
	To 90% of Imax	115.6 lumens per klm.
	Upward LOR	1.4 %
	Downward LOR	98.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.17V I:1.309A P:11.53W PF:0.7239 Freq:59.99Hz Lamp Flux:394.988x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight	RGBWWWEIGHT:
SPEC.:12W 2700K 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

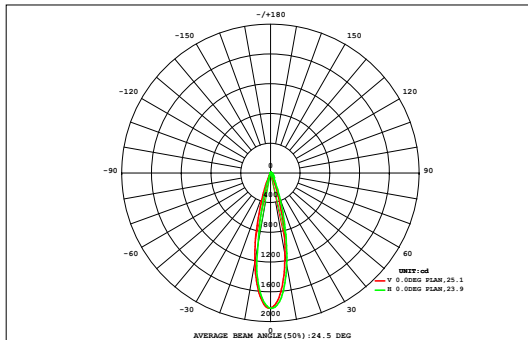

DATA OF LAMP		Eff:34.26lm/W	
MODEL	D9A2-12W-BZ	Imax (cd)	1820
NOMINAL POWER (W)	12	AVAILABILITY (%)	83.5
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	330.0
NOMINAL FLUX (lm)	394.988	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	395.0
TEST VOLTAGE (V)	12	θ @50% (H,V)	25,24DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.09	0.12	0.15	0.19	0.25	0.31	0.37	0.43	0.48	0.47	0.43	0.37	0.31	0.25	0.20	0.15	0.12	0.09	4.78	0.48
27	0.10	0.14	0.19	0.25	0.35	0.46	0.57	0.67	0.74	0.74	0.67	0.56	0.45	0.34	0.25	0.19	0.14	0.11	6.92	4.05
24	0.11	0.16	0.24	0.36	0.52	0.70	0.88	1.04	1.14	1.14	1.02	0.87	0.68	0.50	0.35	0.24	0.17	0.12	10.2	8.16
21	0.13	0.20	0.32	0.52	0.76	1.04	1.32	1.56	1.71	1.70	1.54	1.29	1.00	0.73	0.49	0.31	0.20	0.13	14.9	13.3
18	0.15	0.25	0.44	0.71	1.06	1.47	1.89	2.24	2.44	2.43	2.20	1.85	1.42	1.01	0.67	0.41	0.24	0.15	21.0	19.7
15	0.17	0.32	0.57	0.93	1.40	1.99	2.57	3.00	3.25	3.23	2.94	2.48	1.92	1.34	0.87	0.53	0.29	0.16	28.0	26.8
12	0.19	0.38	0.69	1.14	1.77	2.52	3.19	3.72	4.02	4.00	3.64	3.07	2.39	1.68	1.06	0.63	0.34	0.18	34.6	33.6
9	0.20	0.42	0.78	1.30	2.08	2.91	3.67	4.28	4.61	4.58	4.19	3.52	2.73	1.95	1.21	0.71	0.38	0.19	39.7	38.8
6	0.20	0.44	0.81	1.39	2.24	3.11	3.93	4.57	4.90	4.86	4.45	3.75	2.90	2.07	1.29	0.73	0.38	0.18	42.2	41.3
3	0.19	0.42	0.78	1.34	2.17	3.04	3.90	4.53	4.86	4.83	4.42	3.71	2.83	2.00	1.24	0.70	0.36	0.17	41.5	40.6
0	0.16	0.36	0.68	1.16	1.88	2.68	3.52	4.16	4.47	4.44	4.07	3.37	2.51	1.76	1.07	0.61	0.31	0.14	37.3	36.4
-3	0.12	0.28	0.54	0.92	1.47	2.15	2.79	3.42	3.75	3.72	3.34	2.67	2.02	1.38	0.84	0.49	0.24	0.11	30.3	29.2
-6	0.09	0.19	0.39	0.67	1.04	1.51	1.99	2.35	2.53	2.51	2.29	1.91	1.44	0.97	0.61	0.35	0.17	0.09	21.1	19.9
-9	0.06	0.12	0.25	0.44	0.67	0.95	1.24	1.46	1.53	1.52	1.43	1.20	0.91	0.63	0.40	0.22	0.11	0.06	13.2	11.7
-12	0.04	0.07	0.13	0.25	0.40	0.55	0.70	0.80	0.83	0.82	0.78	0.67	0.52	0.37	0.22	0.12	0.07	0.04	7.39	5.46
-15	0.03	0.04	0.06	0.11	0.20	0.29	0.36	0.41	0.41	0.40	0.39	0.34	0.27	0.18	0.10	0.06	0.04	0.03	3.73	0.51
-18	0.02	0.02	0.03	0.05	0.07	0.11	0.15	0.17	0.17	0.16	0.16	0.14	0.10	0.07	0.05	0.04	0.03	0.02	1.55	0.00
-21	0.01	0.02	0.02	0.02	0.03	0.03	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.49	0.00
-24	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27			
Φ t	2.06	3.94	7.08	11.7	18.3	25.8	33.1	38.8	41.9	41.6	38.0	31.8	24.4	17.3	11.0	6.50	3.61	1.99	359	---
Φ a	0.00	0.69	4.94	10.1	17.0	24.7	32.1	38.0	41.1	40.9	37.1	30.8	23.2	15.8	9.18	4.19	0.32	0.00	---	330

one-half-peak spread: U:11.0,D:13.0 , L:12.1,R:13.2


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.17V I:1.309A P:11.53W PF:0.7239 Freq:59.99Hz Lamp Flux:394.988x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWWEIGHT:	
SPEC.:12W 2700K 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

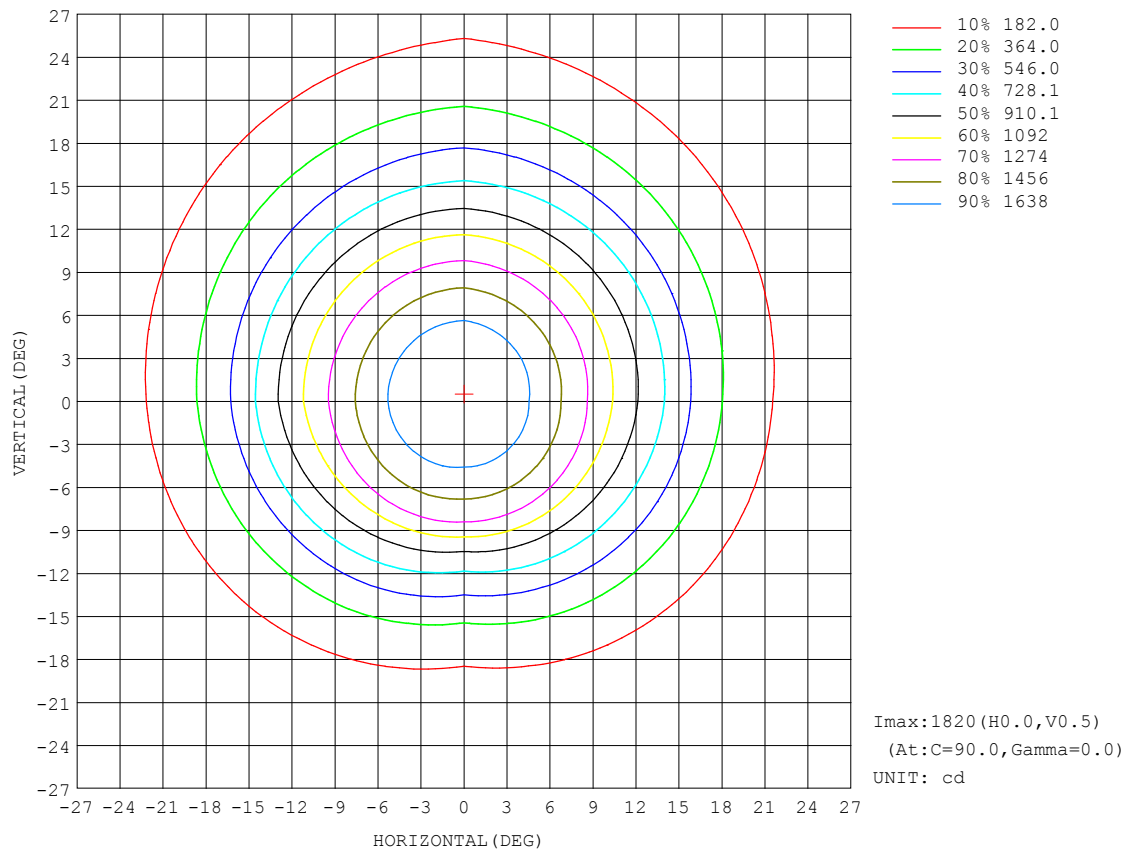


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.17V I:1.309A P:11.53W PF:0.7239 Freq:59.99Hz Lamp Flux:394.988x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWWWEIGHT:	
SPEC.:12W 2700K 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

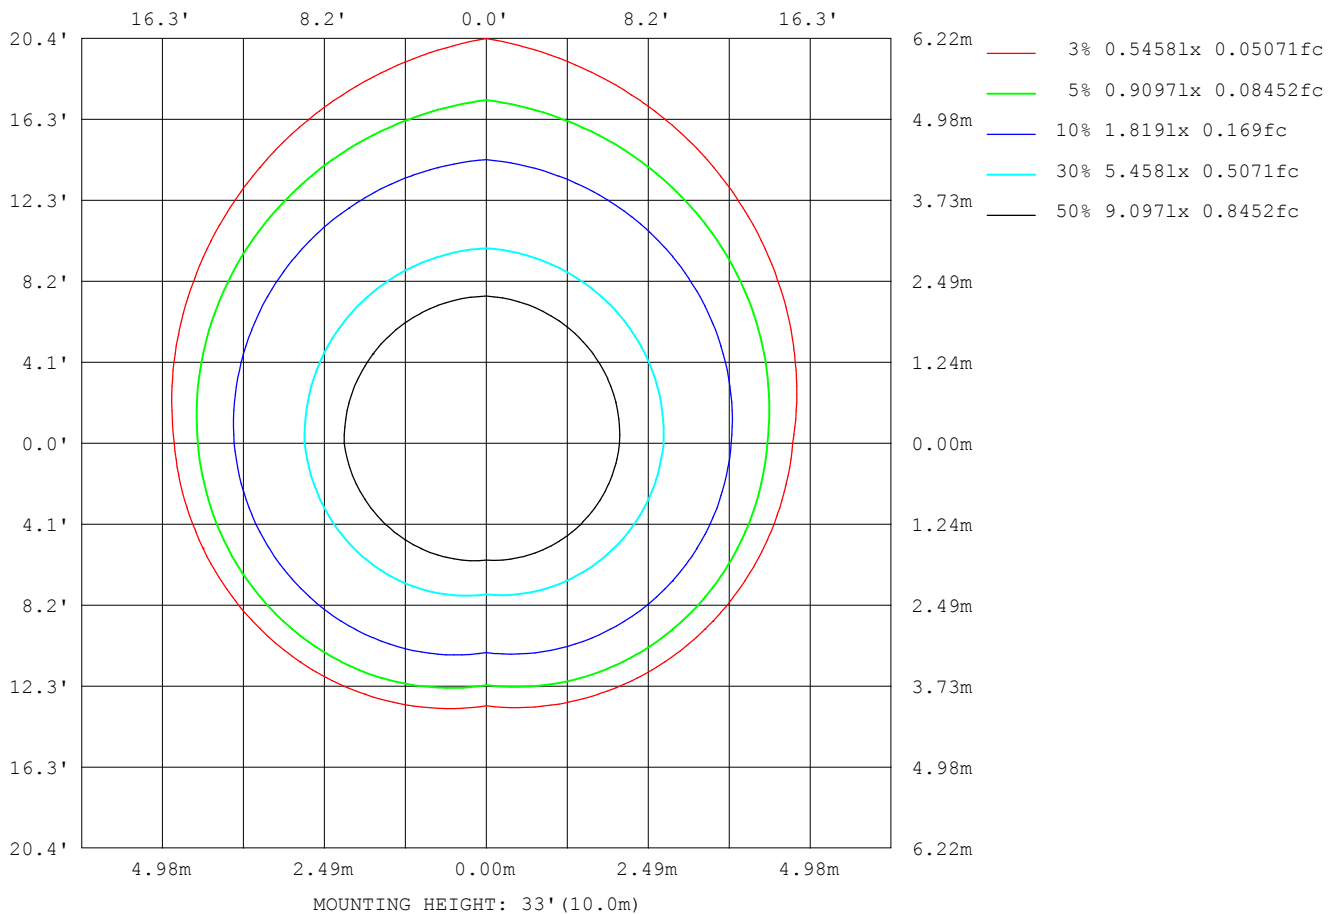

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

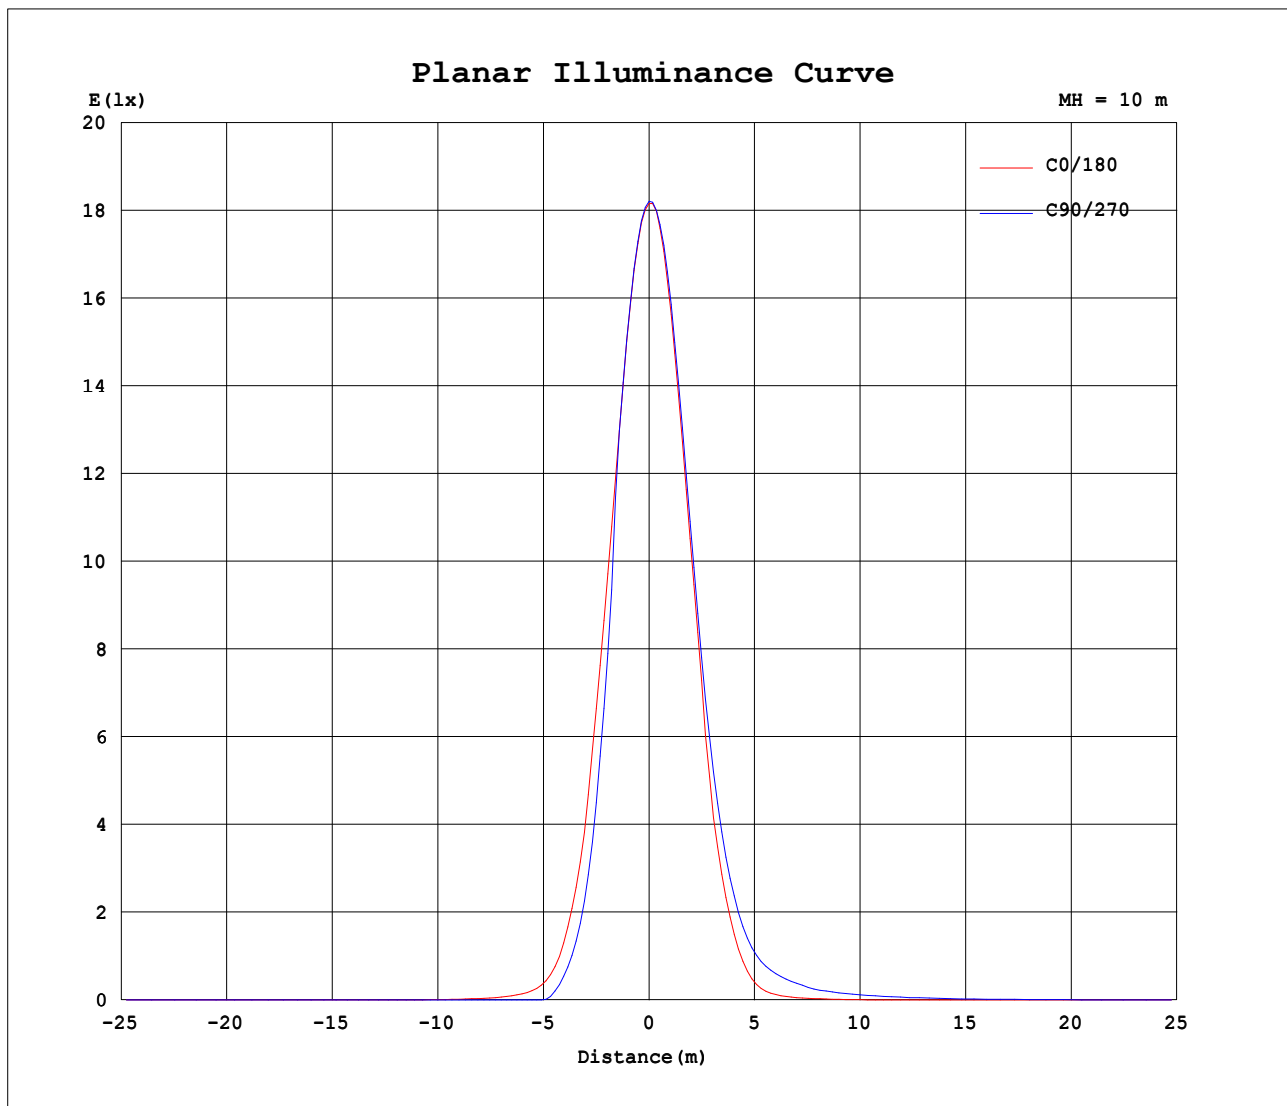


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.17V I:1.309A P:11.53W PF:0.7239 Freq:59.99Hz Lamp Flux:394.988x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWWEIGHT:	
SPEC.:12W 2700K 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

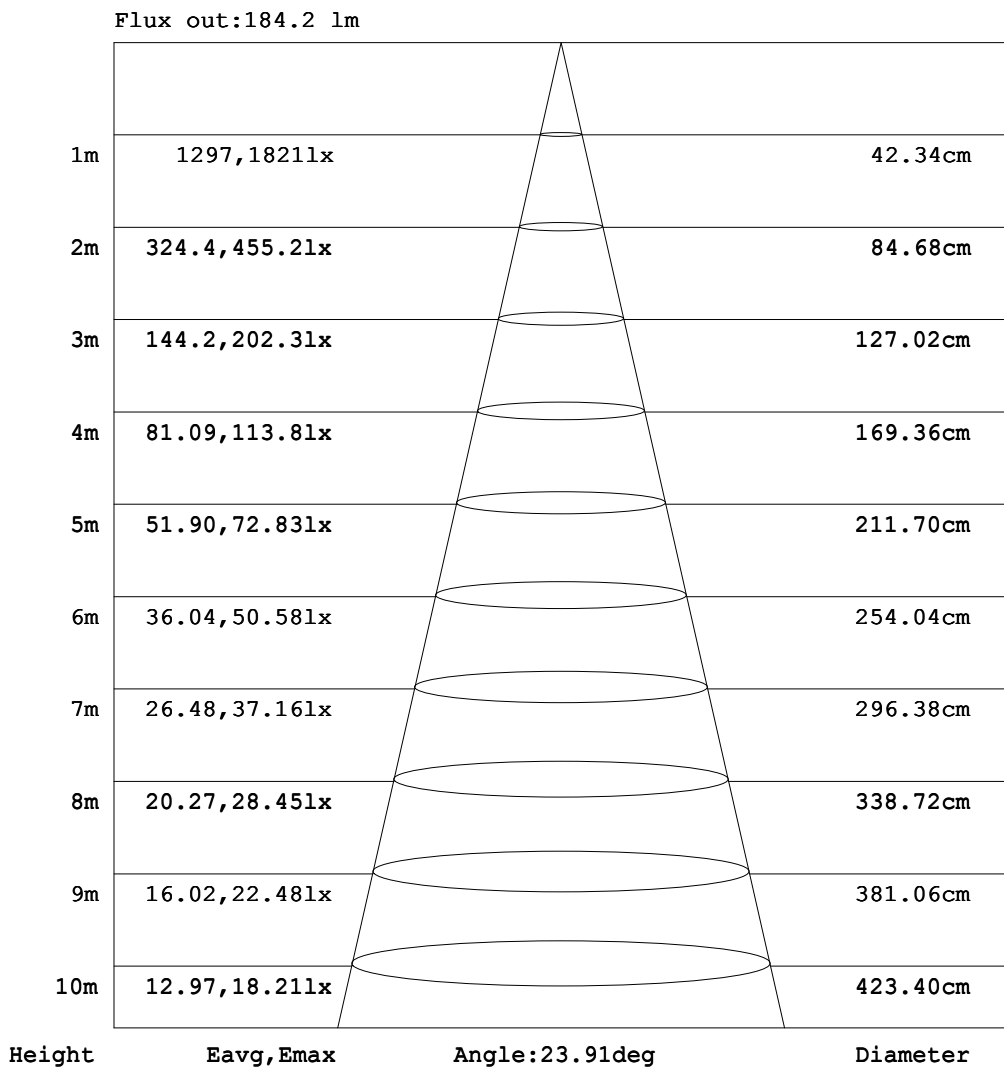

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.17V I:1.309A P:11.53W PF:0.7239 Freq:59.99Hz Lamp Flux:394.988x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight	RGBWWWEIGHT:
SPEC.:12W 2700K 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	0.88	1.83	3.03	4.19	5.05	5.47	5.62	5.68
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.11	0.39	1.04	1.97	3.15	4.31	5.21	5.70	5.92
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.14	0.30	0.79	1.53	2.47	3.51	4.46	5.21	5.75
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.12	0.23	0.43	0.84	1.41	2.08	2.77	3.41	3.94	4.32
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.13	0.22	0.37	0.57	0.81	1.14	1.47	1.72	1.91
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.07	0.12	0.19	0.26	0.34	0.42	0.49	0.54
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.07	0.08	0.10	0.11
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.08	0.08	0.09	0.08	0.06	0.05	0.02	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.12	0.17	0.19	0.22	0.23	0.21	0.20	0.17	0.12	0.06	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.16	0.24	0.32	0.36	0.41	0.51	0.69	0.88	0.92	0.77	0.44	0.00
-30	0.00	0.00	0.00	0.00	0.00	0.08	0.17	0.29	0.42	0.53	0.73	1.37	2.32	3.30	3.97	4.19	3.95	2.51	0.00
-20	0.00	0.00	0.00	0.00	0.00	0.15	0.27	0.42	0.59	0.88	2.03	3.99	6.53	10.7	20.2	47.7	96.9	128	122
-10	0.00	0.00	0.00	0.00	0.00	0.18	0.33	0.54	0.74	1.60	3.94	7.71	14.9	41.4	145	334	635	898	979
0	0.00	0.00	0.00	0.00	0.00	0.19	0.39	0.59	0.89	2.17	5.31	10.5	24.4	88.3	282	670	1218	1660	1816
10	0.00	0.01	0.03	0.06	0.16	0.54	1.06	1.85	2.93	5.12	9.50	17.3	32.0	74.9	209	451	814	1124	1254
20	0.00	0.02	0.05	0.10	0.27	0.77	1.51	2.66	4.29	6.68	10.9	17.4	29.2	47.4	81.7	152	254	345	393
30	0.00	0.03	0.07	0.13	0.30	0.80	1.57	2.82	4.57	6.91	10.1	14.9	21.4	29.6	43.8	59.3	76.2	92.7	105
40	0.00	0.04	0.09	0.16	0.29	0.64	1.38	2.37	3.86	5.84	8.30	11.4	15.2	19.8	25.1	30.7	36.3	41.4	45.5
50	0.00	0.05	0.10	0.17	0.27	0.47	0.90	1.66	2.61	3.94	5.61	7.60	9.89	12.4	15.1	17.8	20.5	22.9	24.9
60	0.00	0.05	0.11	0.18	0.27	0.37	0.54	0.85	1.35	2.06	2.93	3.88	4.98	6.24	7.57	8.85	10.1	11.2	12.0
70	0.00	0.06	0.12	0.18	0.26	0.34	0.43	0.54	0.66	0.83	1.06	1.36	1.72	2.14	2.59	3.03	3.43	3.79	4.07
80	0.00	0.06	0.12	0.18	0.24	0.31	0.38	0.46	0.54	0.61	0.70	0.78	0.87	0.96	1.04	1.13	1.22	1.30	1.38
90	0.00	0.06	0.11	0.17	0.23	0.28	0.34	0.39	0.45	0.51	0.56	0.62	0.68	0.73	0.79	0.85	0.90	0.96	1.01
100	0.00	0.05	0.11	0.15	0.20	0.24	0.28	0.32	0.35	0.38	0.42	0.45	0.49	0.52	0.55	0.58	0.61	0.64	0.68
110	0.00	0.05	0.09	0.13	0.17	0.19	0.22	0.24	0.25	0.26	0.28	0.29	0.32	0.32	0.33	0.35	0.37	0.39	0.41
120	0.00	0.05	0.08	0.11	0.13	0.15	0.16	0.17	0.18	0.18	0.18	0.18	0.17	0.16	0.16	0.16	0.17	0.17	0.18
130	0.00	0.04	0.07	0.09	0.10	0.11	0.12	0.12	0.11	0.10	0.09	0.07	0.06	0.04	0.03	0.01	0.00	0.00	0.00
140	0.00	0.03	0.05	0.07	0.08	0.08	0.08	0.07	0.06	0.04	0.02	0.00	0.00	0.00	0.00	0.03	0.03	0.02	0.00
150	0.00	0.02	0.04	0.05	0.06	0.05	0.05	0.04	0.03	0.01	0.00	0.00	0.09	0.22	0.46	0.77	1.03	1.19	1.18
160	0.00	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.01	0.00	0.00	0.22	0.61	1.25	1.99	2.71	3.28	3.60	3.65
170	0.00	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.17	0.63	1.41	2.45	3.52	4.42	4.97	5.20	5.17
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	0.88	1.83	3.03	4.19	5.05	5.47	5.62	5.68

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.17V I:1.309A P:11.53W PF:0.7239 Freq:59.99Hz Lamp Flux:394.988x1 lm																		
NAME: LED LANDSCAPE LIGHT									TYPE:Aluminum Spotlight RGBWWWEIGHT:									
SPEC.:12W 2700K 40°LENS									DIM.:					SERIAL No.:2				
MFR.: EVERFINE									SUR.:					Shielding Angle:DOWN-LIGHT SHROUD				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	5.76	5.90	5.86	5.49	4.68	3.52	2.29	1.21	0.45	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	6.08	6.08	5.90	5.36	4.46	3.30	2.13	1.13	0.44	0.05	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-160	5.97	5.66	5.15	4.39	3.44	2.43	1.48	0.75	0.27	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-150	4.13	3.76	3.26	2.63	1.94	1.28	0.72	0.34	0.12	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	1.80	1.61	1.32	1.01	0.71	0.44	0.22	0.13	0.07	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.49	0.42	0.34	0.26	0.19	0.12	0.07	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.10	0.08	0.07	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.01	0.02	0.03	0.03	0.04	0.04	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.04	0.07	0.10	0.13	0.14	0.15	0.14	0.13	0.11	0.09	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.09	0.17	0.23	0.28	0.31	0.32	0.32	0.30	0.26	0.22	0.16	0.11	0.04	0.00	0.00	0.00	0.00	0.00	
-40	0.55	0.97	1.19	1.19	1.01	0.75	0.59	0.52	0.46	0.38	0.30	0.21	0.12	0.04	0.00	0.00	0.00	0.00	
-30	2.78	4.52	4.98	4.61	3.96	2.95	1.90	1.06	0.72	0.58	0.45	0.32	0.20	0.09	0.00	0.00	0.00	0.00	
-20	124	89.6	42.7	20.4	12.2	7.59	4.91	2.73	1.29	0.80	0.61	0.44	0.27	0.13	0.01	0.00	0.00	0.00	
-10	872	601	309	128	39.3	17.1	8.95	4.96	2.32	1.06	0.75	0.52	0.33	0.18	0.03	0.00	0.00	0.00	
0	1607	1129	634	252	77.5	26.8	12.3	6.58	3.04	1.28	0.84	0.58	0.36	0.20	0.04	0.00	0.00	0.00	
10	1099	780	425	191	72.8	34.2	18.5	10.5	5.84	3.26	2.07	1.26	0.69	0.33	0.09	0.03	0.01	0.00	
20	340	247	147	82.0	49.0	30.2	18.3	11.6	7.09	4.50	2.84	1.68	0.89	0.40	0.11	0.05	0.02	0.00	
30	93.0	76.8	60.1	44.5	30.3	22.0	15.4	10.5	7.10	4.73	2.98	1.72	0.92	0.40	0.13	0.07	0.03	0.00	
40	41.5	36.5	31.0	25.4	20.1	15.4	11.6	8.47	5.98	4.01	2.50	1.48	0.76	0.33	0.16	0.09	0.04	0.00	
50	23.0	20.6	17.9	15.2	12.5	9.98	7.70	5.71	4.03	2.71	1.74	1.00	0.51	0.27	0.17	0.10	0.05	0.00	
60	11.2	10.1	8.89	7.62	6.29	5.04	3.94	2.99	2.15	1.44	0.90	0.55	0.37	0.27	0.18	0.11	0.05	0.00	
70	3.80	3.46	3.06	2.62	2.17	1.76	1.39	1.08	0.84	0.66	0.54	0.43	0.34	0.26	0.18	0.12	0.06	0.00	
80	1.30	1.22	1.13	1.04	0.96	0.87	0.78	0.70	0.61	0.54	0.46	0.38	0.31	0.24	0.18	0.12	0.06	0.00	
90	0.96	0.90	0.85	0.79	0.73	0.68	0.62	0.56	0.51	0.45	0.39	0.34	0.28	0.23	0.17	0.11	0.06	0.00	
100	0.64	0.61	0.58	0.55	0.52	0.49	0.45	0.42	0.38	0.35	0.32	0.28	0.24	0.20	0.15	0.11	0.05	0.00	
110	0.39	0.37	0.35	0.33	0.32	0.32	0.29	0.28	0.26	0.25	0.24	0.22	0.19	0.17	0.13	0.09	0.05	0.00	
120	0.17	0.17	0.16	0.16	0.16	0.17	0.18	0.18	0.18	0.18	0.17	0.16	0.15	0.13	0.11	0.08	0.05	0.00	
130	0.00	0.00	0.01	0.03	0.04	0.06	0.07	0.09	0.10	0.11	0.12	0.12	0.11	0.10	0.09	0.07	0.04	0.00	
140	0.10	0.18	0.21	0.20	0.14	0.07	0.00	0.02	0.04	0.06	0.07	0.08	0.08	0.08	0.07	0.05	0.03	0.00	
150	1.37	1.39	1.25	1.01	0.75	0.53	0.29	0.10	0.01	0.03	0.04	0.05	0.05	0.06	0.05	0.04	0.02	0.00	
160	3.81	3.73	3.40	2.87	2.22	1.51	0.91	0.45	0.12	0.01	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.00	
170	5.35	5.35	5.11	4.58	3.76	2.74	1.73	0.90	0.33	0.00	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.00	
180	5.76	5.90	5.86	5.49	4.68	3.52	2.29	1.21	0.45	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: