

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		4606.1 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	43.8V x 43.7H
	At 50% of Imax	23.7V x 25.1H
	At 90% of Imax	10.0V x 10.0H
Beam Flux	Total	1000.7 lumens per klm.
	To 10% of Imax	840.2 lumens per klm.
	To 50% of Imax	472.3 lumens per klm.
	To 90% of Imax	86.6 lumens per klm.
	Upward LOR	1.5 %
	Downward LOR	98.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.18V I:1.297A P:11.44W PF:0.7244 Freq:59.98Hz Lamp Flux:526.179x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWW	WEIGHT:
SPEC.:12W 5700K 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

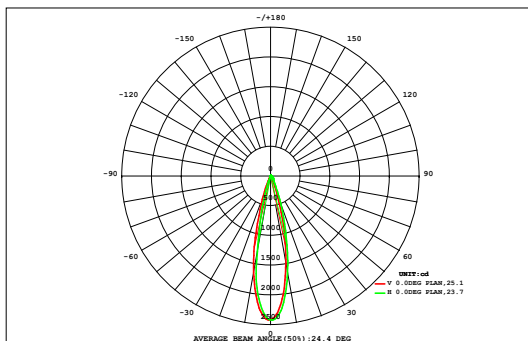

DATA OF LAMP		Eff:46.01lm/W	
MODEL	D9A2-12W-BZ	Imax (cd)	2424
NOMINAL POWER (W)	12	AVAILABILITY (%)	83.4
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	439.0
NOMINAL FLUX (lm)	526.179	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	526.2
TEST VOLTAGE (V)	12	θ @50% (H,V)	25,24DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.12	0.16	0.20	0.26	0.33	0.41	0.50	0.57	0.63	0.63	0.57	0.49	0.41	0.33	0.26	0.21	0.16	0.12	6.38	0.64
27	0.14	0.18	0.25	0.34	0.46	0.61	0.77	0.90	0.99	0.98	0.89	0.75	0.60	0.45	0.34	0.25	0.19	0.14	9.23	5.40
24	0.15	0.22	0.32	0.48	0.69	0.94	1.18	1.39	1.53	1.52	1.37	1.15	0.91	0.67	0.46	0.32	0.22	0.16	13.7	11.0
21	0.17	0.27	0.43	0.69	1.02	1.39	1.76	2.07	2.27	2.26	2.04	1.72	1.34	0.97	0.65	0.41	0.26	0.18	19.9	17.7
18	0.20	0.34	0.59	0.96	1.42	1.96	2.51	2.97	3.23	3.21	2.92	2.45	1.89	1.34	0.89	0.55	0.32	0.20	27.9	26.1
15	0.22	0.42	0.76	1.25	1.88	2.65	3.42	3.99	4.31	4.27	3.89	3.28	2.54	1.78	1.15	0.70	0.39	0.22	37.1	35.6
12	0.25	0.51	0.93	1.53	2.35	3.37	4.26	4.95	5.33	5.29	4.81	4.05	3.15	2.23	1.40	0.84	0.46	0.24	45.9	44.6
9	0.27	0.57	1.05	1.75	2.78	3.91	4.92	5.70	6.13	6.07	5.54	4.66	3.61	2.58	1.61	0.93	0.50	0.25	52.8	51.5
6	0.27	0.59	1.10	1.86	3.01	4.20	5.28	6.10	6.53	6.47	5.90	4.96	3.83	2.74	1.70	0.96	0.51	0.24	56.3	55.1
3	0.25	0.56	1.06	1.79	2.93	4.10	5.23	6.05	6.47	6.41	5.85	4.90	3.73	2.65	1.64	0.92	0.48	0.22	55.2	54.0
0	0.21	0.48	0.92	1.55	2.53	3.60	4.70	5.54	5.92	5.87	5.37	4.44	3.31	2.33	1.41	0.80	0.41	0.19	49.6	48.3
-3	0.17	0.38	0.73	1.24	1.96	2.87	3.72	4.53	4.95	4.90	4.40	3.52	2.66	1.84	1.11	0.64	0.32	0.15	40.1	38.7
-6	0.12	0.26	0.53	0.90	1.39	2.03	2.65	3.10	3.32	3.29	3.00	2.51	1.92	1.29	0.81	0.46	0.23	0.11	27.9	26.4
-9	0.08	0.16	0.33	0.59	0.91	1.28	1.66	1.96	2.04	2.02	1.91	1.61	1.20	0.83	0.53	0.29	0.15	0.08	17.6	15.7
-12	0.05	0.09	0.18	0.34	0.54	0.75	0.94	1.07	1.11	1.10	1.04	0.89	0.69	0.49	0.30	0.16	0.09	0.06	9.89	7.44
-15	0.04	0.05	0.09	0.15	0.26	0.39	0.49	0.55	0.55	0.54	0.53	0.46	0.35	0.24	0.14	0.08	0.06	0.04	5.01	0.76
-18	0.02	0.03	0.05	0.07	0.10	0.15	0.20	0.23	0.23	0.22	0.22	0.18	0.13	0.09	0.06	0.05	0.04	0.03	2.09	0.00
-21	0.02	0.02	0.03	0.03	0.04	0.04	0.05	0.05	0.04	0.04	0.05	0.05	0.04	0.04	0.04	0.03	0.03	0.02	0.65	0.00
-24	0.02	0.02	0.03	0.03	0.04	0.04	0.05	0.05	0.04	0.04	0.05	0.05	0.04	0.04	0.04	0.03	0.03	0.02	0.65	0.00
-27	0.02	0.02	0.03	0.03	0.04	0.04	0.05	0.05	0.04	0.04	0.05	0.05	0.04	0.04	0.04	0.03	0.03	0.02	0.65	0.00
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27			
Φ t	2.75	5.28	9.53	15.8	24.6	34.6	44.2	51.7	55.6	55.1	50.3	42.1	32.3	22.9	14.5	8.61	4.81	2.67	477	---
Φ a	0.00	0.92	6.74	13.6	22.8	33.2	42.9	50.6	54.6	54.1	49.1	40.7	30.7	21.1	12.1	5.52	0.28	0.00	---	439

one-half-peak spread: U:10.9,D:13.0 , L:12.2,R:13.2


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.18V I:1.297A P:11.44W PF:0.7244 Freq:59.98Hz Lamp Flux:526.179x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWWEIGHT:	
SPEC.:12W 5700K 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

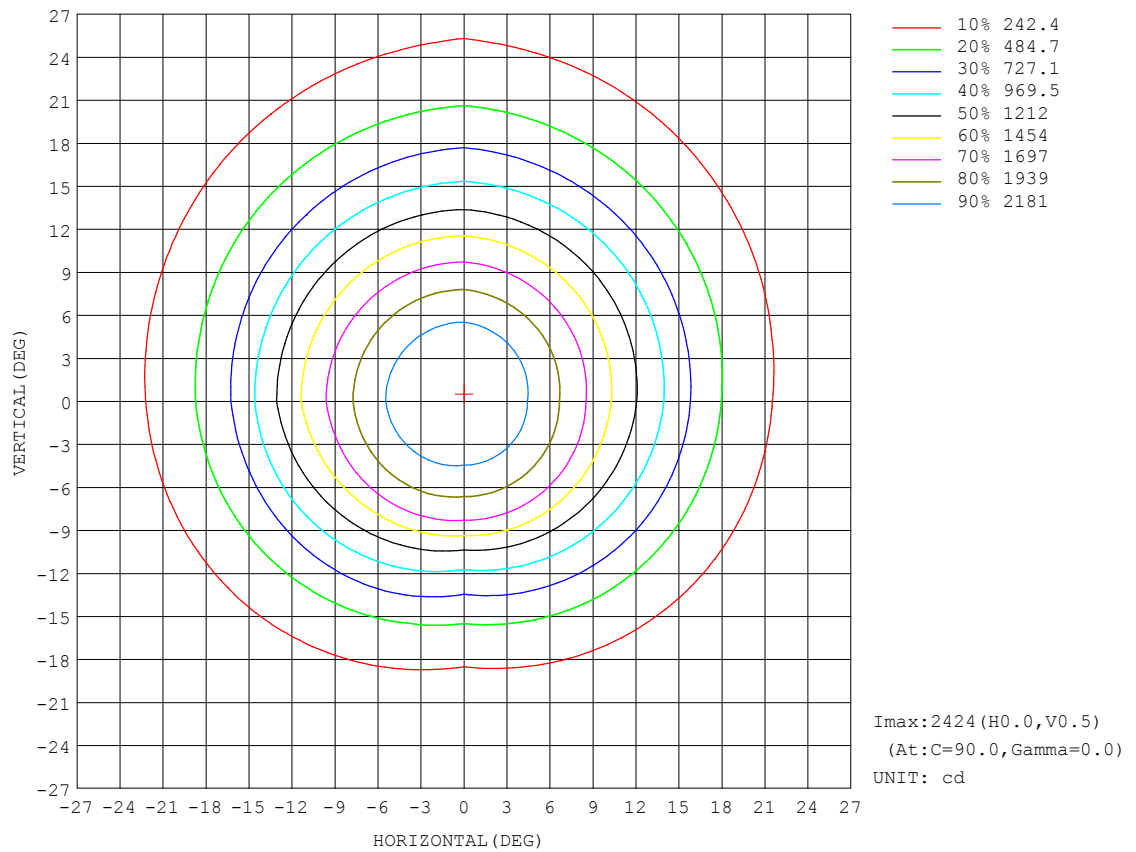


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.18V I:1.297A P:11.44W PF:0.7244 Freq:59.98Hz Lamp Flux:526.179x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWWWEIGHT:	
SPEC.:12W 5700K 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

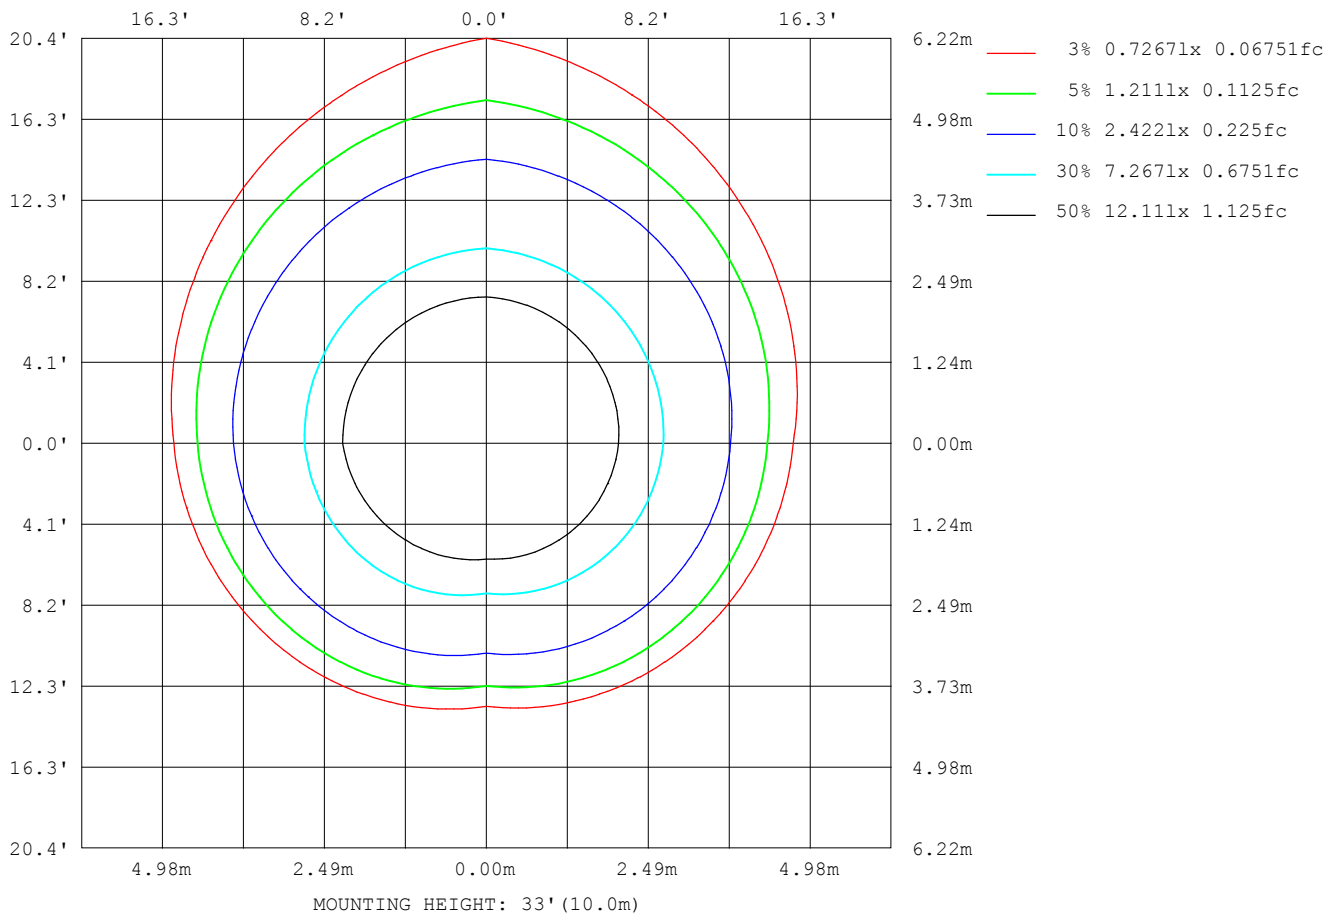

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

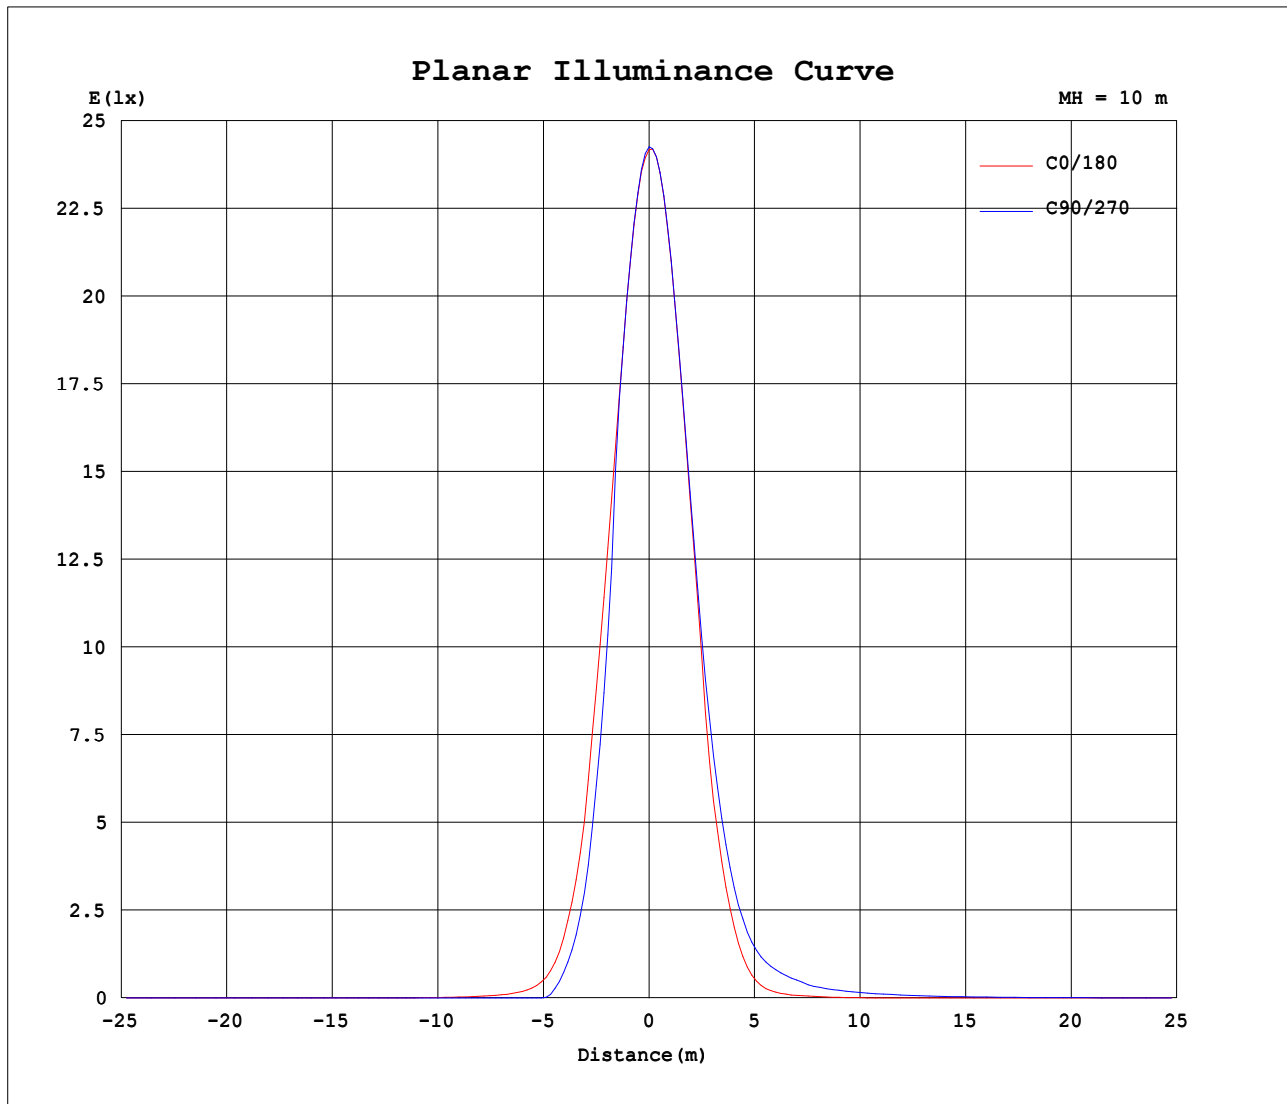


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.18V I:1.297A P:11.44W PF:0.7244 Freq:59.98Hz Lamp Flux:526.179x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWWEIGHT:	
SPEC.:12W 5700K 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

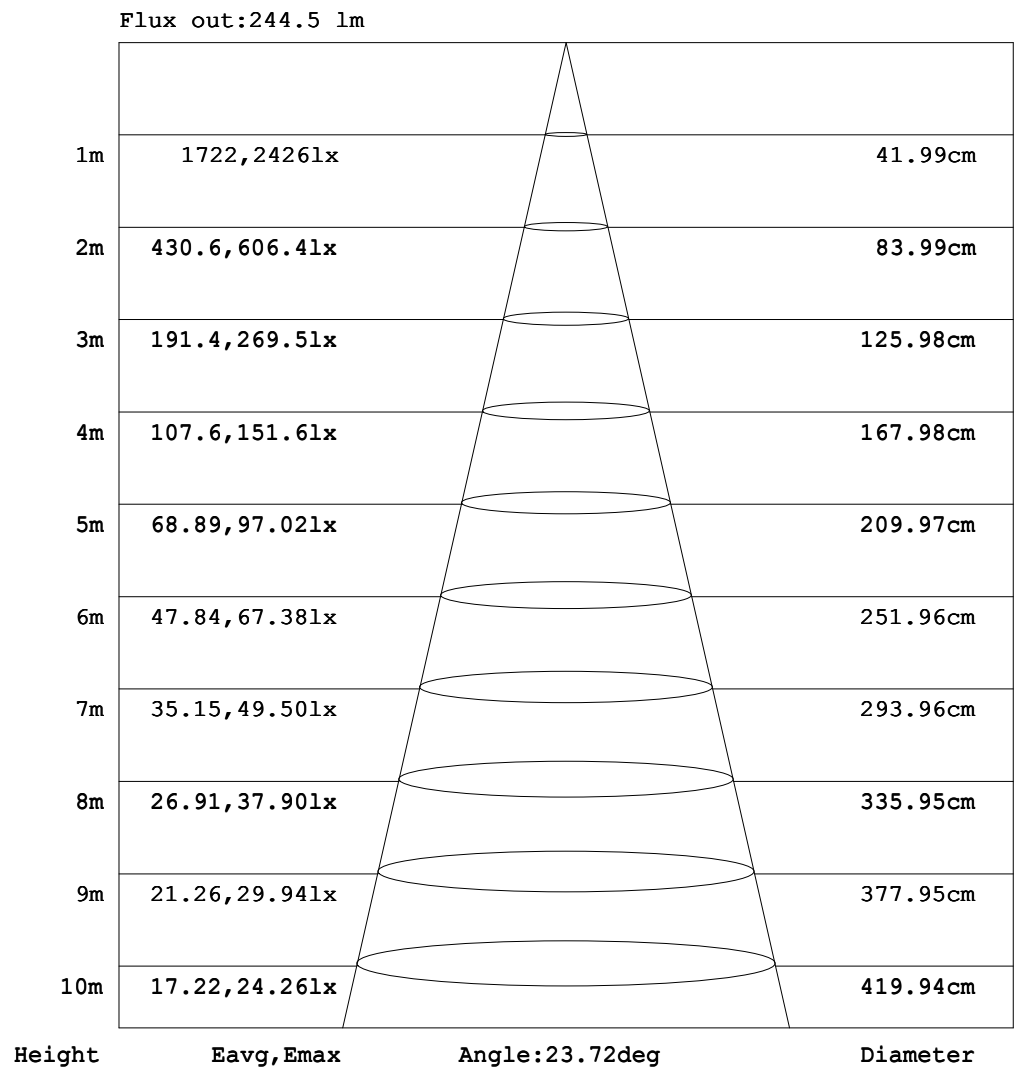

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:1.297A P:11.44W PF:0.7244 Freq:59.98Hz Lamp Flux:526.179x1 lm									
NAME: LED LANDSCAPE LIGHT					TYPE:Aluminum Spotlight RGBWW				
SPEC.:12W 5700K 40°LENS					DIM.:			SERIAL No.:2	
MFR.: EVERFINE					SUR.:			Shielding Angle:DOWN-LIGHT SHROUD	

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.49	1.29	2.55	4.14	5.71	6.85	7.39	7.60	7.67
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.16	0.63	1.47	2.74	4.30	5.86	7.05	7.73	8.04	8.24
-160	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.10	0.21	0.52	1.17	2.15	3.40	4.78	6.06	7.07	7.79	8.29
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.10	0.19	0.34	0.66	1.22	1.99	2.89	3.81	4.68	5.39	5.88
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.07	0.13	0.21	0.34	0.54	0.81	1.21	1.63	2.05	2.41	2.65
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.11	0.16	0.23	0.32	0.42	0.54	0.65	0.76	0.83
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.08	0.10	0.14	0.17	0.20	0.22	0.24
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.03	0.03	0.02	0.01	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.08	0.12	0.13	0.15	0.14	0.12	0.11	0.07	0.04	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.13	0.20	0.26	0.31	0.33	0.33	0.32	0.30	0.23	0.17	0.09	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.11	0.19	0.31	0.40	0.48	0.53	0.60	0.72	0.95	1.20	1.25	1.04	0.59	0.00
-30	0.00	0.00	0.00	0.00	0.02	0.15	0.32	0.46	0.59	0.75	1.01	1.87	3.13	4.42	5.33	5.63	5.30	3.36	0.00
-20	0.00	0.00	0.00	0.00	0.12	0.26	0.42	0.63	0.87	1.23	2.75	5.36	8.77	14.3	27.1	63.7	131	174	165
-10	0.00	0.00	0.00	0.00	0.14	0.30	0.54	0.77	1.06	2.20	5.31	10.3	20.0	55.7	195	453	855	1189	1283
0	0.00	0.00	0.00	0.00	0.14	0.33	0.58	0.89	1.23	2.96	7.16	14.1	32.8	118	381	901	1645	2224	2418
10	0.00	0.02	0.04	0.08	0.35	0.78	1.52	2.54	4.00	6.90	12.7	23.2	42.9	100	279	608	1084	1495	1658
20	0.00	0.03	0.07	0.14	0.48	1.10	2.09	3.63	5.81	8.98	14.6	23.2	39.1	63.3	109	203	337	463	527
30	0.00	0.04	0.10	0.18	0.43	1.12	2.21	3.85	6.15	9.28	13.6	19.9	28.5	39.5	58.7	79.1	102	124	140
40	0.00	0.06	0.13	0.22	0.40	0.98	1.90	3.27	5.25	7.86	11.2	15.3	20.4	26.5	33.5	41.0	48.4	55.2	60.6
50	0.00	0.07	0.15	0.24	0.37	0.64	1.31	2.26	3.55	5.33	7.57	10.2	13.3	16.6	20.2	23.9	27.5	30.7	33.4
60	0.00	0.07	0.16	0.25	0.37	0.51	0.74	1.15	1.92	2.84	3.98	5.25	6.73	8.41	10.2	11.9	13.5	15.0	16.1
70	0.00	0.08	0.16	0.26	0.36	0.47	0.60	0.74	0.91	1.13	1.45	1.86	2.35	2.92	3.55	4.15	4.70	5.18	5.56
80	0.00	0.08	0.16	0.25	0.34	0.44	0.53	0.64	0.75	0.86	0.97	1.09	1.20	1.32	1.44	1.56	1.67	1.79	1.89
90	0.00	0.08	0.16	0.24	0.32	0.40	0.48	0.55	0.63	0.71	0.79	0.87	0.95	1.03	1.11	1.19	1.27	1.35	1.43
100	0.00	0.08	0.15	0.22	0.28	0.34	0.39	0.45	0.50	0.54	0.60	0.65	0.70	0.74	0.78	0.83	0.87	0.92	0.98
110	0.00	0.07	0.13	0.19	0.23	0.28	0.31	0.35	0.37	0.39	0.42	0.44	0.46	0.47	0.50	0.53	0.56	0.60	0.63
120	0.00	0.06	0.12	0.16	0.19	0.22	0.24	0.25	0.26	0.27	0.27	0.27	0.27	0.28	0.28	0.28	0.29	0.30	0.32
130	0.00	0.05	0.10	0.13	0.15	0.17	0.17	0.18	0.17	0.17	0.16	0.14	0.13	0.11	0.09	0.08	0.06	0.05	0.05
140	0.00	0.04	0.08	0.10	0.11	0.12	0.12	0.12	0.10	0.09	0.07	0.04	0.00	0.00	0.04	0.06	0.06	0.04	0.00
150	0.00	0.03	0.06	0.07	0.08	0.08	0.08	0.07	0.05	0.03	0.00	0.04	0.18	0.39	0.75	1.13	1.48	1.69	1.69
160	0.00	0.02	0.04	0.05	0.05	0.05	0.05	0.04	0.02	0.00	0.10	0.38	0.94	1.77	2.76	3.73	4.51	4.94	5.01
170	0.00	0.01	0.02	0.02	0.03	0.02	0.02	0.02	0.01	0.01	0.32	0.94	1.98	3.35	4.81	6.02	6.76	7.06	7.04
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.49	1.29	2.55	4.14	5.71	6.85	7.39	7.60	7.67

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-06-07

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:1.297A P:11.44W PF:0.7244 Freq:59.98Hz Lamp Flux:526.179x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight	RGBWWWEIGHT:
SPEC.:12W 5700K 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	7.80	7.98	7.95	7.44	6.36	4.84	3.19	1.76	0.73	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	8.24	8.22	8.00	7.29	6.07	4.54	2.96	1.62	0.69	0.19	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-160	8.08	7.68	6.99	5.99	4.72	3.36	2.11	1.11	0.46	0.11	0.05	0.02	0.01	0.00	0.00	0.00	0.00	0.00	
-150	5.64	5.15	4.45	3.62	2.71	1.82	1.08	0.55	0.20	0.10	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-140	2.51	2.24	1.88	1.46	1.04	0.68	0.40	0.21	0.13	0.07	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.77	0.67	0.55	0.42	0.32	0.23	0.16	0.11	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.22	0.20	0.17	0.14	0.10	0.08	0.05	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.02	0.04	0.05	0.07	0.07	0.08	0.08	0.07	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.05	0.11	0.15	0.19	0.22	0.24	0.24	0.23	0.21	0.17	0.14	0.09	0.03	0.00	0.00	0.00	0.00	0.00	
-50	0.13	0.24	0.32	0.39	0.44	0.46	0.46	0.44	0.41	0.36	0.29	0.20	0.14	0.05	0.00	0.00	0.00	0.00	
-40	0.74	1.32	1.62	1.62	1.39	1.06	0.84	0.75	0.67	0.57	0.48	0.36	0.23	0.13	0.02	0.00	0.00	0.00	
-30	3.74	6.10	6.72	6.25	5.38	3.99	2.61	1.50	1.01	0.83	0.67	0.52	0.35	0.20	0.06	0.00	0.00	0.00	
-20	166	120	57.1	27.4	16.5	10.3	6.67	3.73	1.82	1.14	0.88	0.66	0.47	0.26	0.10	0.00	0.00	0.00	
-10	1145	802	408	169	52.9	23.0	12.1	6.72	3.19	1.51	1.07	0.78	0.54	0.31	0.13	0.00	0.00	0.00	
0	2129	1492	842	329	104	36.1	16.6	8.96	4.17	1.80	1.21	0.86	0.59	0.34	0.14	0.00	0.00	0.00	
10	1452	1032	563	253	97.3	45.9	25.0	14.1	7.89	4.45	2.84	1.77	1.03	0.52	0.21	0.04	0.02	0.00	
20	456	326	197	109	65.5	40.6	24.6	15.6	9.58	6.08	3.88	2.32	1.30	0.62	0.24	0.07	0.03	0.00	
30	124	103	80.2	59.6	40.5	29.4	20.6	14.1	9.55	6.39	4.06	2.40	1.32	0.61	0.24	0.10	0.04	0.00	
40	55.3	48.7	41.4	33.9	26.9	20.7	15.5	11.4	8.05	5.43	3.44	2.07	1.10	0.53	0.23	0.13	0.06	0.00	
50	30.7	27.6	24.0	20.3	16.7	13.4	10.4	7.71	5.47	3.71	2.42	1.42	0.77	0.42	0.24	0.15	0.07	0.00	
60	15.0	13.6	11.9	10.2	8.49	6.82	5.35	4.09	2.97	2.01	1.29	0.82	0.54	0.37	0.25	0.16	0.07	0.00	
70	5.19	4.72	4.17	3.58	2.97	2.42	1.94	1.52	1.19	0.94	0.75	0.60	0.47	0.36	0.26	0.16	0.08	0.00	
80	1.79	1.67	1.56	1.44	1.32	1.20	1.09	0.97	0.86	0.75	0.64	0.53	0.44	0.34	0.25	0.16	0.08	0.00	
90	1.35	1.27	1.19	1.11	1.03	0.95	0.87	0.79	0.71	0.63	0.55	0.48	0.40	0.32	0.24	0.16	0.08	0.00	
100	0.92	0.87	0.83	0.78	0.74	0.70	0.65	0.60	0.54	0.50	0.45	0.39	0.34	0.28	0.22	0.15	0.08	0.00	
110	0.60	0.56	0.53	0.50	0.47	0.46	0.44	0.42	0.39	0.37	0.35	0.31	0.28	0.23	0.19	0.13	0.07	0.00	
120	0.30	0.29	0.28	0.28	0.28	0.27	0.27	0.27	0.27	0.26	0.25	0.24	0.22	0.19	0.16	0.12	0.06	0.00	
130	0.06	0.08	0.09	0.09	0.11	0.13	0.14	0.16	0.17	0.17	0.18	0.17	0.17	0.15	0.13	0.10	0.05	0.00	
140	0.15	0.26	0.31	0.30	0.23	0.15	0.10	0.07	0.09	0.10	0.12	0.12	0.12	0.11	0.10	0.08	0.04	0.00	
150	1.94	1.96	1.78	1.49	1.11	0.78	0.46	0.20	0.04	0.05	0.07	0.08	0.08	0.08	0.07	0.06	0.03	0.00	
160	5.23	5.12	4.66	3.97	3.08	2.15	1.31	0.68	0.25	0.03	0.04	0.05	0.05	0.05	0.05	0.04	0.02	0.00	
170	7.26	7.25	6.96	6.25	5.12	3.78	2.43	1.31	0.54	0.13	0.02	0.02	0.02	0.03	0.02	0.02	0.01	0.00	
180	7.80	7.98	7.95	7.44	6.36	4.84	3.19	1.76	0.73	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: