

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	795.5 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	104.3V x 123.2H
	At 50% of Imax	51.2V x 71.7H
	At 90% of Imax	19.8V x 32.2H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	905.9 lumens per klm.
	To 50% of Imax	519.9 lumens per klm.
	To 90% of Imax	114.0 lumens per klm.

Upward LOR	1.2 %
Downward LOR	98.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.09V I:1.303A P:11.17W PF:0.7091 Freq:59.98Hz Lamp Flux:500.604x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 2700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:Floodlight Shroud

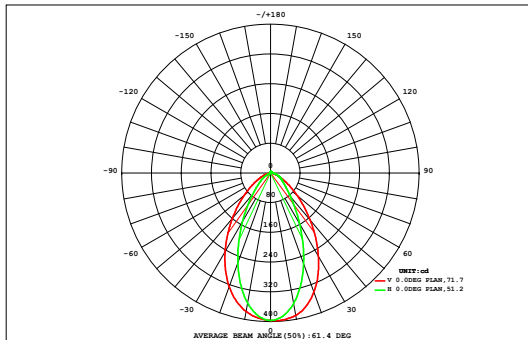

DATA OF LAMP		Eff:44.83lm/W	
MODEL	F7A1-12W-BK	Imax (cd)	398.2
NOMINAL POWER (W)	12	AVAILABILITY (%)	90.6
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	453.5
NOMINAL FLUX (lm)	500.604	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	500.6
TEST VOLTAGE (V)	12	θ @50% (H,V)	72,51DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.01	0.03	0.06	0.09	0.12	0.14	0.15	0.14	0.13	0.11	0.08	0.05	0.02	0.00	0.00	0.00	1.13	0.00
90	0.00	0.00	0.05	0.13	0.21	0.30	0.38	0.44	0.48	0.47	0.43	0.37	0.29	0.20	0.12	0.04	0.00	0.00	3.91	0.00
80	0.00	0.02	0.10	0.23	0.38	0.52	0.66	0.76	0.82	0.81	0.75	0.65	0.51	0.37	0.23	0.10	0.01	0.00	6.92	0.00
70	0.00	0.03	0.16	0.36	0.60	0.83	1.03	1.17	1.24	1.22	1.13	0.99	0.80	0.58	0.35	0.16	0.03	0.00	10.7	3.32
60	0.00	0.05	0.23	0.52	0.91	1.34	1.72	1.93	2.00	1.96	1.84	1.62	1.28	0.88	0.50	0.22	0.05	0.00	17.1	14.8
50	0.00	0.07	0.29	0.70	1.35	2.18	2.96	3.46	3.60	3.55	3.34	2.84	2.09	1.31	0.69	0.28	0.06	0.00	28.8	27.4
40	0.00	0.08	0.34	0.90	1.88	3.25	4.76	5.87	6.29	6.27	5.80	4.70	3.21	1.85	0.89	0.34	0.07	0.00	46.5	45.5
30	0.00	0.08	0.39	1.07	2.35	4.31	6.60	8.47	9.39	9.41	8.57	6.71	4.38	2.38	1.07	0.38	0.08	0.00	65.7	64.8
20	0.00	0.09	0.40	1.16	2.64	4.94	7.73	10.2	11.5	11.6	10.5	8.06	5.14	2.71	1.17	0.40	0.08	0.00	78.2	77.4
10	0.00	0.08	0.39	1.15	2.62	4.90	7.66	10.1	11.4	11.5	10.5	8.08	5.15	2.70	1.16	0.39	0.07	0.00	77.9	77.1
0	0.00	0.07	0.35	1.02	2.29	4.19	6.43	8.27	9.23	9.39	8.61	6.75	4.39	2.36	1.03	0.35	0.06	0.00	64.8	63.9
-10	0.00	0.05	0.29	0.81	1.76	3.10	4.52	5.58	6.08	6.21	5.82	4.73	3.22	1.81	0.82	0.28	0.04	0.00	45.1	44.1
-20	0.00	0.03	0.21	0.58	1.20	1.96	2.67	3.12	3.31	3.37	3.24	2.79	2.03	1.22	0.58	0.20	0.03	0.00	26.5	25.1
-30	0.00	0.01	0.12	0.36	0.70	1.07	1.36	1.55	1.62	1.63	1.56	1.40	1.10	0.71	0.35	0.11	0.01	0.00	13.7	9.95
-40	0.00	0.00	0.04	0.17	0.34	0.50	0.63	0.73	0.77	0.76	0.71	0.63	0.50	0.33	0.15	0.03	0.00	0.00	6.31	0.00
-50	0.00	0.00	0.00	0.03	0.08	0.13	0.17	0.19	0.20	0.20	0.18	0.16	0.12	0.07	0.02	0.00	0.00	0.00	1.55	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.01	0.67	3.37	9.23	19.4	33.6	49.4	61.9	68.1	68.5	63.1	50.6	34.3	19.5	9.14	3.28	0.61	0.01	495	---
Φ a	0.00	0.00	0.25	6.41	16.8	31.0	46.6	59.0	65.0	65.5	60.1	47.7	31.7	17.0	6.37	0.22	0.00	0.00	---	453

one-half-peak spread: U:25.6,D:25.9 , L:38.6,R:33.6


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.09V I:1.303A P:11.17W PF:0.7091 Freq:59.98Hz Lamp Flux:500.604x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 2700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:Floodlight Shroud

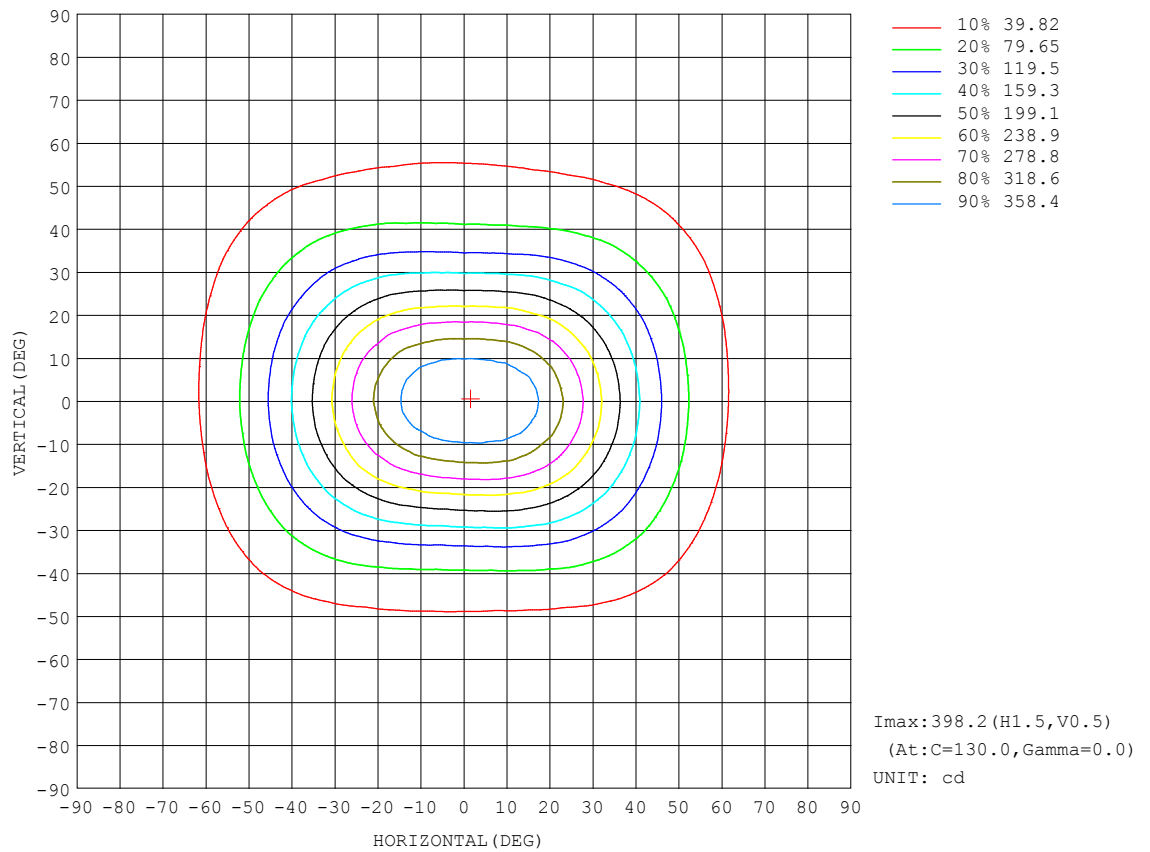


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.09V I:1.303A P:11.17W PF:0.7091 Freq:59.98Hz Lamp Flux:500.604x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 2700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:Floodlight Shroud

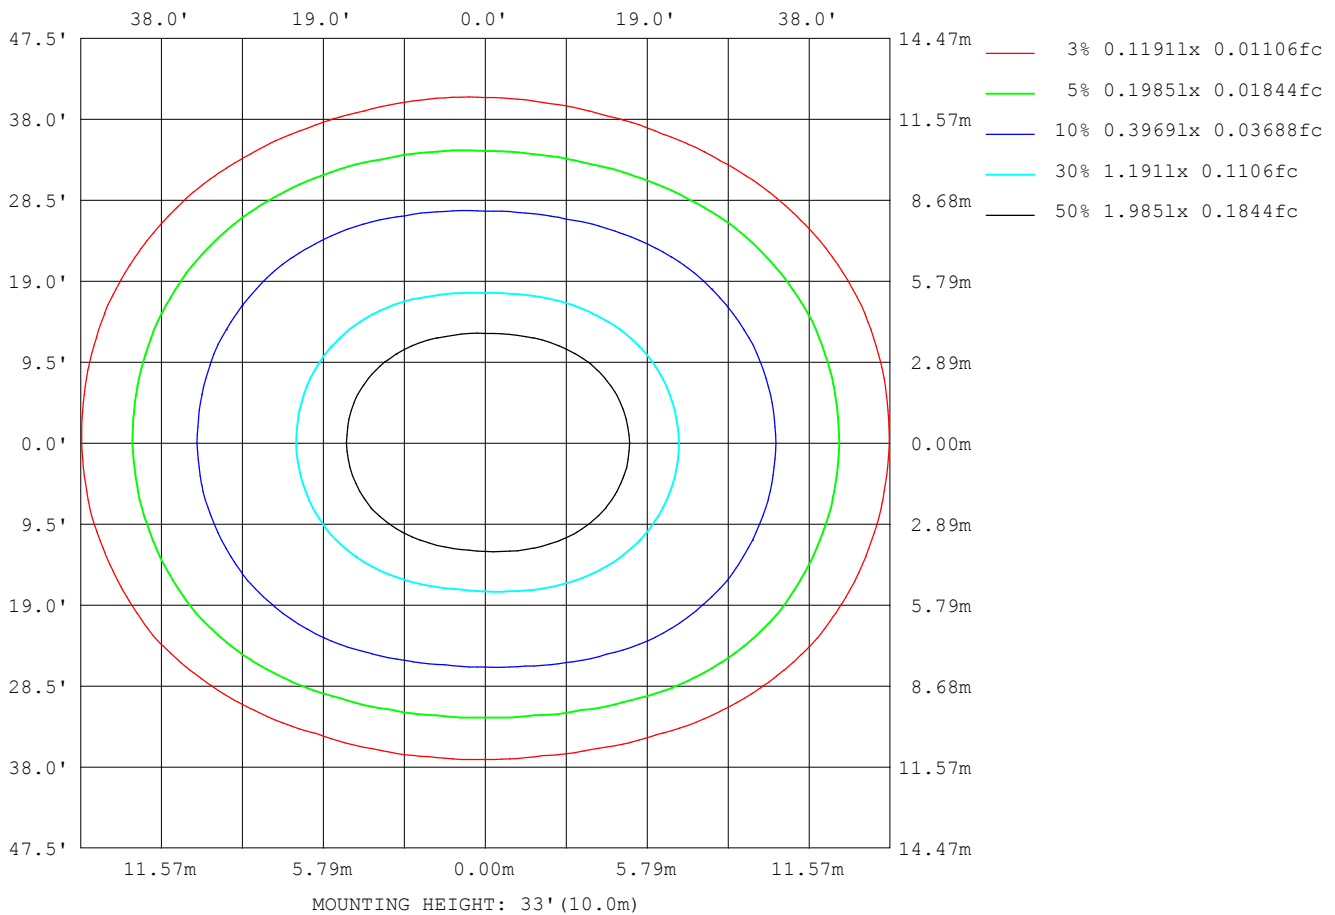

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

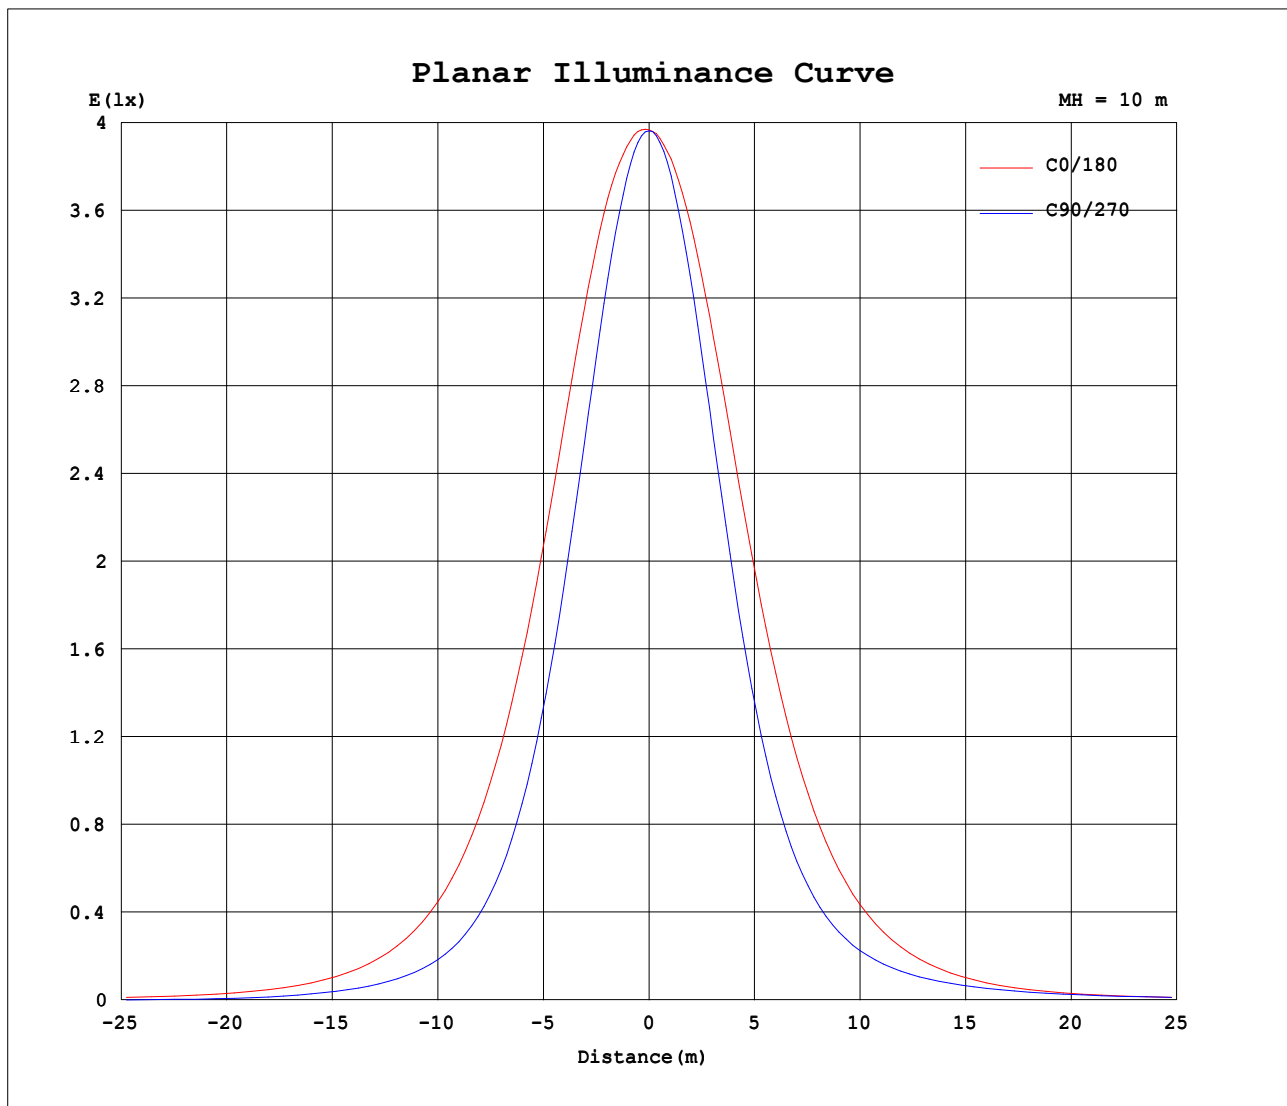


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.09V I:1.303A P:11.17W PF:0.7091 Freq:59.98Hz Lamp Flux:500.604x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 2700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:Floodlight Shroud

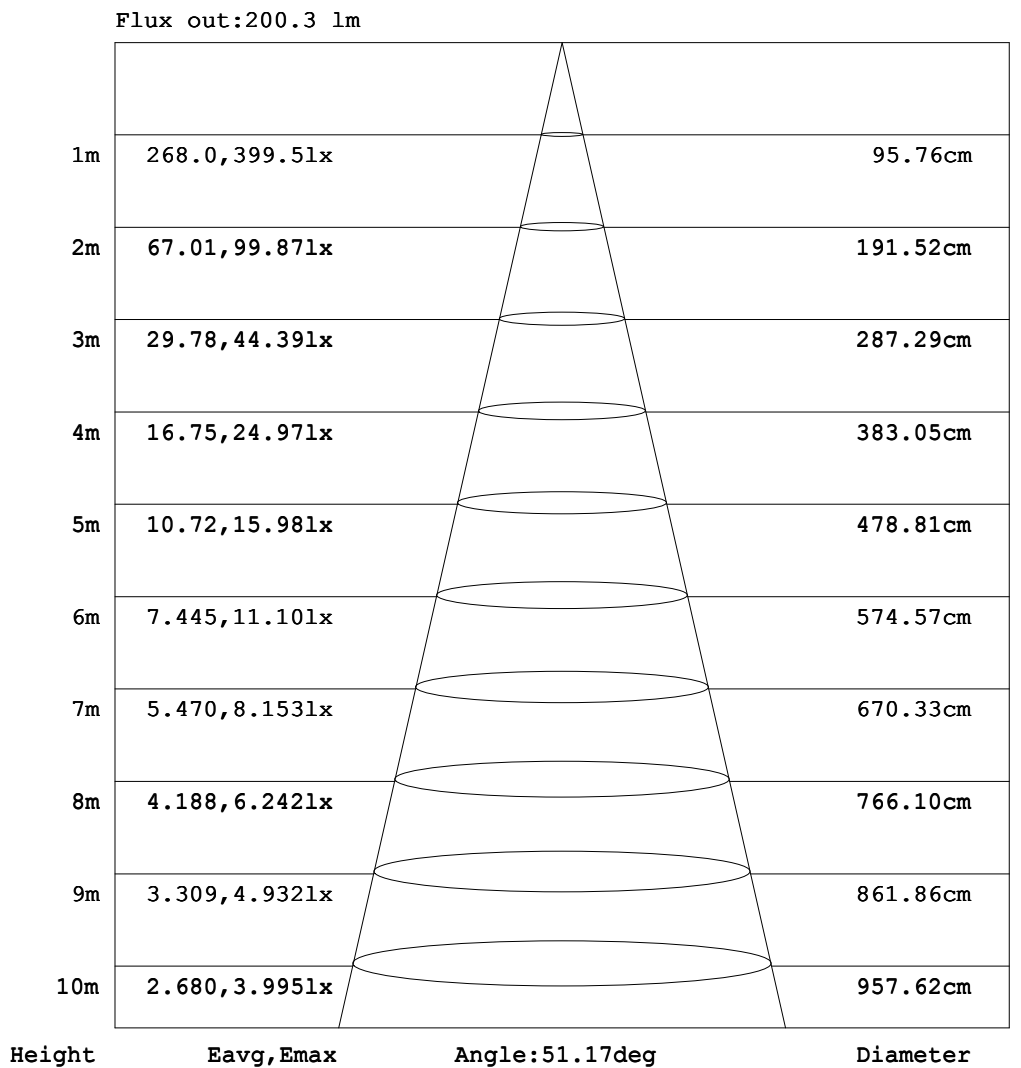

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.09V I:1.303A P:11.17W PF:0.7091 Freq:59.98Hz Lamp Flux:500.604x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 2700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:Floodlight Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.09	0.27	0.47	0.73	1.02	1.36	1.71	2.09	2.45	2.82	3.17	3.50	3.79	4.04	4.12
-170	0.00	0.00	0.01	0.04	0.17	0.39	0.66	0.98	1.36	1.78	2.14	2.46	2.77	3.05	3.33	3.56	3.73	3.86	3.96
-160	0.00	0.00	0.01	0.07	0.23	0.48	0.72	0.97	1.24	1.54	1.82	2.15	2.44	2.69	2.89	3.10	3.23	3.37	3.42
-150	0.00	0.00	0.01	0.08	0.25	0.40	0.57	0.76	1.01	1.24	1.47	1.69	1.89	2.10	2.27	2.40	2.54	2.57	2.65
-140	0.00	0.00	0.00	0.06	0.17	0.30	0.41	0.57	0.73	0.88	1.05	1.18	1.33	1.45	1.52	1.64	1.70	1.71	1.76
-130	0.00	0.00	0.00	0.03	0.07	0.15	0.29	0.37	0.49	0.53	0.62	0.73	0.82	0.85	0.90	0.97	0.95	0.97	1.01
-120	0.00	0.00	0.00	0.00	0.01	0.04	0.14	0.20	0.24	0.29	0.33	0.38	0.41	0.45	0.46	0.48	0.47	0.47	0.49
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.05	0.10	0.12	0.14	0.15	0.16	0.17	0.16	0.14	0.16	0.19
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.12	0.26	0.42	0.63	0.83	0.93	0.99	1.03	1.09	1.07	1.07	1.03
-60	0.00	0.00	0.00	0.05	0.36	0.99	2.40	4.54	6.77	8.86	10.6	11.9	12.7	13.4	14.0	14.4	14.6	14.8	14.7
-50	0.00	0.00	0.06	0.60	2.28	5.49	10.1	14.7	19.1	23.2	26.8	29.8	32.2	33.6	35.2	36.0	36.7	36.9	36.7
-40	0.00	0.00	0.30	1.94	6.25	12.2	18.8	26.1	34.5	43.0	51.1	58.5	64.5	69.5	71.7	74.0	74.8	75.1	75.3
-30	0.00	0.00	0.77	4.18	10.7	18.4	27.7	39.2	52.7	68.2	84.3	100	115	128	139	144	148	149	152
-20	0.00	0.00	1.36	6.55	14.4	24.0	36.0	51.8	71.1	93.7	119	148	175	200	222	238	248	254	257
-10	0.00	0.00	1.92	8.41	17.1	27.9	42.4	61.7	85.5	115	148	185	224	262	295	323	339	350	356
0	0.00	0.00	2.29	9.53	18.6	30.0	45.4	65.7	91.6	123	160	202	245	288	326	357	379	391	397
10	0.00	0.03	2.57	9.83	18.7	29.7	44.2	63.2	87.2	117	151	188	228	268	300	327	344	355	357
20	0.00	0.05	2.51	9.38	17.7	27.5	40.0	55.6	75.1	98.1	124	153	182	208	230	247	257	261	261
30	0.00	0.05	2.14	8.27	15.7	23.8	33.6	45.3	58.6	74.0	91.0	107	124	138	149	155	157	158	156
40	0.00	0.03	1.55	6.61	12.9	19.5	26.6	34.2	42.6	51.3	60.1	68.4	75.6	81.1	85.2	86.5	86.8	86.3	84.9
50	0.00	0.01	0.90	4.56	9.81	15.0	19.8	24.5	29.4	33.9	38.3	41.7	44.8	47.2	48.9	49.6	50.5	50.5	49.9
60	0.00	0.00	0.34	2.52	6.37	10.3	13.6	16.8	19.6	22.1	24.3	26.2	28.0	29.6	30.9	32.0	32.9	33.3	33.1
70	0.00	0.00	0.05	0.90	2.98	5.59	8.10	10.2	12.0	13.5	14.8	16.2	17.4	18.6	19.5	20.3	21.0	21.3	21.3
80	0.00	0.00	0.00	0.08	0.46	1.49	2.85	4.15	5.37	6.27	7.03	7.80	8.53	9.03	9.50	9.88	10.2	10.2	10.2
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.01
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00	0.03	0.05	0.05	0.06	0.07	0.05	0.01
130	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.12	0.18	0.24	0.30	0.34	0.40	0.41	0.43	0.45	0.46	0.43
140	0.00	0.00	0.00	0.00	0.00	0.02	0.13	0.20	0.30	0.44	0.57	0.68	0.79	0.87	0.97	1.01	1.06	1.10	1.06
150	0.00	0.00	0.00	0.00	0.00	0.12	0.24	0.40	0.56	0.75	0.91	1.14	1.33	1.50	1.65	1.77	1.84	1.94	1.93
160	0.00	0.00	0.00	0.00	0.02	0.16	0.32	0.54	0.78	1.04	1.33	1.57	1.83	2.12	2.36	2.55	2.71	2.81	2.81
170	0.00	0.00	0.00	0.00	0.06	0.21	0.43	0.65	0.92	1.23	1.59	1.94	2.27	2.60	2.90	3.15	3.38	3.55	3.59
180	0.00	0.00	0.00	0.00	0.09	0.27	0.47	0.73	1.02	1.36	1.71	2.09	2.45	2.82	3.17	3.50	3.79	4.04	4.14

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.09V I:1.303A P:11.17W PF:0.7091 Freq:59.98Hz Lamp Flux:500.604x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 2700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:Floodlight Shroud

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.10	3.92	3.66	3.40	3.11	2.81	2.48	2.11	1.77	1.39	1.06	0.77	0.49	0.29	0.13	0.00	0.00	0.00	
-170	3.90	3.79	3.60	3.33	3.03	2.74	2.42	2.09	1.75	1.39	1.07	0.77	0.50	0.30	0.14	0.01	0.00	0.00	
-160	3.38	3.27	3.14	2.91	2.66	2.43	2.13	1.80	1.50	1.24	0.95	0.70	0.47	0.28	0.13	0.01	0.00	0.00	
-150	2.58	2.56	2.41	2.28	2.10	1.87	1.69	1.47	1.22	0.98	0.75	0.57	0.39	0.24	0.10	0.01	0.00	0.00	
-140	1.71	1.70	1.65	1.52	1.45	1.33	1.17	1.03	0.88	0.74	0.59	0.41	0.30	0.17	0.08	0.00	0.00	0.00	
-130	0.99	0.97	0.97	0.92	0.87	0.82	0.74	0.63	0.56	0.48	0.37	0.29	0.14	0.09	0.03	0.00	0.00	0.00	
-120	0.48	0.48	0.49	0.46	0.44	0.41	0.40	0.34	0.27	0.24	0.20	0.15	0.06	0.01	0.00	0.00	0.00	0.00	
-110	0.18	0.17	0.18	0.18	0.15	0.15	0.15	0.13	0.11	0.05	0.05	0.04	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	1.05	1.01	1.00	0.93	0.85	0.75	0.60	0.40	0.25	0.12	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-60	14.7	14.4	14.2	13.8	13.2	12.5	11.5	10.1	8.14	5.77	3.47	1.65	0.61	0.18	0.01	0.00	0.00	0.00	
-50	36.6	36.3	35.7	35.0	33.9	32.7	30.2	27.1	23.2	18.8	13.9	8.90	4.32	1.62	0.35	0.03	0.00	0.00	
-40	75.9	76.4	76.0	74.4	71.6	67.1	60.4	52.4	43.6	34.5	25.8	18.1	11.2	5.18	1.36	0.16	0.00	0.00	
-30	153	154	151	145	134	121	104	87.1	69.5	53.1	39.0	27.3	17.8	9.77	3.30	0.50	0.00	0.00	
-20	260	257	249	233	210	184	153	124	96.5	72.2	51.9	35.9	23.5	13.7	5.61	0.96	0.00	0.00	
-10	355	350	335	310	275	236	195	155	119	87.2	61.8	42.1	27.6	16.6	7.53	1.39	0.00	0.00	
0	396	389	371	341	303	258	211	167	127	93.1	65.9	45.1	29.8	18.2	8.74	1.70	0.00	0.00	
10	356	348	335	308	275	235	194	154	119	88.0	63.2	43.9	29.5	18.4	9.13	1.99	0.02	0.00	
20	261	257	246	231	208	182	153	125	98.2	74.5	55.2	39.8	27.5	17.5	8.77	1.99	0.02	0.00	
30	157	155	152	144	134	120	104	88.1	72.1	57.6	44.7	33.3	23.7	15.5	7.72	1.68	0.02	0.00	
40	84.8	84.0	82.5	80.1	76.8	71.5	65.1	57.6	49.6	41.3	33.7	26.3	19.3	12.6	6.07	1.17	0.00	0.00	
50	49.5	48.8	47.5	46.5	44.9	42.7	40.0	36.8	32.8	28.6	24.1	19.4	14.7	9.37	3.97	0.62	0.00	0.00	
60	32.8	32.2	31.2	30.2	28.9	27.3	25.5	23.6	21.6	19.1	16.4	13.3	9.86	5.81	2.03	0.16	0.00	0.00	
70	21.1	20.7	20.1	19.2	18.3	17.3	16.0	14.6	13.2	11.6	9.73	7.54	5.02	2.41	0.57	0.00	0.00	0.00	
80	10.1	9.94	9.56	9.12	8.66	8.12	7.35	6.53	5.71	4.78	3.51	2.18	0.97	0.15	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.04	0.05	0.02	0.02	0.05	0.02	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.46	0.45	0.41	0.39	0.38	0.30	0.28	0.23	0.18	0.11	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
140	1.09	1.05	1.00	0.96	0.85	0.75	0.67	0.56	0.40	0.28	0.19	0.12	0.02	0.00	0.00	0.00	0.00	0.00	
150	1.95	1.84	1.79	1.63	1.46	1.31	1.10	0.89	0.71	0.54	0.38	0.23	0.11	0.01	0.01	0.00	0.00	0.00	
160	2.82	2.74	2.53	2.35	2.09	1.81	1.54	1.28	1.01	0.76	0.53	0.30	0.17	0.08	0.05	0.00	0.00	0.00	
170	3.58	3.40	3.16	2.87	2.56	2.23	1.87	1.53	1.23	0.99	0.76	0.54	0.34	0.19	0.09	0.00	0.00	0.00	
180	4.10	3.92	3.66	3.40	3.11	2.81	2.48	2.11	1.77	1.39	1.06	0.77	0.49	0.29	0.13	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:ADMIN

Test Date:2026-02-09

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352

Humidity:65.0%

Test Distance:13.563m [K=1.0000]

Remarks: