

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	796.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	104.3V x 123.3H
	At 50% of Imax	51.1V x 71.7H
	At 90% of Imax	19.8V x 32.3H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	905.6 lumens per klm.
	To 50% of Imax	519.7 lumens per klm.
	To 90% of Imax	113.9 lumens per klm.

Upward LOR	1.2 %
Downward LOR	98.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.09V I:1.291A P:11.06W PF:0.7087 Freq:59.97Hz Lamp Flux:507.108x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Floodlight Shroud

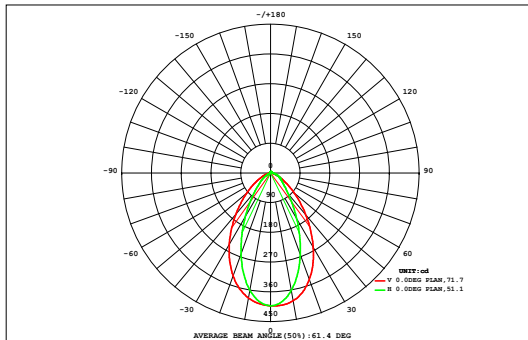

DATA OF LAMP		Eff:45.86lm/W	
MODEL	F7A1-12W-BK	Imax (cd)	403.8
NOMINAL POWER (W)	12	AVAILABILITY (%)	90.6
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	459.4
NOMINAL FLUX (lm)	507.108	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	507.1
TEST VOLTAGE (V)	12	θ @50% (H,V)	72,51DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.01	0.03	0.06	0.10	0.12	0.14	0.15	0.15	0.13	0.11	0.08	0.05	0.02	0.00	0.00	0.00	1.15	0.00
90	0.00	0.01	0.05	0.13	0.22	0.30	0.39	0.45	0.48	0.48	0.44	0.38	0.29	0.20	0.12	0.04	0.00	0.00	3.97	0.00
80	0.00	0.02	0.11	0.24	0.39	0.53	0.67	0.77	0.83	0.82	0.76	0.65	0.52	0.38	0.23	0.10	0.01	0.00	7.01	0.00
70	0.00	0.03	0.17	0.37	0.60	0.84	1.04	1.19	1.25	1.24	1.15	1.01	0.81	0.59	0.36	0.16	0.03	0.00	10.8	3.37
60	0.00	0.05	0.23	0.52	0.92	1.35	1.73	1.95	2.02	1.99	1.87	1.65	1.30	0.89	0.51	0.22	0.05	0.00	17.3	14.9
50	0.00	0.07	0.29	0.71	1.36	2.19	2.98	3.48	3.63	3.60	3.39	2.88	2.12	1.33	0.70	0.29	0.06	0.00	29.1	27.8
40	0.00	0.08	0.35	0.92	1.90	3.30	4.81	5.92	6.36	6.35	5.88	4.76	3.25	1.87	0.90	0.34	0.07	0.00	47.1	46.0
30	0.00	0.09	0.39	1.09	2.40	4.39	6.68	8.57	9.50	9.53	8.67	6.76	4.41	2.39	1.08	0.38	0.08	0.00	66.4	65.6
20	0.00	0.09	0.41	1.19	2.70	5.04	7.87	10.3	11.6	11.7	10.6	8.10	5.16	2.72	1.17	0.40	0.08	0.00	79.1	78.3
10	0.00	0.08	0.40	1.18	2.68	5.02	7.84	10.3	11.6	11.7	10.6	8.11	5.17	2.71	1.16	0.39	0.07	0.00	78.9	78.2
0	0.00	0.07	0.36	1.05	2.35	4.30	6.58	8.45	9.39	9.50	8.68	6.78	4.40	2.36	1.03	0.35	0.06	0.00	65.7	64.9
-10	0.00	0.05	0.29	0.84	1.81	3.18	4.64	5.72	6.19	6.28	5.86	4.74	3.23	1.81	0.82	0.28	0.04	0.00	45.8	44.8
-20	0.00	0.03	0.21	0.60	1.23	2.01	2.75	3.20	3.37	3.41	3.25	2.78	2.03	1.22	0.58	0.19	0.02	0.00	26.9	25.5
-30	0.00	0.01	0.12	0.37	0.72	1.10	1.40	1.59	1.65	1.64	1.57	1.39	1.09	0.70	0.35	0.10	0.01	0.00	13.8	10.1
-40	0.00	0.00	0.04	0.17	0.35	0.52	0.65	0.74	0.78	0.77	0.72	0.63	0.50	0.33	0.15	0.03	0.00	0.00	6.38	0.00
-50	0.00	0.00	0.01	0.03	0.08	0.14	0.17	0.19	0.20	0.20	0.18	0.16	0.12	0.06	0.02	0.00	0.00	0.00	1.57	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.01	0.69	3.46	9.44	19.8	34.3	50.3	63.0	69.0	69.3	63.7	50.9	34.5	19.6	9.18	3.28	0.60	0.01	501	---
Φ a	0.00	0.00	0.29	6.60	17.2	31.6	47.5	60.0	65.9	66.3	60.6	48.0	31.8	17.0	6.35	0.17	0.00	0.00	---	459

one-half-peak spread: U:25.6,D:25.9 , L:36.8,R:35.4


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.09V I:1.291A P:11.06W PF:0.7087 Freq:59.97Hz Lamp Flux:507.108x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Floodlight Shroud

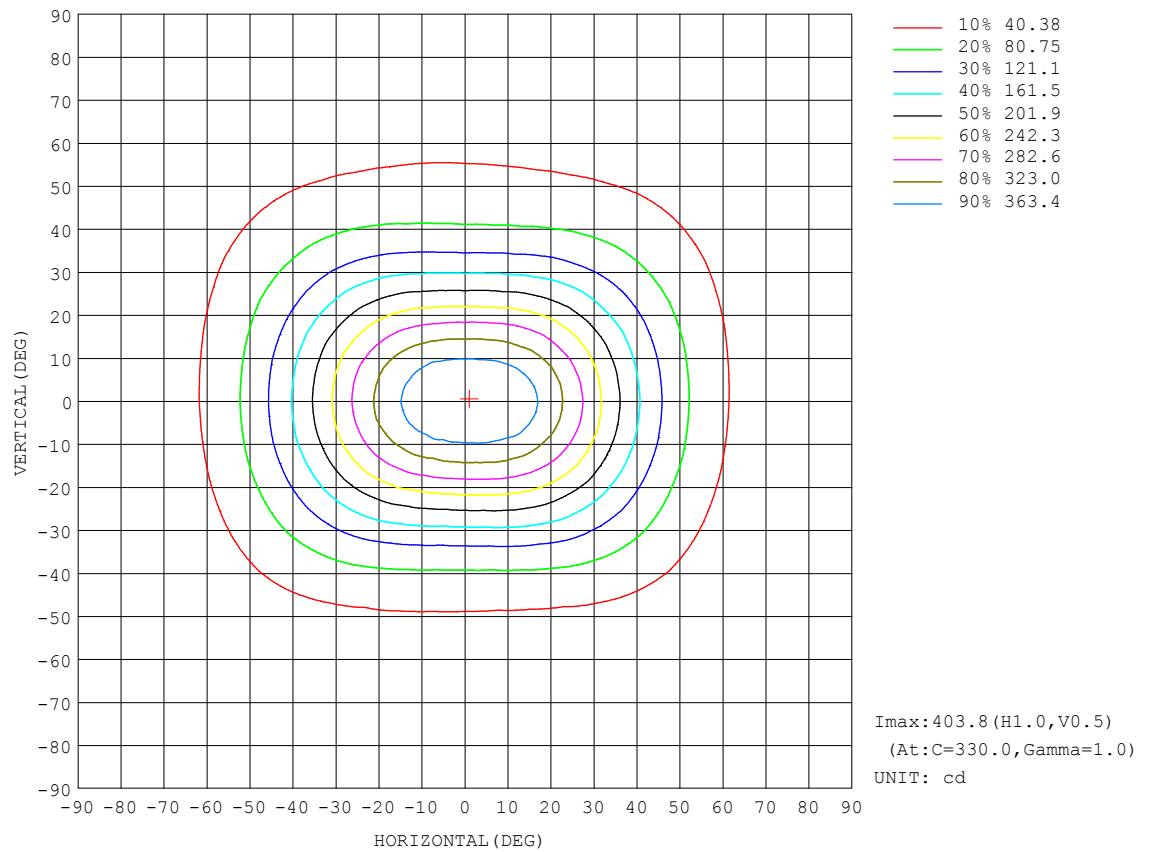


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.09V I:1.291A P:11.06W PF:0.7087 Freq:59.97Hz Lamp Flux:507.108x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Floodlight Shroud

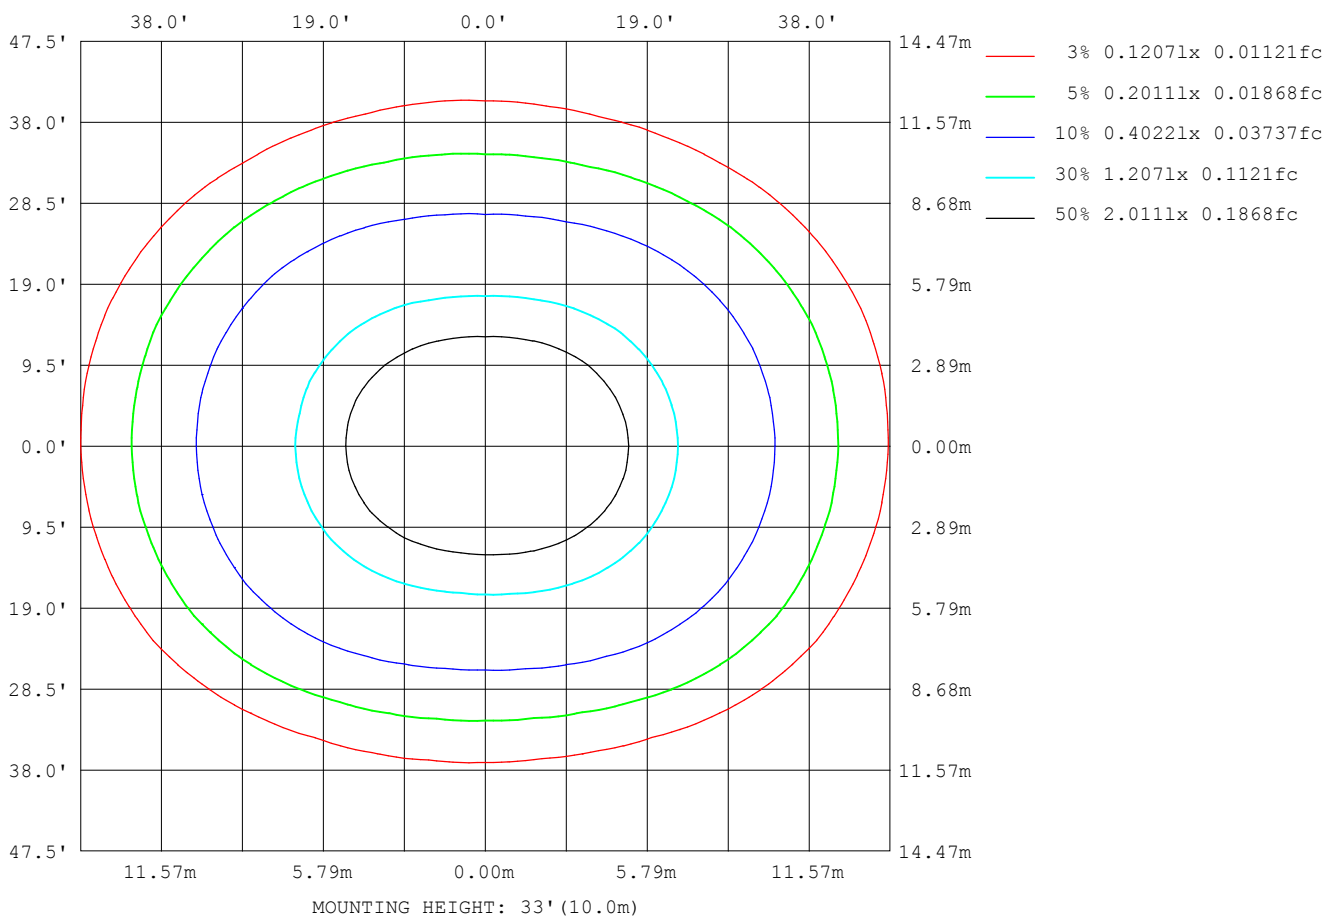

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

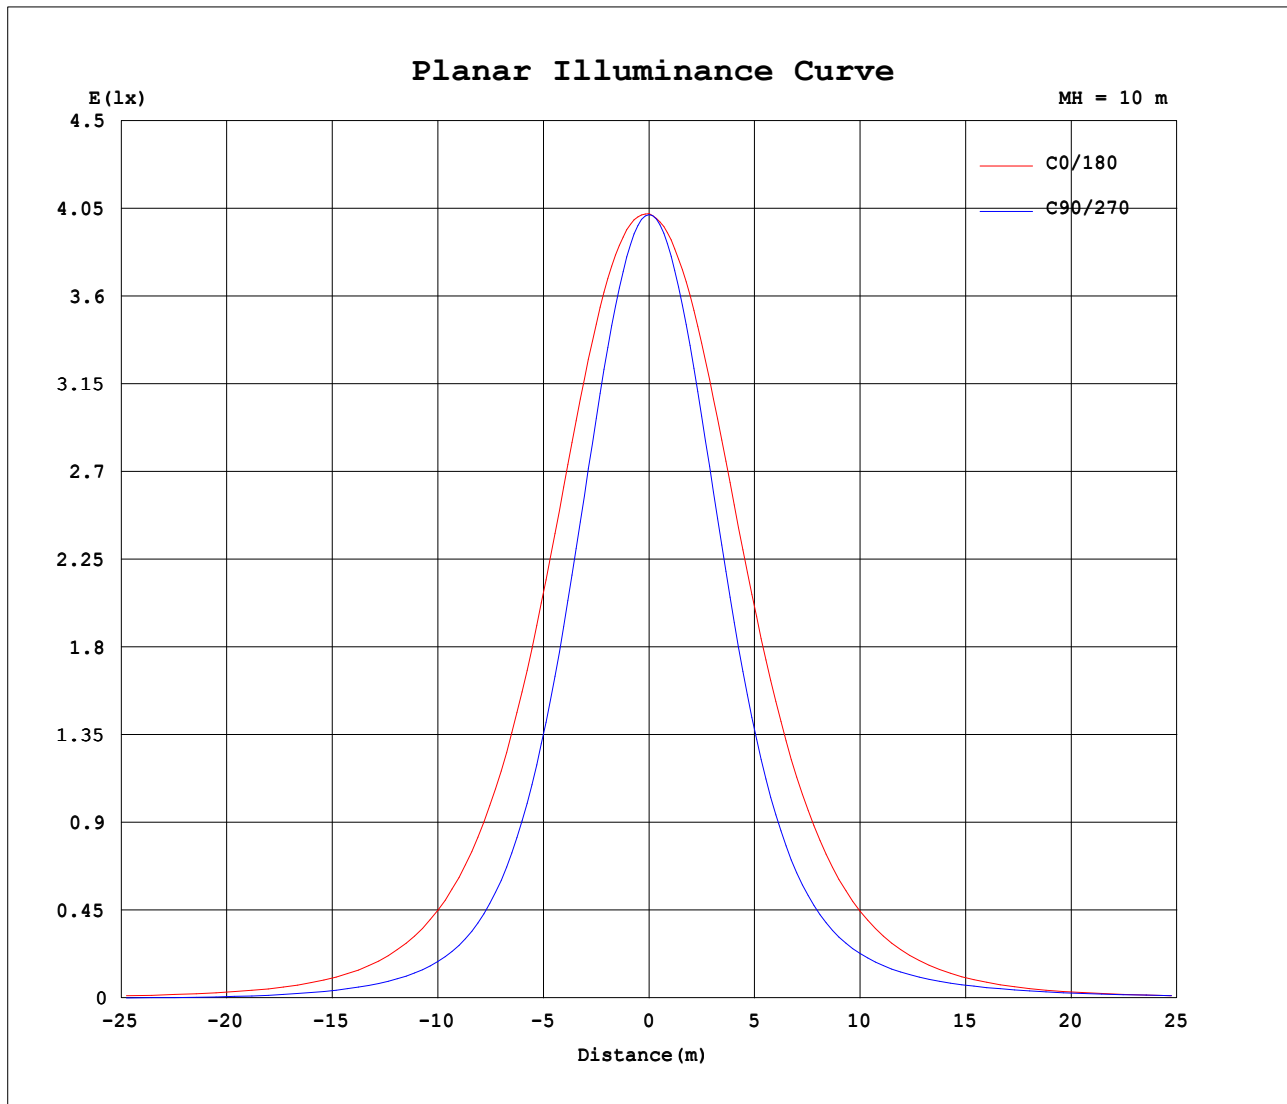


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.09V I:1.291A P:11.06W PF:0.7087 Freq:59.97Hz Lamp Flux:507.108x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Floodlight Shroud

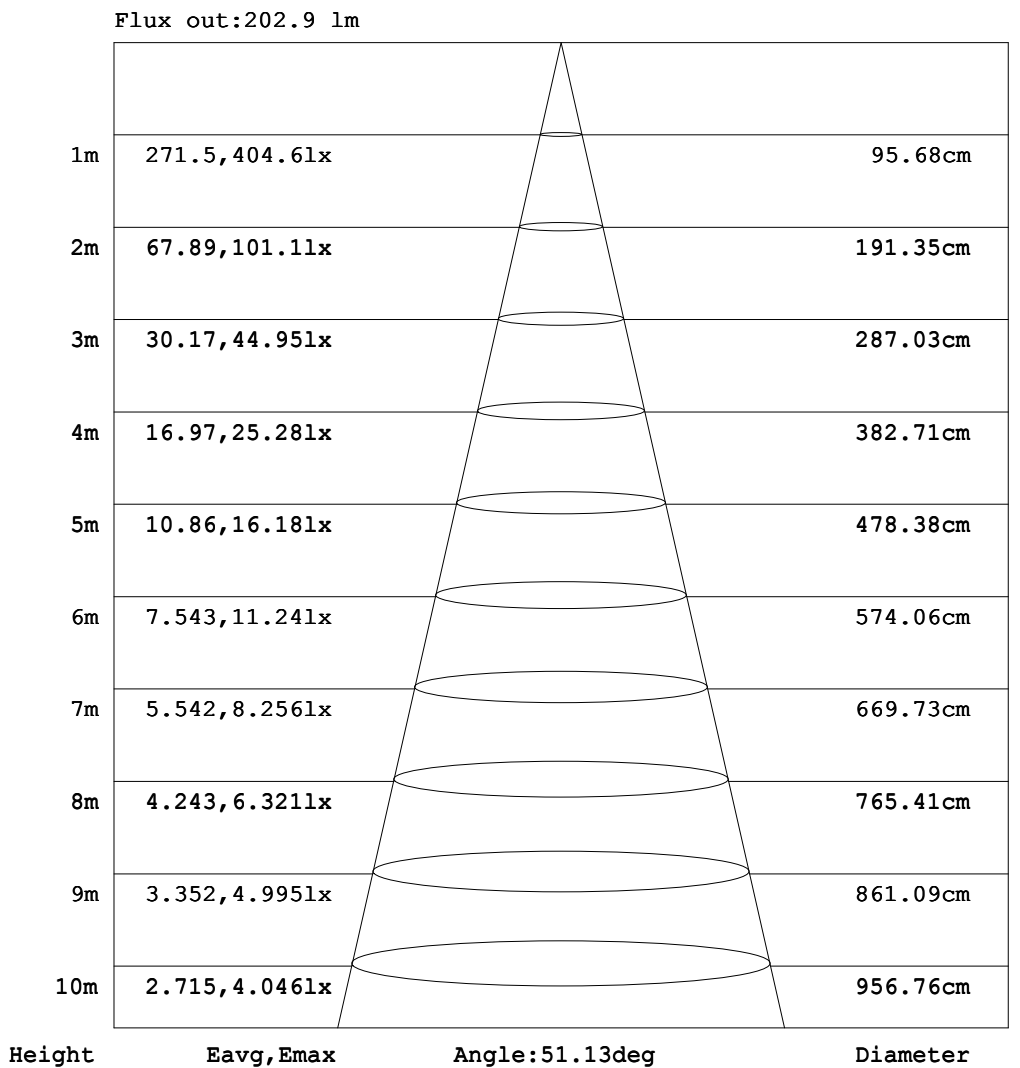

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.09V I:1.291A P:11.06W PF:0.7087 Freq:59.97Hz Lamp Flux:507.108x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Floodlight Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.11	0.27	0.48	0.74	1.01	1.37	1.74	2.11	2.51	2.85	3.19	3.52	3.83	4.08	4.16
-170	0.00	0.00	0.01	0.05	0.18	0.39	0.66	0.99	1.38	1.80	2.17	2.49	2.81	3.07	3.37	3.60	3.82	3.95	4.01
-160	0.00	0.00	0.01	0.08	0.24	0.48	0.73	0.98	1.26	1.54	1.85	2.17	2.46	2.70	2.93	3.14	3.30	3.39	3.46
-150	0.00	0.00	0.01	0.09	0.24	0.39	0.58	0.76	1.01	1.25	1.50	1.71	1.92	2.12	2.29	2.43	2.57	2.62	2.68
-140	0.00	0.00	0.00	0.07	0.17	0.30	0.41	0.58	0.75	0.91	1.08	1.19	1.34	1.46	1.53	1.65	1.72	1.76	1.78
-130	0.00	0.00	0.00	0.04	0.10	0.15	0.28	0.37	0.49	0.55	0.65	0.75	0.82	0.88	0.92	0.97	0.98	1.02	1.03
-120	0.00	0.00	0.00	0.00	0.04	0.07	0.14	0.21	0.25	0.30	0.35	0.40	0.41	0.44	0.46	0.49	0.48	0.48	0.50
-110	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.03	0.08	0.12	0.13	0.14	0.15	0.15	0.17	0.18	0.17	0.18	0.18
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.14	0.29	0.46	0.67	0.88	1.00	1.07	1.09	1.14	1.11	1.11	1.05
-60	0.00	0.00	0.00	0.07	0.41	1.08	2.57	4.77	7.09	9.22	11.0	12.3	13.2	13.8	14.4	14.8	14.9	15.1	15.0
-50	0.00	0.00	0.06	0.66	2.45	5.78	10.4	15.2	19.7	24.0	27.7	30.8	32.8	34.6	36.0	37.1	37.5	37.5	37.3
-40	0.00	0.00	0.34	2.09	6.53	12.5	19.3	26.9	35.5	44.2	52.5	60.2	66.5	71.4	73.6	75.9	76.6	76.5	76.3
-30	0.00	0.00	0.84	4.43	11.1	18.9	28.5	40.3	54.3	70.1	86.8	103	119	132	142	148	151	152	154
-20	0.00	0.00	1.47	6.85	14.8	24.5	37.1	53.3	73.1	96.5	123	151	180	206	228	244	254	259	262
-10	0.00	0.00	2.07	8.73	17.6	28.7	43.5	62.9	87.6	118	152	190	230	268	302	328	346	358	361
0	0.00	0.00	2.47	9.88	19.1	30.7	46.5	67.2	93.7	126	164	206	250	293	332	363	385	397	402
10	0.00	0.04	2.75	10.2	19.2	30.4	45.2	64.5	88.7	119	154	192	232	271	304	332	349	359	362
20	0.00	0.06	2.70	9.72	18.1	28.1	40.8	56.5	76.3	100	126	155	184	211	233	249	260	264	264
30	0.00	0.06	2.32	8.56	16.1	24.4	34.2	46.0	59.4	74.8	91.5	109	125	139	150	156	158	159	158
40	0.00	0.04	1.69	6.95	13.3	19.9	27.2	34.7	43.1	51.9	60.6	69.0	76.0	81.8	85.2	86.9	87.6	87.3	85.9
50	0.00	0.01	1.00	4.84	10.1	15.4	20.1	24.9	29.7	34.4	38.6	42.1	45.2	47.6	49.4	50.1	51.0	51.1	50.5
60	0.00	0.00	0.39	2.68	6.64	10.6	14.0	17.1	19.9	22.4	24.6	26.5	28.4	29.9	31.4	32.4	33.3	33.6	33.6
70	0.00	0.00	0.06	1.00	3.15	5.79	8.31	10.4	12.2	13.7	15.0	16.4	17.7	18.9	19.9	20.7	21.3	21.6	21.5
80	0.00	0.00	0.00	0.09	0.55	1.63	3.00	4.31	5.52	6.39	7.19	7.94	8.67	9.22	9.69	10.0	10.3	10.4	10.3
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.01	0.04	0.06	0.03	0.03	0.06	0.05	0.01
130	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.13	0.18	0.24	0.30	0.32	0.40	0.42	0.44	0.45	0.47	0.45
140	0.00	0.00	0.00	0.00	0.00	0.01	0.12	0.21	0.32	0.44	0.57	0.69	0.77	0.89	0.98	1.05	1.08	1.12	1.08
150	0.00	0.00	0.00	0.00	0.00	0.11	0.24	0.40	0.56	0.77	0.92	1.14	1.34	1.50	1.66	1.80	1.87	1.97	1.96
160	0.00	0.00	0.00	0.00	0.02	0.14	0.31	0.55	0.78	1.06	1.31	1.60	1.87	2.14	2.36	2.56	2.73	2.84	2.88
170	0.00	0.00	0.00	0.00	0.06	0.22	0.42	0.64	0.95	1.23	1.57	1.94	2.29	2.62	2.93	3.19	3.41	3.60	3.68
180	0.00	0.00	0.00	0.00	0.11	0.27	0.48	0.74	1.01	1.37	1.74	2.11	2.51	2.85	3.19	3.52	3.83	4.08	4.16

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.09V I:1.291A P:11.06W PF:0.7087 Freq:59.97Hz Lamp Flux:507.108x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Floodlight Shroud

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.11	3.94	3.73	3.48	3.18	2.88	2.54	2.17	1.81	1.43	1.10	0.77	0.54	0.31	0.13	0.00	0.00	0.00	
-170	3.96	3.83	3.67	3.40	3.08	2.78	2.46	2.12	1.79	1.43	1.09	0.79	0.54	0.33	0.14	0.01	0.00	0.00	
-160	3.43	3.31	3.18	2.96	2.72	2.47	2.16	1.83	1.54	1.25	0.97	0.72	0.49	0.31	0.14	0.01	0.00	0.00	
-150	2.64	2.60	2.44	2.32	2.14	1.90	1.71	1.50	1.25	1.01	0.75	0.58	0.41	0.26	0.12	0.01	0.00	0.00	
-140	1.75	1.72	1.67	1.54	1.46	1.35	1.20	1.06	0.92	0.76	0.59	0.42	0.29	0.17	0.08	0.00	0.00	0.00	
-130	1.02	0.98	0.98	0.93	0.88	0.83	0.76	0.66	0.58	0.50	0.39	0.28	0.15	0.10	0.03	0.00	0.00	0.00	
-120	0.47	0.47	0.49	0.47	0.45	0.44	0.42	0.35	0.31	0.26	0.22	0.15	0.06	0.01	0.00	0.00	0.00	0.00	
-110	0.17	0.16	0.18	0.18	0.15	0.15	0.18	0.15	0.12	0.09	0.07	0.05	0.01	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	1.06	1.01	0.98	0.90	0.83	0.72	0.56	0.39	0.21	0.11	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-60	14.9	14.5	14.2	13.7	13.1	12.4	11.4	9.95	7.96	5.65	3.34	1.58	0.58	0.16	0.01	0.00	0.00	0.00	
-50	37.0	36.5	35.8	35.3	33.8	32.4	30.0	27.0	23.0	18.6	13.9	8.79	4.14	1.53	0.30	0.03	0.00	0.00	
-40	76.6	76.8	76.4	74.3	71.6	66.8	60.3	52.2	43.5	34.6	25.7	18.0	11.1	5.02	1.26	0.15	0.00	0.00	
-30	154	155	152	145	135	120	104	87.4	69.6	53.3	39.1	27.3	17.7	9.60	3.16	0.46	0.00	0.00	
-20	263	259	251	234	211	184	154	124	96.6	72.0	52.1	36.1	23.6	13.7	5.41	0.89	0.00	0.00	
-10	361	353	338	312	277	237	195	155	119	87.3	61.8	42.3	27.6	16.6	7.38	1.31	0.00	0.00	
0	401	393	374	343	304	259	212	167	127	93.4	66.2	45.2	29.7	18.2	8.61	1.60	0.00	0.00	
10	360	353	336	311	276	237	195	155	119	88.3	63.5	44.1	29.5	18.4	9.02	1.89	0.01	0.00	
20	264	260	250	233	211	184	154	126	98.6	75.2	55.7	39.9	27.5	17.5	8.63	1.89	0.02	0.00	
30	159	157	153	147	136	122	106	89.3	73.0	58.1	45.0	33.5	23.8	15.5	7.56	1.59	0.01	0.00	
40	86.1	85.4	83.9	81.5	78.2	72.6	66.4	58.5	50.2	41.9	33.8	26.5	19.4	12.6	5.93	1.11	0.00	0.00	
50	50.2	49.4	48.3	47.2	45.6	43.4	40.6	37.3	33.2	28.9	24.3	19.6	14.8	9.31	3.84	0.57	0.00	0.00	
60	33.2	32.6	31.5	30.5	29.2	27.7	25.8	24.0	21.8	19.3	16.5	13.4	9.88	5.71	1.93	0.14	0.00	0.00	
70	21.4	21.0	20.3	19.4	18.5	17.4	16.1	14.8	13.4	11.7	9.81	7.61	4.93	2.30	0.52	0.00	0.00	0.00	
80	10.2	10.1	9.67	9.22	8.75	8.19	7.41	6.58	5.72	4.77	3.48	2.15	0.93	0.14	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.06	0.07	0.03	0.03	0.05	0.03	0.00	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.48	0.46	0.42	0.40	0.40	0.33	0.28	0.25	0.18	0.11	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
140	1.12	1.07	1.01	0.96	0.86	0.76	0.68	0.57	0.44	0.32	0.22	0.13	0.01	0.00	0.00	0.00	0.00	0.00	
150	1.99	1.90	1.83	1.67	1.50	1.35	1.15	0.92	0.75	0.57	0.41	0.26	0.11	0.00	0.02	0.00	0.00	0.00	
160	2.87	2.77	2.58	2.39	2.14	1.84	1.59	1.33	1.06	0.80	0.56	0.32	0.18	0.09	0.06	0.00	0.00	0.00	
170	3.64	3.47	3.20	2.93	2.64	2.29	1.91	1.56	1.23	1.00	0.76	0.56	0.37	0.21	0.10	0.00	0.00	0.00	
180	4.11	3.94	3.73	3.48	3.18	2.88	2.54	2.17	1.81	1.43	1.10	0.77	0.54	0.31	0.13	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: