

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1782.0 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	65.3V x 65.9H
	At 50% of Imax	42.8V x 44.7H
	At 90% of Imax	28.3V x 29.2H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	887.5 lumens per klm.
	To 50% of Imax	659.8 lumens per klm.
	To 90% of Imax	323.2 lumens per klm.
	Upward LOR	0.8 %
	Downward LOR	99.3 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.05V I:1.316A P:11.57W PF:0.7293 Freq:59.99Hz Lamp Flux:81.7577x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight	RGBWWWEIGHT:
SPEC.:12W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

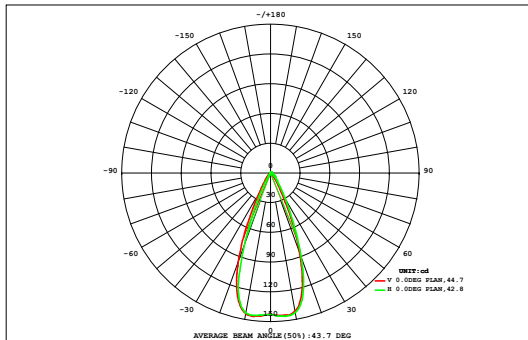

DATA OF LAMP		Eff:7.07lm/W	
MODEL	D9A1-12W-BZ	Imax (cd)	145.7
NOMINAL POWER (W)	12	AVAILABILITY (%)	88.4
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	72.29
NOMINAL FLUX (lm)	81.7577	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	81.76
TEST VOLTAGE (V)	12	θ @50% (H,V)	45,43DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.06	0.07	0.07	0.06	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.71	0.00
45	0.01	0.02	0.03	0.04	0.05	0.06	0.08	0.09	0.10	0.10	0.09	0.08	0.06	0.05	0.04	0.03	0.02	0.01	0.97	0.06
40	0.02	0.02	0.04	0.05	0.07	0.09	0.12	0.15	0.17	0.17	0.15	0.12	0.09	0.07	0.05	0.04	0.02	0.02	1.45	0.84
35	0.02	0.03	0.05	0.07	0.10	0.15	0.21	0.26	0.30	0.29	0.26	0.20	0.15	0.10	0.07	0.05	0.03	0.02	2.33	1.90
30	0.02	0.03	0.06	0.09	0.15	0.25	0.36	0.47	0.53	0.53	0.46	0.35	0.24	0.15	0.09	0.06	0.03	0.02	3.90	3.56
25	0.02	0.04	0.07	0.13	0.23	0.41	0.60	0.75	0.83	0.82	0.73	0.58	0.38	0.22	0.12	0.07	0.04	0.02	6.07	5.79
20	0.03	0.05	0.08	0.17	0.34	0.59	0.82	0.97	1.03	1.03	0.96	0.79	0.56	0.31	0.16	0.08	0.05	0.03	8.05	7.80
15	0.03	0.05	0.10	0.21	0.45	0.74	0.96	1.07	1.10	1.10	1.06	0.94	0.69	0.41	0.19	0.09	0.05	0.03	9.25	9.01
10	0.03	0.05	0.10	0.23	0.51	0.81	1.02	1.09	1.10	1.10	1.08	0.99	0.76	0.46	0.21	0.10	0.05	0.03	9.72	9.51
5	0.02	0.05	0.10	0.23	0.50	0.81	1.02	1.09	1.10	1.09	1.08	0.99	0.75	0.45	0.20	0.09	0.05	0.02	9.66	9.44
0	0.02	0.04	0.08	0.19	0.42	0.72	0.96	1.07	1.10	1.10	1.06	0.93	0.67	0.38	0.17	0.08	0.04	0.02	9.07	8.83
-5	0.02	0.04	0.07	0.14	0.30	0.55	0.80	0.96	1.03	1.03	0.95	0.77	0.51	0.27	0.13	0.06	0.04	0.02	7.68	7.42
-10	0.01	0.03	0.05	0.09	0.18	0.34	0.53	0.69	0.78	0.77	0.68	0.51	0.32	0.17	0.09	0.05	0.03	0.01	5.32	5.03
-15	0.01	0.02	0.03	0.06	0.10	0.17	0.27	0.37	0.41	0.41	0.35	0.26	0.16	0.09	0.05	0.03	0.02	0.01	2.82	2.46
-20	0.01	0.01	0.02	0.03	0.05	0.08	0.11	0.14	0.16	0.16	0.14	0.11	0.07	0.05	0.03	0.02	0.01	0.01	1.22	0.65
-25	0.01	0.01	0.01	0.02	0.03	0.04	0.04	0.05	0.05	0.05	0.05	0.04	0.04	0.03	0.02	0.01	0.01	0.01	0.50	0.00
-30	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.23	0.00
-35	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.09	0.00
-40	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	0.28	0.51	0.92	1.77	3.54	5.88	7.99	9.33	9.87	9.83	9.20	7.74	5.53	3.27	1.67	0.90	0.51	0.29	79	---
Φ a	0.00	0.00	0.26	1.34	3.18	5.56	7.71	9.08	9.63	9.60	8.95	7.46	5.21	2.90	1.21	0.22	0.00	0.00	---	72

one-half-peak spread: U:12.6,D:16.4 , L:15.9,R:14.9


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.05V I:1.316A P:11.57W PF:0.7293 Freq:59.99Hz Lamp Flux:81.7577x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWWEIGHT:	
SPEC.:12W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

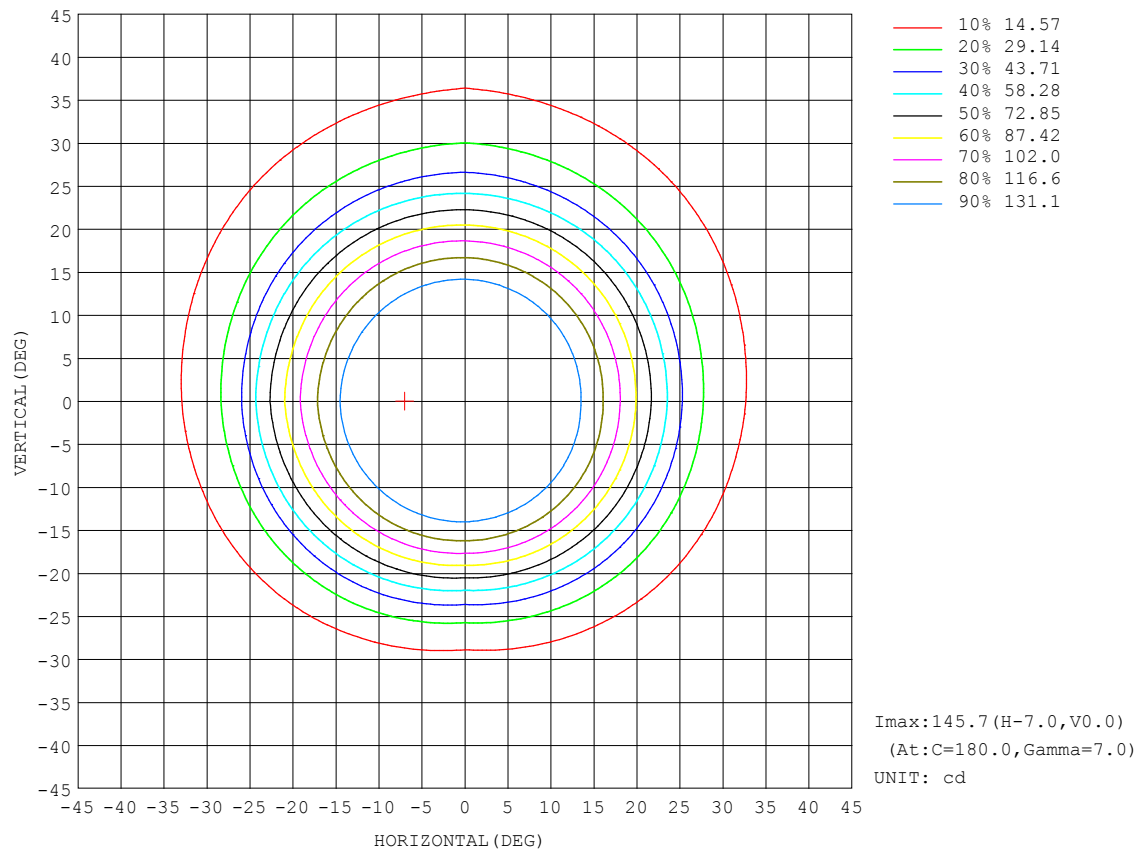


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.05V I:1.316A P:11.57W PF:0.7293 Freq:59.99Hz Lamp Flux:81.7577x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWWWEIGHT:	
SPEC.:12W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

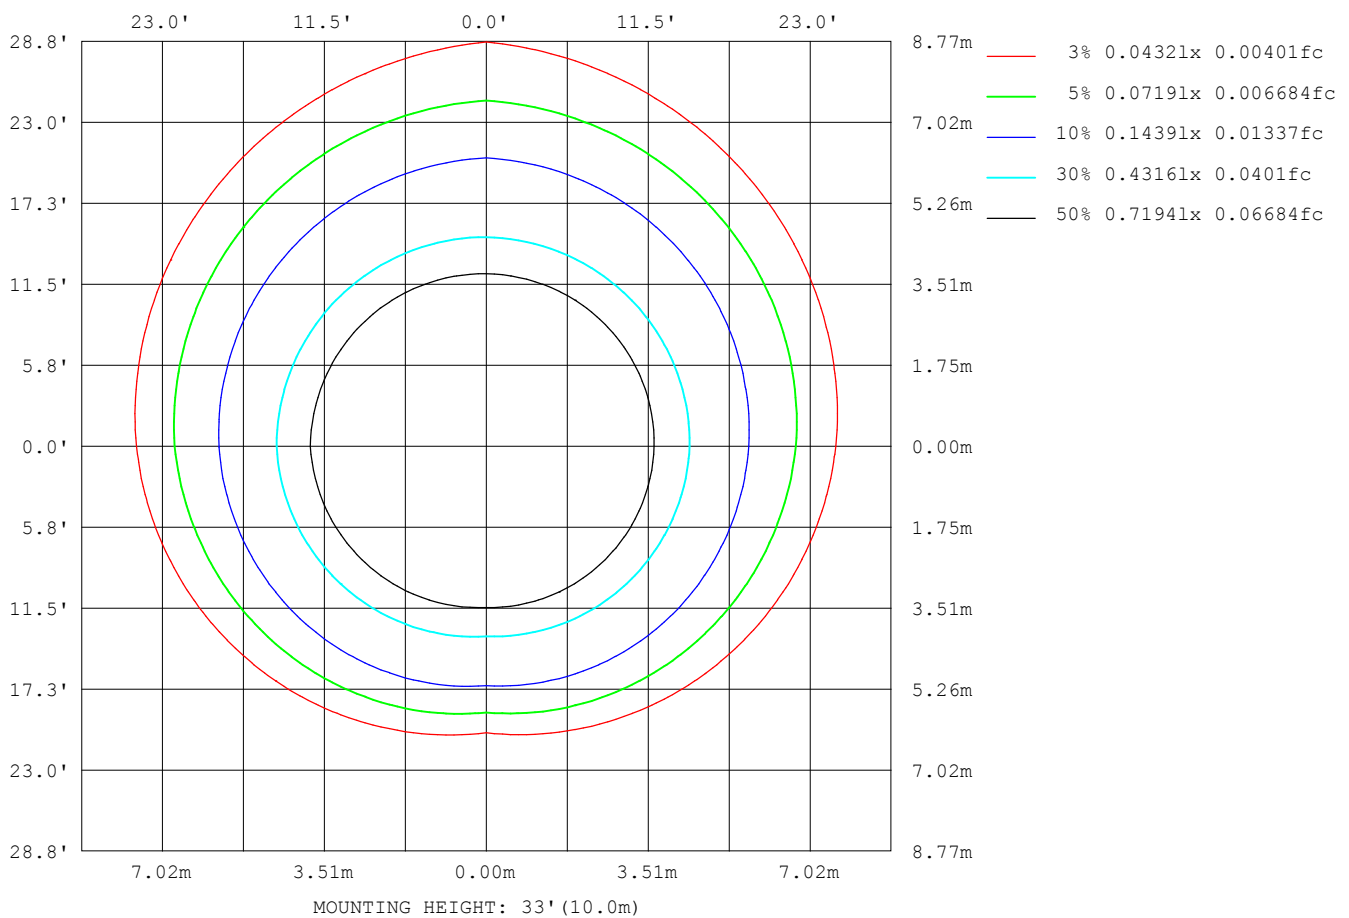

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

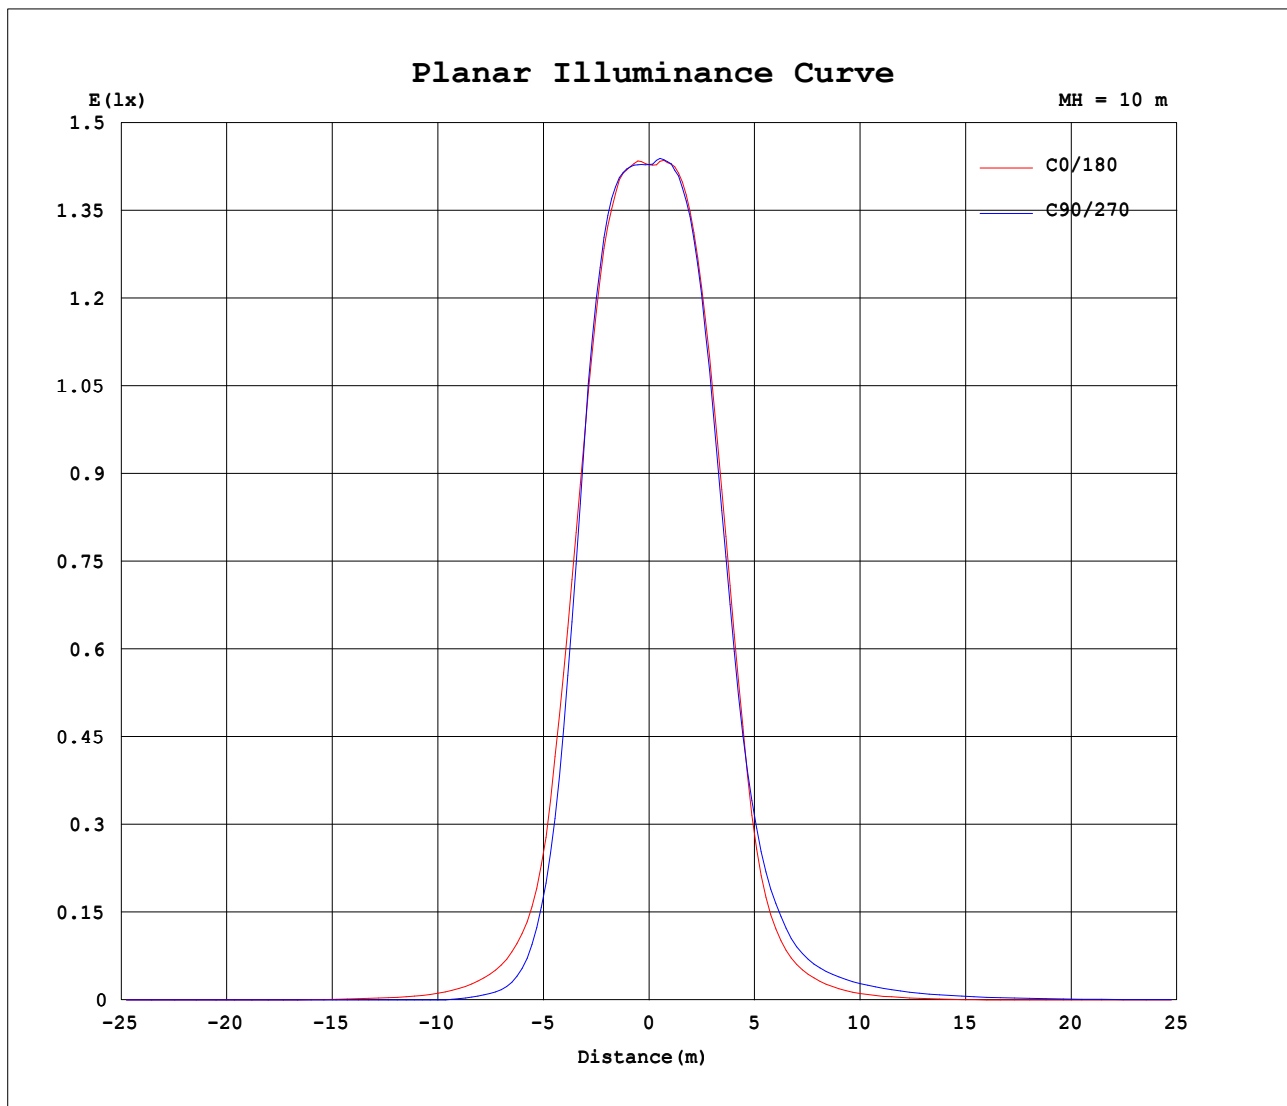


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.05V I:1.316A P:11.57W PF:0.7293 Freq:59.99Hz Lamp Flux:81.7577x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWWEIGHT:	
SPEC.:12W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

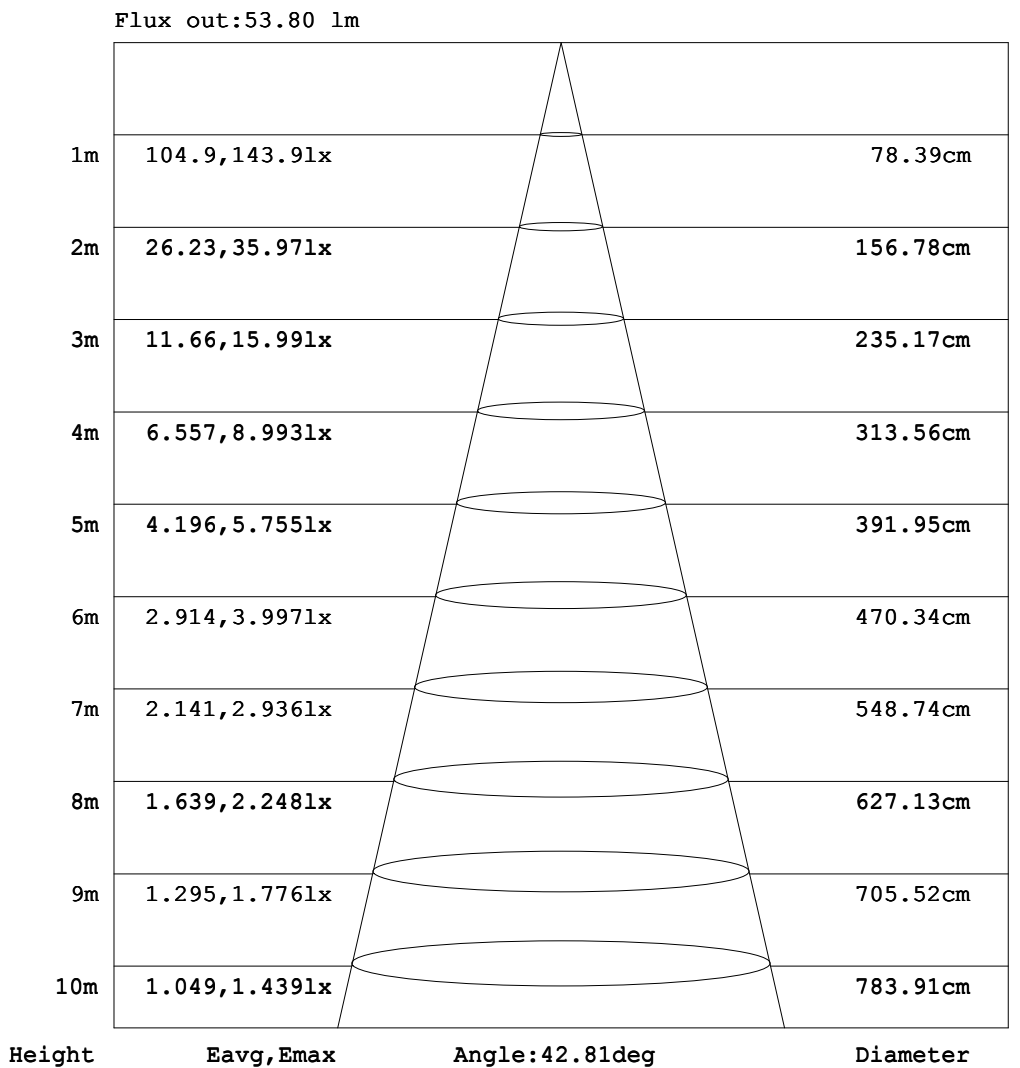

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:1.316A P:11.57W PF:0.7293 Freq:59.99Hz Lamp Flux:81.7577x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight	RGBWWEIGHT:
SPEC.:12W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.21	0.38	0.53	0.67	0.80	0.90	0.94
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.08	0.23	0.39	0.55	0.69	0.80	0.88	0.94
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.15	0.29	0.43	0.55	0.66	0.75	0.81
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.12	0.21	0.31	0.39	0.46	0.50
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.12	0.16	0.19
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.14	0.24	0.31	0.33	0.30	0.23	0.12	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.28	0.55	0.79	0.96	1.12	1.30	1.54	1.63	1.51	1.17
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.44	0.91	1.35	2.00	3.14	4.48	5.93	7.76	9.90	11.3	11.0
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.36	0.95	1.64	2.82	4.88	7.87	13.5	24.8	42.9	61.9	75.1	77.9
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.63	1.43	2.56	4.79	8.47	16.1	34.6	70.4	107	132	142	144
0	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.78	1.72	3.21	6.08	11.1	22.4	51.9	95.6	129	144	145	143
10	0.00	0.00	0.00	0.01	0.04	0.09	0.23	0.93	1.94	3.39	6.01	10.4	19.3	38.9	75.2	110	132	141	143
20	0.00	0.00	0.00	0.01	0.06	0.15	0.29	0.87	1.81	3.00	4.88	7.74	12.2	20.4	33.8	53.8	73.7	87.1	91.3
30	0.00	0.00	0.00	0.01	0.06	0.18	0.33	0.66	1.39	2.40	3.57	5.20	7.34	10.0	13.6	18.3	23.4	27.3	29.2
40	0.00	0.00	0.00	0.00	0.03	0.15	0.31	0.52	0.88	1.55	2.38	3.35	4.41	5.65	6.95	8.25	9.40	10.3	10.9
50	0.00	0.00	0.00	0.00	0.01	0.07	0.20	0.39	0.61	0.87	1.28	1.83	2.45	3.12	3.78	4.42	4.99	5.48	5.85
60	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.14	0.31	0.50	0.70	0.93	1.16	1.42	1.72	2.02	2.31	2.55	2.75
70	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.03	0.06	0.13	0.21	0.32	0.46	0.59	0.71	0.82	0.91	0.99
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.14	0.15	0.14
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.16	0.25	0.34	0.43	0.46	0.46
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.17	0.31	0.45	0.57	0.64	0.73	0.75
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.21	0.38	0.53	0.67	0.80	0.90	0.93

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:1.316A P:11.57W PF:0.7293 Freq:59.99Hz Lamp Flux:81.7577x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWWEIGHT:	
SPEC.:12W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.93	0.91	0.80	0.74	0.60	0.44	0.29	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.92	0.87	0.80	0.67	0.53	0.38	0.22	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.78	0.71	0.64	0.51	0.39	0.27	0.16	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.48	0.43	0.36	0.29	0.20	0.09	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.17	0.13	0.08	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.13	0.24	0.33	0.37	0.36	0.30	0.19	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	1.51	1.64	1.55	1.33	1.15	1.00	0.85	0.64	0.36	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	11.1	9.67	7.62	5.86	4.49	3.17	2.05	1.42	1.00	0.54	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-20	73.7	59.5	40.3	23.2	12.9	7.75	4.90	2.88	1.71	1.08	0.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-10	141	129	101	64.6	31.4	15.2	8.38	4.83	2.62	1.54	0.76	0.10	0.00	0.00	0.00	0.00	0.00	0.00	
0	144	142	123	86.6	45.8	20.6	10.9	6.13	3.28	1.82	0.93	0.17	0.00	0.00	0.00	0.00	0.00	0.00	
10	141	130	104	69.4	35.8	18.4	10.3	6.04	3.45	2.05	1.06	0.27	0.09	0.04	0.01	0.00	0.00	0.00	
20	85.7	71.3	51.2	32.2	19.8	12.1	7.76	4.95	3.08	1.93	0.96	0.29	0.15	0.06	0.01	0.00	0.00	0.00	
30	27.1	23.2	18.2	13.6	10.0	7.37	5.24	3.63	2.48	1.49	0.69	0.33	0.18	0.06	0.01	0.00	0.00	0.00	
40	10.3	9.40	8.27	6.98	5.68	4.46	3.41	2.48	1.62	0.91	0.52	0.31	0.15	0.03	0.00	0.00	0.00	0.00	
50	5.49	5.01	4.45	3.82	3.17	2.51	1.88	1.30	0.87	0.61	0.39	0.20	0.07	0.01	0.00	0.00	0.00	0.00	
60	2.56	2.31	2.03	1.72	1.42	1.16	0.93	0.70	0.50	0.31	0.14	0.05	0.01	0.00	0.00	0.00	0.00	0.00	
70	0.91	0.82	0.71	0.59	0.46	0.32	0.21	0.13	0.06	0.03	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.01	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.17	0.18	0.09	0.10	0.08	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.50	0.48	0.43	0.33	0.26	0.16	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.77	0.71	0.68	0.57	0.45	0.32	0.17	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.93	0.91	0.80	0.74	0.60	0.44	0.29	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-06-07

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks: