

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1011.7 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	102.2V x 102.2H
	At 50% of Imax	55.0V x 54.8H
	At 90% of Imax	18.6V x 17.7H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	936.9 lumens per klm.
	To 50% of Imax	509.0 lumens per klm.
	To 90% of Imax	74.2 lumens per klm.
	Upward LOR	0.3 %
	Downward LOR	99.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.19V I:0.7885A P:6.581W PF:0.6844 Freq:59.99Hz Lamp Flux:82.3717x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light CW	WEIGHT:
SPEC.:7W 2700K Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-038

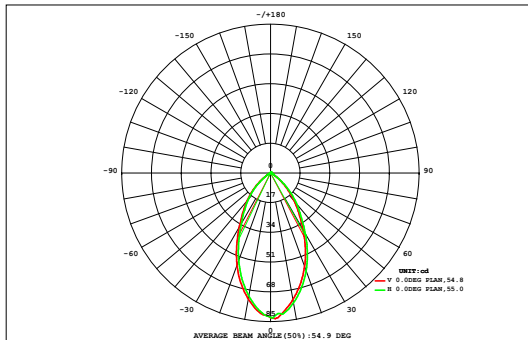

DATA OF LAMP		Eff:12.52lm/W	
MODEL	A7B1-7W-A	Imax (cd)	83.34
NOMINAL POWER (W)	7	AVAILABILITY (%)	93.8
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	77.24
NOMINAL FLUX (lm)	82.3717	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	82.37
TEST VOLTAGE (V)	12	θ @50% (H,V)	55,55DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00
70	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.22	0.00
60	0.00	0.00	0.00	0.01	0.02	0.04	0.09	0.14	0.17	0.17	0.14	0.09	0.05	0.02	0.01	0.00	0.00	0.00	0.93	0.13
50	0.00	0.00	0.00	0.02	0.05	0.14	0.28	0.42	0.50	0.50	0.42	0.28	0.14	0.05	0.02	0.00	0.00	0.00	2.83	2.34
40	0.00	0.00	0.01	0.03	0.12	0.31	0.54	0.76	0.91	0.91	0.77	0.55	0.31	0.12	0.03	0.01	0.00	0.00	5.39	5.09
30	0.00	0.00	0.01	0.05	0.21	0.48	0.82	1.19	1.46	1.46	1.20	0.83	0.48	0.21	0.05	0.01	0.00	0.00	8.48	8.25
20	0.00	0.00	0.01	0.08	0.28	0.62	1.09	1.62	1.99	1.99	1.64	1.11	0.63	0.28	0.08	0.01	0.00	0.00	11.4	11.2
10	0.00	0.00	0.01	0.09	0.32	0.69	1.25	1.88	2.33	2.34	1.89	1.28	0.71	0.32	0.09	0.02	0.00	0.00	13.2	13.1
0	0.00	0.00	0.01	0.09	0.32	0.68	1.23	1.85	2.29	2.29	1.86	1.26	0.70	0.32	0.09	0.02	0.00	0.00	13.0	12.8
-10	0.00	0.00	0.01	0.07	0.27	0.59	1.03	1.53	1.86	1.86	1.55	1.05	0.60	0.27	0.07	0.01	0.00	0.00	10.8	10.6
-20	0.00	0.00	0.01	0.05	0.20	0.45	0.76	1.07	1.28	1.29	1.08	0.77	0.46	0.20	0.05	0.01	0.00	0.00	7.67	7.44
-30	0.00	0.00	0.01	0.03	0.11	0.28	0.49	0.68	0.79	0.79	0.68	0.49	0.28	0.11	0.03	0.01	0.00	0.00	4.78	4.46
-40	0.00	0.00	0.00	0.02	0.05	0.12	0.24	0.35	0.42	0.42	0.35	0.24	0.12	0.05	0.02	0.00	0.00	0.00	2.39	1.80
-50	0.00	0.00	0.00	0.01	0.02	0.04	0.07	0.11	0.13	0.13	0.11	0.07	0.04	0.02	0.01	0.00	0.00	0.00	0.74	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.03	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.18	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.00	0.00	0.09	0.53	1.98	4.48	7.92	11.7	14.2	14.2	11.7	8.06	4.55	2.00	0.54	0.10	0.01	0.00	82	---
Φ a	0.00	0.00	0.00	0.03	1.52	4.11	7.58	11.3	13.9	13.9	11.4	7.72	4.18	1.53	0.03	0.00	0.00	0.00	---	77

one-half-peak spread: U:27.0,D:24.4 , L:29.3,R:26.0


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.19V I:0.7885A P:6.581W PF:0.6844 Freq:59.99Hz Lamp Flux:82.3717x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light CW	WEIGHT:
SPEC.:7W 2700K Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-038

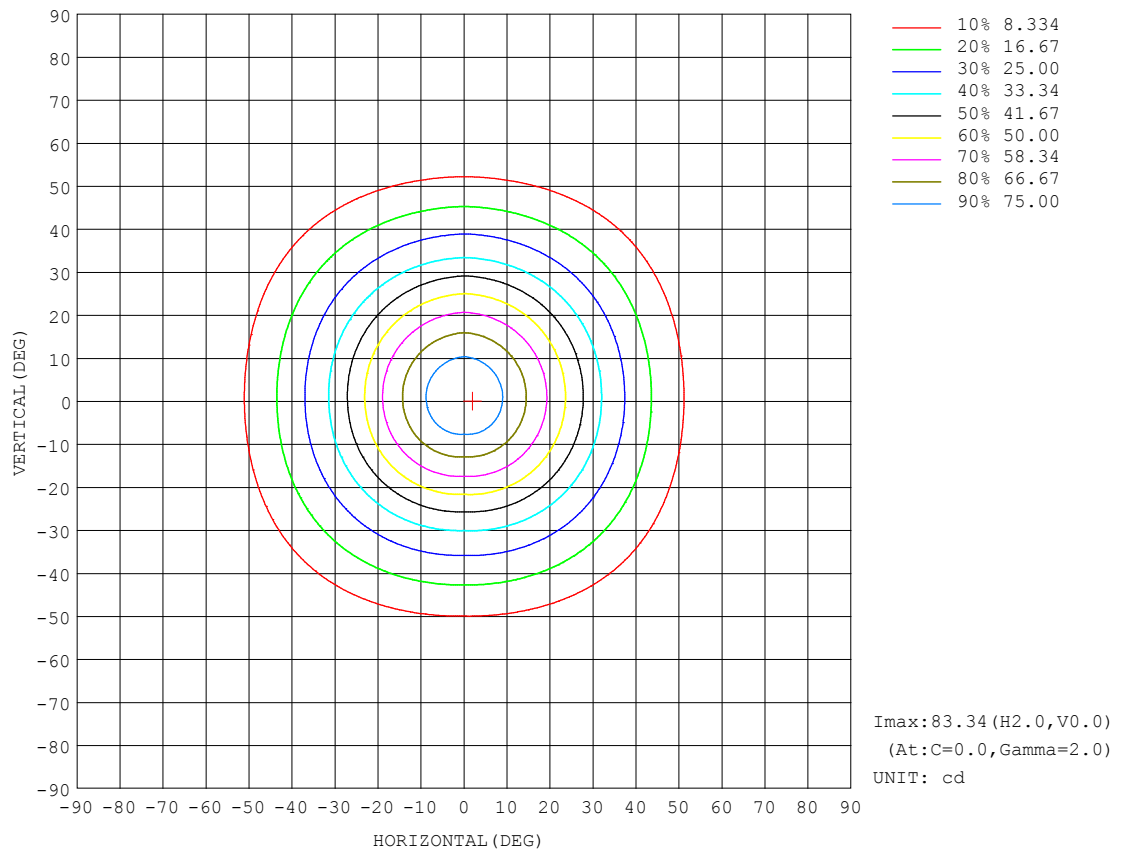


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.19V I:0.7885A P:6.581W PF:0.6844 Freq:59.99Hz Lamp Flux:82.3717x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light CW	WEIGHT:
SPEC.:7W 2700K Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-038

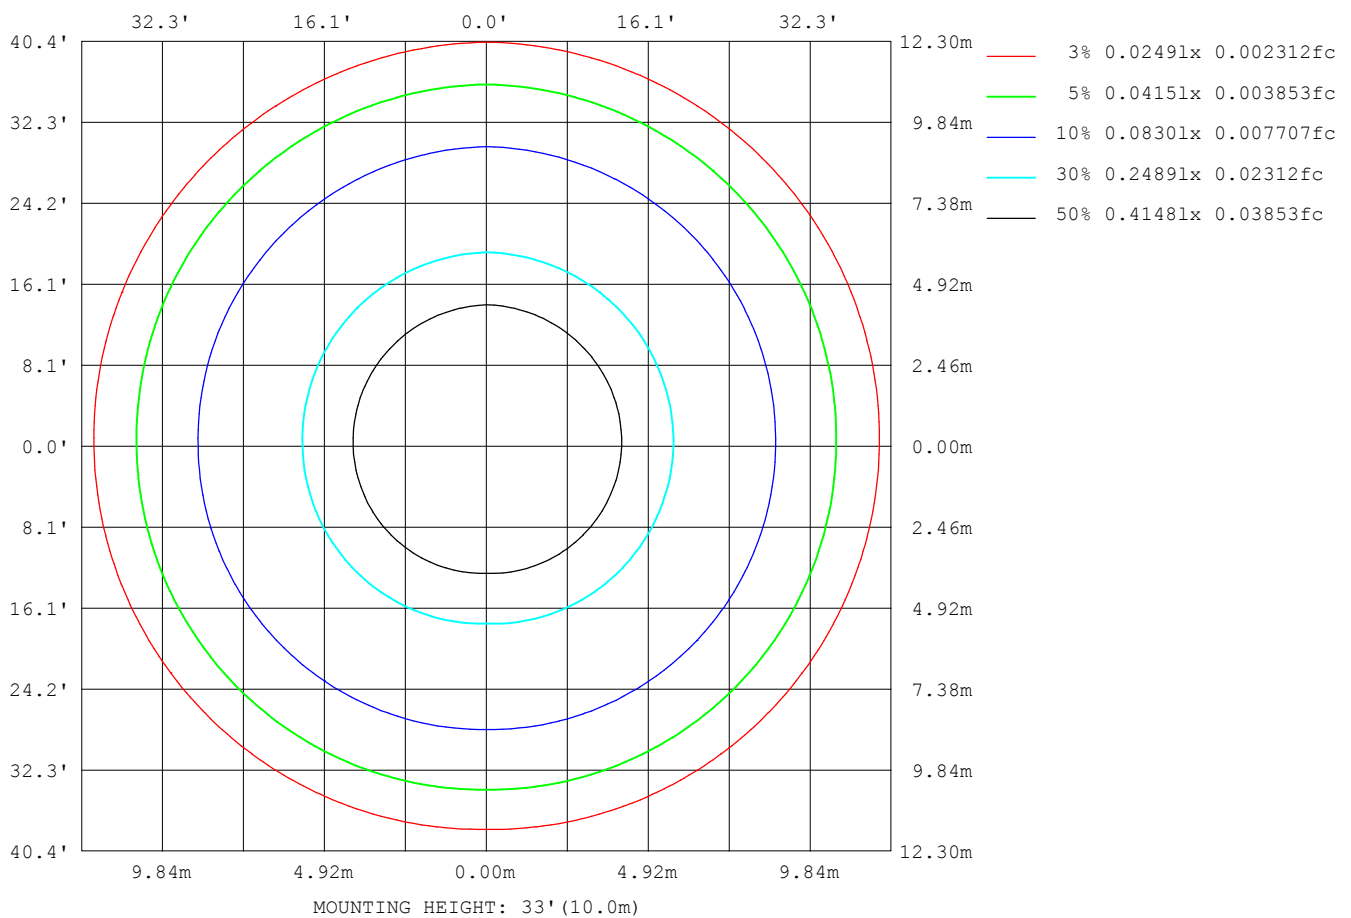

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

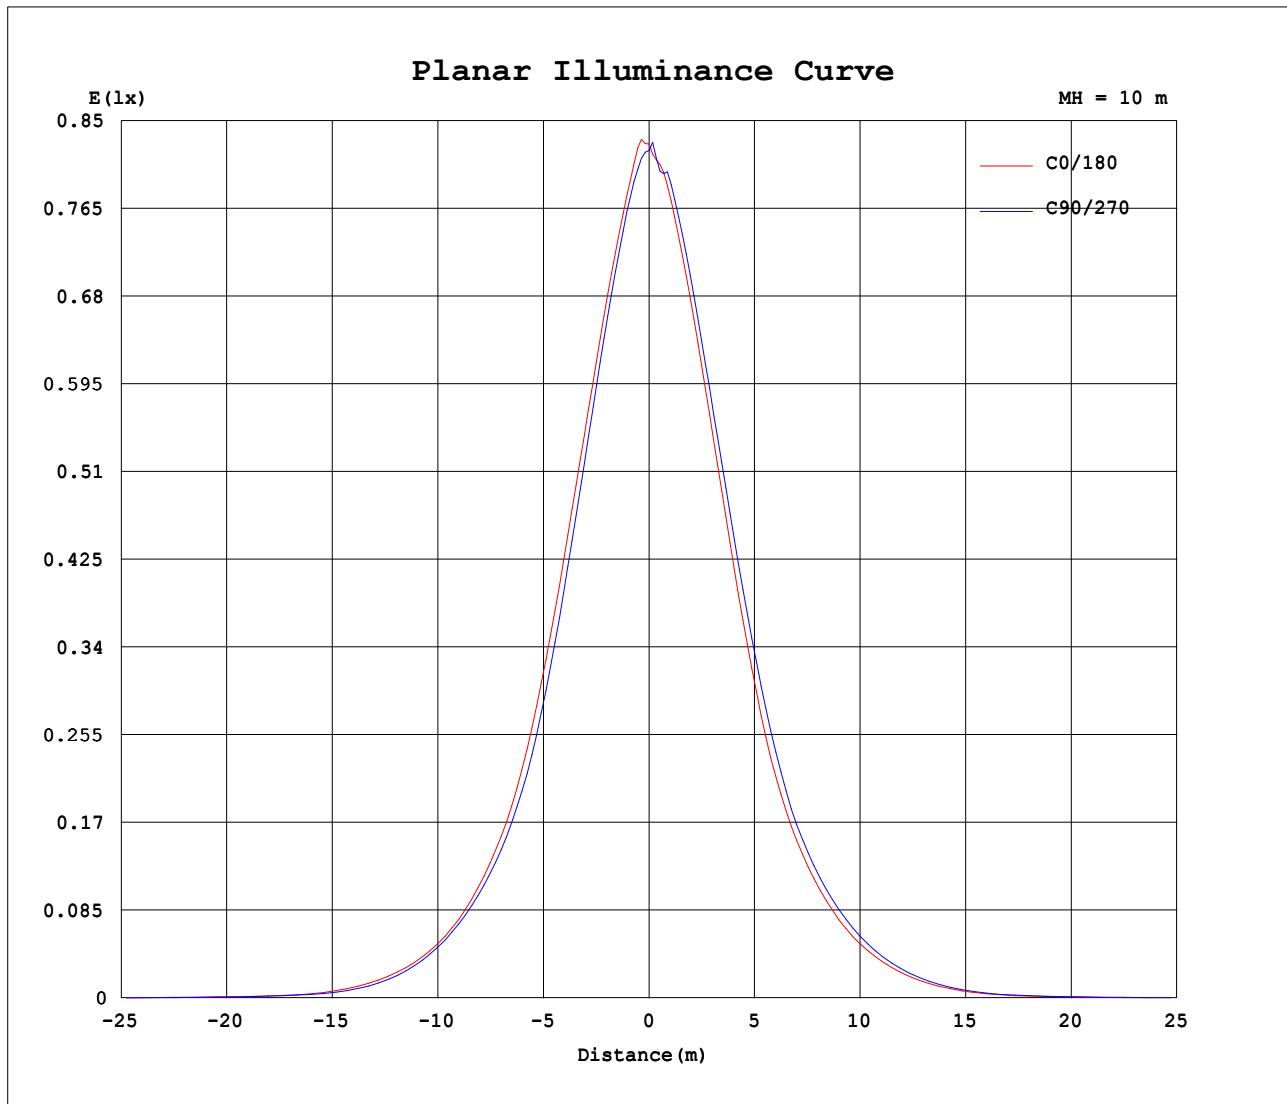


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.19V I:0.7885A P:6.581W PF:0.6844 Freq:59.99Hz Lamp Flux:82.3717x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light CW	WEIGHT:
SPEC.:7W 2700K Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-038

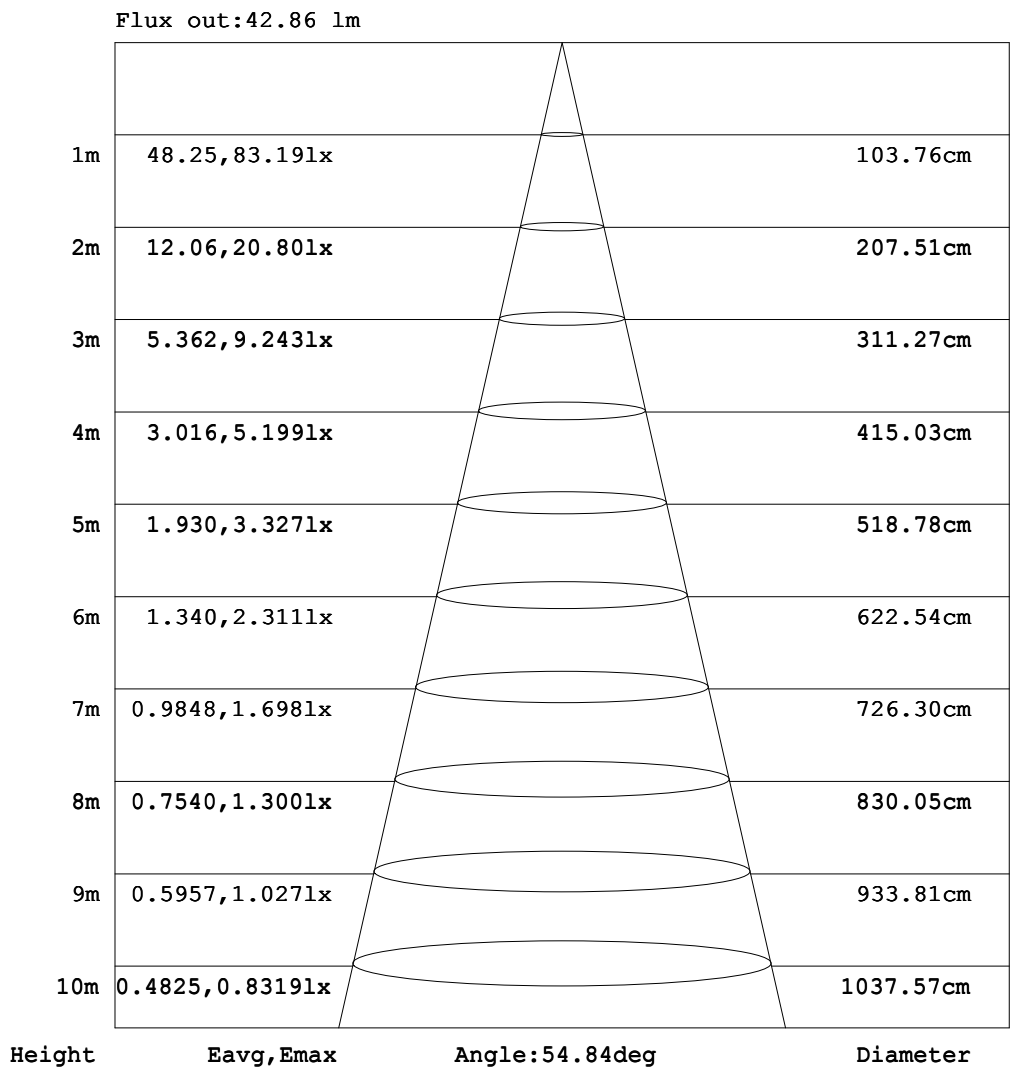

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.19V I:0.7885A P:6.581W PF:0.6844 Freq:59.99Hz Lamp Flux:82.3717x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light CW	WEIGHT:
SPEC.:7W 2700K Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-038

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.12	0.18	0.24	0.32	0.36	0.40	0.41
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.12	0.19	0.25	0.32	0.36	0.40
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.08	0.14	0.20	0.26	0.30	0.33
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.12	0.15	0.19	0.22	0.24
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.05	0.06	0.08	0.10
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.14	0.19	0.24	0.27	0.29	0.30
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.21	0.41	0.63	0.87	1.11	1.32	1.48	1.63	1.73	1.79	1.81
-50	0.00	0.00	0.00	0.00	0.00	0.02	0.22	0.53	0.92	1.34	1.78	2.50	3.49	4.67	5.86	6.90	7.70	8.18	8.29
-40	0.00	0.00	0.00	0.00	0.00	0.24	0.64	1.20	1.80	3.06	5.14	7.73	10.5	13.1	15.5	17.5	18.9	19.7	19.9
-30	0.00	0.00	0.00	0.00	0.11	0.52	1.14	1.88	3.74	6.88	10.7	14.7	18.8	22.6	26.1	29.1	31.6	33.1	33.5
-20	0.00	0.00	0.00	0.00	0.23	0.76	1.52	3.08	6.46	10.9	15.9	21.1	26.5	32.2	38.5	44.7	49.6	52.6	53.4
-10	0.00	0.00	0.00	0.00	0.32	0.96	1.83	4.27	8.58	13.8	19.6	25.8	32.9	41.6	50.8	59.1	65.8	70.2	71.5
0	0.00	0.00	0.00	0.00	0.35	1.03	1.97	4.78	9.41	14.9	21.1	27.8	35.8	46.0	56.2	65.5	73.3	79.6	82.8
10	0.00	0.00	0.00	0.00	0.33	0.97	1.86	4.38	8.80	14.1	20.0	26.5	33.9	43.2	52.7	61.2	68.2	73.2	75.5
20	0.00	0.00	0.00	0.00	0.25	0.79	1.55	3.23	6.83	11.5	16.7	22.2	28.0	34.5	41.8	48.7	54.2	57.9	59.6
30	0.00	0.00	0.00	0.00	0.13	0.55	1.18	1.98	4.07	7.53	11.6	16.0	20.3	24.6	28.7	32.6	36.1	38.7	39.8
40	0.00	0.00	0.00	0.00	0.02	0.27	0.70	1.27	1.93	3.44	5.91	8.87	11.9	14.9	17.6	19.9	21.7	22.9	23.5
50	0.00	0.00	0.00	0.00	0.00	0.05	0.27	0.60	1.00	1.44	1.97	2.93	4.27	5.83	7.35	8.72	9.80	10.5	10.8
60	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.12	0.29	0.51	0.75	1.01	1.27	1.48	1.70	1.89	2.09	2.22	2.28
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.13	0.20	0.27	0.34	0.41	0.46	0.49	0.51
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.02	0.03	0.03
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.11	0.15	0.16	0.17	0.17
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.15	0.19	0.25	0.30	0.30	0.29
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.12	0.18	0.24	0.32	0.36	0.40	0.41

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-04-26

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.19V I:0.7885A P:6.581W PF:0.6844 Freq:59.99Hz Lamp Flux:82.3717x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light CW	WEIGHT:
SPEC.:7W 2700K Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-038

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.41	0.34	0.33	0.30	0.26	0.16	0.12	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.40	0.36	0.33	0.31	0.23	0.16	0.12	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.34	0.33	0.29	0.22	0.17	0.14	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.23	0.20	0.17	0.15	0.09	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.08	0.06	0.05	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.30	0.28	0.26	0.22	0.17	0.11	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	1.80	1.75	1.65	1.51	1.35	1.14	0.92	0.69	0.46	0.27	0.11	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-50	8.19	7.71	6.92	5.89	4.71	3.52	2.52	1.83	1.40	0.98	0.60	0.29	0.07	0.00	0.00	0.00	0.00	0.00	
-40	19.7	18.9	17.5	15.5	13.1	10.5	7.78	5.20	3.10	1.86	1.26	0.72	0.32	0.06	0.00	0.00	0.00	0.00	
-30	33.3	31.8	29.4	26.3	22.8	18.9	14.8	10.7	6.95	3.80	1.95	1.21	0.60	0.18	0.00	0.00	0.00	0.00	
-20	52.8	49.9	45.3	39.3	32.8	26.9	21.4	16.0	10.9	6.56	3.13	1.61	0.87	0.32	0.01	0.00	0.00	0.00	
-10	70.3	66.0	59.5	51.6	42.6	33.7	26.4	19.8	13.8	8.66	4.36	1.92	1.06	0.42	0.05	0.00	0.00	0.00	
0	80.2	73.6	65.8	57.0	47.3	37.2	28.5	21.4	14.9	9.48	4.90	2.05	1.13	0.46	0.06	0.00	0.00	0.00	
10	73.3	68.4	61.6	53.4	44.2	34.8	27.0	20.3	14.1	8.88	4.47	1.94	1.07	0.43	0.05	0.00	0.00	0.00	
20	58.0	54.5	49.2	42.5	35.1	28.4	22.4	16.7	11.5	6.93	3.28	1.65	0.89	0.33	0.01	0.00	0.00	0.00	
30	38.8	36.4	32.9	28.9	24.8	20.5	16.0	11.6	7.61	4.13	2.05	1.25	0.63	0.20	0.00	0.00	0.00	0.00	
40	22.9	21.8	20.0	17.6	14.9	11.9	8.92	5.97	3.48	1.99	1.32	0.78	0.35	0.07	0.00	0.00	0.00	0.00	
50	10.5	9.81	8.74	7.39	5.87	4.30	2.95	2.02	1.50	1.07	0.66	0.34	0.10	0.00	0.00	0.00	0.00	0.00	
60	2.23	2.10	1.91	1.72	1.52	1.30	1.06	0.80	0.56	0.35	0.17	0.04	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.50	0.47	0.42	0.37	0.30	0.22	0.16	0.08	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.04	0.03	0.04	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.18	0.18	0.18	0.13	0.09	0.08	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.30	0.30	0.27	0.25	0.19	0.12	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.41	0.34	0.33	0.30	0.26	0.16	0.12	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-04-26

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks: