

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	353.7 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	164.6V x 171.2H
	At 50% of Imax	110.0V x 112.5H
	At 90% of Imax	27.0V x 38.0H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	993.1 lumens per klm.
	To 50% of Imax	684.5 lumens per klm.
	To 90% of Imax	83.6 lumens per klm.

Upward LOR	0.1 %
Downward LOR	99.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.07V I:0.7773A P:6.442W PF:0.6868 Freq:59.98Hz Lamp Flux:107.654x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW WEIGHT:	
SPEC.:7W RED Max beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

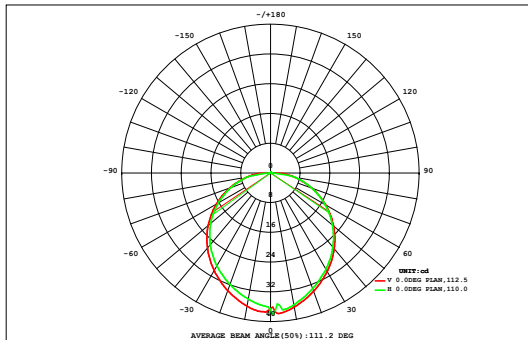

DATA OF LAMP		Eff:16.71lm/W	
MODEL	A9B1-7W-A	Imax (cd)	38.08
NOMINAL POWER (W)	7	AVAILABILITY (%)	98.9
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	106.5
NOMINAL FLUX (lm)	107.654	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	107.7
TEST VOLTAGE (V)	12	θ @50% (H,V)	112,110DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.02	0.02	0.03	0.04	0.05	0.06	0.06	0.06	0.06	0.05	0.04	0.04	0.03	0.02	0.01	0.00	0.59	0.25
90	0.00	0.00	0.02	0.02	0.03	0.04	0.05	0.06	0.06	0.06	0.06	0.05	0.04	0.04	0.03	0.02	0.01	0.00	2.55	2.44
80	0.01	0.03	0.08	0.15	0.22	0.29	0.36	0.41	0.43	0.43	0.41	0.36	0.30	0.22	0.15	0.09	0.04	0.01	3.98	3.96
70	0.01	0.04	0.11	0.20	0.30	0.40	0.48	0.55	0.58	0.58	0.55	0.49	0.40	0.30	0.20	0.11	0.05	0.01	5.35	5.34
60	0.01	0.05	0.13	0.24	0.36	0.49	0.60	0.68	0.72	0.72	0.68	0.60	0.49	0.37	0.24	0.13	0.05	0.01	6.60	6.59
50	0.01	0.06	0.15	0.28	0.42	0.57	0.70	0.80	0.85	0.85	0.80	0.70	0.57	0.43	0.28	0.15	0.06	0.01	7.68	7.68
40	0.01	0.07	0.17	0.31	0.47	0.63	0.78	0.89	0.95	0.95	0.89	0.78	0.64	0.47	0.31	0.17	0.07	0.01	8.58	8.58
30	0.01	0.07	0.18	0.33	0.50	0.68	0.84	0.97	1.04	1.04	0.97	0.85	0.68	0.51	0.33	0.18	0.07	0.01	9.27	9.27
20	0.01	0.07	0.18	0.34	0.52	0.70	0.88	1.02	1.11	1.11	1.02	0.88	0.71	0.52	0.34	0.19	0.07	0.01	9.71	9.70
10	0.01	0.07	0.18	0.34	0.52	0.70	0.87	1.01	1.09	1.09	1.02	0.88	0.71	0.52	0.34	0.19	0.07	0.01	9.64	9.63
0	0.01	0.07	0.18	0.33	0.50	0.67	0.83	0.95	1.01	1.01	0.96	0.84	0.68	0.50	0.33	0.18	0.07	0.01	9.14	9.14
-10	0.01	0.07	0.17	0.31	0.47	0.63	0.77	0.87	0.92	0.92	0.88	0.77	0.63	0.47	0.31	0.17	0.07	0.01	8.43	8.43
-20	0.01	0.06	0.15	0.27	0.42	0.56	0.69	0.78	0.82	0.82	0.78	0.69	0.56	0.42	0.28	0.15	0.06	0.01	7.53	7.53
-30	0.01	0.05	0.13	0.24	0.36	0.48	0.59	0.66	0.70	0.70	0.66	0.59	0.48	0.36	0.24	0.13	0.05	0.01	6.45	6.45
-40	0.01	0.04	0.11	0.19	0.29	0.39	0.47	0.53	0.56	0.57	0.53	0.47	0.39	0.29	0.20	0.11	0.05	0.01	5.21	5.20
-50	0.01	0.03	0.08	0.15	0.22	0.29	0.35	0.39	0.42	0.42	0.39	0.35	0.29	0.22	0.15	0.08	0.03	0.01	3.86	3.83
-60	0.00	0.02	0.05	0.09	0.14	0.18	0.22	0.25	0.26	0.26	0.25	0.22	0.18	0.14	0.09	0.05	0.02	0.00	2.44	2.32
-70	0.00	0.00	0.02	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.03	0.03	0.02	0.01	0.00	0.53	0.18
-80	0.00	0.00	0.02	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.03	0.03	0.02	0.01	0.00	0.53	0.18
-90	0.00	0.00	0.02	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.03	0.03	0.02	0.01	0.00	0.53	0.18
HORIZONTAL (DEG)																				
Φ t	0.14	0.86	2.14	3.89	5.90	7.94	9.76	11.1	11.9	11.9	11.2	9.80	7.99	5.96	3.94	2.18	0.88	0.15	108	---
Φ a	0.09	0.78	2.07	3.82	5.84	7.88	9.71	11.1	11.8	11.8	11.1	9.75	7.93	5.89	3.86	2.10	0.81	0.10	---	107

one-half-peak spread: U:55.7,D:51.1 , L:54.4,R:53.8


NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.07V I:0.7773A P:6.442W PF:0.6868 Freq:59.98Hz Lamp Flux:107.654x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW WEIGHT:	
SPEC.:7W RED Max beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

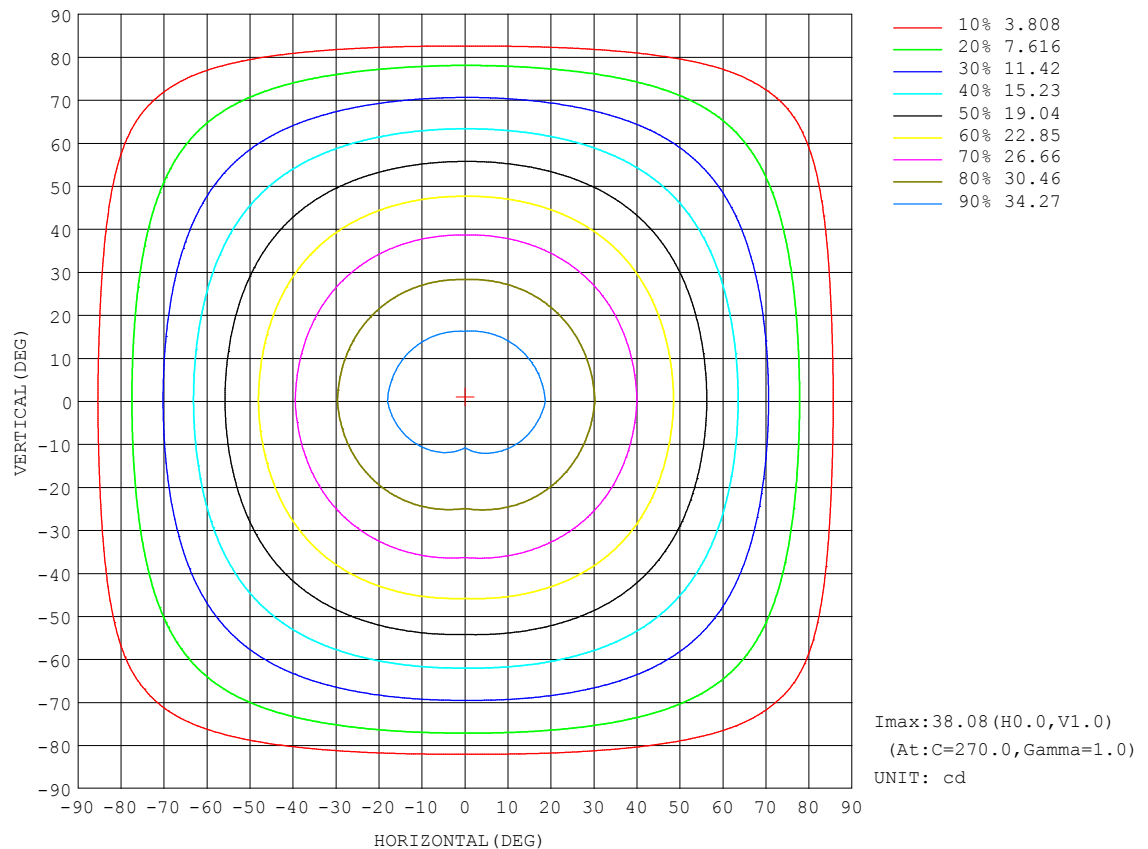


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.07V I:0.7773A P:6.442W PF:0.6868 Freq:59.98Hz Lamp Flux:107.654x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW WEIGHT:	
SPEC.:7W RED Max beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

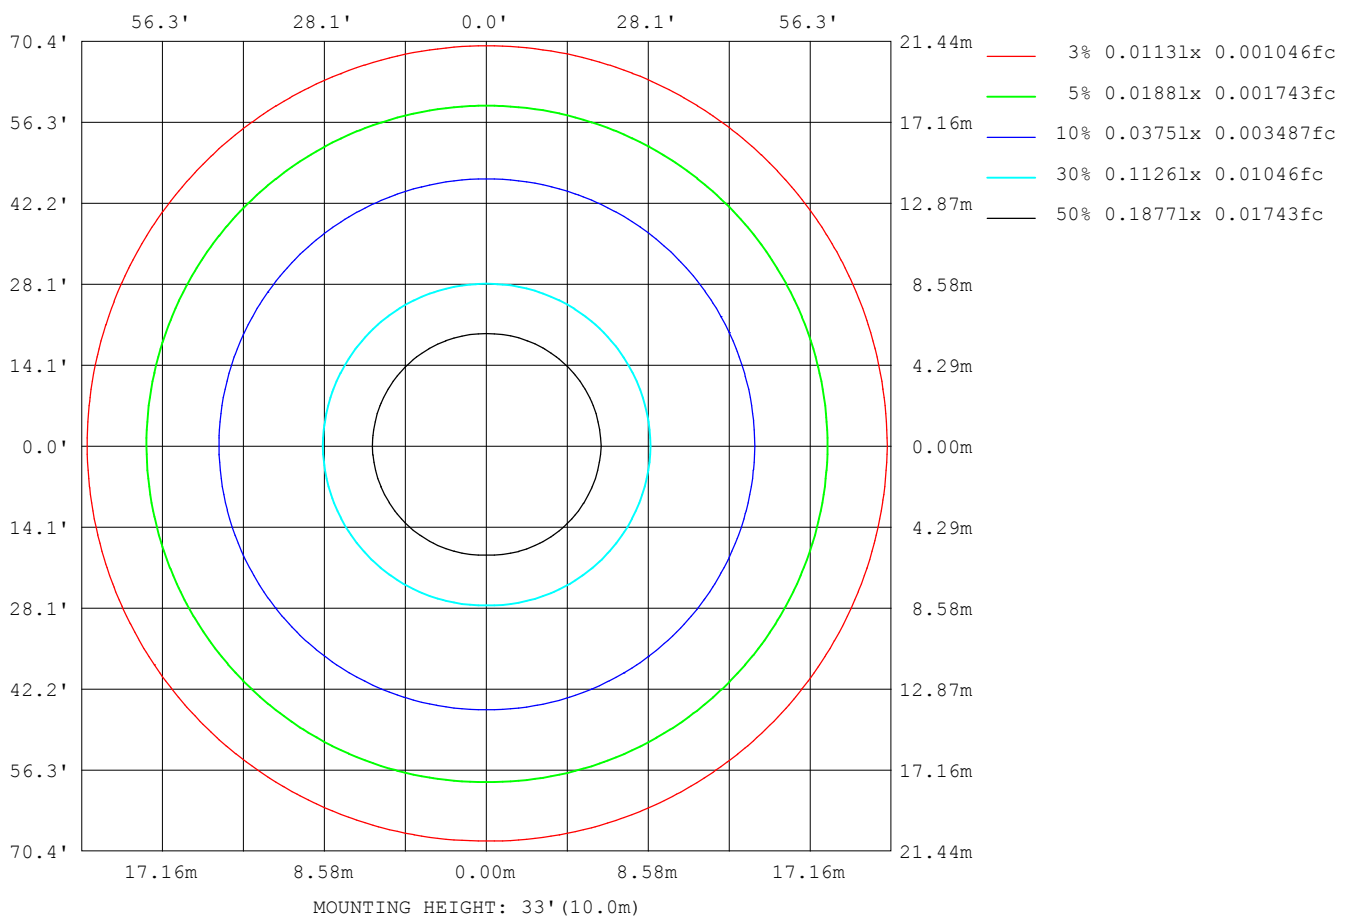

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

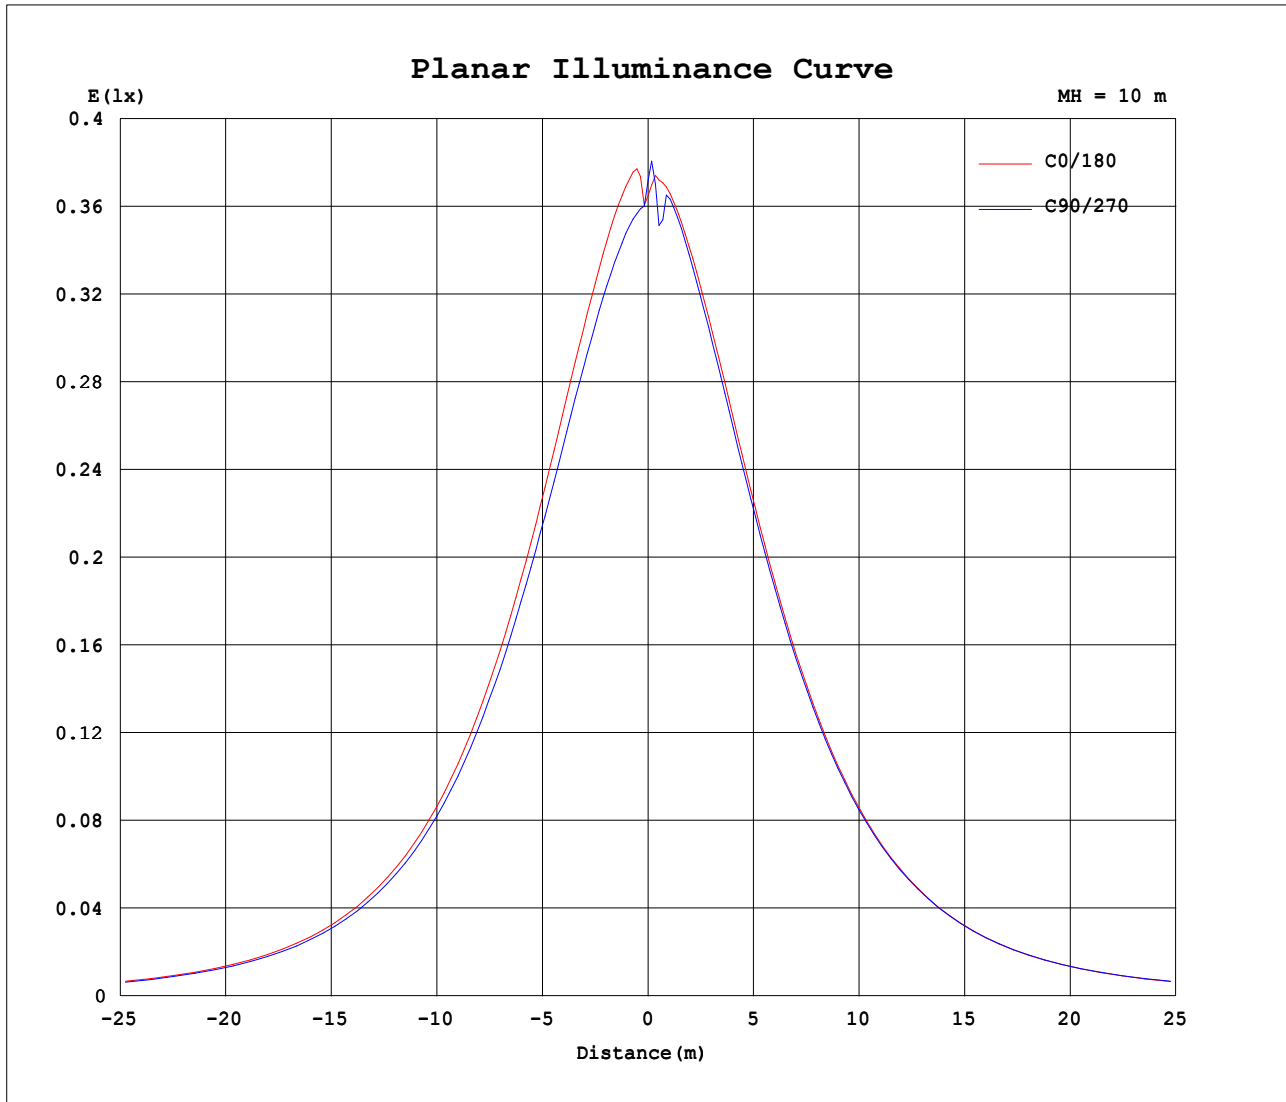


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.07V I:0.7773A P:6.442W PF:0.6868 Freq:59.98Hz Lamp Flux:107.654x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW	WEIGHT:
SPEC.:7W RED Max beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

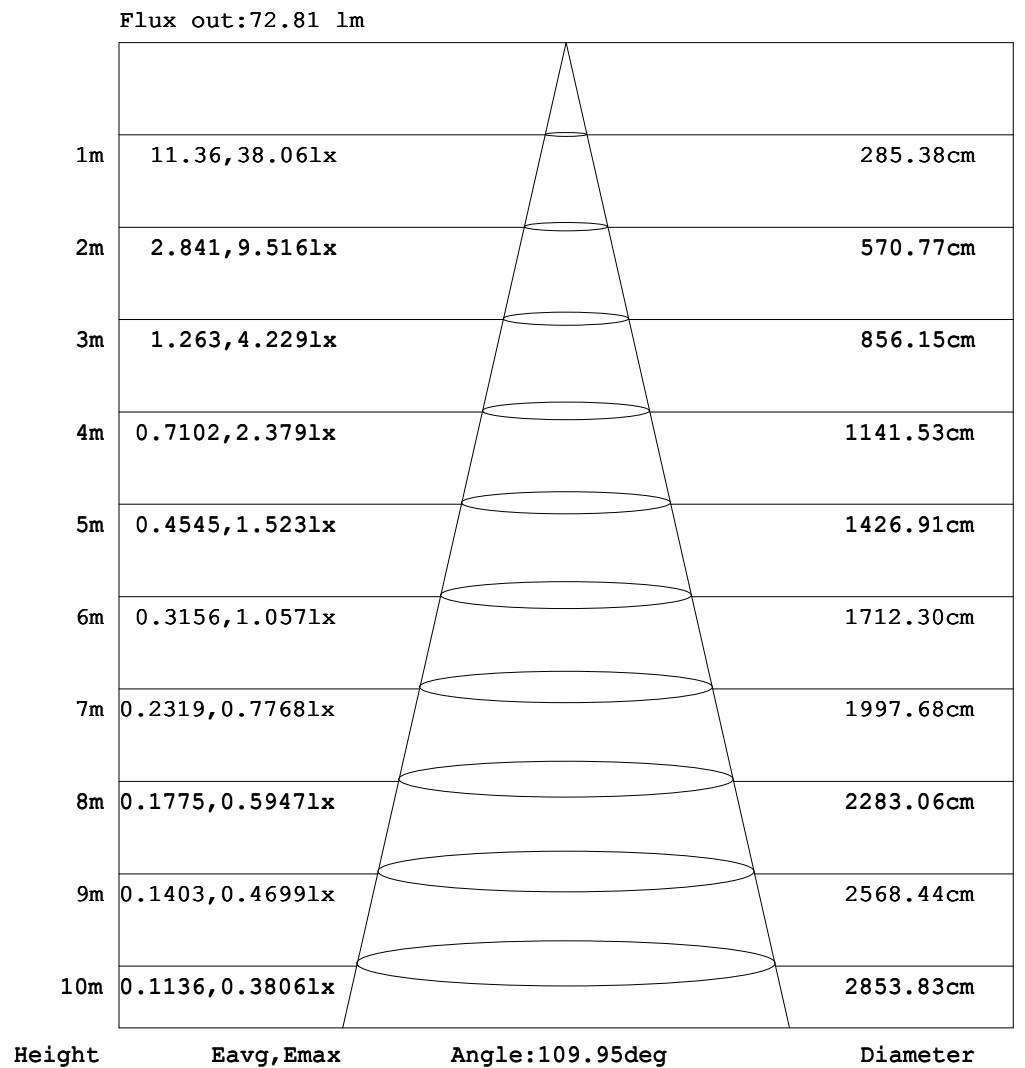

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.07V I:0.7773A P:6.442W PF:0.6868 Freq:59.98Hz Lamp Flux:107.654x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW	WEIGHT:
SPEC.:7W RED Max beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.07	0.12	0.11	0.13	0.13	0.15
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.04	0.07	0.10	0.12	0.13	0.14	0.14
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.08	0.09	0.11	0.12	0.12
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.03	0.03	0.06	0.07	0.08
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.02
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.84	1.91	2.52	2.64	2.66	2.79	3.09	3.53	4.12	4.69	5.22	5.68	5.88	6.04	6.16	6.23	6.25
-70	0.00	0.87	2.88	3.39	4.10	5.22	6.22	6.95	7.63	8.30	8.87	9.40	9.89	10.3	10.6	10.9	11.1	11.2	11.2
-60	0.00	2.04	3.58	4.77	6.24	7.40	8.57	9.67	10.7	11.8	12.7	13.5	14.3	14.9	15.4	15.8	16.1	16.3	16.3
-50	0.00	2.98	4.32	6.10	7.67	9.23	10.8	12.3	13.7	15.1	16.3	17.5	18.4	19.3	20.0	20.5	20.8	21.0	21.0
-40	0.00	3.33	5.05	7.04	8.95	10.9	12.8	14.7	16.4	18.1	19.6	21.0	22.2	23.2	24.0	24.6	25.0	25.3	25.3
-30	0.00	3.58	5.63	7.82	10.0	12.3	14.5	16.7	18.7	20.6	22.3	23.9	25.3	26.5	27.5	28.2	28.7	28.9	28.9
-20	0.00	3.77	6.03	8.42	10.9	13.3	15.8	18.1	20.4	22.5	24.5	26.2	27.8	29.2	30.3	31.2	31.8	32.0	31.9
-10	0.00	3.90	6.26	8.76	11.4	14.0	16.6	19.1	21.5	23.7	25.8	27.8	29.5	31.1	32.5	33.6	34.4	34.8	34.5
0	0.00	3.97	6.33	8.88	11.5	14.2	16.9	19.5	21.9	24.3	26.4	28.5	30.3	32.1	33.7	35.1	36.4	37.3	36.5
10	0.00	3.91	6.26	8.78	11.4	14.0	16.6	19.1	21.6	23.8	25.9	27.9	29.7	31.3	32.8	34.1	35.1	35.8	36.0
20	0.00	3.77	6.05	8.45	10.9	13.4	15.9	18.2	20.5	22.7	24.7	26.5	28.1	29.6	30.8	31.8	32.6	33.0	33.1
30	0.00	3.59	5.67	7.86	10.1	12.4	14.6	16.8	18.9	20.8	22.6	24.2	25.7	27.0	28.0	28.9	29.4	29.8	29.9
40	0.00	3.33	5.11	7.08	9.02	11.0	13.0	14.9	16.6	18.3	19.9	21.3	22.6	23.6	24.5	25.2	25.7	26.0	26.1
50	0.00	2.98	4.38	6.17	7.75	9.35	10.9	12.5	14.0	15.4	16.7	17.8	18.8	19.7	20.5	21.0	21.5	21.7	21.8
60	0.00	2.04	3.60	4.89	6.32	7.51	8.70	9.85	11.0	12.0	13.0	13.9	14.7	15.3	15.9	16.4	16.7	16.9	16.9
70	0.00	0.87	2.89	3.43	4.27	5.42	6.37	7.11	7.83	8.51	9.12	9.71	10.2	10.7	11.0	11.3	11.6	11.7	11.7
80	0.00	0.00	0.84	1.91	2.52	2.65	2.73	2.98	3.40	3.97	4.59	5.18	5.68	6.11	6.30	6.45	6.56	6.64	6.68
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.02	0.05	0.08	0.10	0.10
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.04	0.08	0.11	0.12	0.13	0.14
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.07	0.12	0.11	0.13	0.13	0.16

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.07V I:0.7773A P:6.442W PF:0.6868 Freq:59.98Hz Lamp Flux:107.654x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW	WEIGHT:
SPEC.:7W RED Max beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.16	0.14	0.14	0.12	0.11	0.09	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.15	0.13	0.13	0.12	0.10	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.12	0.12	0.11	0.10	0.06	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.07	0.07	0.04	0.03	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	6.24	6.18	6.07	5.92	5.73	5.28	4.76	4.19	3.63	3.18	2.88	2.75	2.73	2.64	2.10	1.04	0.04	0.00	
-70	11.2	11.1	10.9	10.7	10.4	9.95	9.48	8.96	8.38	7.74	7.06	6.34	5.35	4.23	3.50	3.03	1.08	0.00	
-60	16.3	16.1	15.9	15.5	15.0	14.3	13.6	12.8	11.9	10.9	9.79	8.69	7.55	6.38	4.92	3.70	2.27	0.00	
-50	21.0	20.9	20.5	20.0	19.3	18.5	17.6	16.5	15.2	13.9	12.4	10.9	9.38	7.82	6.26	4.46	3.15	0.00	
-40	25.3	25.1	24.7	24.1	23.3	22.3	21.1	19.7	18.2	16.6	14.8	13.0	11.1	9.12	7.21	5.21	3.46	0.00	
-30	29.0	28.7	28.3	27.6	26.6	25.4	24.1	22.5	20.7	18.8	16.8	14.7	12.4	10.2	7.98	5.80	3.71	0.00	
-20	32.1	31.9	31.3	30.4	29.3	27.9	26.4	24.6	22.7	20.6	18.3	16.0	13.5	11.0	8.56	6.20	3.90	0.00	
-10	34.8	34.5	33.8	32.6	31.3	29.7	28.0	26.0	23.9	21.7	19.3	16.8	14.2	11.6	8.94	6.43	4.04	0.00	
0	37.7	36.7	35.3	33.9	32.3	30.5	28.7	26.7	24.5	22.1	19.7	17.1	14.4	11.8	9.08	6.51	4.11	0.00	
10	35.9	35.2	34.2	33.0	31.5	29.9	28.1	26.2	24.0	21.8	19.4	16.8	14.2	11.6	8.95	6.44	4.04	0.00	
20	33.1	32.6	31.9	30.9	29.7	28.3	26.6	24.8	22.8	20.7	18.4	16.0	13.6	11.1	8.59	6.22	3.90	0.00	
30	29.8	29.5	28.9	28.1	27.1	25.8	24.4	22.8	21.0	19.0	17.0	14.8	12.5	10.3	8.02	5.84	3.71	0.00	
40	26.0	25.8	25.3	24.6	23.7	22.7	21.4	20.0	18.5	16.8	15.0	13.1	11.2	9.18	7.25	5.27	3.46	0.00	
50	21.7	21.5	21.1	20.5	19.8	18.9	17.9	16.8	15.5	14.1	12.6	11.1	9.49	7.90	6.32	4.53	3.15	0.00	
60	16.9	16.7	16.4	15.9	15.4	14.7	13.9	13.1	12.1	11.1	9.97	8.82	7.66	6.47	5.04	3.73	2.27	0.00	
70	11.7	11.6	11.4	11.1	10.7	10.3	9.79	9.21	8.59	7.94	7.22	6.49	5.55	4.40	3.54	3.03	1.08	0.00	
80	6.65	6.58	6.48	6.34	6.16	5.74	5.24	4.67	4.06	3.49	3.07	2.82	2.74	2.64	2.10	1.04	0.04	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.10	0.09	0.07	0.05	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.14	0.12	0.12	0.11	0.08	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.16	0.14	0.14	0.12	0.11	0.09	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: