

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		3435.1 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	47.6V x 48.1H
	At 50% of Imax	29.8V x 32.5H
	At 90% of Imax	14.1V x 14.0H
Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	879.1 lumens per klm.
	To 50% of Imax	605.5 lumens per klm.
	To 90% of Imax	158.7 lumens per klm.
	Upward LOR	1.3 %
	Downward LOR	98.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.05V I:0.4208A P:4.618W PF:0.9109 Freq:59.98Hz Lamp Flux:305.226x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:5W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

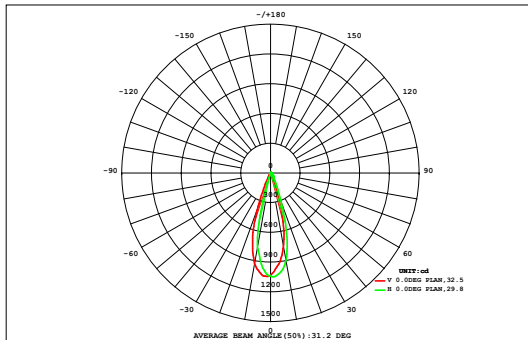

DATA OF LAMP		Eff:66.09lm/W	
MODEL	D6B2-5W-30K-A	Imax (cd)	1048
NOMINAL POWER (W)	5	AVAILABILITY (%)	86.7
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	264.7
NOMINAL FLUX (lm)	305.226	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	305.2
TEST VOLTAGE (V)	12	θ @50% (H,V)	33,30DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.03	0.04	0.06	0.08	0.10	0.12	0.15	0.18	0.20	0.20	0.18	0.15	0.12	0.10	0.07	0.05	0.04	0.03	1.89	0.00
45	0.03	0.04	0.06	0.08	0.10	0.12	0.15	0.18	0.20	0.20	0.18	0.15	0.12	0.10	0.07	0.05	0.04	0.03	1.89	0.00
40	0.03	0.05	0.07	0.09	0.13	0.17	0.21	0.26	0.30	0.30	0.26	0.21	0.16	0.12	0.09	0.06	0.05	0.03	2.58	0.00
35	0.03	0.05	0.08	0.11	0.17	0.24	0.33	0.42	0.50	0.49	0.41	0.32	0.23	0.16	0.11	0.07	0.05	0.03	3.82	0.00
30	0.04	0.06	0.09	0.15	0.24	0.38	0.57	0.76	0.90	0.87	0.70	0.51	0.34	0.21	0.13	0.08	0.05	0.04	6.13	1.89
25	0.04	0.06	0.11	0.19	0.36	0.66	1.09	1.51	1.76	1.68	1.30	0.86	0.52	0.30	0.16	0.09	0.06	0.04	10.8	8.06
20	0.04	0.06	0.12	0.26	0.59	1.23	2.15	3.05	3.56	3.39	2.60	1.59	0.81	0.40	0.20	0.10	0.06	0.03	20.2	18.2
15	0.03	0.07	0.14	0.35	0.96	2.16	3.77	5.13	5.82	5.63	4.54	2.85	1.33	0.51	0.22	0.10	0.05	0.03	33.7	32.1
10	0.03	0.06	0.15	0.46	1.40	3.21	5.22	6.65	7.30	7.08	5.98	4.12	1.95	0.65	0.22	0.09	0.04	0.02	44.6	43.3
5	0.02	0.05	0.15	0.53	1.72	3.91	5.98	7.32	7.86	7.54	6.46	4.68	2.30	0.70	0.18	0.07	0.03	0.02	49.5	48.4
0	0.02	0.04	0.13	0.49	1.62	3.73	5.79	7.14	7.67	7.36	6.28	4.48	2.12	0.60	0.14	0.05	0.02	0.01	47.7	46.6
-5	0.02	0.04	0.10	0.35	1.14	2.70	4.55	6.06	6.57	6.35	5.38	3.45	1.44	0.38	0.10	0.04	0.02	0.01	38.7	37.5
-10	0.01	0.03	0.07	0.20	0.63	1.49	2.71	3.83	4.42	4.23	3.24	1.79	0.66	0.18	0.07	0.03	0.02	0.01	23.6	22.3
-15	0.01	0.02	0.04	0.10	0.27	0.62	1.09	1.51	1.55	1.38	1.05	0.53	0.20	0.08	0.04	0.02	0.01	0.01	8.53	6.35
-20	0.01	0.01	0.03	0.05	0.10	0.20	0.32	0.36	0.25	0.16	0.14	0.10	0.06	0.04	0.02	0.01	0.01	0.01	1.87	0.00
-25	0.01	0.01	0.02	0.02	0.04	0.06	0.08	0.08	0.03	0.01	0.02	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.50	0.00
-30	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.20	0.00
-35	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.10	0.00
-40	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	0.39	0.67	1.36	3.47	9.50	20.9	34.0	44.3	48.7	46.7	38.6	25.7	12.3	4.46	1.79	0.91	0.53	0.33	295	---
Φ a	0.00	0.00	0.00	0.36	7.02	18.8	32.1	42.5	47.1	45.1	36.9	23.7	9.89	1.12	0.00	0.00	0.00	0.00	---	265

one-half-peak spread: U:15.2,D:14.8 , L:14.2,R:16.4


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.05V I:0.4208A P:4.618W PF:0.9109 Freq:59.98Hz Lamp Flux:305.226x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:5W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

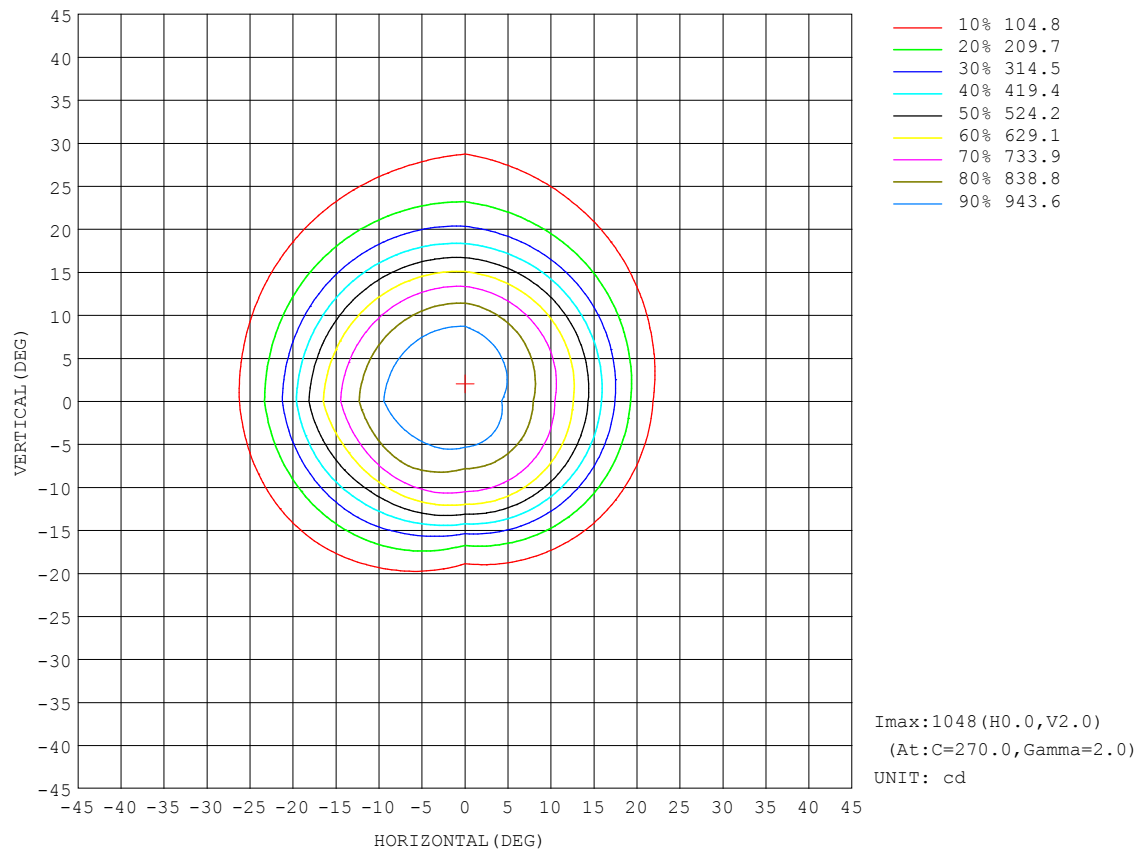


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.05V I:0.4208A P:4.618W PF:0.9109 Freq:59.98Hz Lamp Flux:305.226x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:5W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

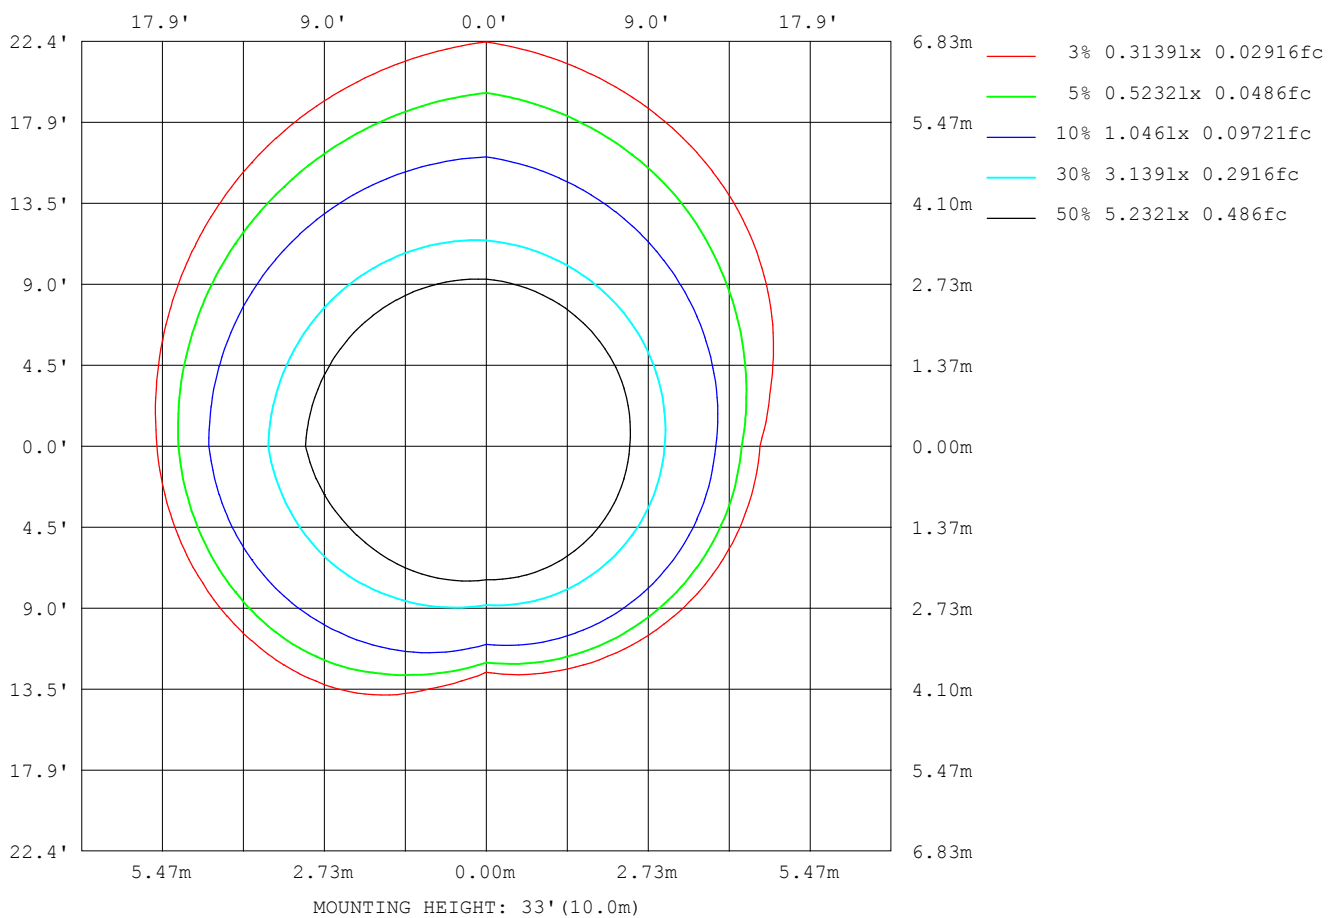

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

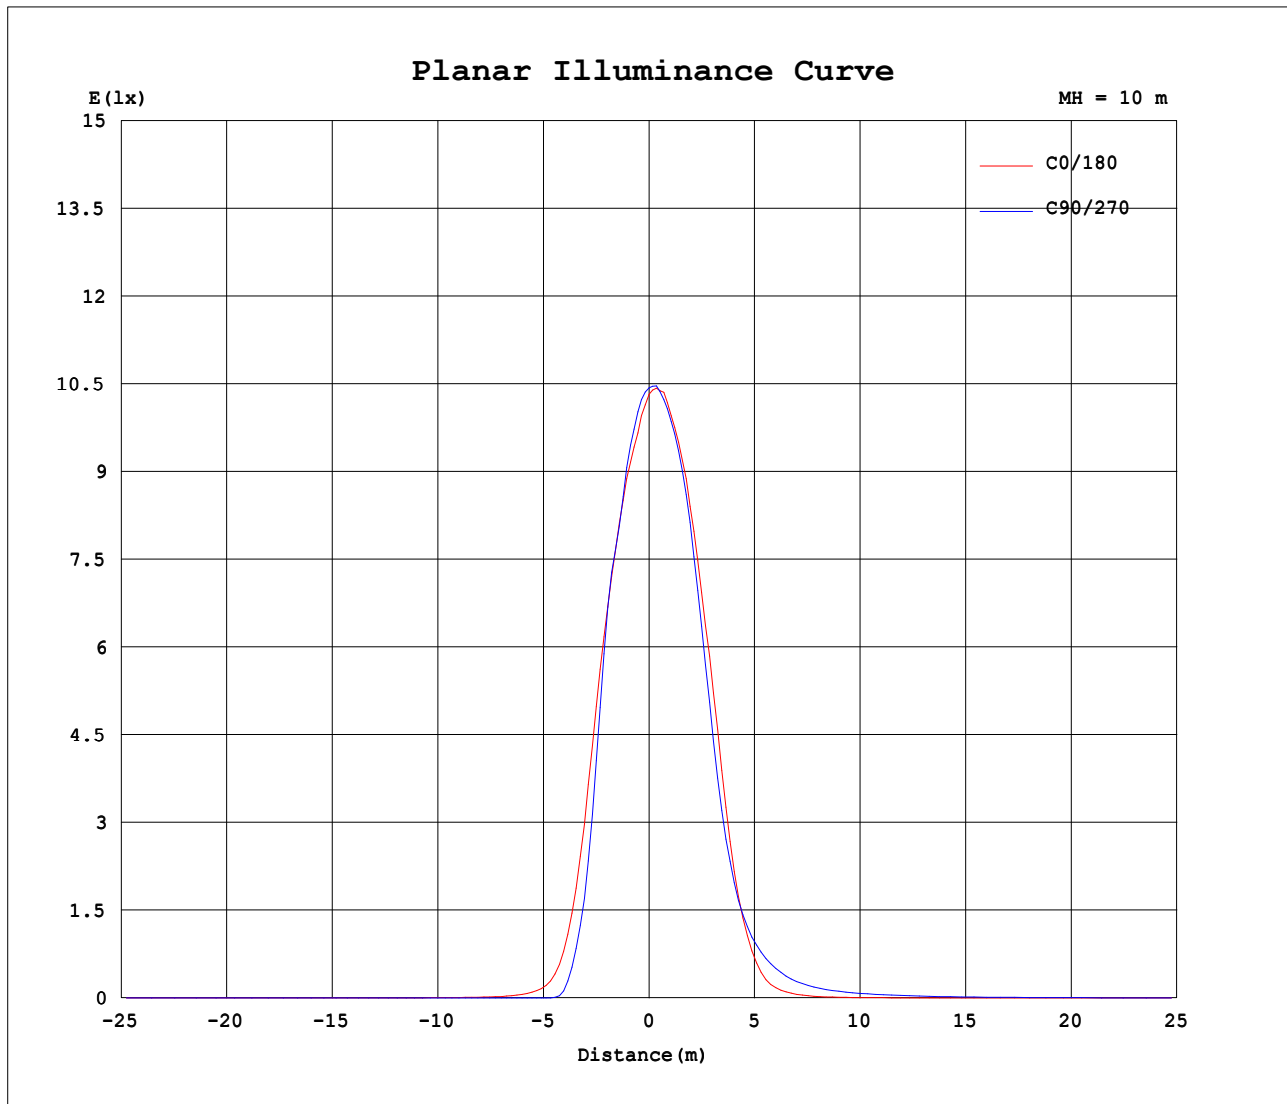


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.05V I:0.4208A P:4.618W PF:0.9109 Freq:59.98Hz Lamp Flux:305.226x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:5W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

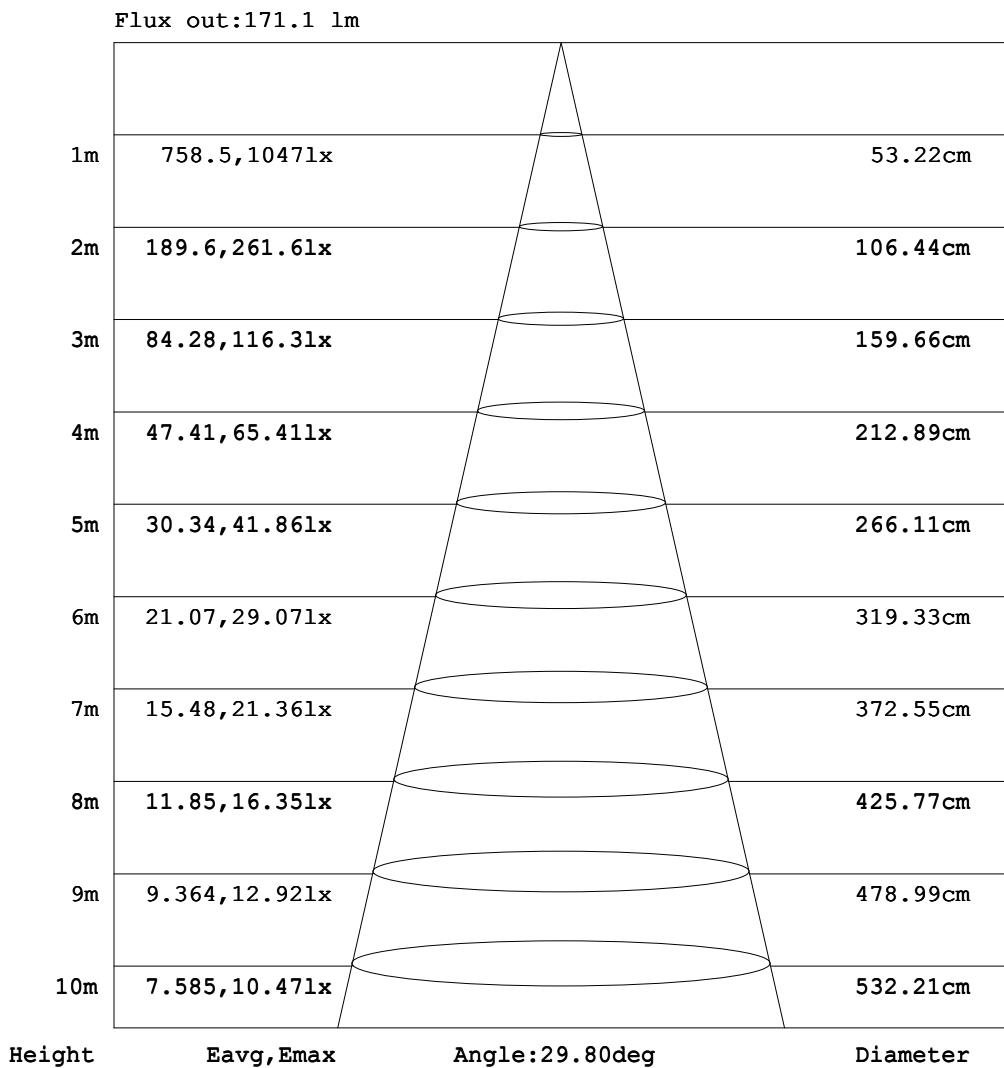

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:0.4208A P:4.618W PF:0.9109 Freq:59.98Hz Lamp Flux:305.226x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:5W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.53	1.15	1.89	2.53	2.91	2.99	3.01	3.05
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.08	0.20	0.66	1.31	2.08	2.82	3.32	3.53	3.59	3.70
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.10	0.23	0.52	1.06	1.71	2.42	3.08	3.63	4.04	4.36
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.17	0.33	0.58	1.01	1.51	2.03	2.48	2.86	3.14
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.15	0.26	0.42	0.62	0.85	1.10	1.32	1.47
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.11	0.16	0.22	0.28	0.34	0.37
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.05	0.04	0.04	0.03	0.02	0.01	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.09	0.10	0.13	0.15	0.16	0.14	0.14	0.11	0.08	0.04	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.05	0.11	0.16	0.23	0.27	0.32	0.36	0.40	0.39	0.38	0.31	0.23	0.12	0.00
-40	0.00	0.00	0.00	0.00	0.02	0.12	0.20	0.33	0.41	0.55	0.68	0.81	0.91	0.96	0.96	0.88	0.70	0.39	0.00
-30	0.00	0.00	0.00	0.00	0.12	0.19	0.36	0.49	0.73	0.98	1.28	1.63	2.14	3.00	4.25	5.40	5.45	3.62	0.00
-20	0.00	0.00	0.00	0.00	0.14	0.26	0.47	0.72	1.11	1.55	2.21	3.57	7.00	14.6	33.2	63.9	87.3	96.4	64.0
-10	0.00	0.00	0.00	0.01	0.15	0.35	0.56	0.95	1.44	2.17	3.57	7.78	20.6	69.5	189	394	595	750	762
0	0.00	0.00	0.00	0.01	0.16	0.40	0.63	1.06	1.68	2.64	4.74	11.8	35.9	144	393	707	930	1030	1032
10	0.00	0.01	0.03	0.09	0.34	0.70	1.15	1.89	2.93	4.54	7.51	14.9	34.8	99.3	253	501	721	860	901
20	0.00	0.02	0.06	0.15	0.48	0.88	1.52	2.38	3.66	5.44	8.23	13.3	23.7	45.0	88.0	161	244	312	328
30	0.00	0.03	0.08	0.20	0.54	0.96	1.65	2.49	3.75	5.35	7.60	10.8	15.5	22.8	33.7	48.3	65.4	80.8	90.4
40	0.00	0.04	0.10	0.21	0.46	0.92	1.51	2.33	3.31	4.63	6.24	8.26	10.8	13.8	17.4	21.6	25.8	29.8	32.8
50	0.00	0.04	0.10	0.20	0.39	0.74	1.24	1.85	2.65	3.55	4.65	5.93	7.42	8.96	10.7	12.4	14.0	15.6	16.9
60	0.00	0.05	0.11	0.19	0.31	0.52	0.82	1.28	1.79	2.38	3.08	3.86	4.68	5.52	6.46	7.30	8.10	8.83	9.46
70	0.00	0.05	0.11	0.18	0.26	0.37	0.50	0.70	0.96	1.26	1.62	2.02	2.44	2.87	3.28	3.69	4.08	4.43	4.73
80	0.00	0.05	0.10	0.16	0.22	0.29	0.36	0.45	0.54	0.63	0.74	0.84	0.94	1.05	1.17	1.29	1.40	1.50	1.60
90	0.00	0.05	0.09	0.14	0.19	0.24	0.28	0.33	0.38	0.43	0.47	0.52	0.57	0.62	0.66	0.71	0.76	0.80	0.85
100	0.00	0.04	0.09	0.12	0.16	0.19	0.22	0.25	0.27	0.29	0.31	0.34	0.36	0.39	0.41	0.43	0.45	0.47	0.50
110	0.00	0.04	0.08	0.10	0.13	0.15	0.16	0.17	0.18	0.18	0.17	0.15	0.14	0.13	0.12	0.11	0.10	0.09	0.10
120	0.00	0.04	0.06	0.08	0.10	0.11	0.10	0.08	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.03	0.05	0.07	0.07	0.06	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.03	0.04	0.05	0.05	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
150	0.00	0.02	0.03	0.03	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.10	0.26	0.49	0.71	0.84	0.88
160	0.00	0.01	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.35	0.81	1.32	1.78	2.15	2.36	2.42
170	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.34	0.89	1.56	2.22	2.69	2.91	2.98	2.97
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.53	1.15	1.89	2.53	2.91	2.99	3.01	3.04

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:0.4208A P:4.618W PF:0.9109 Freq:59.98Hz Lamp Flux:305.226x1 lm																		
NAME: LED LANDSCAPE LIGHT									TYPE:Copper Spotlight					WEIGHT:				
SPEC.:5W 3000K 40°LENS									DIM.:					SERIAL No.:1				
MFR.: EVERFINE									SUR.:					Shielding Angle:DOWN-LIGHT SHROUD				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.11	3.33	3.74	3.80	3.46	2.79	1.99	1.20	0.60	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	3.72	3.89	4.01	3.85	3.33	2.63	1.84	1.09	0.50	0.09	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	4.25	4.07	3.74	3.26	2.68	2.01	1.33	0.74	0.31	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	3.04	2.83	2.51	2.08	1.60	1.12	0.70	0.33	0.07	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	1.41	1.27	1.08	0.84	0.60	0.38	0.16	0.07	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.34	0.29	0.22	0.16	0.11	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.01	0.01	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.03	0.06	0.09	0.11	0.12	0.13	0.12	0.10	0.07	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.09	0.17	0.24	0.28	0.31	0.31	0.30	0.27	0.22	0.18	0.11	0.05	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.24	0.45	0.59	0.67	0.70	0.68	0.61	0.53	0.44	0.34	0.26	0.15	0.06	0.00	0.00	0.00	0.00	0.00	
-30	1.28	2.00	2.10	1.86	1.61	1.39	1.16	0.95	0.75	0.57	0.41	0.28	0.13	0.01	0.00	0.00	0.00	0.00	
-20	63.9	37.3	18.0	9.87	5.39	3.06	2.11	1.55	1.15	0.83	0.58	0.38	0.21	0.06	0.00	0.00	0.00	0.00	
-10	696	487	233	70.8	18.9	7.54	3.58	2.29	1.58	1.09	0.74	0.47	0.28	0.09	0.00	0.00	0.00	0.00	
0	927	755	479	175	39.2	12.5	4.97	2.87	1.90	1.28	0.84	0.53	0.33	0.11	0.00	0.00	0.00	0.00	
10	806	613	341	135	48.6	21.8	10.7	6.23	3.95	2.58	1.69	1.06	0.63	0.28	0.08	0.03	0.01	0.00	
20	280	195	115	64.6	35.7	19.8	11.9	7.58	5.05	3.38	2.24	1.43	0.83	0.40	0.15	0.06	0.02	0.00	
30	78.5	62.0	45.0	31.3	21.4	14.8	10.3	7.27	5.12	3.58	2.41	1.58	0.91	0.44	0.20	0.08	0.03	0.00	
40	29.7	25.6	21.3	17.1	13.6	10.5	8.06	6.09	4.53	3.24	2.26	1.46	0.86	0.44	0.21	0.10	0.04	0.00	
50	15.6	14.0	12.3	10.6	8.87	7.33	5.87	4.60	3.51	2.60	1.81	1.18	0.70	0.39	0.20	0.10	0.04	0.00	
60	8.83	8.09	7.28	6.43	5.50	4.65	3.83	3.05	2.35	1.74	1.22	0.82	0.52	0.31	0.19	0.11	0.05	0.00	
70	4.42	4.07	3.68	3.26	2.83	2.40	1.99	1.61	1.26	0.96	0.70	0.50	0.37	0.26	0.18	0.11	0.05	0.00	
80	1.50	1.40	1.29	1.17	1.05	0.94	0.84	0.74	0.63	0.54	0.45	0.36	0.29	0.22	0.16	0.10	0.05	0.00	
90	0.80	0.76	0.71	0.66	0.62	0.57	0.52	0.47	0.43	0.38	0.33	0.28	0.24	0.19	0.14	0.09	0.05	0.00	
100	0.47	0.45	0.43	0.41	0.39	0.36	0.34	0.31	0.29	0.27	0.25	0.22	0.19	0.16	0.12	0.09	0.04	0.00	
110	0.09	0.10	0.11	0.12	0.13	0.14	0.15	0.17	0.18	0.18	0.17	0.16	0.15	0.13	0.10	0.08	0.04	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.08	0.10	0.11	0.10	0.08	0.06	0.04	0.00	
130	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.06	0.07	0.07	0.05	0.03	0.00	
140	0.10	0.18	0.23	0.22	0.18	0.12	0.02	0.00	0.00	0.00	0.00	0.00	0.03	0.05	0.05	0.04	0.03	0.00	
150	1.02	1.06	0.97	0.83	0.70	0.55	0.37	0.17	0.00	0.00	0.00	0.00	0.00	0.03	0.03	0.03	0.02	0.00	
160	2.57	2.59	2.44	2.17	1.77	1.30	0.89	0.51	0.20	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.01	0.00	
170	3.11	3.27	3.38	3.25	2.81	2.21	1.53	0.92	0.42	0.06	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	
180	3.11	3.33	3.74	3.80	3.46	2.79	1.99	1.20	0.60	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:ADMIN

Test Date:2022-08-20

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352

Humidity:65.0%

Test Distance:13.563m [K=1.0000]

Remarks: