

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2615.6 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	54.2V x 51.4H
	At 50% of Imax	32.7V x 35.4H
	At 90% of Imax	16.9V x 16.3H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	844.8 lumens per klm.
	To 50% of Imax	571.7 lumens per klm.
	To 90% of Imax	164.9 lumens per klm.
	Upward LOR	1.4 %
	Downward LOR	98.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.18V I:1.095A P:9.637W PF:0.7224 Freq:59.98Hz Lamp Flux:373.378x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

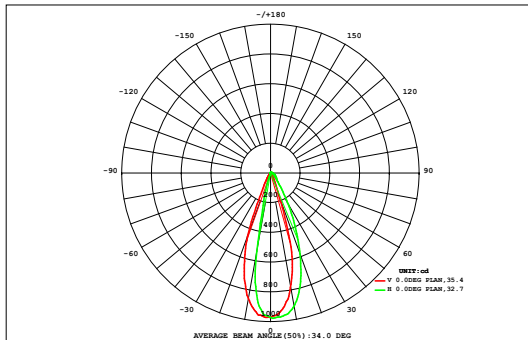

DATA OF LAMP		Eff:38.75lm/W	
MODEL	D9B2-10W-A	Imax (cd)	976.6
NOMINAL POWER (W)	10	AVAILABILITY (%)	82.7
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	308.8
NOMINAL FLUX (lm)	373.378	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	373.4
TEST VOLTAGE (V)	12	θ @50% (H,V)	35,33DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.08	0.11	0.14	0.19	0.24	0.30	0.36	0.42	0.47	0.47	0.42	0.35	0.29	0.23	0.18	0.14	0.10	0.08	4.56	0.00
45	0.08	0.11	0.14	0.19	0.24	0.30	0.36	0.42	0.47	0.47	0.42	0.35	0.29	0.23	0.18	0.14	0.10	0.08	4.56	0.00
40	0.09	0.12	0.17	0.23	0.31	0.41	0.52	0.63	0.72	0.72	0.62	0.50	0.38	0.29	0.21	0.15	0.11	0.08	6.25	0.85
35	0.09	0.13	0.19	0.29	0.42	0.60	0.83	1.07	1.26	1.25	1.04	0.79	0.56	0.38	0.26	0.17	0.12	0.08	9.55	6.04
30	0.10	0.15	0.23	0.38	0.61	0.95	1.39	1.85	2.22	2.19	1.79	1.32	0.88	0.54	0.33	0.20	0.13	0.08	15.3	12.7
25	0.10	0.17	0.28	0.50	0.88	1.45	2.20	2.98	3.52	3.43	2.77	2.02	1.32	0.78	0.42	0.23	0.13	0.08	23.3	21.1
20	0.10	0.18	0.34	0.64	1.19	2.13	3.40	4.44	5.03	4.88	3.95	2.77	1.76	1.02	0.53	0.26	0.13	0.08	32.8	31.0
15	0.10	0.19	0.38	0.76	1.52	3.06	4.61	5.71	6.33	6.22	5.34	3.78	2.12	1.17	0.59	0.27	0.13	0.07	42.4	40.7
10	0.09	0.19	0.39	0.80	1.89	3.84	5.42	6.53	7.08	6.99	6.21	4.74	2.51	1.17	0.58	0.26	0.11	0.05	48.9	47.3
5	0.08	0.17	0.36	0.76	2.09	4.17	5.78	6.86	7.34	7.24	6.52	5.07	2.70	1.00	0.47	0.20	0.08	0.04	50.9	49.3
0	0.07	0.15	0.31	0.65	1.86	3.79	5.25	6.52	7.15	7.06	6.18	4.54	2.32	0.77	0.36	0.16	0.06	0.03	47.2	45.6
-5	0.06	0.13	0.26	0.51	1.29	2.79	3.87	4.88	5.74	5.65	4.56	3.20	1.46	0.57	0.28	0.13	0.05	0.02	35.4	33.6
-10	0.05	0.10	0.19	0.36	0.72	1.62	2.42	2.68	2.50	2.40	2.32	1.58	0.68	0.37	0.20	0.09	0.04	0.02	18.4	16.3
-15	0.04	0.07	0.14	0.24	0.39	0.69	1.11	1.22	0.89	0.74	0.73	0.48	0.33	0.22	0.12	0.06	0.03	0.02	7.50	4.35
-20	0.03	0.05	0.09	0.15	0.22	0.29	0.37	0.36	0.17	0.08	0.16	0.19	0.16	0.11	0.07	0.04	0.02	0.01	2.56	0.00
-25	0.02	0.04	0.06	0.08	0.12	0.15	0.15	0.12	0.05	0.03	0.07	0.08	0.07	0.06	0.03	0.02	0.01	0.01	1.17	0.00
-30	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.05	0.02	0.01	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.58	0.00
-35	0.01	0.02	0.02	0.03	0.03	0.04	0.03	0.02	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.30	0.00
-40	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.18	0.00
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	1.16	1.99	3.59	6.62	13.9	26.4	37.8	46.4	50.5	49.4	42.7	31.5	17.6	8.71	4.66	2.41	1.29	0.77	347	---
Φ a	0.00	0.00	0.00	2.58	11.2	24.3	36.0	44.8	49.2	48.2	41.3	29.6	15.4	5.63	0.58	0.00	0.00	0.00	---	309

one-half-peak spread: U:11.4,D:18.5 , L:14.5,R:16.0


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.18V I:1.095A P:9.637W PF:0.7224 Freq:59.98Hz Lamp Flux:373.378x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

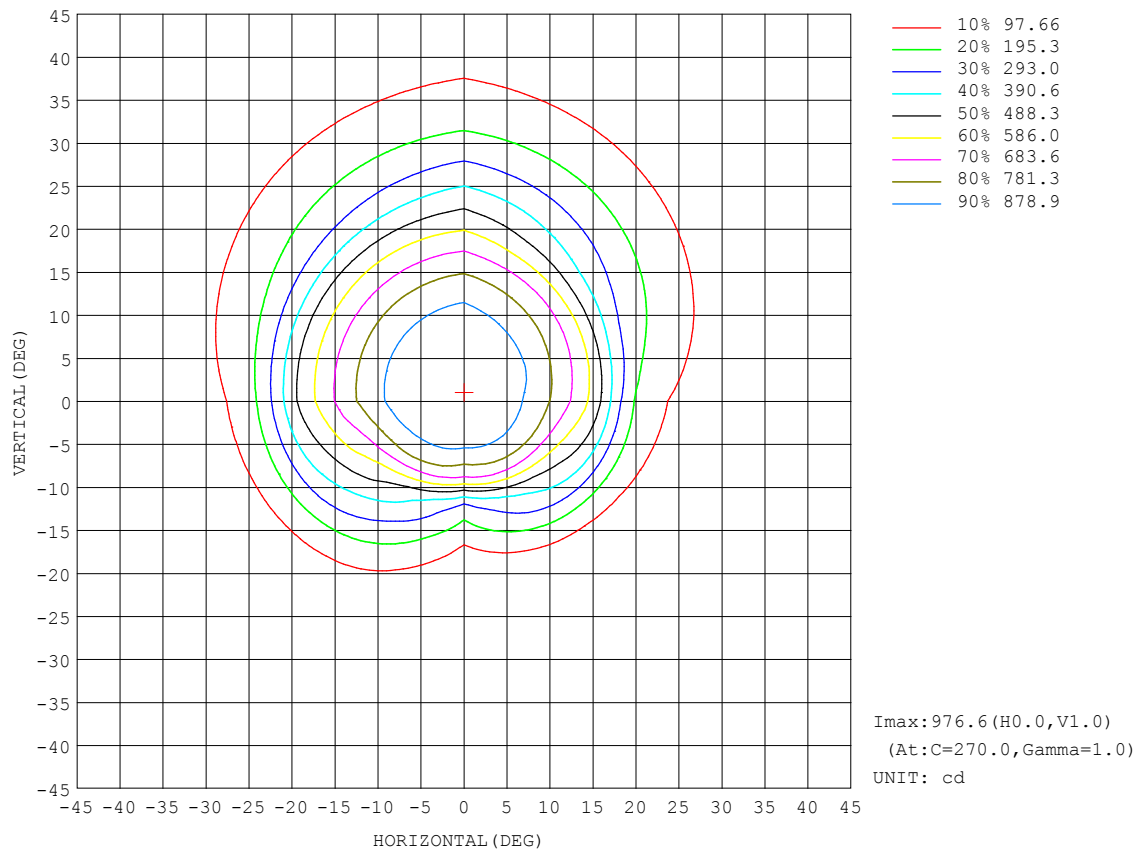


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.18V I:1.095A P:9.637W PF:0.7224 Freq:59.98Hz Lamp Flux:373.378x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

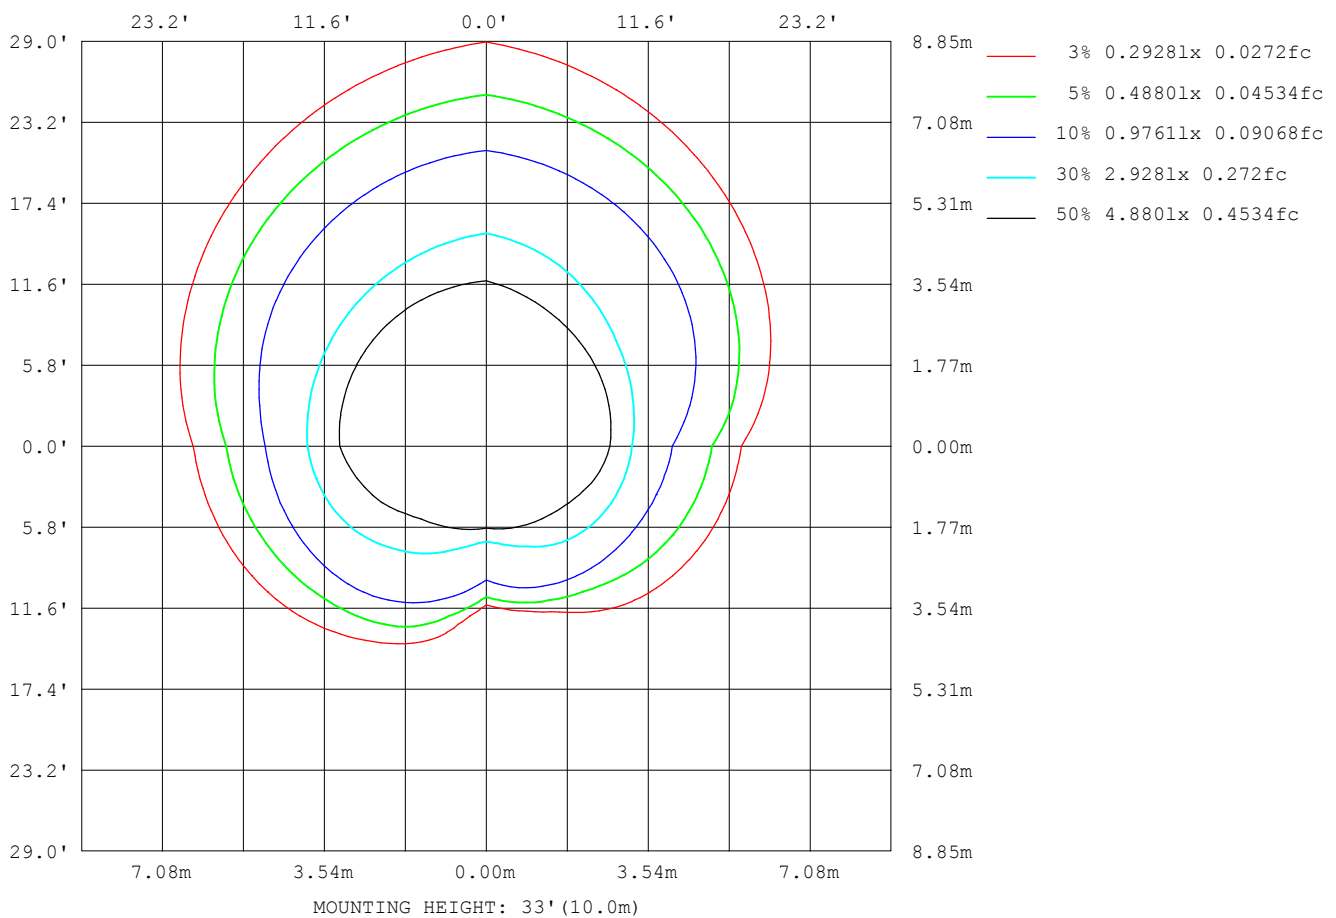

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

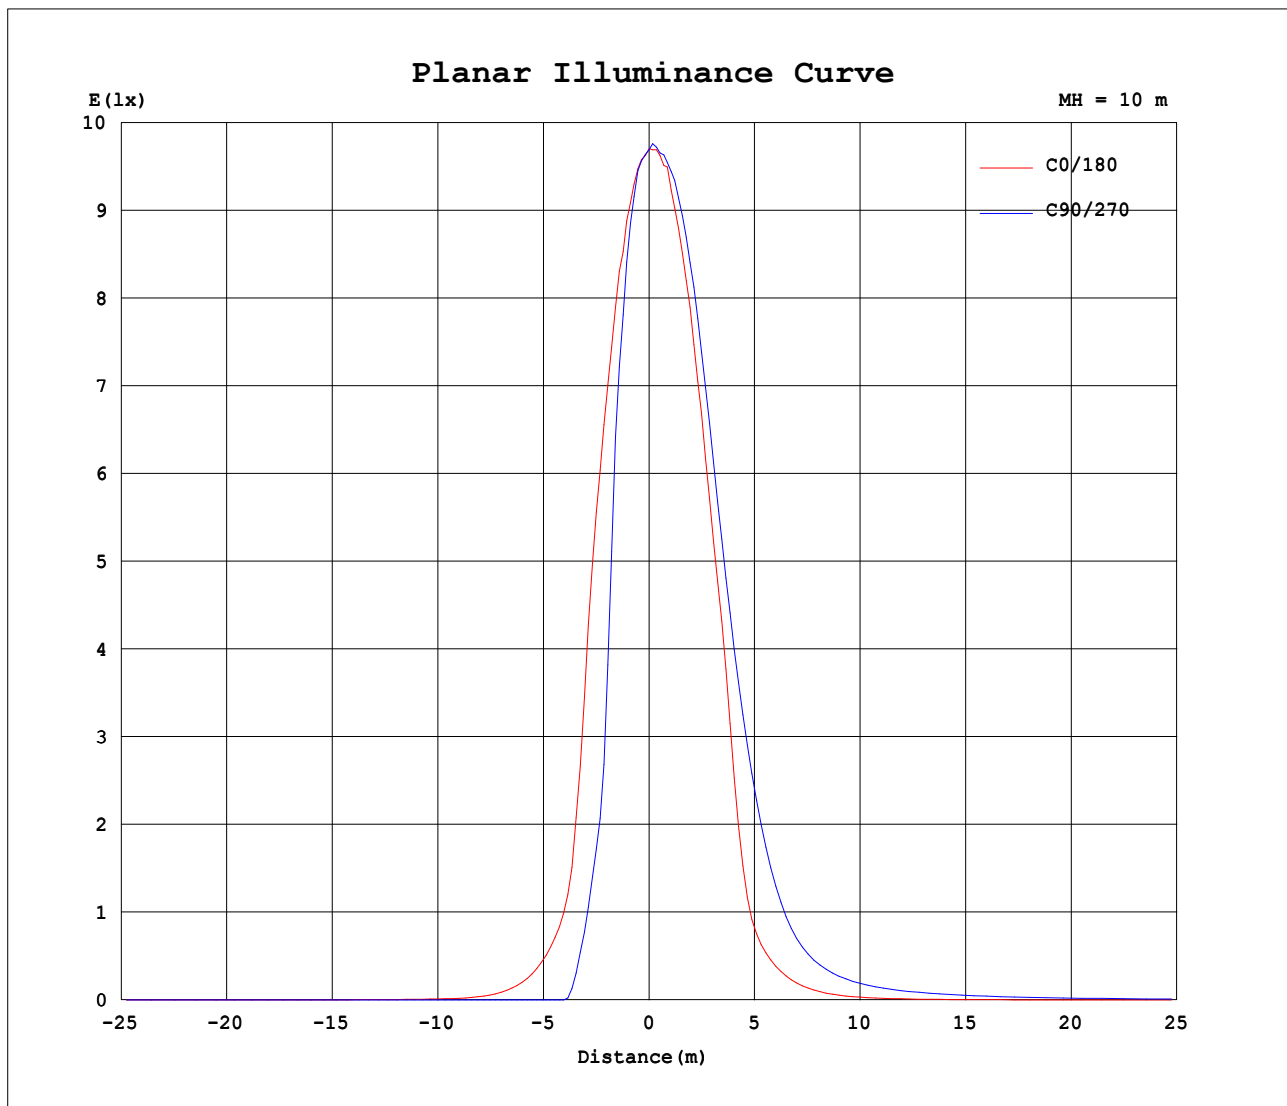


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.18V I:1.095A P:9.637W PF:0.7224 Freq:59.98Hz Lamp Flux:373.378x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

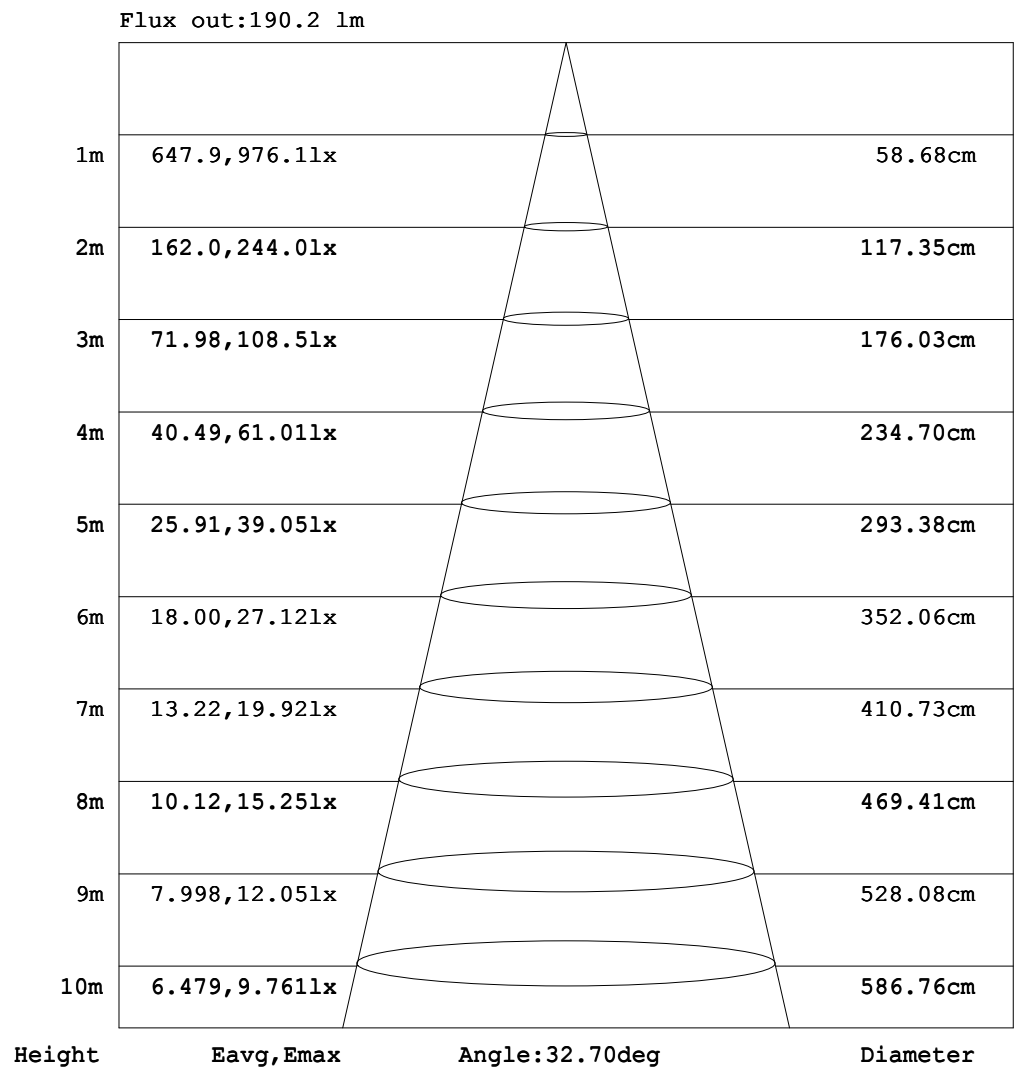

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:1.095A P:9.637W PF:0.7224 Freq:59.98Hz Lamp Flux:373.378x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.38	0.90	1.57	2.27	2.82	3.16	3.32	3.48	3.56
-170	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.10	0.19	0.57	1.15	1.88	2.65	3.30	3.69	3.90	4.02	4.22
-160	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.08	0.16	0.29	0.56	1.07	1.71	2.45	3.19	3.84	4.31	4.69	5.05
-150	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.08	0.15	0.28	0.46	0.76	1.22	1.78	2.37	2.96	3.51	3.97	4.33
-140	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.12	0.20	0.32	0.50	0.73	1.00	1.35	1.72	2.07	2.38	2.61
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.07	0.11	0.17	0.26	0.36	0.49	0.64	0.78	0.93	1.06	1.16
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.07	0.11	0.14	0.18	0.22	0.29	0.32	0.35	0.37
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.04	0.05	0.06	0.07	0.08	0.09
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.07	0.06	0.05	0.05	0.05	0.05	0.04	0.03	0.02	0.00
-70	0.00	0.00	0.00	0.00	0.08	0.11	0.18	0.21	0.24	0.31	0.30	0.31	0.29	0.26	0.24	0.19	0.13	0.07	0.00
-60	0.00	0.00	0.00	0.11	0.21	0.31	0.42	0.51	0.60	0.66	0.70	0.73	0.71	0.65	0.57	0.46	0.32	0.17	0.00
-50	0.00	0.00	0.06	0.20	0.35	0.56	0.74	0.91	1.09	1.22	1.34	1.40	1.41	1.35	1.24	1.03	0.75	0.40	0.00
-40	0.00	0.00	0.12	0.31	0.54	0.83	1.11	1.44	1.73	2.01	2.32	2.64	3.01	3.32	3.50	3.31	2.65	1.48	0.00
-30	0.00	0.00	0.14	0.39	0.72	1.11	1.56	2.03	2.56	3.24	4.25	5.84	8.06	10.7	13.2	14.2	12.4	7.38	0.00
-20	0.00	0.00	0.20	0.56	0.92	1.41	1.98	2.66	3.61	5.14	8.04	13.3	21.7	33.7	47.9	69.8	91.2	73.1	16.2
-10	0.00	0.00	0.25	0.59	1.04	1.65	2.37	3.29	4.72	7.56	13.5	25.2	46.8	85.4	216	376	458	516	535
0	0.00	0.00	0.28	0.61	1.11	1.79	2.62	3.72	5.55	9.44	17.8	35.3	70.3	157	455	686	859	961	970
10	0.00	0.04	0.38	0.91	1.74	2.88	4.15	5.80	8.39	13.2	22.8	42.5	83.1	160	355	595	765	868	910
20	0.00	0.07	0.43	1.15	2.18	3.70	5.33	7.26	10.1	14.5	22.3	36.5	62.7	111	188	299	434	535	580
30	0.00	0.10	0.44	1.16	2.32	4.09	6.03	8.08	10.6	14.2	19.5	27.5	39.7	58.1	85.4	122	165	205	232
40	0.00	0.12	0.47	1.15	2.21	3.82	6.04	8.27	10.6	13.3	16.6	21.1	26.8	33.9	42.4	52.1	62.1	71.3	77.9
50	0.00	0.14	0.43	0.99	1.88	3.19	4.96	7.38	9.73	12.1	14.5	17.2	20.2	23.6	27.2	31.1	34.8	38.2	41.1
60	0.00	0.15	0.36	0.80	1.45	2.36	3.55	5.08	6.97	9.37	11.8	14.1	16.3	18.6	20.7	22.8	24.8	26.6	28.4
70	0.00	0.15	0.34	0.60	1.00	1.46	2.19	3.03	4.00	5.16	6.39	7.81	9.32	10.9	12.4	13.9	15.4	16.8	17.9
80	0.00	0.14	0.31	0.50	0.72	0.96	1.23	1.55	1.92	2.32	2.71	3.14	3.61	4.09	4.65	5.18	5.67	6.12	6.50
90	0.00	0.14	0.28	0.41	0.55	0.69	0.83	0.96	1.10	1.24	1.38	1.51	1.65	1.79	1.93	2.07	2.20	2.34	2.48
100	0.00	0.13	0.24	0.35	0.44	0.53	0.60	0.66	0.72	0.78	0.83	0.88	0.93	0.98	1.03	1.09	1.14	1.20	1.27
110	0.00	0.12	0.21	0.28	0.34	0.38	0.41	0.43	0.44	0.43	0.41	0.39	0.36	0.35	0.33	0.31	0.30	0.30	0.31
120	0.00	0.10	0.18	0.22	0.25	0.27	0.25	0.21	0.17	0.12	0.06	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.09	0.14	0.17	0.18	0.16	0.11	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.07	0.11	0.13	0.11	0.08	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.05	0.05	0.03	0.00
150	0.00	0.05	0.08	0.08	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.03	0.14	0.26	0.34	0.43	0.55	0.58	0.51
160	0.00	0.04	0.05	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.07	0.29	0.56	0.93	1.35	1.75	2.03	2.19	2.18
170	0.00	0.02	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.26	0.65	1.17	1.79	2.37	2.81	3.08	3.23	3.20
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.38	0.90	1.57	2.27	2.82	3.16	3.32	3.48	3.58

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:1.095A P:9.637W PF:0.7224 Freq:59.98Hz Lamp Flux:373.378x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.79	3.94	4.10	3.99	3.63	3.01	2.26	1.46	0.81	0.32	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	4.23	4.35	4.41	4.21	3.73	3.04	2.23	1.49	0.86	0.36	0.06	0.02	0.01	0.00	0.00	0.00	0.00	0.00	
-160	4.88	4.70	4.42	3.92	3.30	2.58	1.86	1.19	0.71	0.28	0.08	0.04	0.02	0.01	0.00	0.00	0.00	0.00	
-150	4.13	3.81	3.40	2.90	2.35	1.78	1.23	0.81	0.39	0.15	0.08	0.04	0.02	0.00	0.00	0.00	0.00	0.00	
-140	2.47	2.25	1.96	1.63	1.30	0.97	0.63	0.39	0.20	0.12	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	
-130	1.08	0.97	0.83	0.68	0.52	0.36	0.26	0.17	0.11	0.07	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.35	0.32	0.29	0.22	0.18	0.14	0.11	0.07	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.08	0.07	0.06	0.05	0.04	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.01	0.02	0.03	0.03	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.07	0.14	0.19	0.23	0.25	0.26	0.23	0.20	0.15	0.08	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.18	0.35	0.49	0.60	0.66	0.67	0.65	0.58	0.48	0.36	0.23	0.10	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.56	0.98	1.22	1.32	1.34	1.33	1.25	1.13	0.95	0.75	0.52	0.31	0.12	0.00	0.00	0.00	0.00	0.00	
-30	3.95	6.46	6.97	5.99	4.27	2.97	2.24	1.87	1.55	1.23	0.89	0.56	0.28	0.04	0.00	0.00	0.00	0.00	
-20	32.7	36.5	35.3	27.2	17.5	9.86	5.04	3.03	2.26	1.73	1.25	0.81	0.42	0.13	0.00	0.00	0.00	0.00	
-10	488	396	222	86.2	48.3	24.4	11.1	4.99	3.02	2.21	1.59	1.03	0.56	0.19	0.00	0.00	0.00	0.00	
0	920	780	552	182	81.1	37.9	16.4	6.71	3.64	2.56	1.80	1.16	0.64	0.22	0.00	0.00	0.00	0.00	
10	840	702	441	225	123	60.6	28.4	14.3	8.65	5.87	4.10	2.81	1.79	0.89	0.32	0.12	0.04	0.00	
20	494	379	264	167	94.7	50.9	28.3	17.3	11.6	8.17	5.86	4.16	2.71	1.38	0.59	0.23	0.07	0.00	
30	202	159	115	78.2	51.6	34.6	23.9	17.1	12.5	9.31	6.94	5.03	3.25	1.64	0.77	0.30	0.10	0.00	
40	70.3	60.4	50.0	40.2	31.9	25.1	19.7	15.5	12.2	9.58	7.35	5.24	3.10	1.66	0.84	0.35	0.12	0.00	
50	38.0	34.4	30.5	26.6	22.9	19.5	16.5	13.8	11.4	9.00	6.70	4.32	2.63	1.53	0.79	0.37	0.14	0.00	
60	26.5	24.6	22.5	20.4	18.2	15.9	13.6	11.3	8.86	6.45	4.59	3.13	2.05	1.24	0.68	0.36	0.15	0.00	
70	16.7	15.3	13.8	12.2	10.7	9.06	7.50	6.10	4.85	3.76	2.82	2.01	1.36	0.92	0.59	0.34	0.15	0.00	
80	6.10	5.64	5.14	4.60	4.05	3.56	3.08	2.65	2.25	1.88	1.54	1.23	0.96	0.72	0.50	0.31	0.14	0.00	
90	2.34	2.20	2.07	1.93	1.79	1.65	1.51	1.38	1.24	1.10	0.96	0.83	0.69	0.55	0.41	0.28	0.14	0.00	
100	1.20	1.14	1.09	1.03	0.98	0.93	0.88	0.83	0.78	0.72	0.66	0.60	0.53	0.44	0.35	0.24	0.13	0.00	
110	0.30	0.30	0.31	0.33	0.35	0.36	0.39	0.41	0.43	0.44	0.43	0.41	0.38	0.34	0.28	0.21	0.12	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.06	0.12	0.17	0.21	0.25	0.27	0.25	0.22	0.18	0.10	0.00	
130	0.02	0.04	0.05	0.04	0.03	0.00	0.00	0.00	0.00	0.01	0.06	0.11	0.16	0.18	0.17	0.14	0.09	0.00	
140	0.12	0.23	0.29	0.31	0.30	0.24	0.14	0.06	0.00	0.00	0.00	0.03	0.08	0.11	0.13	0.11	0.07	0.00	
150	0.73	0.86	0.87	0.87	0.83	0.70	0.51	0.34	0.12	0.00	0.00	0.00	0.03	0.06	0.08	0.08	0.05	0.00	
160	2.38	2.42	2.33	2.08	1.78	1.42	1.08	0.71	0.42	0.12	0.00	0.00	0.01	0.03	0.05	0.05	0.04	0.00	
170	3.44	3.53	3.53	3.28	2.87	2.34	1.73	1.17	0.67	0.26	0.01	0.00	0.00	0.01	0.02	0.03	0.02	0.00	
180	3.79	3.94	4.10	3.99	3.63	3.01	2.26	1.46	0.81	0.32	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: