

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1969.9 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	64.6V x 60.2H
	At 50% of Imax	39.6V x 39.0H
	At 90% of Imax	19.5V x 18.7H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	880.6 lumens per klm.
	To 50% of Imax	591.2 lumens per klm.
	To 90% of Imax	173.6 lumens per klm.
	Upward LOR	0.5 %
	Downward LOR	99.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.18V I:1.088A P:9.584W PF:0.7230 Freq:59.99Hz Lamp Flux:51.662x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

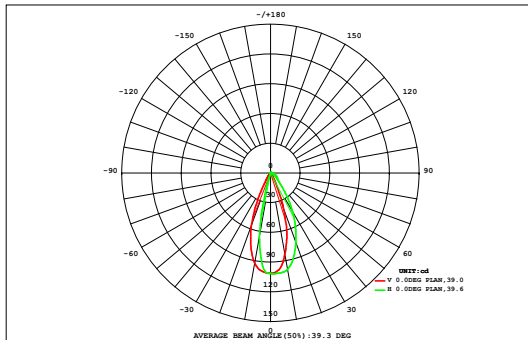

DATA OF LAMP		Eff:5.39lm/W	
MODEL	D9B2-10W-A	Imax (cd)	101.8
NOMINAL POWER (W)	10	AVAILABILITY (%)	85.7
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	44.25
NOMINAL FLUX (lm)	51.662	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	51.66
TEST VOLTAGE (V)	12	θ @50% (H,V)	39,40DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.02	0.03	0.04	0.05	0.06	0.08	0.09	0.10	0.10	0.09	0.08	0.06	0.05	0.04	0.03	0.02	0.01	0.96	0.47
45	0.01	0.02	0.03	0.05	0.07	0.09	0.12	0.15	0.17	0.17	0.14	0.12	0.09	0.06	0.04	0.03	0.02	0.01	1.40	1.05
40	0.02	0.03	0.04	0.06	0.09	0.14	0.18	0.23	0.27	0.26	0.22	0.18	0.13	0.09	0.06	0.04	0.02	0.02	2.08	1.81
35	0.02	0.03	0.05	0.08	0.13	0.20	0.27	0.33	0.38	0.37	0.32	0.25	0.18	0.12	0.08	0.04	0.03	0.02	2.90	2.68
30	0.02	0.03	0.06	0.11	0.18	0.27	0.36	0.44	0.50	0.49	0.42	0.33	0.24	0.16	0.09	0.05	0.03	0.02	3.77	3.59
25	0.02	0.04	0.07	0.13	0.22	0.35	0.46	0.55	0.61	0.60	0.52	0.41	0.29	0.18	0.11	0.06	0.03	0.02	4.67	4.50
20	0.02	0.04	0.08	0.15	0.27	0.42	0.55	0.65	0.71	0.69	0.61	0.49	0.34	0.20	0.11	0.06	0.03	0.01	5.45	5.30
15	0.02	0.04	0.08	0.16	0.31	0.47	0.61	0.71	0.76	0.75	0.67	0.55	0.38	0.22	0.11	0.05	0.02	0.01	5.92	5.77
10	0.01	0.03	0.07	0.16	0.32	0.49	0.64	0.73	0.77	0.76	0.70	0.56	0.39	0.21	0.09	0.04	0.02	0.01	6.00	5.85
5	0.01	0.03	0.06	0.14	0.29	0.45	0.59	0.70	0.75	0.74	0.66	0.51	0.34	0.18	0.07	0.03	0.01	0.00	5.57	5.42
0	0.01	0.02	0.05	0.11	0.22	0.34	0.45	0.56	0.62	0.61	0.53	0.39	0.25	0.13	0.06	0.02	0.01	0.00	4.39	4.23
-5	0.01	0.02	0.04	0.07	0.15	0.23	0.29	0.34	0.35	0.34	0.30	0.23	0.15	0.08	0.04	0.02	0.01	0.00	2.67	2.48
-10	0.01	0.01	0.02	0.05	0.08	0.13	0.16	0.16	0.12	0.11	0.12	0.10	0.07	0.04	0.02	0.01	0.01	0.00	1.24	0.96
-15	0.01	0.01	0.02	0.03	0.04	0.06	0.08	0.06	0.03	0.02	0.04	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.50	0.09
-20	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.22	0.00
-25	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.10	0.00
-30	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.00
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	0.21	0.38	0.71	1.37	2.49	3.75	4.89	5.74	6.14	6.03	5.37	4.26	2.97	1.76	0.94	0.50	0.26	0.14	48	---
Φ a	0.00	0.00	0.28	1.10	2.29	3.60	4.77	5.65	6.08	5.99	5.29	4.14	2.81	1.54	0.63	0.06	0.00	0.00	---	44

one-half-peak spread: U:13.7,D:26.1 , L:19.5,R:16.7


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.18V I:1.088A P:9.584W PF:0.7230 Freq:59.99Hz Lamp Flux:51.662x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

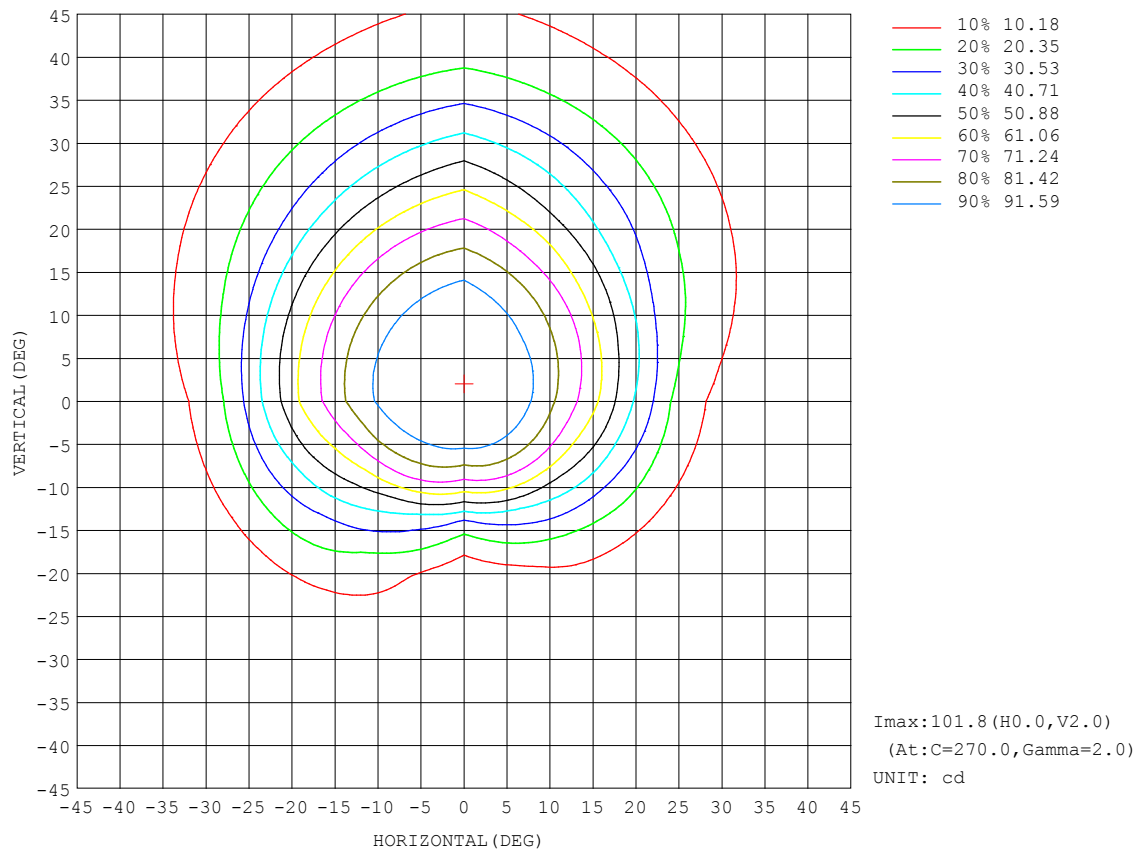


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.18V I:1.088A P:9.584W PF:0.7230 Freq:59.99Hz Lamp Flux:51.662x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

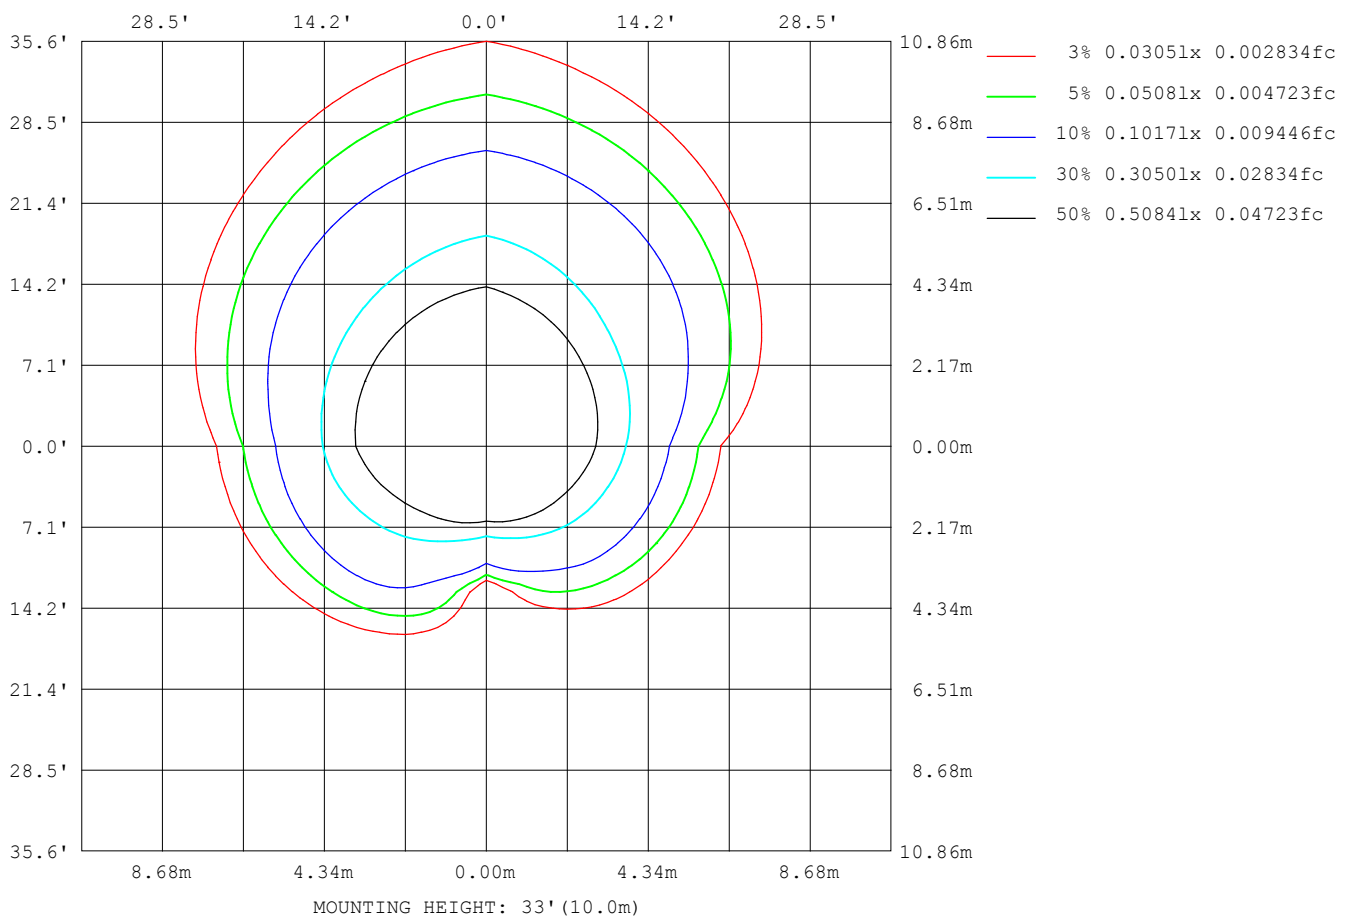

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

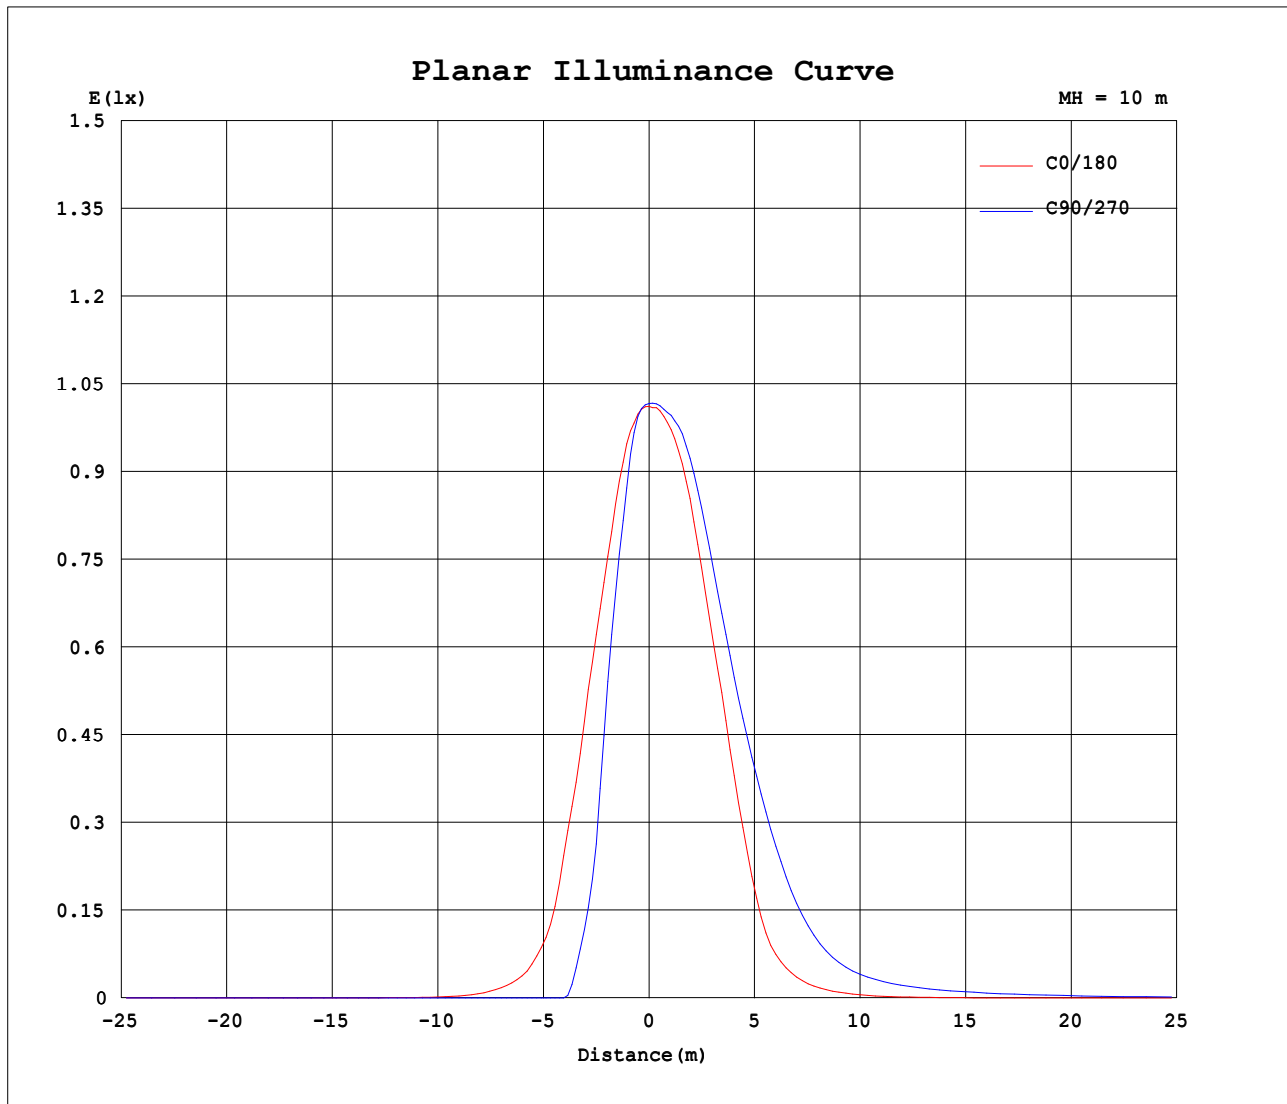


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.18V I:1.088A P:9.584W PF:0.7230 Freq:59.99Hz Lamp Flux:51.662x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

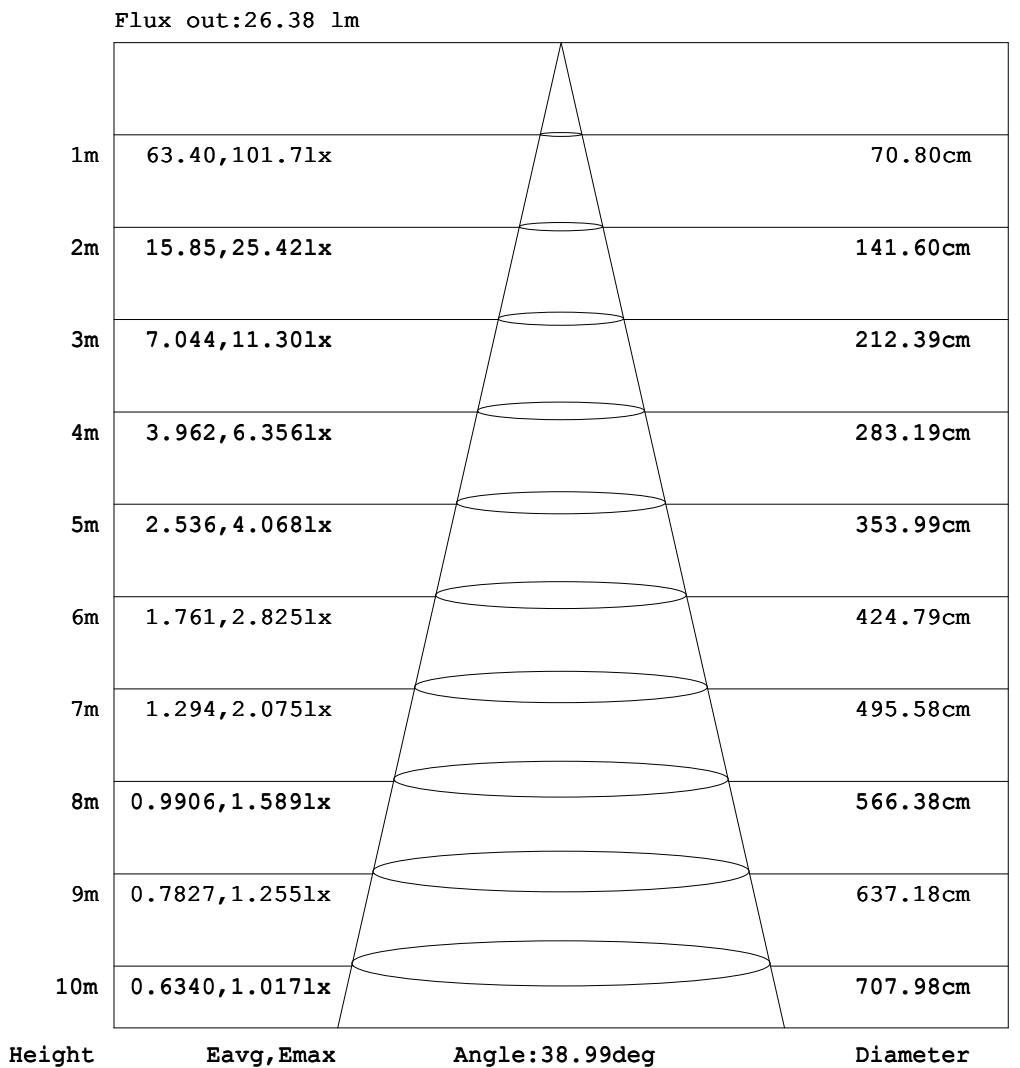

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:1.088A P:9.584W PF:0.7230 Freq:59.99Hz Lamp Flux:51.662x1 lm																		
NAME: LED LANDSCAPE LIGHT									TYPE:Copper Spotlight RGBWW WEIGHT:									
SPEC.:10W BLUE 40°LENS									DIM.:					SERIAL No.:1				
MFR.: EVERFINE									SUR.:					Shielding Angle:DOWNLIGHT SHROUD				

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.10	0.15	0.19	0.22	0.22
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.10	0.18	0.25	0.25	0.27	0.31
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.08	0.13	0.18	0.26	0.33	0.38	0.43
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.10	0.15	0.20	0.25	0.30	0.34
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.09	0.12	0.15	0.17
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.04	0.04	0.03	0.02	0.01	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.07	0.09	0.13	0.14	0.16	0.16	0.14	0.11	0.06	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.11	0.18	0.26	0.37	0.46	0.55	0.61	0.59	0.47	0.26	0.00
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.14	0.26	0.41	0.65	1.01	1.44	1.93	2.42	2.67	2.39	1.45	0.00
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.24	0.47	0.79	1.40	2.36	3.99	6.47	10.5	14.5	14.1	9.89	2.82
-10	0.00	0.00	0.00	0.00	0.00	0.02	0.16	0.36	0.66	1.26	2.41	4.58	9.00	19.4	33.3	45.2	54.4	65.8	65.0
0	0.00	0.00	0.00	0.00	0.00	0.03	0.18	0.44	0.77	1.62	3.18	6.56	13.9	33.5	57.1	76.9	92.5	99.5	101
10	0.00	0.00	0.02	0.05	0.12	0.23	0.49	0.86	1.41	2.45	4.52	8.63	16.4	31.7	52.5	71.2	85.8	95.0	98.8
20	0.00	0.01	0.03	0.09	0.21	0.38	0.75	1.14	1.76	2.72	4.48	7.73	13.5	22.3	34.8	49.4	61.4	70.2	75.0
30	0.00	0.01	0.04	0.12	0.26	0.48	0.86	1.29	1.86	2.62	3.78	5.63	8.56	13.1	19.2	26.3	33.6	39.8	44.3
40	0.00	0.01	0.05	0.12	0.26	0.49	0.81	1.30	1.78	2.38	3.13	4.11	5.35	6.96	9.01	11.4	13.9	16.2	17.9
50	0.00	0.01	0.05	0.11	0.23	0.41	0.69	1.05	1.48	2.05	2.58	3.20	3.85	4.60	5.38	6.20	7.01	7.74	8.36
60	0.00	0.01	0.04	0.09	0.18	0.30	0.48	0.73	1.04	1.42	1.83	2.27	2.77	3.28	3.74	4.18	4.63	5.04	5.41
70	0.00	0.01	0.04	0.07	0.12	0.19	0.28	0.41	0.56	0.74	0.95	1.19	1.45	1.72	2.00	2.27	2.53	2.76	2.96
80	0.00	0.01	0.03	0.05	0.08	0.11	0.15	0.19	0.24	0.30	0.36	0.42	0.50	0.58	0.65	0.73	0.80	0.86	0.92
90	0.00	0.01	0.02	0.03	0.04	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13	0.15	0.16	0.17	0.18	0.19	0.20
100	0.00	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.01	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.08	0.13	0.16	0.14
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.10	0.15	0.19	0.22	0.22

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-08-18

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:1.088A P:9.584W PF:0.7230 Freq:59.99Hz Lamp Flux:51.662x1 lm																	
NAME: LED LANDSCAPE LIGHT									TYPE:Copper Spotlight RGBWW WEIGHT:								
SPEC.:10W BLUE 40°LENS									DIM.:			SERIAL No.:1					
MFR.: EVERFINE									SUR.:			Shielding Angle:DOWNLIGHT SHROUD					

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.28	0.27	0.27	0.21	0.16	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.30	0.31	0.31	0.25	0.21	0.17	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.40	0.36	0.31	0.26	0.21	0.08	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.32	0.28	0.21	0.15	0.10	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.15	0.12	0.09	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.02	0.04	0.05	0.05	0.05	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.11	0.19	0.21	0.21	0.19	0.16	0.13	0.08	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	0.74	1.22	1.33	1.18	0.85	0.55	0.34	0.22	0.15	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-20	7.14	8.83	7.45	5.42	3.29	1.94	0.99	0.48	0.27	0.16	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-10	62.7	48.1	34.6	20.9	9.75	4.59	2.20	0.94	0.43	0.23	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
0	98.1	83.4	63.8	39.5	16.9	7.15	3.21	1.30	0.54	0.28	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10	91.9	79.4	60.6	40.1	22.1	12.0	6.25	3.05	1.62	0.98	0.60	0.34	0.21	0.12	0.05	0.02	0.00	0.00	
20	67.4	56.2	42.3	29.8	19.2	11.5	6.35	3.56	2.20	1.45	0.94	0.61	0.38	0.21	0.09	0.03	0.01	0.00	
30	39.1	32.4	25.0	17.9	12.0	7.67	4.96	3.35	2.35	1.66	1.15	0.78	0.48	0.26	0.12	0.04	0.01	0.00	
40	16.1	13.7	11.0	8.61	6.60	5.05	3.87	2.96	2.24	1.66	1.21	0.81	0.49	0.26	0.12	0.05	0.01	0.00	
50	7.71	6.95	6.11	5.28	4.49	3.75	3.08	2.49	1.97	1.48	1.05	0.69	0.41	0.23	0.11	0.05	0.01	0.00	
60	5.03	4.61	4.15	3.70	3.24	2.74	2.27	1.83	1.42	1.04	0.73	0.48	0.30	0.18	0.09	0.04	0.01	0.00	
70	2.76	2.53	2.27	2.00	1.72	1.45	1.19	0.95	0.74	0.56	0.41	0.28	0.19	0.12	0.07	0.04	0.01	0.00	
80	0.86	0.80	0.73	0.65	0.58	0.50	0.42	0.36	0.30	0.24	0.19	0.15	0.11	0.08	0.05	0.03	0.01	0.00	
90	0.19	0.18	0.17	0.16	0.15	0.13	0.12	0.11	0.10	0.09	0.08	0.07	0.06	0.04	0.03	0.02	0.01	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.02	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.03	0.05	0.07	0.08	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.19	0.19	0.15	0.13	0.13	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.28	0.27	0.27	0.21	0.16	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:ADMIN

Test Date:2023-08-18

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352

Humidity:65.0%

Test Distance:13.563m [K=1.0000]

Remarks: