

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2023.0 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	63.1V x 59.5H
	At 50% of Imax	38.5V x 38.4H
	At 90% of Imax	18.4V x 17.3H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	864.9 lumens per klm.
	To 50% of Imax	571.2 lumens per klm.
	To 90% of Imax	158.3 lumens per klm.
	Upward LOR	1.0 %
	Downward LOR	99.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.18V I:1.085A P:9.545W PF:0.7218 Freq:59.98Hz Lamp Flux:123.571x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W RED 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

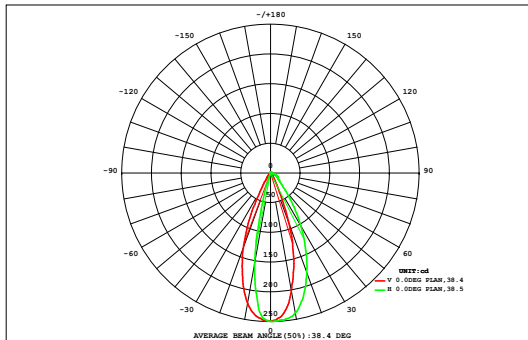

DATA OF LAMP		Eff:12.95lm/W	
MODEL	D9B2-10W-A	Imax (cd)	250.0
NOMINAL POWER (W)	10	AVAILABILITY (%)	84.4
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	104.3
NOMINAL FLUX (lm)	123.571	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	123.6
TEST VOLTAGE (V)	12	θ @50% (H,V)	38,39DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.04	0.05	0.06	0.08	0.11	0.14	0.17	0.21	0.23	0.23	0.20	0.17	0.13	0.10	0.08	0.06	0.05	0.03	2.15	0.83
45	0.04	0.05	0.08	0.11	0.15	0.20	0.27	0.33	0.38	0.38	0.33	0.26	0.20	0.14	0.10	0.07	0.05	0.04	3.17	2.28
40	0.04	0.06	0.09	0.14	0.22	0.31	0.42	0.53	0.61	0.61	0.51	0.41	0.30	0.20	0.13	0.08	0.05	0.04	4.75	4.08
35	0.04	0.07	0.11	0.19	0.31	0.45	0.61	0.77	0.88	0.87	0.74	0.58	0.42	0.28	0.17	0.10	0.06	0.04	6.69	6.15
30	0.05	0.08	0.14	0.25	0.41	0.62	0.86	1.05	1.17	1.15	0.97	0.76	0.54	0.36	0.22	0.12	0.06	0.04	8.84	8.38
25	0.05	0.09	0.17	0.30	0.53	0.83	1.10	1.32	1.46	1.43	1.24	0.97	0.66	0.42	0.25	0.13	0.07	0.04	11.0	10.6
20	0.05	0.09	0.18	0.35	0.66	1.00	1.31	1.55	1.70	1.67	1.47	1.17	0.80	0.47	0.26	0.14	0.07	0.03	13.0	12.6
15	0.04	0.09	0.18	0.38	0.75	1.12	1.46	1.71	1.84	1.82	1.63	1.31	0.91	0.49	0.25	0.12	0.06	0.03	14.2	13.8
10	0.04	0.08	0.16	0.39	0.77	1.16	1.52	1.77	1.88	1.86	1.69	1.34	0.92	0.48	0.21	0.09	0.04	0.02	14.4	14.1
5	0.03	0.06	0.14	0.35	0.70	1.06	1.40	1.68	1.83	1.82	1.60	1.22	0.82	0.40	0.16	0.07	0.03	0.01	13.4	13.0
0	0.03	0.06	0.12	0.26	0.54	0.82	1.08	1.36	1.49	1.47	1.27	0.93	0.60	0.29	0.13	0.06	0.02	0.01	10.5	10.1
-5	0.02	0.04	0.09	0.17	0.37	0.55	0.70	0.81	0.84	0.82	0.73	0.56	0.35	0.17	0.09	0.04	0.02	0.01	6.37	5.90
-10	0.02	0.03	0.06	0.11	0.20	0.32	0.38	0.38	0.30	0.27	0.30	0.24	0.16	0.10	0.05	0.03	0.01	0.01	2.97	2.25
-15	0.01	0.02	0.04	0.06	0.10	0.15	0.19	0.15	0.07	0.04	0.08	0.09	0.07	0.05	0.03	0.02	0.01	0.01	1.20	0.21
-20	0.01	0.02	0.03	0.04	0.05	0.07	0.07	0.06	0.02	0.01	0.03	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.54	0.00
-25	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.02	0.01	0.00	0.01	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.26	0.00
-30	0.01	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.14	0.00
-35	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.00
-40	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	0.53	0.91	1.68	3.23	5.91	8.86	11.6	13.7	14.7	14.5	12.8	10.1	6.94	3.99	2.14	1.15	0.62	0.35	114	---
Φ a	0.00	0.00	0.55	2.55	5.39	8.45	11.3	13.4	14.6	14.3	12.6	9.75	6.53	3.43	1.33	0.08	0.00	0.00	---	104

one-half-peak spread: U:12.6,D:22.1 , L:19.1,R:17.5


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.18V I:1.085A P:9.545W PF:0.7218 Freq:59.98Hz Lamp Flux:123.571x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W RED 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

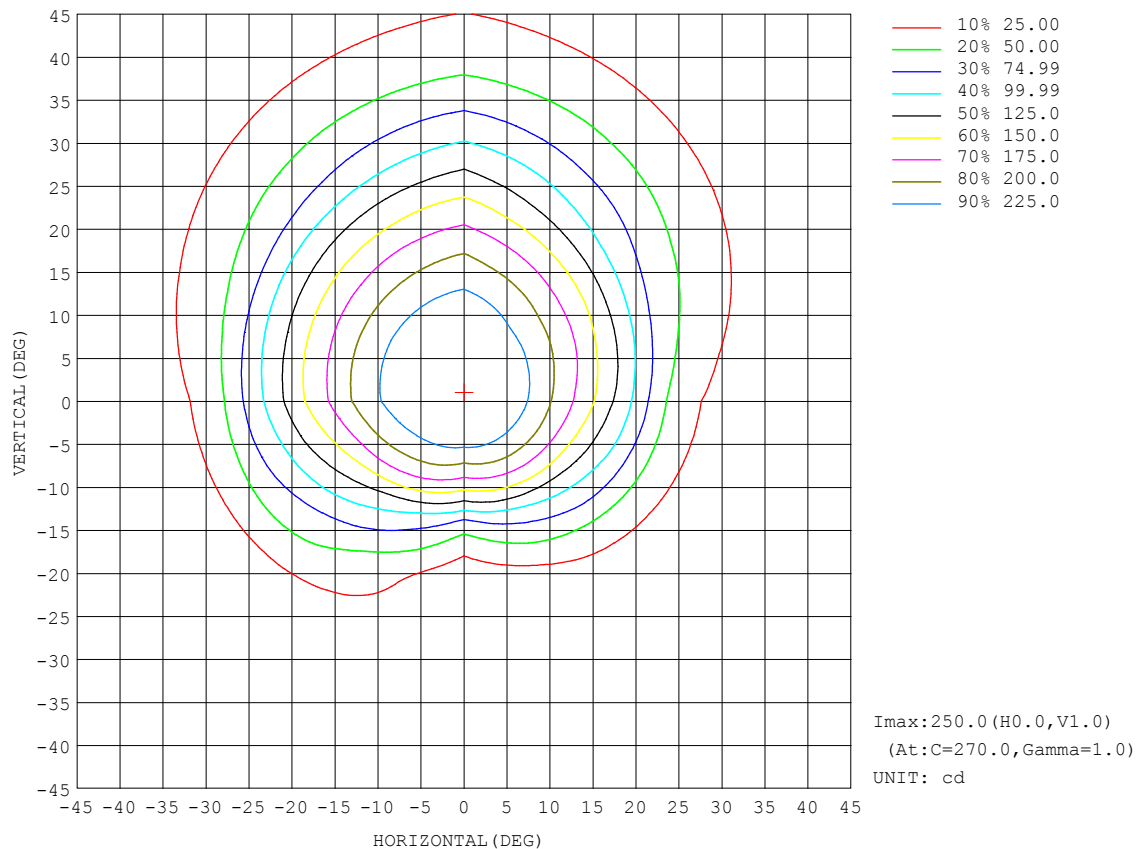


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.18V I:1.085A P:9.545W PF:0.7218 Freq:59.98Hz Lamp Flux:123.571x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W RED 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

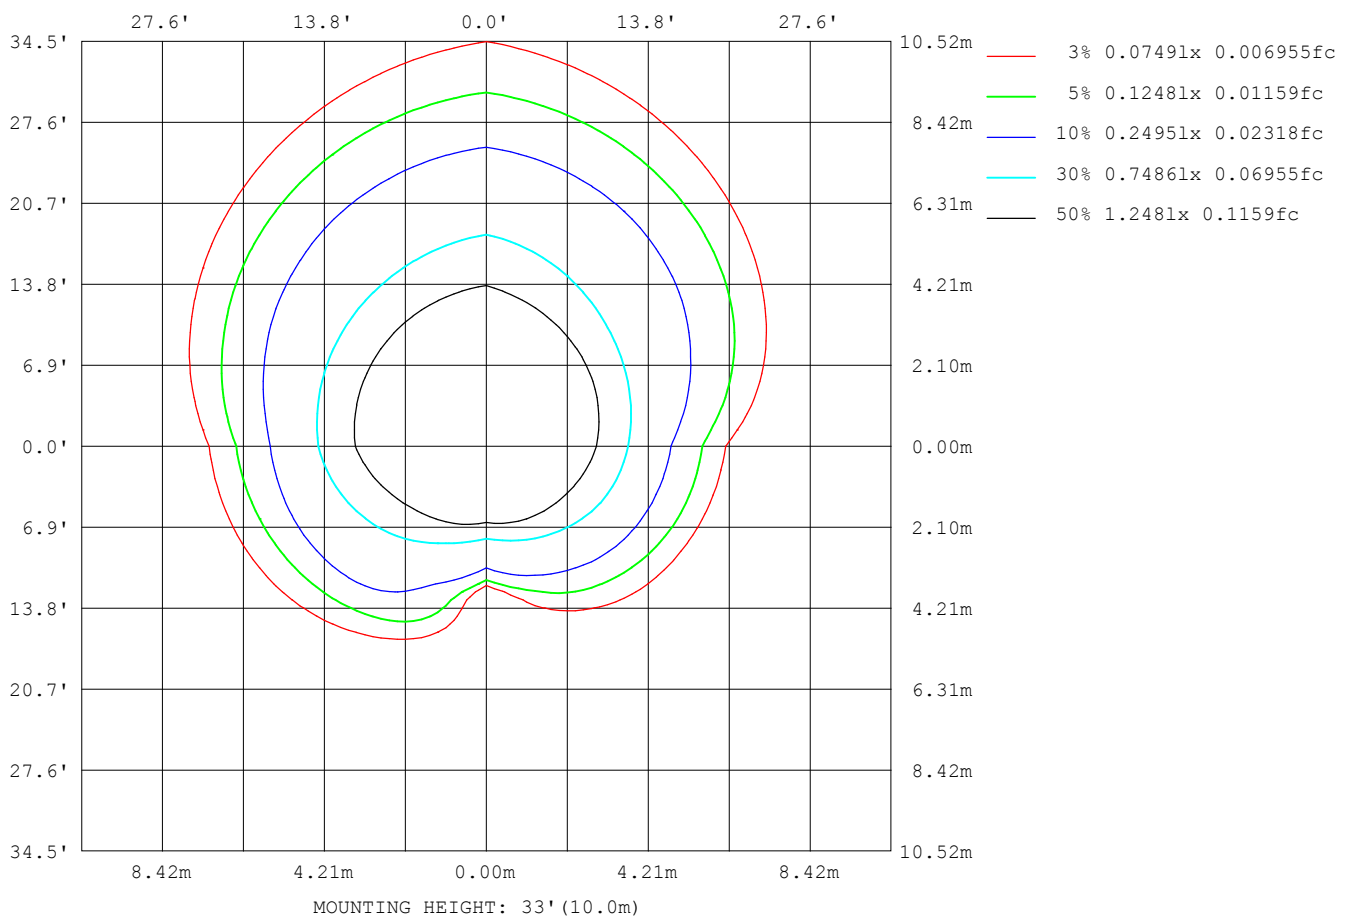

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

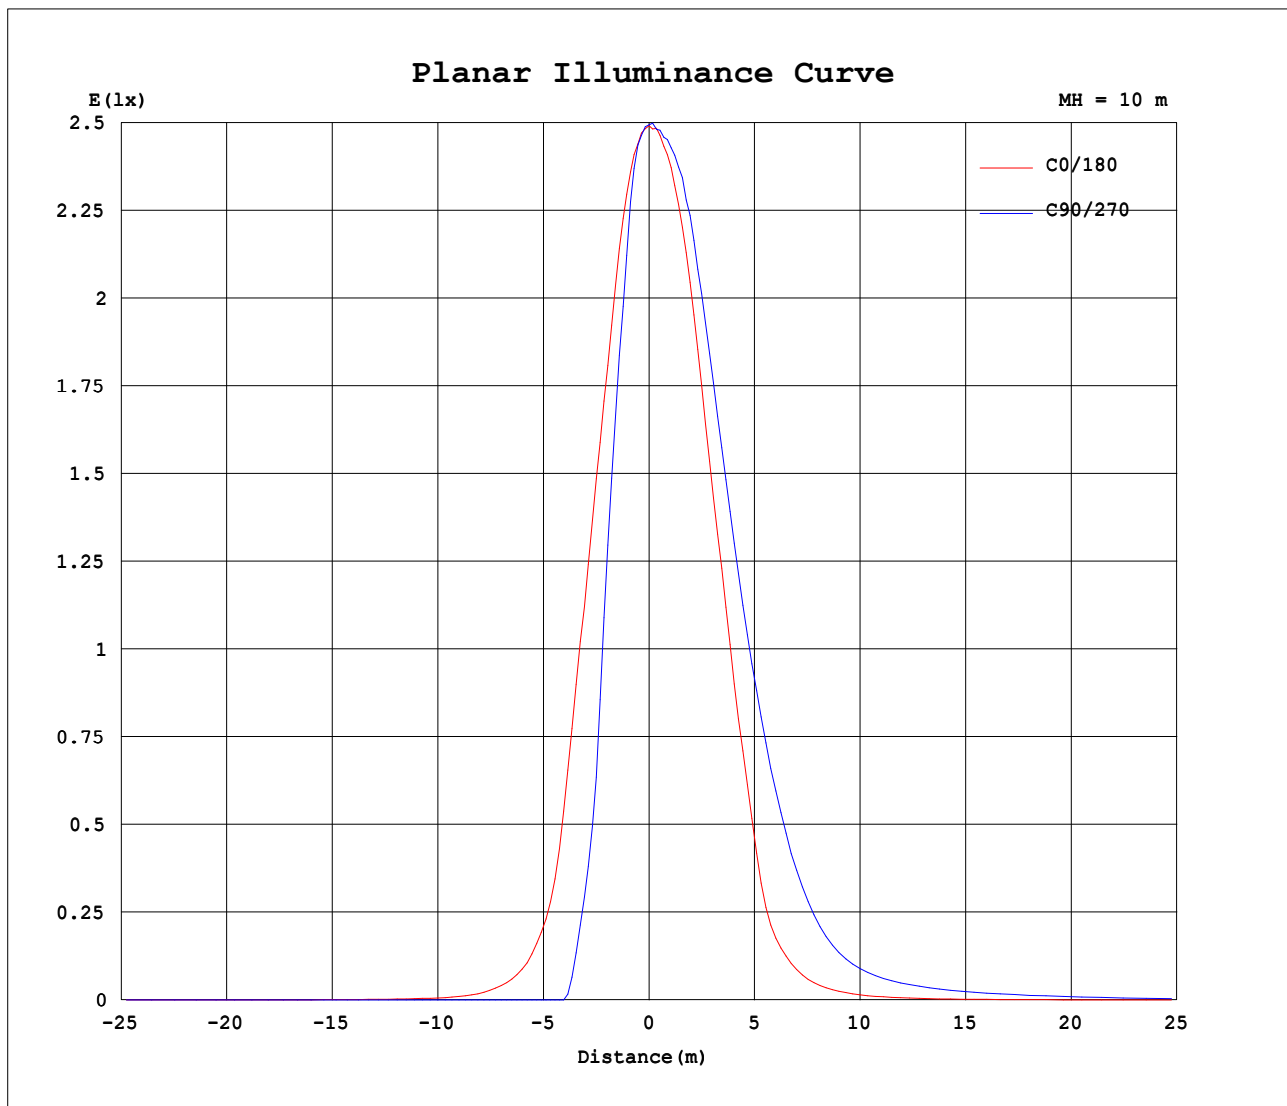


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.18V I:1.085A P:9.545W PF:0.7218 Freq:59.98Hz Lamp Flux:123.571x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W RED 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

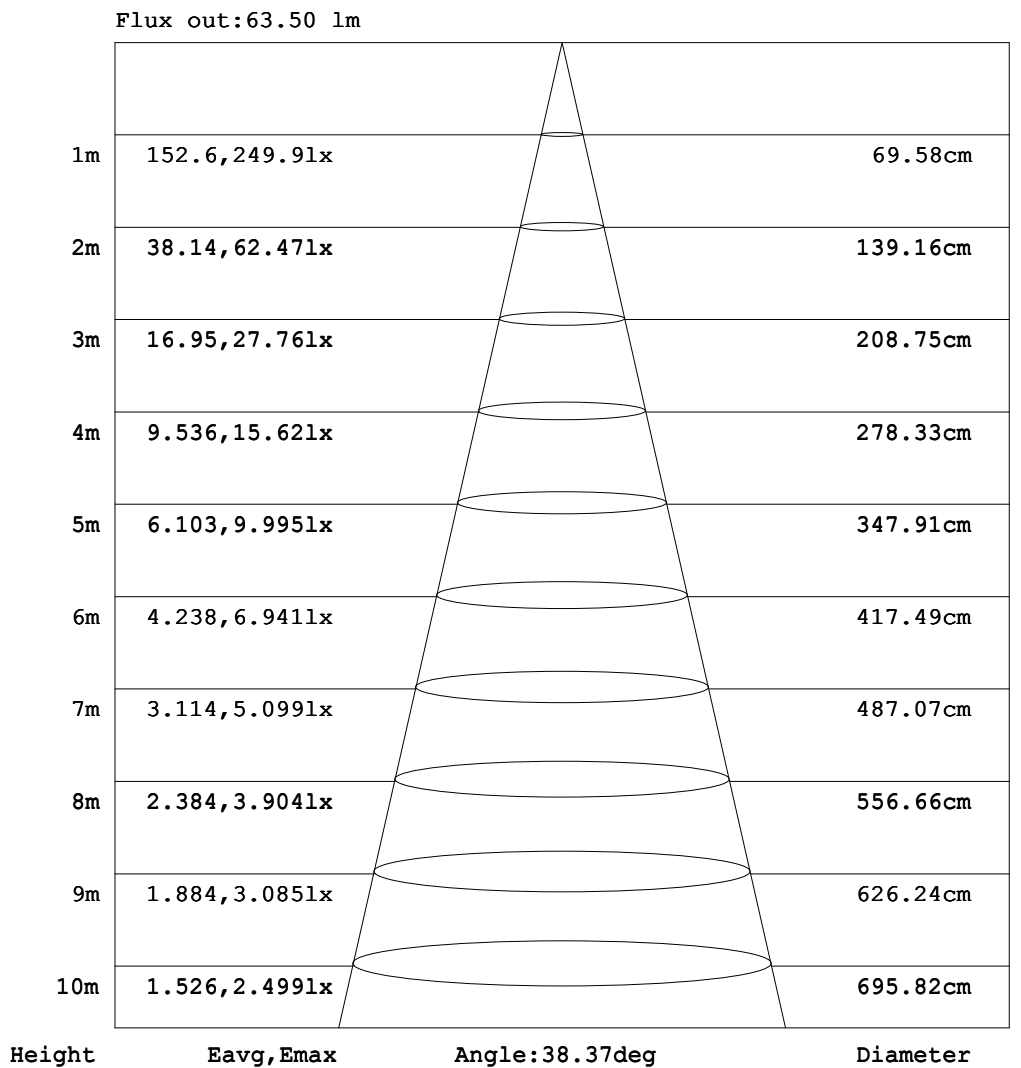

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:1.085A P:9.545W PF:0.7218 Freq:59.98Hz Lamp Flux:123.571x1 lm																		
NAME: LED LANDSCAPE LIGHT									TYPE:Copper Spotlight RGBWW WEIGHT:									
SPEC.:10W RED 40°LENS									DIM.:					SERIAL No.:1				
MFR.: EVERFINE									SUR.:					Shielding Angle:DOWNLIGHT SHROUD				

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.31	0.49	0.63	0.73	0.80	0.89	0.91
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.09	0.21	0.42	0.62	0.79	0.92	0.98	1.04	1.10
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.13	0.21	0.39	0.59	0.79	0.96	1.12	1.24	1.35
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.12	0.20	0.30	0.43	0.60	0.77	0.92	1.05	1.16
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.12	0.19	0.27	0.37	0.46	0.56	0.64	0.71
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.10	0.14	0.19	0.23	0.27	0.30
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.06	0.07	0.07	0.06	0.05	0.04	0.02	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.11	0.16	0.22	0.25	0.26	0.28	0.25	0.23	0.20	0.13	0.07	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.11	0.20	0.31	0.40	0.48	0.56	0.58	0.61	0.60	0.55	0.46	0.34	0.18	0.00
-40	0.00	0.00	0.00	0.00	0.11	0.22	0.40	0.57	0.72	0.86	1.03	1.19	1.37	1.52	1.58	1.49	1.18	0.65	0.00
-30	0.00	0.00	0.00	0.00	0.17	0.38	0.61	0.83	1.10	1.45	1.93	2.65	3.61	4.68	5.83	6.44	5.68	3.43	0.00
-20	0.00	0.00	0.00	0.05	0.25	0.52	0.78	1.13	1.61	2.33	3.64	5.80	9.59	15.4	25.2	35.7	33.4	24.3	7.91
-10	0.00	0.00	0.00	0.11	0.30	0.61	0.98	1.44	2.13	3.45	6.02	11.0	21.4	47.5	79.0	107	130	158	156
0	0.00	0.00	0.00	0.13	0.33	0.68	1.06	1.65	2.51	4.29	7.80	15.8	32.9	82.5	135	182	223	244	249
10	0.00	0.01	0.05	0.23	0.58	1.11	1.76	2.56	3.77	6.04	10.7	20.2	38.4	76.2	125	169	205	229	239
20	0.00	0.03	0.08	0.27	0.74	1.43	2.21	3.16	4.50	6.59	10.4	17.8	31.4	51.8	81.5	117	146	167	179
30	0.00	0.04	0.11	0.29	0.78	1.54	2.45	3.48	4.70	6.37	8.83	12.8	19.5	29.8	44.1	60.7	77.3	91.5	102
40	0.00	0.04	0.13	0.31	0.75	1.41	2.33	3.41	4.57	5.83	7.44	9.45	12.1	15.6	20.1	25.5	31.2	36.5	40.2
50	0.00	0.05	0.14	0.29	0.57	1.11	1.87	2.83	3.88	5.07	6.31	7.57	8.98	10.5	12.2	13.9	15.6	17.1	18.5
60	0.00	0.05	0.13	0.25	0.46	0.76	1.24	1.86	2.68	3.64	4.60	5.62	6.73	7.80	8.84	9.86	10.8	11.7	12.4
70	0.00	0.05	0.12	0.22	0.34	0.51	0.74	1.05	1.40	1.84	2.38	2.93	3.56	4.23	4.88	5.51	6.11	6.64	7.09
80	0.00	0.05	0.11	0.18	0.26	0.35	0.46	0.57	0.70	0.83	0.99	1.15	1.33	1.52	1.71	1.90	2.08	2.24	2.39
90	0.00	0.05	0.09	0.14	0.19	0.24	0.28	0.33	0.38	0.43	0.47	0.52	0.57	0.62	0.66	0.71	0.76	0.81	0.85
100	0.00	0.04	0.08	0.12	0.15	0.17	0.19	0.21	0.22	0.24	0.25	0.26	0.27	0.27	0.28	0.30	0.31	0.33	0.34
110	0.00	0.04	0.07	0.09	0.10	0.11	0.11	0.11	0.10	0.09	0.06	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.03	0.06	0.07	0.07	0.06	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.03	0.04	0.05	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.02	0.03	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.06	0.06	0.03	0.00
160	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.15	0.20	0.29	0.37	0.35
170	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.21	0.34	0.49	0.59	0.67	0.68	0.69
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.31	0.49	0.63	0.73	0.80	0.89	0.91

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-08-18

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:1.085A P:9.545W PF:0.7218 Freq:59.98Hz Lamp Flux:123.571x1 lm																		
NAME: LED LANDSCAPE LIGHT									TYPE:Copper Spotlight RGBWW WEIGHT:									
SPEC.:10W RED 40°LENS									DIM.:					SERIAL No.:1				
MFR.: EVERFINE									SUR.:					Shielding Angle:DOWNLIGHT SHROUD				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.96	0.96	0.96	0.91	0.80	0.65	0.45	0.26	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	1.09	1.09	1.08	1.02	0.88	0.70	0.50	0.29	0.09	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	1.29	1.21	1.10	0.98	0.80	0.60	0.40	0.24	0.08	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	1.09	0.99	0.89	0.73	0.57	0.41	0.28	0.12	0.07	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.66	0.60	0.50	0.41	0.28	0.19	0.12	0.07	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.27	0.23	0.19	0.14	0.10	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.03	0.05	0.07	0.09	0.08	0.08	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.08	0.15	0.22	0.26	0.28	0.28	0.26	0.22	0.16	0.09	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.28	0.48	0.60	0.63	0.63	0.60	0.55	0.48	0.39	0.28	0.16	0.05	0.00	0.00	0.00	0.00	0.00	0.00	
-30	1.71	2.80	3.09	2.77	2.09	1.47	1.07	0.84	0.67	0.51	0.34	0.17	0.02	0.00	0.00	0.00	0.00	0.00	
-20	17.4	19.5	16.5	12.3	7.60	4.56	2.49	1.44	1.02	0.74	0.51	0.29	0.09	0.00	0.00	0.00	0.00	0.00	
-10	150	115	84.7	46.1	21.8	10.6	5.22	2.47	1.42	0.97	0.67	0.38	0.14	0.00	0.00	0.00	0.00	0.00	
0	239	201	152	93.2	37.7	16.4	7.49	3.32	1.74	1.13	0.78	0.44	0.17	0.00	0.00	0.00	0.00	0.00	
10	222	190	146	91.8	50.4	27.6	14.5	7.18	4.02	2.62	1.79	1.16	0.64	0.28	0.12	0.05	0.01	0.00	
20	160	132	98.1	68.6	44.0	26.3	14.5	8.24	5.27	3.63	2.54	1.73	0.99	0.50	0.22	0.08	0.03	0.00	
30	89.8	74.4	57.3	41.1	27.2	17.3	11.2	7.74	5.60	4.10	2.98	2.01	1.18	0.62	0.29	0.11	0.04	0.00	
40	36.1	30.5	24.6	19.2	14.7	11.4	8.81	6.89	5.36	4.13	3.00	1.97	1.18	0.63	0.31	0.13	0.04	0.00	
50	17.0	15.4	13.7	11.9	10.2	8.65	7.25	5.97	4.76	3.58	2.54	1.67	1.00	0.57	0.29	0.14	0.05	0.00	
60	11.6	10.7	9.73	8.69	7.63	6.53	5.42	4.38	3.42	2.52	1.76	1.18	0.76	0.46	0.25	0.13	0.05	0.00	
70	6.62	6.07	5.46	4.82	4.16	3.49	2.87	2.31	1.82	1.40	1.05	0.74	0.51	0.34	0.22	0.12	0.05	0.00	
80	2.24	2.08	1.90	1.71	1.52	1.33	1.15	0.99	0.83	0.70	0.57	0.46	0.35	0.26	0.18	0.11	0.05	0.00	
90	0.81	0.76	0.71	0.66	0.62	0.57	0.52	0.47	0.43	0.38	0.33	0.28	0.24	0.19	0.14	0.09	0.05	0.00	
100	0.33	0.31	0.30	0.28	0.27	0.27	0.26	0.25	0.24	0.22	0.21	0.19	0.17	0.15	0.12	0.08	0.04	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.09	0.10	0.11	0.11	0.11	0.10	0.09	0.07	0.04	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.06	0.07	0.07	0.06	0.03	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.05	0.04	0.03	0.00	
140	0.02	0.04	0.04	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.03	0.02	0.00	
150	0.07	0.13	0.18	0.18	0.15	0.12	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.02	0.00	
160	0.42	0.46	0.43	0.39	0.36	0.29	0.19	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	
170	0.73	0.78	0.75	0.72	0.61	0.49	0.36	0.21	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	
180	0.96	0.96	0.96	0.91	0.80	0.65	0.45	0.26	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-08-18

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks: