

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	810.8 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	107.2V x 115.3H
	At 50% of Imax	51.9V x 72.8H
	At 90% of Imax	21.4V x 32.2H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	923.2 lumens per klm.
	To 50% of Imax	560.6 lumens per klm.
	To 90% of Imax	141.7 lumens per klm.

Upward LOR	1.2 %
Downward LOR	98.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.26V I:0.9000A P:10.03W PF:0.9089 Freq:59.98Hz Lamp Flux:577.52x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:10W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

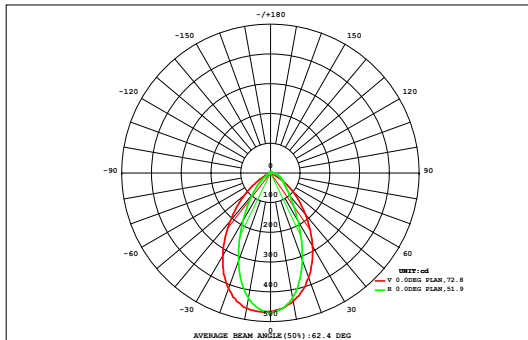

DATA OF LAMP		Eff:57.60lm/W	
MODEL	F6B1-10W-30K-A	Imax (cd)	468.3
NOMINAL POWER (W)	10	AVAILABILITY (%)	92.4
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	533.7
NOMINAL FLUX (lm)	577.52	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	577.5
TEST VOLTAGE (V)	12	θ @50% (H,V)	73,52DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.01	0.03	0.05	0.08	0.12	0.16	0.19	0.19	0.16	0.12	0.08	0.05	0.03	0.01	0.00	0.00	1.29	0.00
90	0.00	0.00	0.01	0.03	0.05	0.08	0.12	0.16	0.19	0.19	0.16	0.12	0.08	0.05	0.03	0.01	0.00	0.00	4.03	0.00
80	0.00	0.01	0.03	0.08	0.16	0.26	0.38	0.50	0.60	0.60	0.50	0.38	0.26	0.16	0.08	0.03	0.01	0.00	7.05	0.00
70	0.00	0.01	0.05	0.13	0.27	0.46	0.69	0.90	1.04	1.04	0.88	0.67	0.45	0.26	0.13	0.05	0.01	0.00	11.8	6.08
60	0.00	0.02	0.07	0.19	0.46	0.86	1.26	1.54	1.62	1.60	1.49	1.20	0.81	0.43	0.18	0.07	0.02	0.00	20.1	17.8
50	0.00	0.02	0.08	0.32	0.86	1.60	2.25	2.61	2.58	2.54	2.49	2.11	1.47	0.78	0.29	0.08	0.02	0.00	33.6	32.2
40	0.00	0.02	0.11	0.54	1.46	2.63	3.71	4.42	4.47	4.37	4.17	3.42	2.39	1.32	0.47	0.10	0.02	0.00	53.6	52.6
30	0.00	0.02	0.15	0.81	2.16	3.90	5.73	7.21	7.73	7.57	6.80	5.23	3.49	1.93	0.71	0.13	0.02	0.00	75.5	74.6
20	0.00	0.01	0.19	1.07	2.83	5.24	7.95	10.3	11.4	11.2	9.71	7.22	4.64	2.50	0.94	0.16	0.01	0.00	90.4	89.7
10	0.00	0.01	0.21	1.25	3.34	6.31	9.67	12.4	13.7	13.4	11.6	8.69	5.54	2.91	1.09	0.17	0.01	0.00	90.3	89.6
0	0.00	0.01	0.20	1.23	3.32	6.31	9.68	12.4	13.7	13.5	11.6	8.70	5.53	2.90	1.07	0.16	0.01	0.00	75.3	74.6
-10	0.00	0.01	0.16	1.02	2.78	5.22	7.96	10.3	11.5	11.3	9.75	7.23	4.62	2.45	0.88	0.13	0.01	0.00	53.1	52.1
-20	0.00	0.00	0.10	0.71	2.05	3.83	5.72	7.24	7.79	7.63	6.83	5.21	3.42	1.82	0.61	0.08	0.00	0.00	31.9	30.6
-30	0.00	0.00	0.05	0.39	1.27	2.45	3.58	4.35	4.42	4.32	4.10	3.29	2.21	1.13	0.33	0.03	0.00	0.00	16.2	13.7
-40	0.00	0.00	0.02	0.15	0.58	1.26	1.90	2.26	2.22	2.18	2.14	1.75	1.13	0.51	0.12	0.01	0.00	0.00	5.73	0.14
-50	0.00	0.00	0.01	0.03	0.16	0.40	0.68	0.86	0.84	0.82	0.80	0.62	0.35	0.13	0.02	0.01	0.00	0.00	0.77	0.00
-60	0.00	0.00	0.00	0.01	0.02	0.05	0.09	0.12	0.12	0.11	0.11	0.08	0.04	0.01	0.01	0.00	0.00	0.00	0.04	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.01	0.14	1.45	7.97	21.8	40.9	61.4	77.6	84.0	82.4	73.1	55.9	36.4	19.3	6.96	1.22	0.13	0.01	571	---
Φ a	0.00	0.00	0.00	4.82	19.3	38.3	58.7	74.8	81.0	79.3	70.2	53.2	33.8	16.7	3.61	0.00	0.00	0.00	---	534

one-half-peak spread: U:25.2,D:27.1 , L:30.1,R:35.1


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.26V I:0.9000A P:10.03W PF:0.9089 Freq:59.98Hz Lamp Flux:577.52x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:10W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

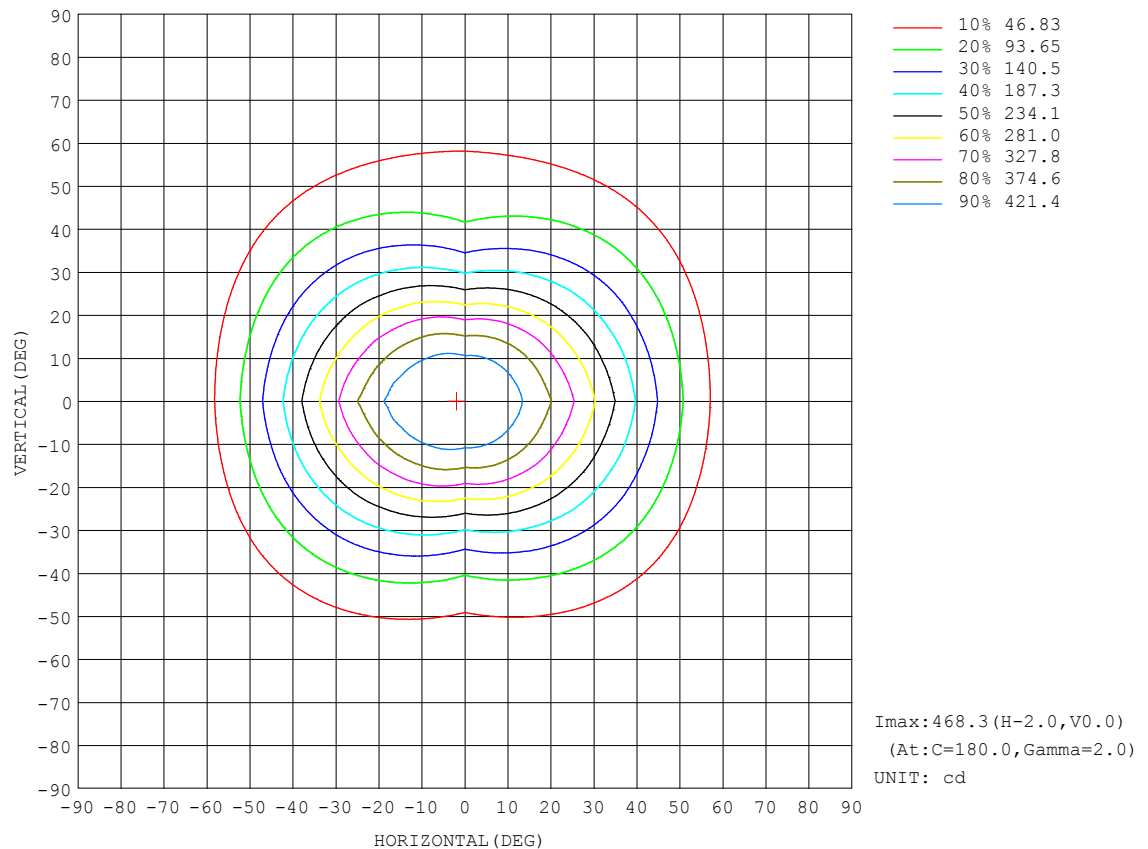


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.26V I:0.9000A P:10.03W PF:0.9089 Freq:59.98Hz Lamp Flux:577.52x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:10W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

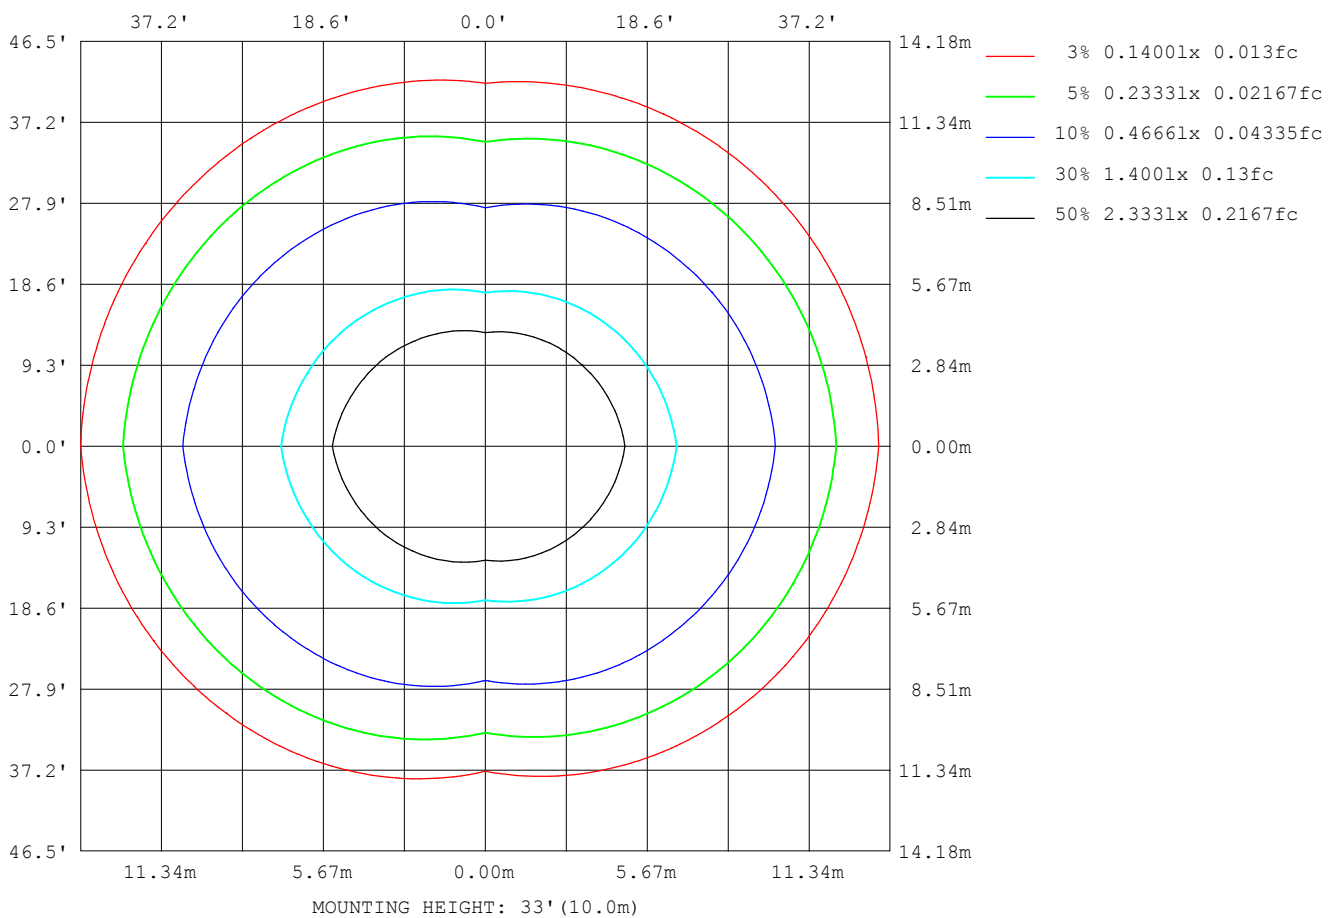

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

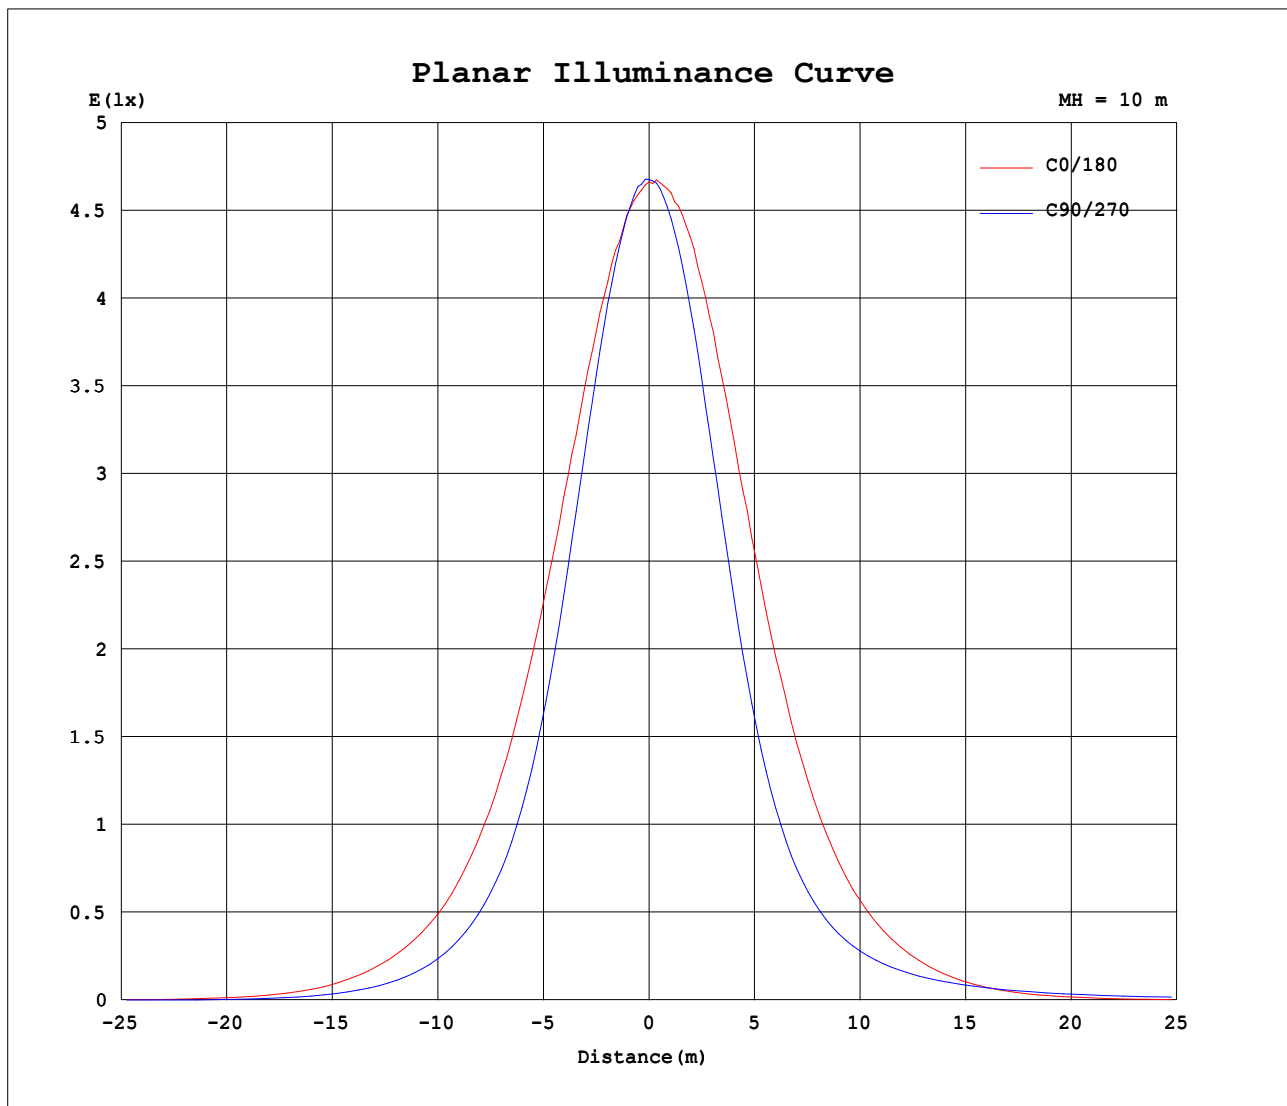


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.26V I:0.9000A P:10.03W PF:0.9089 Freq:59.98Hz Lamp Flux:577.52x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:10W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

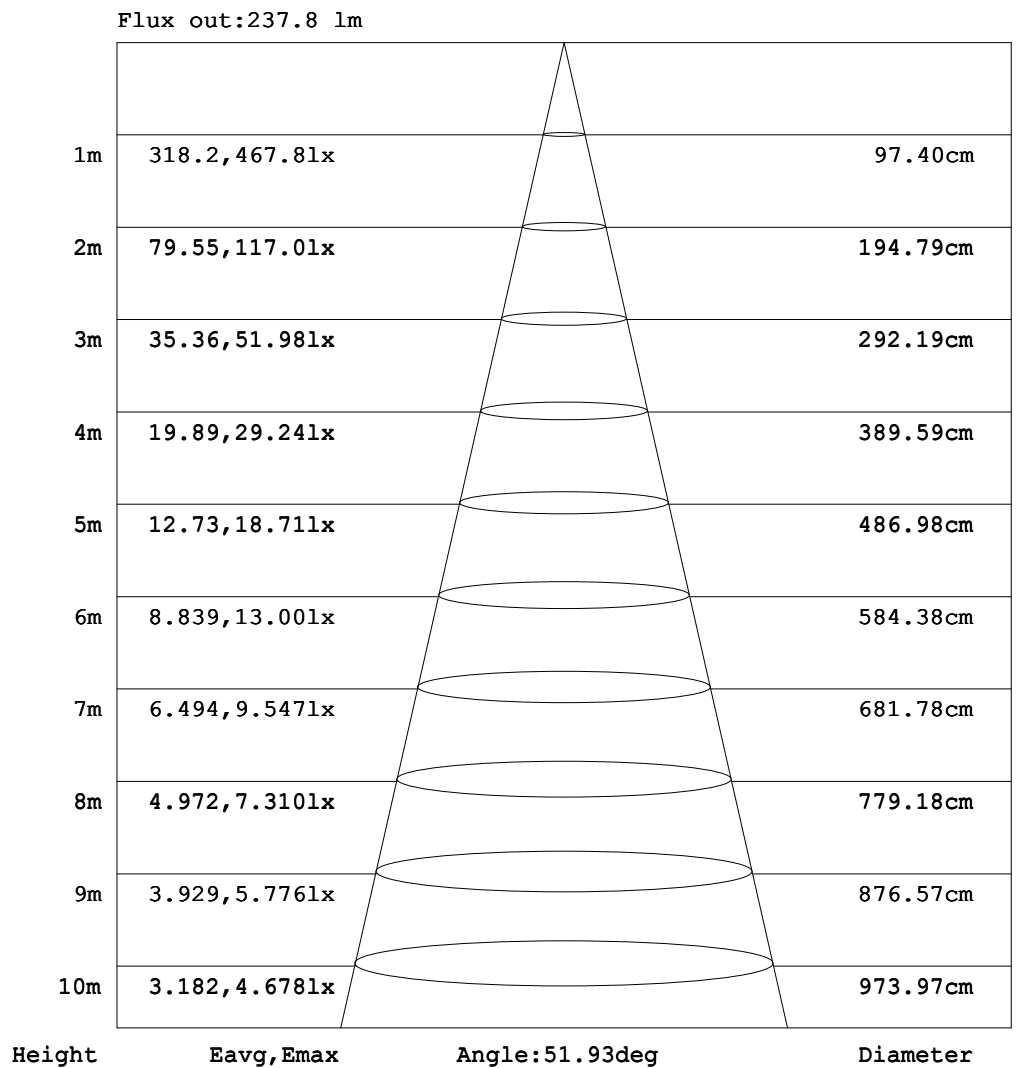

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.26V I:0.9000A P:10.03W PF:0.9089 Freq:59.98Hz Lamp Flux:577.52x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:10W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.04	0.21	0.45	0.75	1.06	1.40	1.75	2.11	2.50	2.85	3.22	3.59	3.87	4.15	4.37
-170	0.00	0.00	0.00	0.01	0.04	0.21	0.43	0.72	1.02	1.36	1.71	2.10	2.48	2.86	3.25	3.58	3.89	4.09	4.25
-160	0.00	0.00	0.00	0.01	0.02	0.17	0.38	0.63	0.90	1.21	1.53	1.87	2.23	2.59	2.92	3.24	3.52	3.72	3.86
-150	0.00	0.00	0.00	0.01	0.02	0.11	0.28	0.48	0.71	0.96	1.23	1.50	1.79	2.08	2.35	2.59	2.81	2.97	3.06
-140	0.00	0.00	0.00	0.01	0.03	0.05	0.17	0.31	0.49	0.67	0.87	1.06	1.27	1.46	1.64	1.81	1.93	2.03	2.09
-130	0.00	0.00	0.00	0.01	0.02	0.04	0.07	0.16	0.27	0.40	0.52	0.64	0.77	0.89	0.99	1.09	1.16	1.22	1.24
-120	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.07	0.10	0.17	0.24	0.31	0.38	0.45	0.51	0.56	0.60	0.63	0.65
-110	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.07	0.10	0.12	0.14	0.16	0.19	0.22	0.25	0.27	0.29
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.03	0.03	0.04	0.05	0.06	0.07	0.07	0.08
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.05	0.05	0.05	0.04	0.03	0.01	0.00
-70	0.00	0.00	0.00	0.00	0.02	0.10	0.17	0.22	0.27	0.30	0.33	0.35	0.38	0.40	0.41	0.37	0.29	0.16	0.00
-60	0.00	0.00	0.00	0.06	0.20	0.33	0.45	0.62	1.03	2.05	3.72	5.73	7.89	9.81	11.3	12.3	12.5	11.9	10.6
-50	0.00	0.00	0.01	0.20	0.39	0.61	1.27	3.64	8.22	14.4	22.0	30.0	37.9	44.1	48.1	50.0	49.7	47.3	43.0
-40	0.00	0.00	0.08	0.33	0.61	1.46	5.52	13.8	25.6	41.1	57.7	72.8	86.2	96.7	105	109	109	105	96.6
-30	0.00	0.00	0.15	0.44	0.96	4.19	13.8	29.3	51.8	76.5	101	125	147	167	183	194	199	197	186
-20	0.00	0.00	0.20	0.56	1.59	8.29	23.2	47.6	79.0	112	146	182	217	250	279	303	319	324	316
-10	0.00	0.00	0.24	0.64	2.35	12.0	31.5	63.2	101	142	187	233	281	325	365	396	419	431	427
0	0.00	0.00	0.26	0.69	2.73	13.8	35.7	71.4	114	160	212	267	321	374	414	445	462	468	466
10	0.00	0.06	0.51	1.26	3.48	13.7	33.7	65.4	103	143	187	234	280	325	364	395	418	429	426
20	0.00	0.12	0.70	1.71	3.68	11.6	27.4	52.2	83.4	116	149	183	217	249	278	302	317	322	313
30	0.00	0.16	0.82	1.98	3.75	8.61	19.8	36.4	59.1	83.5	107	130	150	169	184	194	198	195	184
40	0.00	0.18	0.83	2.06	3.73	6.43	12.7	22.9	36.1	52.2	68.8	83.4	95.7	105	112	115	114	110	102
50	0.00	0.18	0.75	1.90	3.46	5.46	8.31	13.2	20.3	28.6	37.7	46.7	55.1	61.6	65.9	68.1	68.2	66.5	63.4
60	0.00	0.15	0.65	1.53	2.85	4.49	6.45	8.78	11.7	15.4	19.8	24.5	29.1	33.2	36.7	39.5	41.6	42.9	43.7
70	0.00	0.11	0.47	1.07	1.93	3.10	4.48	6.06	7.81	9.74	11.8	13.9	16.2	18.5	20.7	22.9	25.0	26.8	28.4
80	0.00	0.05	0.23	0.55	0.98	1.53	2.20	2.96	3.82	4.77	5.80	6.86	7.94	9.03	10.1	11.1	12.1	13.0	13.9
90	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13	0.14	0.15	0.16	0.17	0.18
100	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.05	0.08	0.09	0.10	0.09	0.08	0.07	0.06	0.04
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.12	0.18	0.23	0.33	0.42	0.47	0.51	0.55	0.58	0.59	0.57
140	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.18	0.30	0.45	0.59	0.74	0.89	1.01	1.13	1.22	1.28	1.32	1.31
150	0.00	0.00	0.00	0.00	0.00	0.07	0.19	0.35	0.56	0.76	0.99	1.22	1.43	1.65	1.85	2.03	2.14	2.23	2.25
160	0.00	0.00	0.00	0.00	0.00	0.13	0.31	0.53	0.78	1.06	1.34	1.64	1.95	2.24	2.52	2.79	2.99	3.11	3.16
170	0.00	0.00	0.00	0.00	0.03	0.19	0.40	0.67	0.96	1.27	1.61	1.97	2.32	2.67	3.04	3.36	3.61	3.79	3.84
180	0.00	0.00	0.00	0.00	0.04	0.21	0.45	0.75	1.06	1.40	1.75	2.11	2.50	2.85	3.22	3.59	3.87	4.15	4.40

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-02-18

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.26V I:0.9000A P:10.03W PF:0.9089 Freq:59.98Hz Lamp Flux:577.52x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:10W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.28	4.17	4.09	3.85	3.65	3.34	2.99	2.62	2.26	1.78	1.38	0.99	0.64	0.33	0.14	0.00	0.00	0.00	
-170	4.20	4.13	3.96	3.75	3.47	3.16	2.83	2.49	2.09	1.68	1.31	0.94	0.61	0.33	0.14	0.00	0.00	0.00	
-160	3.82	3.73	3.57	3.34	3.09	2.80	2.50	2.16	1.82	1.47	1.13	0.84	0.52	0.30	0.11	0.00	0.00	0.00	
-150	3.06	2.99	2.86	2.70	2.50	2.26	2.02	1.74	1.47	1.19	0.91	0.66	0.43	0.21	0.04	0.00	0.00	0.00	
-140	2.11	2.09	2.02	1.91	1.79	1.63	1.45	1.27	1.05	0.85	0.66	0.46	0.30	0.15	0.01	0.00	0.00	0.00	
-130	1.27	1.27	1.24	1.18	1.12	1.03	0.92	0.80	0.66	0.54	0.42	0.29	0.17	0.05	0.01	0.00	0.00	0.00	
-120	0.67	0.67	0.66	0.64	0.59	0.55	0.49	0.42	0.36	0.28	0.19	0.14	0.04	0.01	0.00	0.00	0.00	0.00	
-110	0.29	0.28	0.28	0.26	0.25	0.21	0.19	0.17	0.13	0.07	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	
-100	0.07	0.07	0.06	0.05	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.01	0.02	0.03	0.04	0.04	0.05	0.05	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.11	0.20	0.27	0.30	0.31	0.31	0.29	0.28	0.26	0.23	0.20	0.14	0.09	0.02	0.00	0.00	0.00	0.00	
-60	11.6	11.8	11.4	10.2	8.53	6.54	4.52	2.72	1.41	0.77	0.51	0.38	0.28	0.17	0.06	0.00	0.00	0.00	
-50	46.3	47.8	47.4	45.0	40.6	34.2	26.6	19.1	12.1	6.35	2.52	0.94	0.51	0.34	0.17	0.01	0.00	0.00	
-40	102	104	103	97.1	89.0	78.7	66.0	51.7	35.7	21.9	11.0	3.94	1.08	0.51	0.29	0.08	0.00	0.00	
-30	192	191	182	169	153	133	112	90.6	68.3	45.0	24.9	10.8	2.88	0.78	0.39	0.13	0.00	0.00	
-20	318	307	285	258	227	194	162	129	99.3	69.9	40.7	19.3	6.09	1.18	0.48	0.17	0.00	0.00	
-10	422	403	373	336	293	250	205	164	124	89.0	54.6	26.5	9.09	1.66	0.54	0.21	0.00	0.00	
0	457	439	411	375	331	283	233	184	139	99.7	61.9	29.8	10.5	1.90	0.57	0.22	0.00	0.00	
10	421	402	372	336	293	250	205	164	126	91.0	56.8	28.6	10.8	2.78	1.16	0.47	0.06	0.00	
20	316	305	284	257	227	195	163	132	103	74.3	45.3	23.5	9.36	3.27	1.63	0.67	0.12	0.00	
30	191	190	182	170	154	136	116	96.6	75.4	52.3	32.0	16.9	7.29	3.57	1.93	0.80	0.16	0.00	
40	108	110	109	104	97.4	88.2	76.5	62.7	46.8	32.4	20.2	11.1	6.04	3.63	2.02	0.83	0.18	0.00	
50	65.5	66.3	65.5	62.8	58.1	51.3	43.3	34.8	26.2	18.5	12.1	7.98	5.37	3.41	1.87	0.76	0.18	0.00	
60	42.5	40.9	38.6	35.5	31.9	27.7	23.3	18.8	14.7	11.4	8.67	6.38	4.44	2.82	1.53	0.65	0.15	0.00	
70	26.8	24.9	22.8	20.6	18.4	16.1	13.9	11.7	9.70	7.78	6.04	4.46	3.09	1.94	1.07	0.47	0.11	0.00	
80	13.0	12.1	11.1	10.1	9.02	7.94	6.86	5.79	4.77	3.83	2.96	2.20	1.53	0.98	0.55	0.23	0.05	0.00	
90	0.17	0.16	0.15	0.14	0.13	0.12	0.11	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	
110	0.02	0.04	0.06	0.07	0.08	0.07	0.07	0.07	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	
120	0.10	0.14	0.18	0.22	0.24	0.26	0.26	0.24	0.22	0.18	0.12	0.09	0.01	0.00	0.00	0.00	0.00	0.00	
130	0.64	0.68	0.71	0.71	0.70	0.68	0.60	0.52	0.45	0.39	0.31	0.22	0.13	0.02	0.00	0.00	0.00	0.00	
140	1.40	1.44	1.43	1.40	1.34	1.25	1.12	0.99	0.83	0.66	0.53	0.37	0.25	0.13	0.00	0.00	0.00	0.00	
150	2.32	2.32	2.29	2.20	2.08	1.91	1.73	1.50	1.27	1.04	0.78	0.57	0.38	0.19	0.03	0.00	0.00	0.00	
160	3.22	3.20	3.12	2.95	2.75	2.52	2.27	1.97	1.67	1.35	1.04	0.77	0.48	0.28	0.10	0.00	0.00	0.00	
170	3.90	3.86	3.73	3.54	3.28	3.00	2.70	2.39	2.01	1.62	1.26	0.90	0.59	0.32	0.13	0.00	0.00	0.00	
180	4.28	4.17	4.09	3.85	3.65	3.34	2.99	2.62	2.26	1.78	1.38	0.99	0.64	0.33	0.14	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: