

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	775.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	108.3V x 116.6H
	At 50% of Imax	53.0V x 76.4H
	At 90% of Imax	21.9V x 36.1H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	931.5 lumens per klm.
	To 50% of Imax	584.7 lumens per klm.
	To 90% of Imax	158.0 lumens per klm.

Upward LOR	1.0 %
Downward LOR	99.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.08V I:0.4161A P:4.600W PF:0.9154 Freq:59.98Hz Lamp Flux:313.49x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:5W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

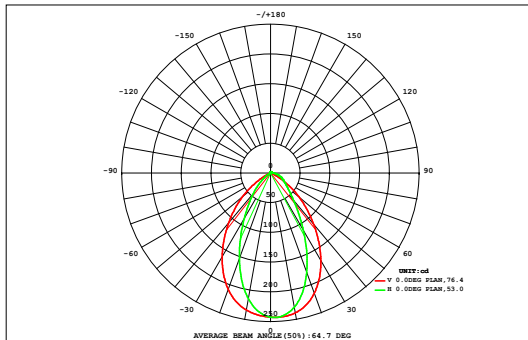

DATA OF LAMP		Eff:68.15lm/W	
MODEL	F6B1-5W-30K-A	Imax (cd)	243.1
NOMINAL POWER (W)	5	AVAILABILITY (%)	92.9
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	291.3
NOMINAL FLUX (lm)	313.49	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	313.5
TEST VOLTAGE (V)	12	θ @50% (H,V)	76,53DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.01	0.02	0.04	0.07	0.09	0.12	0.15	0.15	0.12	0.09	0.07	0.04	0.02	0.01	0.00	0.00	1.02	0.00
90	0.00	0.01	0.02	0.05	0.10	0.16	0.23	0.31	0.37	0.37	0.31	0.23	0.16	0.10	0.05	0.02	0.01	0.00	2.50	0.00
80	0.00	0.01	0.03	0.08	0.16	0.26	0.39	0.51	0.60	0.61	0.52	0.40	0.27	0.16	0.08	0.03	0.01	0.00	4.12	0.06
70	0.00	0.01	0.04	0.11	0.25	0.47	0.70	0.87	0.93	0.94	0.88	0.72	0.48	0.26	0.11	0.04	0.01	0.00	6.81	4.50
60	0.00	0.01	0.05	0.16	0.46	0.88	1.26	1.48	1.51	1.51	1.50	1.28	0.90	0.48	0.18	0.05	0.01	0.00	11.7	10.6
50	0.00	0.01	0.05	0.27	0.79	1.45	2.05	2.49	2.62	2.63	2.53	2.08	1.47	0.82	0.29	0.06	0.01	0.00	19.6	19.0
40	0.00	0.01	0.07	0.42	1.18	2.10	3.10	3.98	4.41	4.44	4.05	3.17	2.14	1.20	0.45	0.08	0.01	0.00	30.8	30.3
30	0.00	0.01	0.09	0.57	1.52	2.76	4.18	5.48	6.21	6.25	5.58	4.30	2.84	1.55	0.59	0.10	0.01	0.00	42.0	41.6
20	0.00	0.00	0.10	0.66	1.77	3.25	4.94	6.36	7.14	7.20	6.51	5.11	3.37	1.81	0.69	0.11	0.01	0.00	49.0	48.7
10	0.00	0.00	0.09	0.65	1.75	3.22	4.86	6.24	6.97	7.03	6.39	5.03	3.34	1.79	0.68	0.10	0.00	0.00	48.1	47.8
0	0.00	0.00	0.07	0.52	1.46	2.66	3.98	5.13	5.71	5.74	5.24	4.11	2.74	1.49	0.55	0.08	0.00	0.00	39.5	39.1
-10	0.00	0.00	0.04	0.35	1.07	1.96	2.86	3.57	3.79	3.82	3.64	2.94	2.00	1.10	0.38	0.05	0.00	0.00	27.6	27.1
-20	0.00	0.00	0.02	0.18	0.64	1.25	1.80	2.14	2.14	2.15	2.18	1.83	1.27	0.67	0.20	0.02	0.00	0.00	16.5	15.9
-30	0.00	0.00	0.01	0.06	0.27	0.62	0.93	1.09	1.04	1.04	1.10	0.95	0.64	0.29	0.07	0.01	0.00	0.00	8.13	6.60
-40	0.00	0.00	0.00	0.01	0.06	0.17	0.30	0.37	0.35	0.35	0.38	0.32	0.19	0.07	0.02	0.00	0.00	0.00	2.59	0.00
-50	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.03	0.03	0.05	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.28	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.00	0.07	0.68	4.12	11.5	21.3	31.7	40.2	44.0	44.3	41.0	32.6	21.9	11.9	4.37	0.78	0.08	0.00	310	---
Φ a	0.00	0.00	0.00	2.49	10.2	20.0	30.3	38.7	42.4	42.7	39.5	31.2	20.6	10.5	2.76	0.00	0.00	0.00	---	291

one-half-peak spread: U:26.9,D:26.4 , L:41.1,R:35.8


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.08V I:0.4161A P:4.600W PF:0.9154 Freq:59.98Hz Lamp Flux:313.49x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:5W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

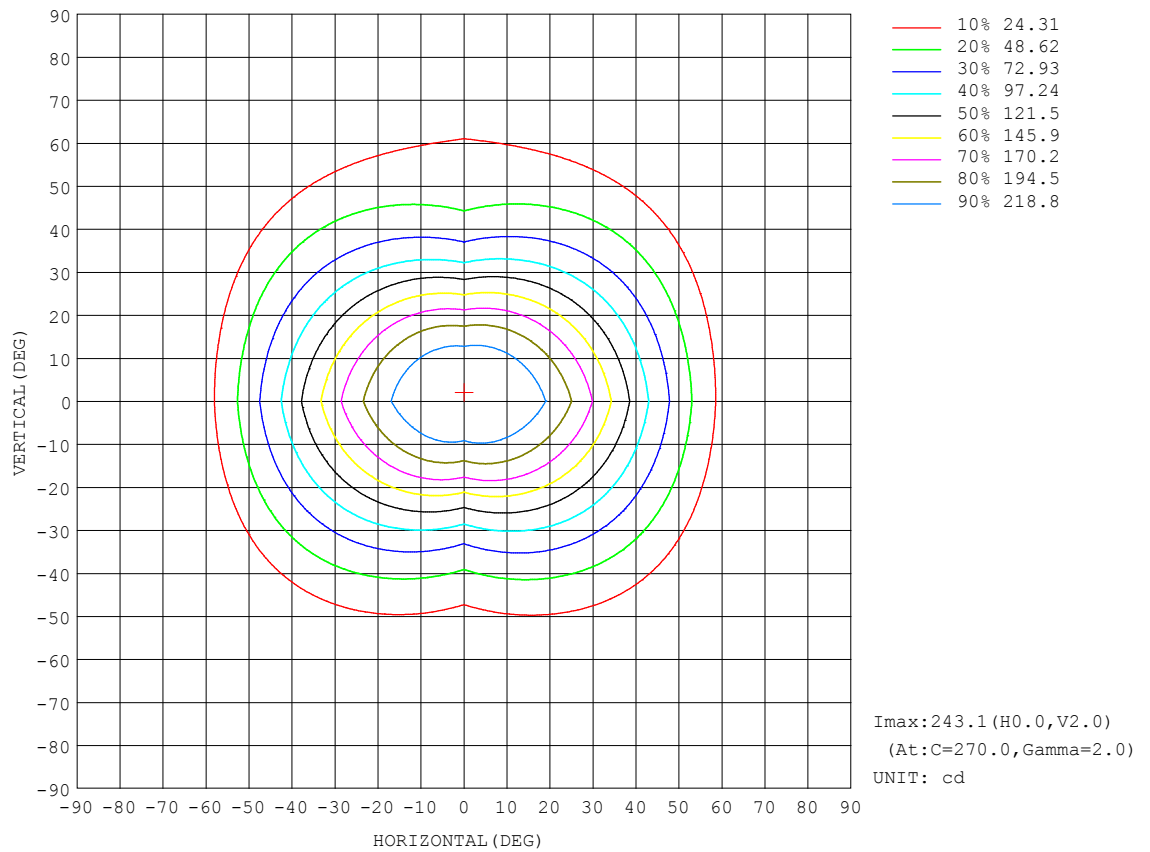


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.08V I:0.4161A P:4.600W PF:0.9154 Freq:59.98Hz Lamp Flux:313.49x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:5W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

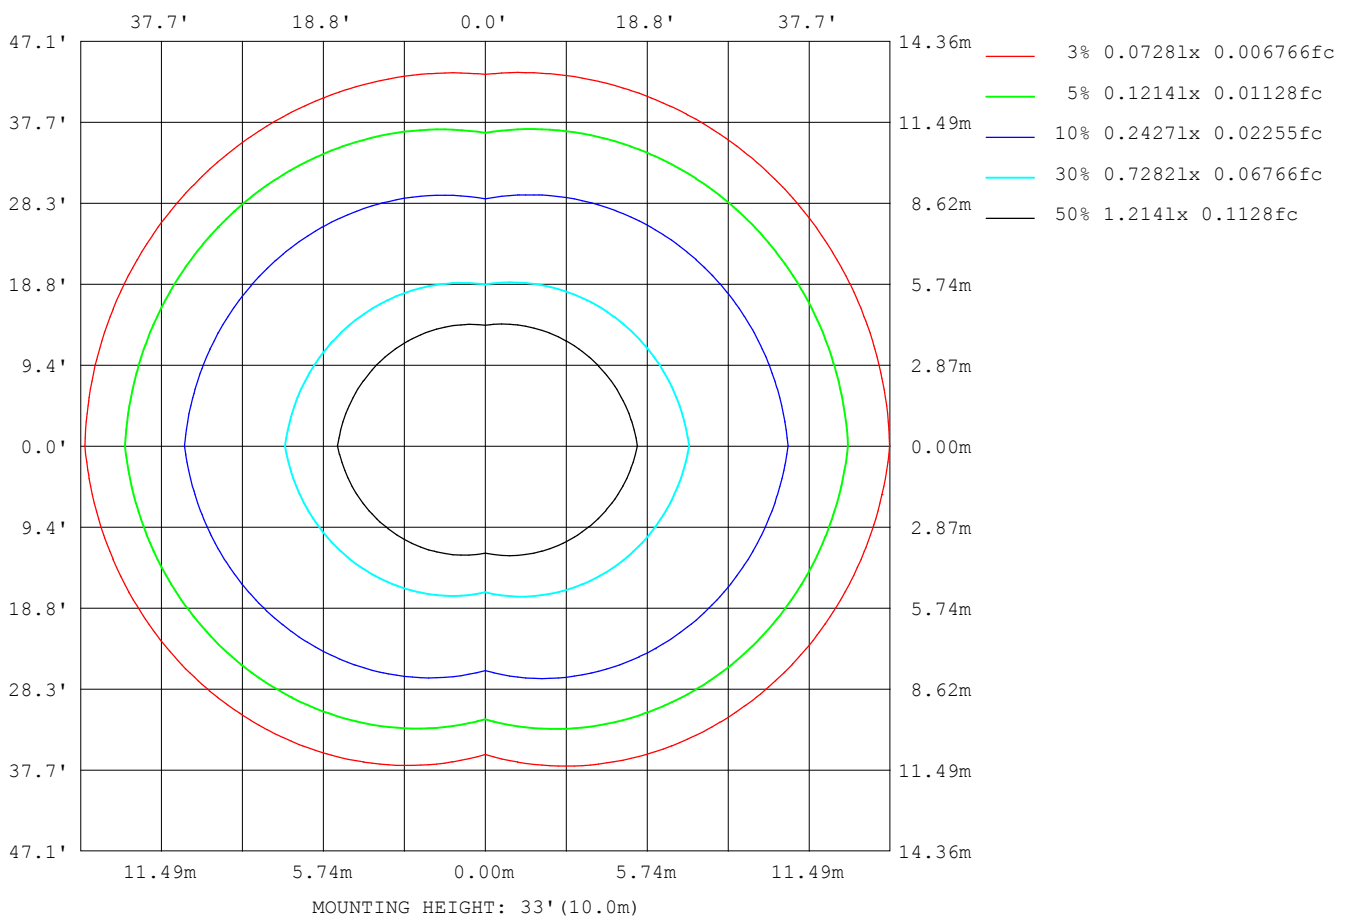

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

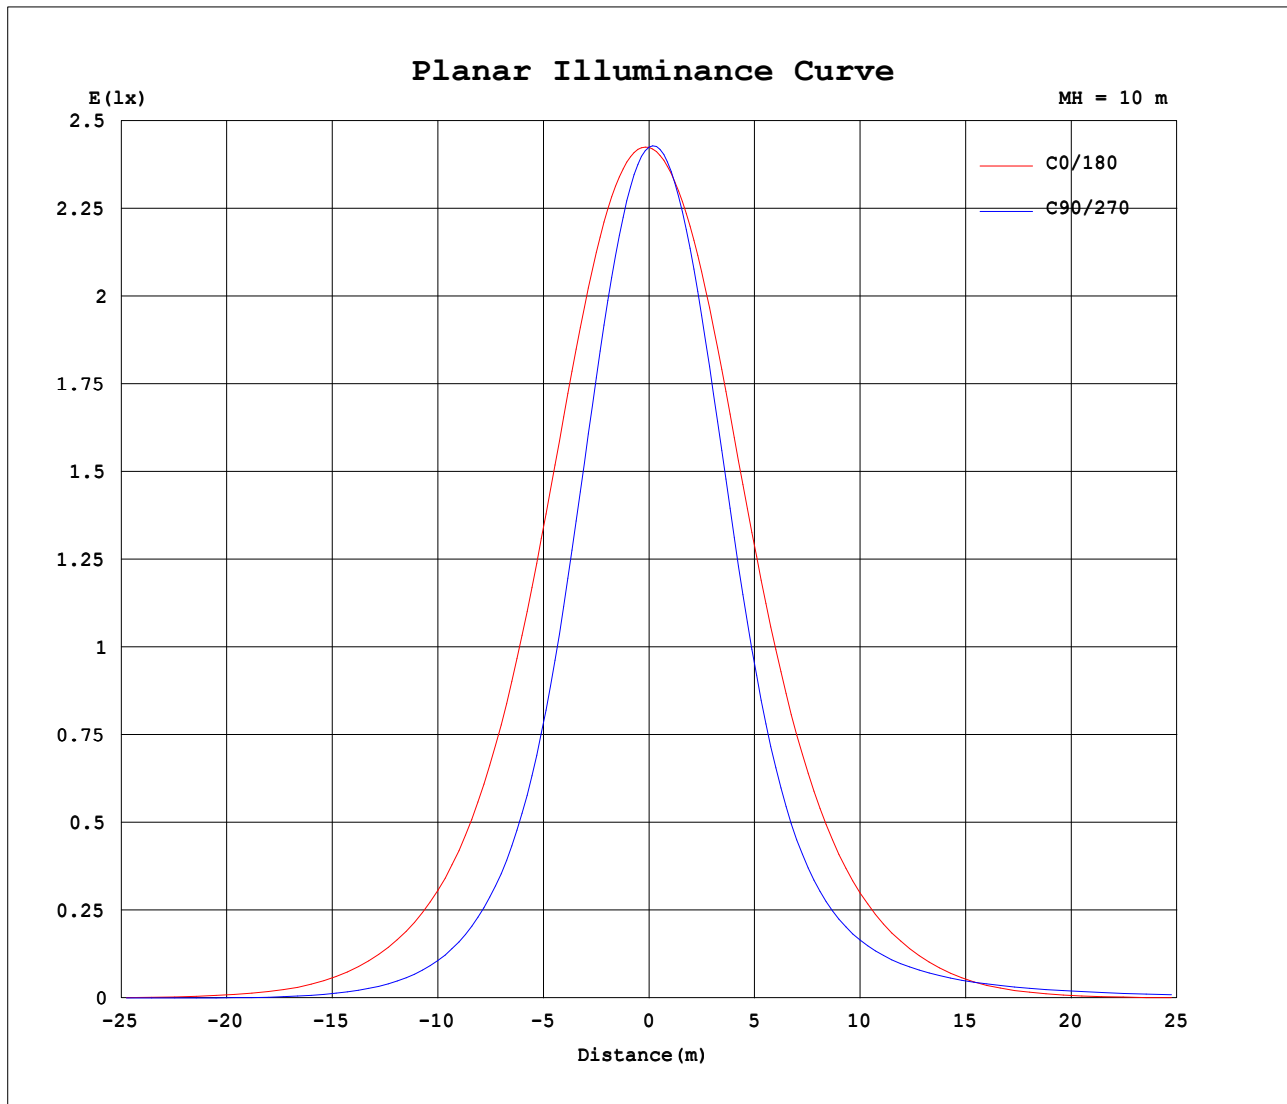


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.08V I:0.4161A P:4.600W PF:0.9154 Freq:59.98Hz Lamp Flux:313.49x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:5W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

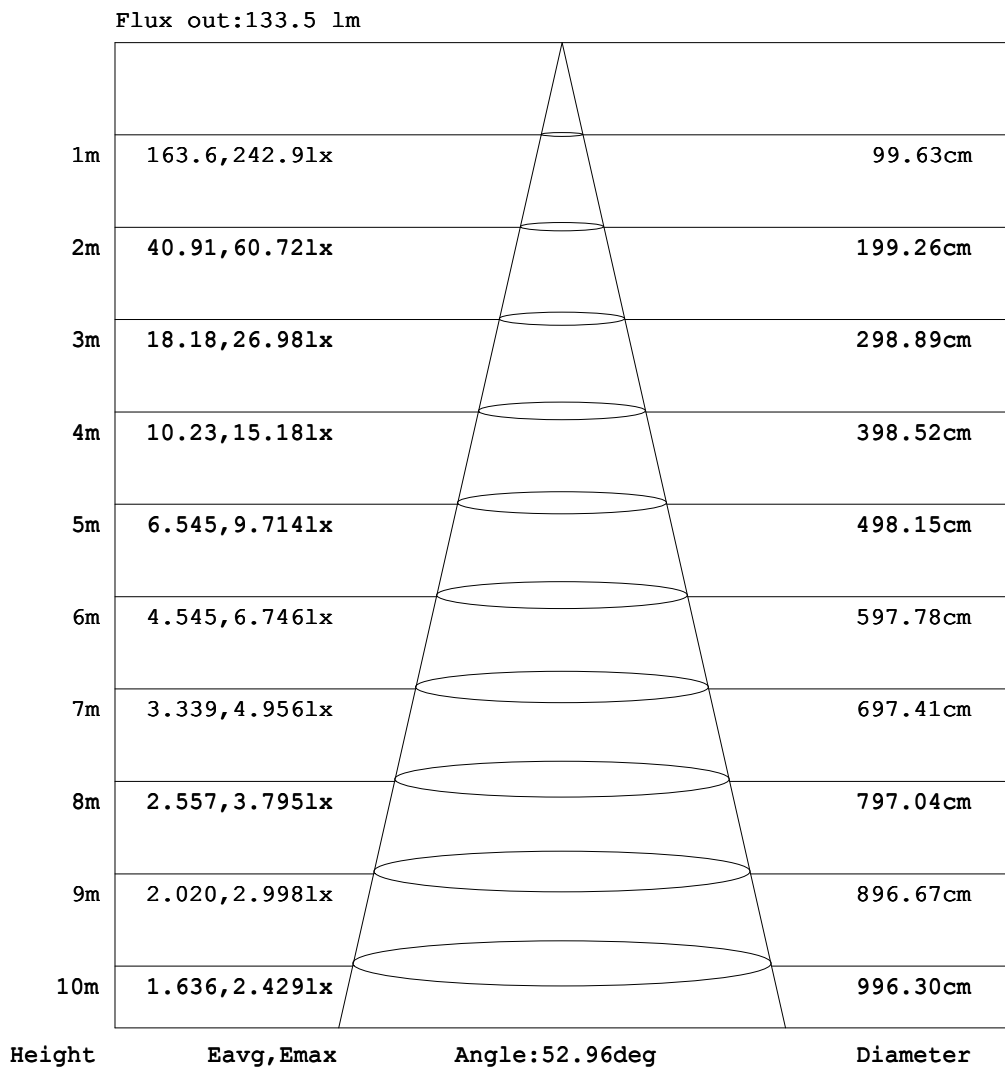

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.08V I:0.4161A P:4.600W PF:0.9154 Freq:59.98Hz Lamp Flux:313.49x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:5W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.04	0.19	0.34	0.52	0.73	0.91	1.11	1.31	1.49	1.66	1.84	1.98	2.11	2.15
-170	0.00	0.00	0.00	0.00	0.00	0.03	0.18	0.33	0.52	0.71	0.90	1.10	1.30	1.50	1.67	1.84	2.00	2.09	2.15
-160	0.00	0.00	0.00	0.00	0.00	0.01	0.13	0.28	0.44	0.61	0.80	0.98	1.17	1.35	1.52	1.68	1.80	1.91	1.97
-150	0.00	0.00	0.00	0.00	0.00	0.01	0.07	0.20	0.33	0.48	0.62	0.78	0.93	1.08	1.23	1.36	1.46	1.53	1.58
-140	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.09	0.20	0.30	0.41	0.53	0.64	0.75	0.84	0.93	1.01	1.07	1.10
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.06	0.13	0.22	0.28	0.35	0.42	0.49	0.54	0.57	0.59	0.60
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.05	0.08	0.12	0.16	0.19	0.23	0.25	0.27	0.28
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.03	0.04	0.05	0.05	0.06
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.07	0.07	0.09	0.12	0.12	0.13	0.13	0.12	0.09	0.05	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.07	0.11	0.20	0.33	0.65	1.23	2.02	2.89	3.64	4.20	4.48	4.39	3.91	3.11
-50	0.00	0.00	0.00	0.00	0.10	0.20	0.41	1.21	3.13	6.06	9.73	13.8	17.7	20.9	22.8	23.4	22.7	21.0	18.3
-40	0.00	0.00	0.00	0.03	0.16	0.47	1.94	5.77	11.8	19.9	29.0	37.0	43.5	48.4	51.8	53.3	52.8	50.2	45.5
-30	0.00	0.00	0.00	0.12	0.31	1.41	5.77	13.8	25.9	39.8	52.5	64.0	74.6	83.8	90.9	95.5	97.1	95.1	89.0
-20	0.00	0.00	0.00	0.13	0.51	3.10	10.7	23.8	41.6	59.0	75.9	92.9	109	125	138	149	157	159	154
-10	0.00	0.00	0.00	0.16	0.75	4.85	15.2	32.7	54.0	74.9	96.6	119	141	163	182	198	210	216	215
0	0.00	0.00	0.00	0.17	0.87	5.72	17.5	37.5	61.2	84.8	110	136	163	187	208	224	234	240	242
10	0.00	0.05	0.17	0.54	1.42	5.90	16.6	34.3	55.7	76.8	98.6	122	145	168	189	207	219	227	229
20	0.00	0.09	0.33	0.84	1.76	5.07	13.4	27.1	45.2	62.8	79.9	97.5	115	133	149	163	174	179	178
30	0.00	0.13	0.44	1.08	1.99	4.04	9.52	18.6	31.3	45.6	58.6	70.5	81.7	92.1	101	108	113	114	110
40	0.00	0.15	0.51	1.13	2.07	3.43	6.21	11.5	18.8	27.8	37.6	46.1	53.1	58.6	62.6	65.1	65.7	64.4	61.1
50	0.00	0.16	0.53	1.12	2.02	3.15	4.61	6.90	10.5	15.0	20.1	25.4	30.3	34.4	37.2	38.7	39.1	38.5	37.0
60	0.00	0.15	0.49	1.02	1.73	2.69	3.80	5.14	6.68	8.56	10.9	13.4	16.0	18.4	20.6	22.3	23.7	24.6	25.2
70	0.00	0.13	0.40	0.81	1.35	2.02	2.81	3.73	4.79	5.89	7.09	8.36	9.65	11.0	12.3	13.5	14.7	15.9	16.9
80	0.00	0.10	0.28	0.53	0.84	1.22	1.67	2.17	2.73	3.32	3.94	4.59	5.26	5.94	6.61	7.26	7.88	8.47	9.01
90	0.00	0.07	0.13	0.20	0.27	0.33	0.40	0.47	0.53	0.60	0.67	0.73	0.80	0.87	0.93	1.00	1.07	1.13	1.20
100	0.00	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.03	0.03	0.02	0.01	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.09	0.11	0.13	0.13	0.12	0.12	0.14	0.14	0.12
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.12	0.17	0.22	0.29	0.35	0.41	0.44	0.49	0.51	0.49	0.46
150	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.14	0.23	0.32	0.44	0.55	0.66	0.76	0.85	0.90	0.95	0.95	0.92
160	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.22	0.35	0.50	0.65	0.80	0.96	1.09	1.23	1.33	1.42	1.42	1.41
170	0.00	0.00	0.00	0.00	0.00	0.02	0.16	0.30	0.47	0.64	0.82	1.00	1.18	1.35	1.52	1.65	1.77	1.85	1.83
180	0.00	0.00	0.00	0.00	0.00	0.04	0.19	0.34	0.52	0.73	0.91	1.11	1.31	1.49	1.66	1.84	1.98	2.11	2.13

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.08V I:0.4161A P:4.600W PF:0.9154 Freq:59.98Hz Lamp Flux:313.49x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:5W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.12	2.10	1.99	1.81	1.69	1.54	1.37	1.18	1.02	0.77	0.58	0.36	0.15	0.00	0.00	0.00	0.00	0.00	
-170	2.11	2.06	1.97	1.82	1.68	1.50	1.35	1.13	0.92	0.75	0.52	0.33	0.15	0.00	0.00	0.00	0.00	0.00	
-160	1.94	1.86	1.77	1.67	1.51	1.35	1.16	1.02	0.82	0.62	0.44	0.28	0.14	0.00	0.00	0.00	0.00	0.00	
-150	1.56	1.51	1.44	1.34	1.21	1.07	0.96	0.79	0.66	0.46	0.33	0.18	0.10	0.00	0.00	0.00	0.00	0.00	
-140	1.09	1.05	0.99	0.94	0.84	0.75	0.67	0.53	0.42	0.31	0.19	0.12	0.01	0.00	0.00	0.00	0.00	0.00	
-130	0.61	0.61	0.59	0.55	0.49	0.42	0.38	0.30	0.25	0.14	0.10	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.28	0.27	0.26	0.24	0.22	0.17	0.14	0.11	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.05	0.05	0.04	0.03	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.01	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.07	0.13	0.18	0.19	0.20	0.20	0.18	0.17	0.14	0.13	0.10	0.06	0.03	0.00	0.00	0.00	0.00	0.00	
-60	4.02	4.61	4.79	4.60	4.12	3.38	2.48	1.61	0.92	0.50	0.32	0.22	0.15	0.07	0.01	0.00	0.00	0.00	
-50	21.1	23.0	23.7	23.2	21.5	18.6	14.7	10.6	6.95	3.83	1.64	0.61	0.32	0.18	0.07	0.00	0.00	0.00	
-40	50.5	53.3	53.9	52.5	49.1	44.1	37.8	30.1	21.2	13.0	6.78	2.54	0.70	0.31	0.15	0.02	0.00	0.00	
-30	95.9	98.5	97.3	92.9	85.7	76.2	65.2	53.4	40.9	27.5	15.2	6.85	1.92	0.50	0.21	0.05	0.00	0.00	
-20	160	159	152	142	128	113	95.4	77.5	60.1	42.9	25.5	12.1	3.94	0.76	0.27	0.07	0.00	0.00	
-10	218	213	202	187	168	147	123	99.2	76.4	55.3	34.6	16.8	5.93	1.10	0.33	0.09	0.00	0.00	
0	243	239	230	215	195	170	142	113	86.7	62.5	39.5	19.2	6.93	1.26	0.35	0.10	0.00	0.00	
10	229	222	211	194	174	150	126	101	78.3	57.0	36.2	18.2	6.97	1.76	0.70	0.26	0.05	0.00	
20	180	176	167	153	136	119	99.9	81.5	63.9	46.5	28.8	14.8	5.91	2.01	0.98	0.40	0.09	0.00	
30	115	114	110	103	94.0	83.3	71.7	59.6	46.7	32.9	20.0	10.6	4.55	2.18	1.17	0.49	0.13	0.00	
40	64.7	66.2	65.7	63.3	59.2	53.8	46.9	38.7	29.1	19.9	12.5	6.81	3.66	2.22	1.25	0.53	0.15	0.00	
50	38.6	39.3	39.0	37.6	35.0	31.2	26.3	21.0	15.9	11.2	7.33	4.82	3.27	2.11	1.19	0.53	0.16	0.00	
60	24.7	23.9	22.6	20.9	18.9	16.5	13.9	11.2	8.83	6.85	5.26	3.91	2.77	1.80	1.03	0.49	0.15	0.00	
70	15.9	14.8	13.6	12.3	11.0	9.72	8.42	7.17	5.96	4.85	3.82	2.87	2.05	1.35	0.81	0.40	0.13	0.00	
80	8.48	7.89	7.27	6.62	5.95	5.28	4.61	3.95	3.32	2.73	2.17	1.67	1.22	0.84	0.53	0.28	0.10	0.00	
90	1.13	1.07	1.00	0.93	0.87	0.80	0.73	0.67	0.60	0.53	0.47	0.40	0.33	0.27	0.20	0.13	0.07	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
120	0.02	0.04	0.06	0.07	0.09	0.07	0.06	0.07	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.16	0.17	0.18	0.18	0.20	0.20	0.21	0.18	0.17	0.09	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.51	0.55	0.56	0.54	0.50	0.47	0.42	0.34	0.29	0.23	0.14	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.97	1.00	0.98	0.96	0.89	0.80	0.73	0.61	0.50	0.37	0.28	0.15	0.09	0.00	0.00	0.00	0.00	0.00	0.00
160	1.45	1.48	1.41	1.37	1.24	1.13	0.98	0.87	0.70	0.53	0.38	0.25	0.13	0.00	0.00	0.00	0.00	0.00	0.00
170	1.87	1.84	1.78	1.66	1.54	1.38	1.24	1.05	0.86	0.70	0.49	0.31	0.14	0.00	0.00	0.00	0.00	0.00	0.00
180	2.12	2.10	1.99	1.81	1.69	1.54	1.37	1.18	1.02	0.77	0.58	0.36	0.15	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: