

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	783.1 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	102.9V x 115.0H
	At 50% of Imax	52.8V x 78.3H
	At 90% of Imax	22.5V x 37.5H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	927.0 lumens per klm.
	To 50% of Imax	605.5 lumens per klm.
	To 90% of Imax	170.8 lumens per klm.

Upward LOR	1.0 %
Downward LOR	99.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.16V I:1.105A P:9.725W PF:0.7237 Freq:59.98Hz Lamp Flux:338.405x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 2700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

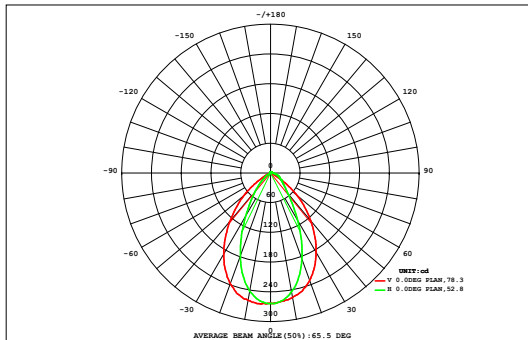

DATA OF LAMP		Eff:34.80lm/W	
MODEL	F9B1-10W-A	Imax (cd)	265.0
NOMINAL POWER (W)	10	AVAILABILITY (%)	92.9
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	314.4
NOMINAL FLUX (lm)	338.405	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	338.4
TEST VOLTAGE (V)	12	θ @50% (H,V)	78,53DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.01	0.02	0.03	0.05	0.07	0.09	0.11	0.11	0.09	0.07	0.05	0.03	0.02	0.01	0.00	0.00	0.74	0.00
90	0.00	0.00	0.02	0.04	0.08	0.14	0.20	0.26	0.32	0.32	0.26	0.20	0.14	0.08	0.04	0.02	0.00	0.00	2.12	0.00
80	0.00	0.01	0.03	0.07	0.14	0.24	0.36	0.47	0.54	0.54	0.46	0.35	0.23	0.14	0.07	0.03	0.01	0.00	3.66	0.00
70	0.00	0.01	0.03	0.10	0.24	0.45	0.66	0.82	0.86	0.85	0.81	0.64	0.42	0.23	0.09	0.03	0.01	0.00	6.26	2.64
60	0.00	0.01	0.04	0.17	0.45	0.89	1.28	1.47	1.41	1.41	1.47	1.27	0.86	0.42	0.15	0.04	0.01	0.00	11.4	10.1
50	0.00	0.01	0.06	0.28	0.83	1.55	2.16	2.56	2.57	2.56	2.54	2.16	1.55	0.80	0.25	0.05	0.01	0.00	19.9	19.2
40	0.00	0.01	0.08	0.43	1.29	2.31	3.38	4.26	4.59	4.57	4.20	3.33	2.30	1.28	0.40	0.07	0.01	0.00	32.5	31.9
30	0.00	0.01	0.10	0.60	1.71	3.12	4.68	6.00	6.65	6.61	5.90	4.58	3.07	1.71	0.57	0.09	0.01	0.00	45.4	45.0
20	0.00	0.00	0.11	0.72	2.02	3.76	5.64	7.11	7.78	7.70	6.95	5.49	3.69	2.03	0.69	0.09	0.00	0.00	53.8	53.4
10	0.00	0.00	0.11	0.71	2.01	3.74	5.61	7.08	7.76	7.68	6.92	5.46	3.67	2.01	0.67	0.09	0.00	0.00	53.5	53.1
0	0.00	0.00	0.08	0.57	1.67	3.07	4.60	5.90	6.53	6.49	5.80	4.50	3.03	1.67	0.53	0.07	0.00	0.00	44.5	44.1
-10	0.00	0.00	0.05	0.38	1.21	2.24	3.28	4.10	4.38	4.35	4.05	3.23	2.23	1.20	0.34	0.04	0.00	0.00	31.1	30.6
-20	0.00	0.00	0.03	0.20	0.71	1.41	2.02	2.40	2.37	2.36	2.38	2.02	1.41	0.68	0.18	0.02	0.00	0.00	18.2	17.5
-30	0.00	0.00	0.01	0.08	0.29	0.68	1.03	1.19	1.11	1.11	1.20	1.03	0.65	0.27	0.06	0.00	0.00	0.00	8.73	6.99
-40	0.00	0.00	0.00	0.02	0.08	0.19	0.33	0.41	0.38	0.38	0.40	0.31	0.17	0.06	0.01	0.00	0.00	0.00	2.77	0.00
-50	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.04	0.04	0.05	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.32	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.00	0.07	0.76	4.38	12.8	23.9	35.4	44.2	47.4	47.1	43.5	34.7	23.5	12.6	4.08	0.64	0.06	0.00	335	---
Φ a	0.00	0.00	0.00	2.62	11.4	22.4	33.9	42.6	45.6	45.3	41.9	33.2	22.1	11.2	2.32	0.00	0.00	0.00	---	314

one-half-peak spread: U:25.6,D:25.1 , L:27.5,R:31.2


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.16V I:1.105A P:9.725W PF:0.7237 Freq:59.98Hz Lamp Flux:338.405x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 2700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

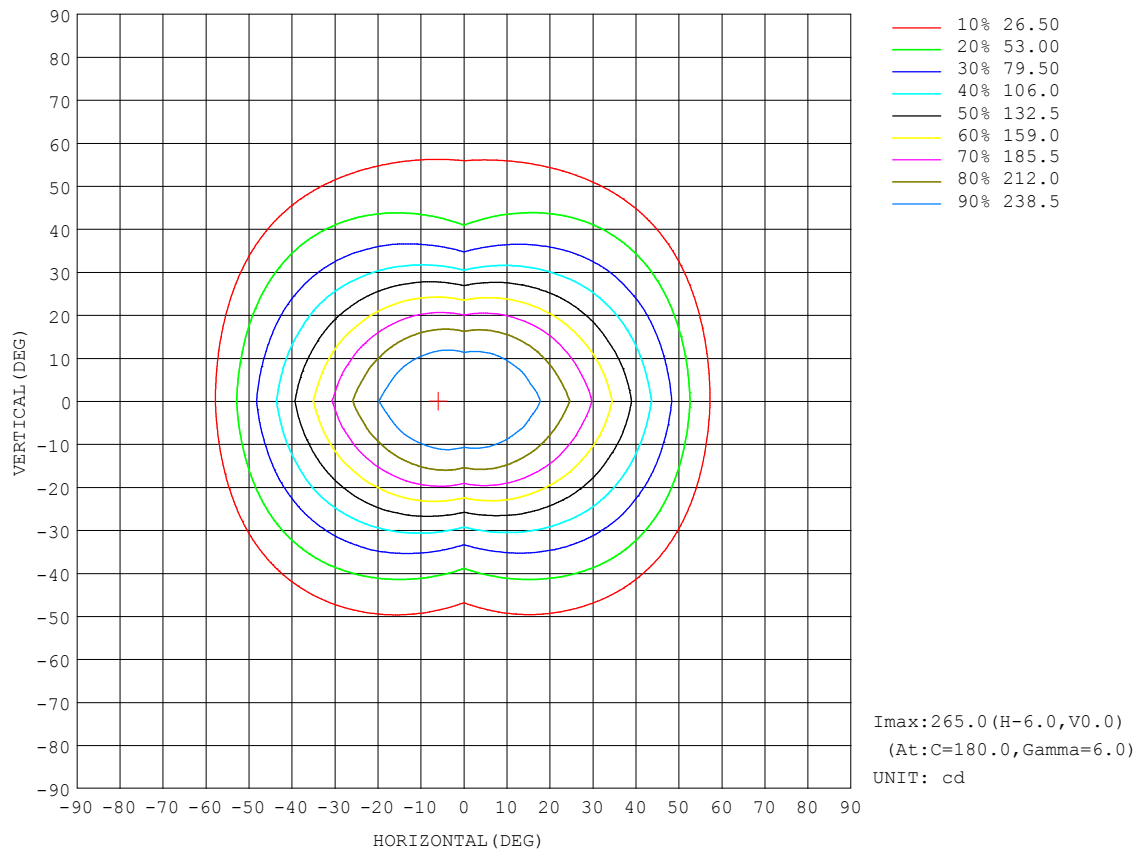


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.16V I:1.105A P:9.725W PF:0.7237 Freq:59.98Hz Lamp Flux:338.405x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 2700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

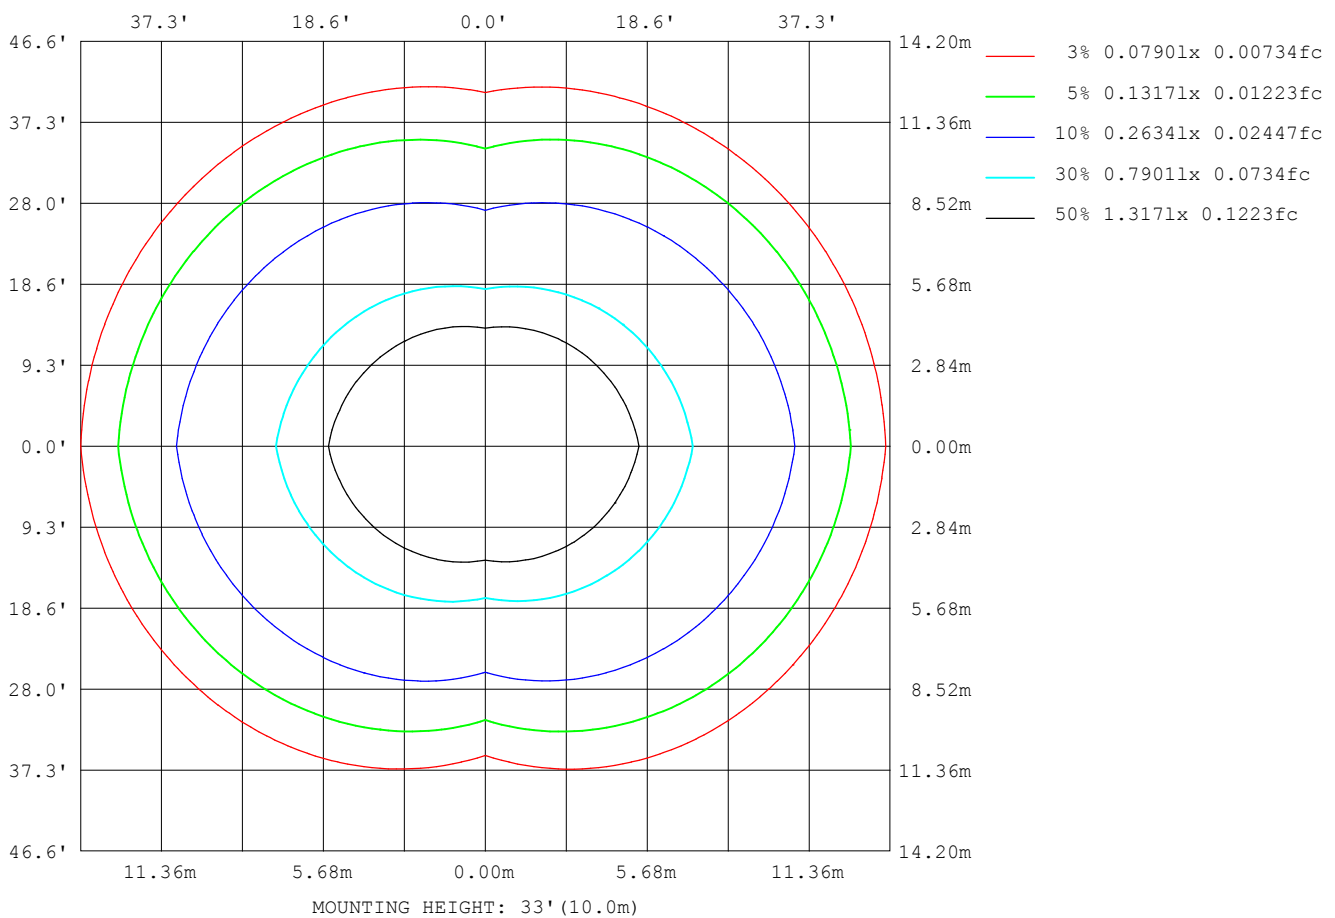

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

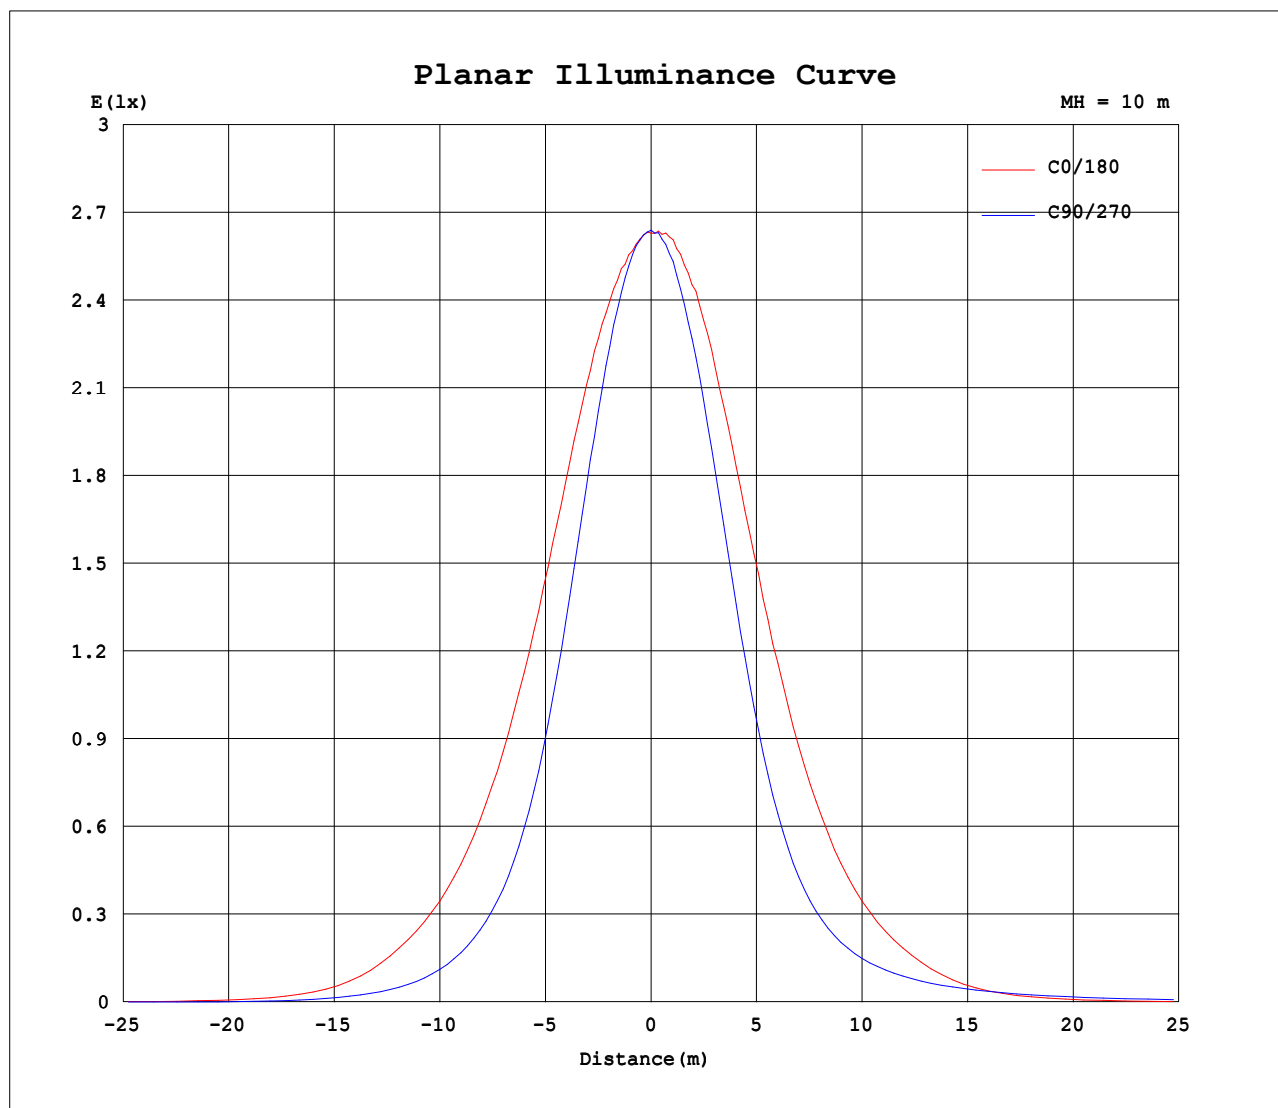


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.16V I:1.105A P:9.725W PF:0.7237 Freq:59.98Hz Lamp Flux:338.405x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 2700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

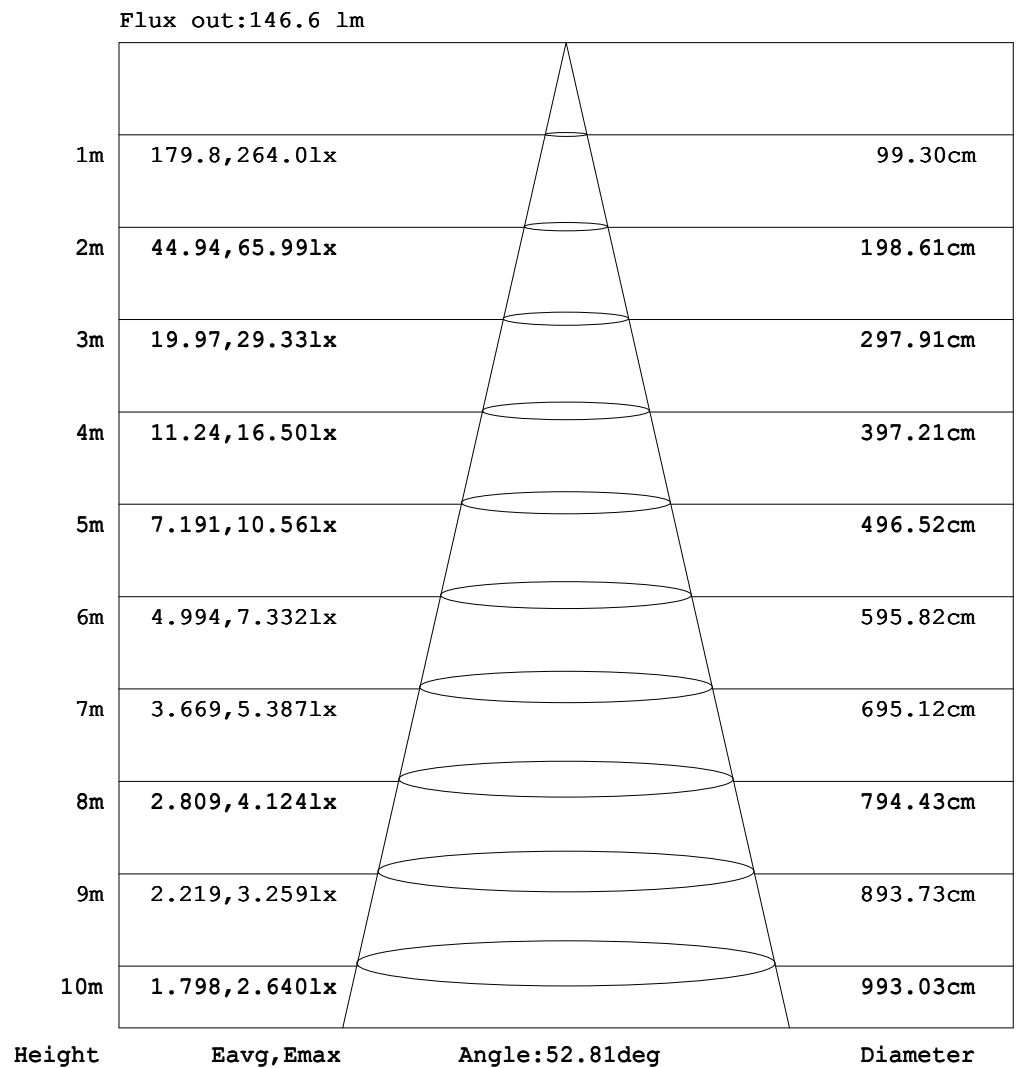

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.16V I:1.105A P:9.725W PF:0.7237 Freq:59.98Hz Lamp Flux:338.405x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 2700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.06	0.23	0.40	0.62	0.82	1.03	1.23	1.44	1.65	1.84	2.05	2.22	2.33	2.43
-170	0.00	0.00	0.00	0.00	0.00	0.05	0.21	0.37	0.58	0.79	1.00	1.21	1.42	1.63	1.84	2.04	2.20	2.31	2.38
-160	0.00	0.00	0.00	0.00	0.00	0.02	0.16	0.32	0.49	0.68	0.88	1.07	1.27	1.47	1.66	1.83	1.97	2.08	2.15
-150	0.00	0.00	0.00	0.00	0.00	0.01	0.09	0.22	0.35	0.51	0.68	0.84	1.00	1.16	1.31	1.44	1.56	1.64	1.69
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.10	0.22	0.32	0.44	0.55	0.68	0.79	0.89	0.97	1.05	1.08	1.10
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.14	0.22	0.29	0.35	0.43	0.49	0.53	0.57	0.60	0.61
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.08	0.11	0.15	0.18	0.21	0.23	0.24	0.24
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.03
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.09	0.10	0.13	0.14	0.16	0.17	0.17	0.18	0.17	0.13	0.07	0.00
-60	0.00	0.00	0.00	0.00	0.05	0.12	0.19	0.27	0.45	1.14	2.06	2.83	3.68	4.51	5.11	5.46	5.44	5.01	4.25
-50	0.00	0.00	0.00	0.03	0.14	0.27	0.55	2.16	4.27	7.08	10.7	14.9	19.2	22.9	25.0	25.6	24.7	22.5	19.3
-40	0.00	0.00	0.00	0.13	0.26	0.64	3.24	6.95	12.7	21.3	31.8	41.4	48.6	54.0	57.4	58.8	57.7	54.5	48.7
-30	0.00	0.00	0.00	0.17	0.42	2.53	7.08	14.7	27.7	44.5	59.3	72.5	84.6	95.1	103	109	111	108	101
-20	0.00	0.00	0.02	0.24	0.69	4.72	11.7	25.3	46.2	67.1	86.8	107	126	144	159	173	181	184	179
-10	0.00	0.00	0.06	0.27	1.09	6.47	16.0	35.0	61.3	86.0	111	138	164	189	209	226	238	243	242
0	0.00	0.00	0.07	0.29	1.29	7.37	18.3	40.4	69.8	97.6	128	159	189	216	238	254	261	265	263
10	0.00	0.04	0.20	0.59	1.68	7.39	17.2	36.3	62.6	87.2	112	139	166	191	211	228	240	245	243
20	0.00	0.07	0.29	0.85	1.78	6.45	14.0	27.9	49.0	69.8	89.2	109	128	147	164	177	187	190	185
30	0.00	0.09	0.36	0.98	1.87	4.84	10.3	18.7	32.1	49.0	63.8	76.6	88.3	98.9	107	114	117	115	109
40	0.00	0.11	0.41	1.05	1.90	3.22	7.01	11.9	18.5	27.8	38.7	48.5	55.7	60.8	64.0	65.3	64.3	61.3	56.0
50	0.00	0.11	0.41	0.95	1.78	2.82	4.22	7.18	10.7	14.8	19.4	24.5	29.5	33.7	36.4	37.5	37.2	35.8	33.4
60	0.00	0.10	0.37	0.81	1.47	2.33	3.35	4.54	5.98	8.10	10.5	12.9	15.1	17.2	18.9	20.5	21.6	22.3	22.7
70	0.00	0.08	0.28	0.61	1.06	1.63	2.35	3.20	4.11	5.09	6.16	7.29	8.42	9.58	10.7	11.9	13.0	13.9	14.8
80	0.00	0.05	0.16	0.34	0.58	0.88	1.25	1.66	2.12	2.61	3.15	3.70	4.27	4.84	5.41	5.97	6.49	6.98	7.43
90	0.00	0.02	0.03	0.05	0.07	0.09	0.10	0.12	0.14	0.15	0.17	0.19	0.21	0.22	0.24	0.26	0.27	0.29	0.31
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.04	0.04	0.04	0.03	0.01	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.11	0.14	0.14	0.15	0.18	0.22	0.22	0.19	0.16
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.14	0.20	0.26	0.37	0.43	0.49	0.58	0.58	0.63	0.62	0.59
150	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.17	0.26	0.40	0.52	0.64	0.77	0.90	0.99	1.05	1.13	1.14	1.13
160	0.00	0.00	0.00	0.00	0.00	0.01	0.13	0.27	0.42	0.58	0.77	0.92	1.09	1.25	1.38	1.50	1.59	1.68	1.67
170	0.00	0.00	0.00	0.00	0.00	0.05	0.20	0.34	0.54	0.74	0.94	1.12	1.32	1.52	1.68	1.86	2.02	2.10	2.11
180	0.00	0.00	0.00	0.00	0.00	0.06	0.23	0.40	0.62	0.82	1.03	1.23	1.44	1.65	1.84	2.05	2.22	2.33	2.43

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.16V I:1.105A P:9.725W PF:0.7237 Freq:59.98Hz Lamp Flux:338.405x1 lm																		
NAME: LED LANDSCAPE LIGHT									TYPE:Copper Spotlight RGBWW WEIGHT:									
SPEC.:10W 2700K 60°LENS									DIM.:					SERIAL No.:1				
MFR.: EVERFINE									SUR.:					Shielding Angle:FLOODLIGHT SHROUD				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.41	2.33	2.29	2.14	1.98	1.83	1.65	1.41	1.20	0.93	0.74	0.44	0.28	0.12	0.00	0.00	0.00	0.00	
-170	2.34	2.30	2.18	2.04	1.91	1.72	1.51	1.33	1.10	0.88	0.65	0.43	0.24	0.09	0.00	0.00	0.00	0.00	
-160	2.13	2.06	1.97	1.82	1.68	1.52	1.34	1.13	0.96	0.74	0.56	0.38	0.16	0.02	0.00	0.00	0.00	0.00	
-150	1.68	1.63	1.56	1.47	1.35	1.21	1.06	0.91	0.74	0.55	0.40	0.27	0.13	0.00	0.00	0.00	0.00	0.00	
-140	1.12	1.11	1.07	1.00	0.93	0.84	0.73	0.63	0.50	0.37	0.26	0.13	0.02	0.00	0.00	0.00	0.00	0.00	
-130	0.63	0.62	0.60	0.57	0.54	0.47	0.42	0.34	0.26	0.18	0.12	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.25	0.26	0.26	0.25	0.21	0.20	0.15	0.11	0.09	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.03	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.04	0.08	0.10	0.11	0.11	0.11	0.10	0.08	0.06	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	4.88	5.18	5.09	4.65	3.99	3.11	2.25	1.42	0.55	0.28	0.18	0.10	0.05	0.00	0.00	0.00	0.00	0.00	
-50	22.5	24.6	25.4	24.5	21.9	18.2	13.8	9.60	6.11	3.40	1.28	0.35	0.16	0.07	0.00	0.00	0.00	0.00	
-40	54.3	57.7	58.8	57.6	54.1	48.9	41.1	30.3	19.7	11.3	5.78	2.24	0.40	0.16	0.03	0.00	0.00	0.00	
-30	108	109	107	102	94.3	84.4	72.5	59.7	43.5	25.8	13.1	5.82	1.43	0.28	0.09	0.00	0.00	0.00	
-20	183	179	170	156	141	124	106	87.1	67.5	44.6	23.1	10.1	3.55	0.44	0.12	0.00	0.00	0.00	
-10	241	234	222	205	184	160	135	111	86.2	60.9	32.7	14.1	5.16	0.62	0.16	0.00	0.00	0.00	
0	260	255	247	231	210	184	156	127	97.6	69.8	37.8	16.2	5.93	0.72	0.17	0.00	0.00	0.00	
10	243	237	224	207	186	162	136	112	87.5	62.3	34.0	15.3	6.08	1.21	0.48	0.14	0.04	0.00	
20	189	185	175	161	144	126	108	89.5	70.3	47.4	25.7	12.4	5.28	1.53	0.73	0.27	0.07	0.00	
30	115	116	113	106	98.1	88.1	76.6	64.2	48.1	30.2	17.1	9.08	3.75	1.74	0.90	0.36	0.09	0.00	
40	61.2	64.3	65.2	64.2	61.0	55.9	48.2	37.1	26.1	17.1	10.7	6.01	2.98	1.80	0.95	0.41	0.11	0.00	
50	35.7	37.2	37.3	35.8	32.8	28.4	23.3	18.3	13.8	9.88	6.30	4.01	2.71	1.70	0.92	0.41	0.11	0.00	
60	22.1	21.3	20.1	18.5	16.6	14.5	12.3	9.91	7.51	5.81	4.45	3.26	2.26	1.42	0.81	0.37	0.10	0.00	
70	13.9	12.9	11.8	10.7	9.51	8.37	7.23	6.11	5.03	4.06	3.13	2.31	1.63	1.06	0.61	0.28	0.08	0.00	
80	6.98	6.49	5.96	5.41	4.84	4.27	3.70	3.15	2.61	2.12	1.66	1.25	0.88	0.58	0.34	0.16	0.05	0.00	
90	0.29	0.27	0.26	0.24	0.22	0.21	0.19	0.17	0.15	0.14	0.12	0.10	0.09	0.07	0.05	0.03	0.02	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.03	0.06	0.08	0.10	0.10	0.11	0.09	0.08	0.08	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.22	0.26	0.29	0.26	0.27	0.25	0.27	0.23	0.19	0.14	0.10	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.65	0.69	0.68	0.69	0.62	0.60	0.54	0.45	0.39	0.30	0.22	0.12	0.02	0.00	0.00	0.00	0.00	0.00	
150	1.18	1.20	1.17	1.14	1.09	0.98	0.86	0.75	0.62	0.46	0.35	0.24	0.12	0.00	0.00	0.00	0.00	0.00	
160	1.73	1.68	1.64	1.54	1.46	1.34	1.19	1.01	0.87	0.66	0.51	0.35	0.16	0.02	0.00	0.00	0.00	0.00	
170	2.13	2.13	2.01	1.89	1.79	1.62	1.43	1.26	1.05	0.84	0.62	0.41	0.23	0.09	0.00	0.00	0.00	0.00	
180	2.41	2.33	2.29	2.14	1.98	1.83	1.65	1.41	1.20	0.93	0.74	0.44	0.28	0.12	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: