

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	778.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	103.5V x 115.0H
	At 50% of Imax	53.2V x 78.1H
	At 90% of Imax	23.2V x 38.1H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	925.5 lumens per klm.
	To 50% of Imax	603.8 lumens per klm.
	To 90% of Imax	174.2 lumens per klm.

Upward LOR	1.1 %
Downward LOR	98.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.17V I:1.093A P:9.625W PF:0.7233 Freq:59.97Hz Lamp Flux:419.294x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 5700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

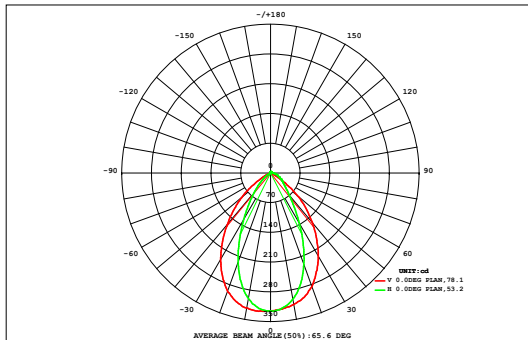

DATA OF LAMP		Eff:43.56lm/W	
MODEL	F9B1-10W-A	Imax (cd)	326.5
NOMINAL POWER (W)	10	AVAILABILITY (%)	92.8
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	389.2
NOMINAL FLUX (lm)	419.294	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	419.3
TEST VOLTAGE (V)	12	θ @50% (H,V)	78,53DEG

		AREA FLUX DIAGRAM															UNIT: lm		Φ t	Φ a			
		0.00	0.00	0.01	0.02	0.04	0.06	0.09	0.11	0.14	0.14	0.11	0.09	0.06	0.04	0.02	0.01	0.00	0.00	0.92	0.00		
VERTICAL (DEG)	90	0.00	0.01	0.02	0.05	0.11	0.17	0.25	0.33	0.39	0.39	0.33	0.25	0.17	0.10	0.05	0.02	0.01	0.00	2.65	0.00		
	80	0.00	0.01	0.03	0.09	0.17	0.30	0.45	0.58	0.68	0.67	0.57	0.43	0.29	0.17	0.08	0.03	0.01	0.00	4.57	0.00		
	70	0.00	0.01	0.04	0.13	0.31	0.56	0.84	1.03	1.07	1.06	0.99	0.79	0.52	0.28	0.12	0.04	0.01	0.00	7.80	3.34		
	60	0.00	0.01	0.06	0.22	0.57	1.12	1.60	1.83	1.77	1.76	1.81	1.56	1.04	0.51	0.19	0.05	0.01	0.00	14.1	12.5		
	50	0.00	0.01	0.08	0.36	1.05	1.93	2.70	3.19	3.20	3.18	3.13	2.64	1.88	0.95	0.30	0.06	0.01	0.00	24.7	23.7		
	40	0.00	0.01	0.11	0.56	1.61	2.88	4.20	5.28	5.69	5.65	5.17	4.08	2.81	1.54	0.48	0.08	0.01	0.00	40.2	39.5		
	30	0.00	0.01	0.13	0.77	2.14	3.88	5.80	7.45	8.24	8.18	7.28	5.61	3.75	2.07	0.67	0.10	0.01	0.00	56.1	55.5		
	-30	20	0.00	0.01	0.15	0.92	2.53	4.67	7.00	8.81	9.61	9.50	8.56	6.72	4.49	2.45	0.81	0.11	0.00	0.00	66.3	65.9	
		10	0.00	0.01	0.14	0.90	2.51	4.65	6.97	8.78	9.59	9.49	8.53	6.70	4.47	2.44	0.80	0.10	0.00	0.00	66.1	65.6	
		0	0.00	0.00	0.11	0.73	2.09	3.83	5.73	7.35	8.13	8.06	7.18	5.54	3.70	2.02	0.63	0.08	0.00	0.00	55.2	54.6	
		-10	0.00	0.00	0.07	0.48	1.52	2.79	4.09	5.12	5.48	5.43	5.01	3.98	2.72	1.45	0.41	0.05	0.00	0.00	38.6	38.0	
		-20	0.00	0.00	0.04	0.26	0.90	1.77	2.53	3.01	2.98	2.96	2.95	2.48	1.72	0.81	0.21	0.02	0.00	0.00	22.6	21.7	
		-30	0.00	0.00	0.01	0.11	0.38	0.86	1.30	1.50	1.40	1.39	1.48	1.26	0.78	0.32	0.08	0.01	0.00	0.00	10.9	8.82	
		-40	0.00	0.00	0.00	0.03	0.11	0.25	0.43	0.53	0.49	0.47	0.49	0.38	0.21	0.08	0.01	0.00	0.00	0.00	3.48	0.00	
		-50	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.07	0.06	0.05	0.06	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.43	0.00	
	-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00		
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
		-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)					20	30	40	50	60	70	80	90	
Φ t	0.00	0.09	1.01	5.61	16.0	29.8	44.0	55.0	58.9	58.4	53.7	42.5	28.6	15.2	4.85	0.77	0.08	0.00	415	---			
Φ a	0.00	0.00	0.00	3.43	14.3	28.0	42.2	53.0	56.7	56.2	51.7	40.7	26.9	13.5	2.64	0.00	0.00	0.00	---	389			

one-half-peak spread: U:27.3,D:26.2 , L:34.7,R:38.9


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.17V I:1.093A P:9.625W PF:0.7233 Freq:59.97Hz Lamp Flux:419.294x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 5700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

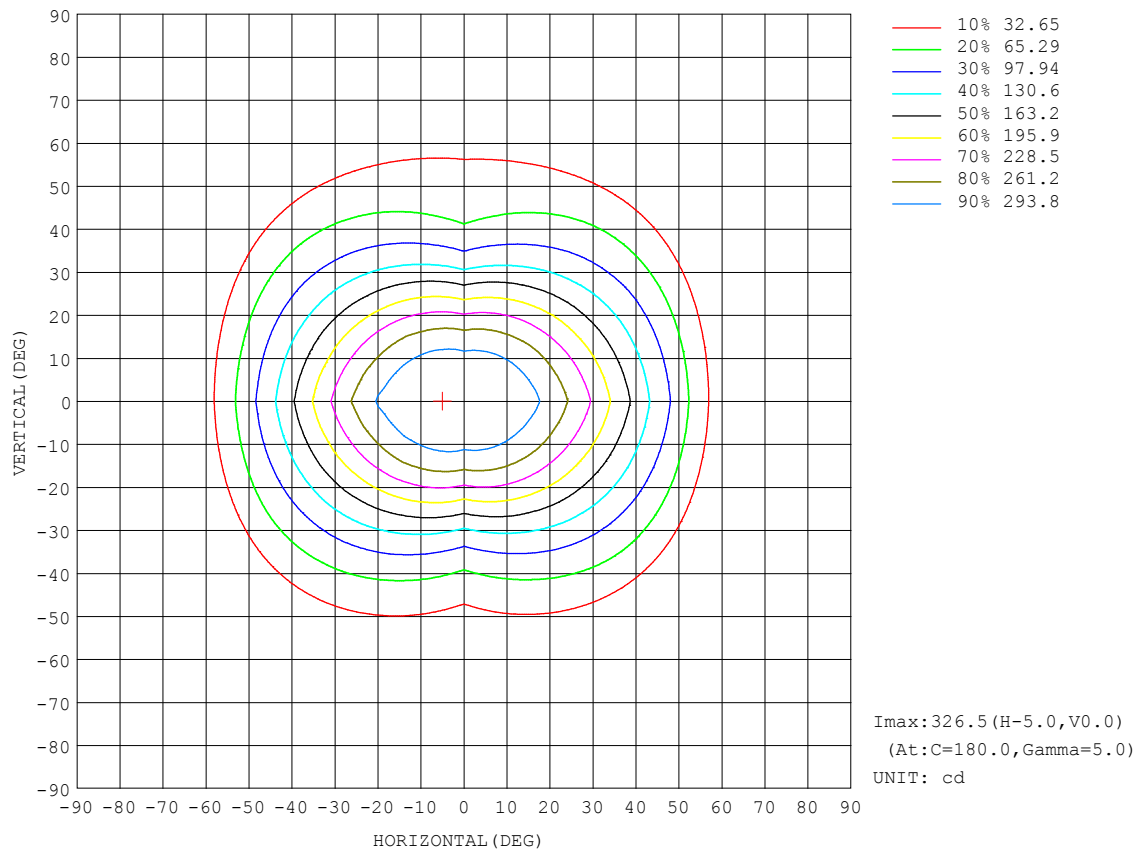


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.17V I:1.093A P:9.625W PF:0.7233 Freq:59.97Hz Lamp Flux:419.294x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 5700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

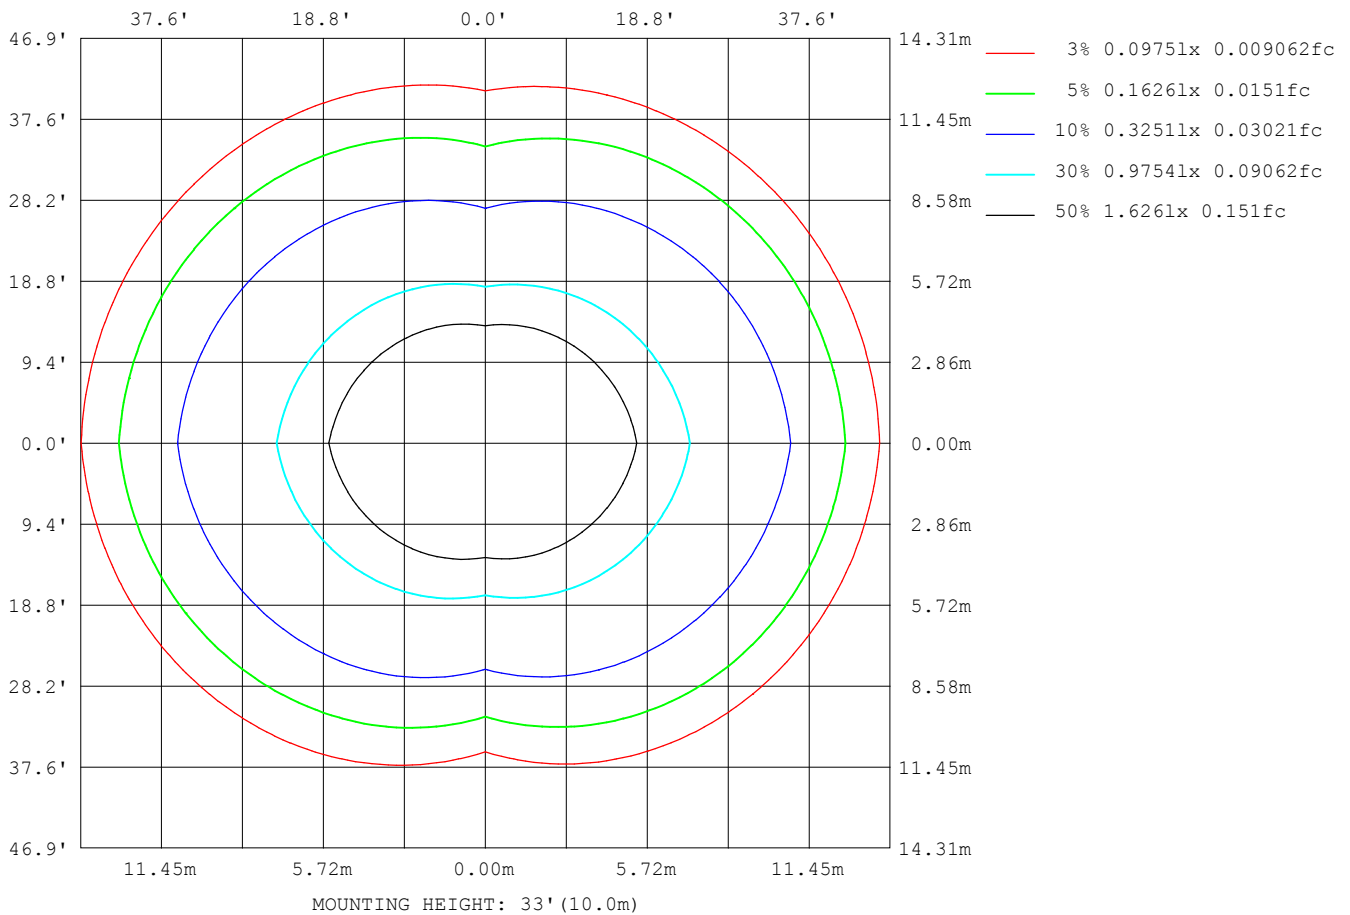

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

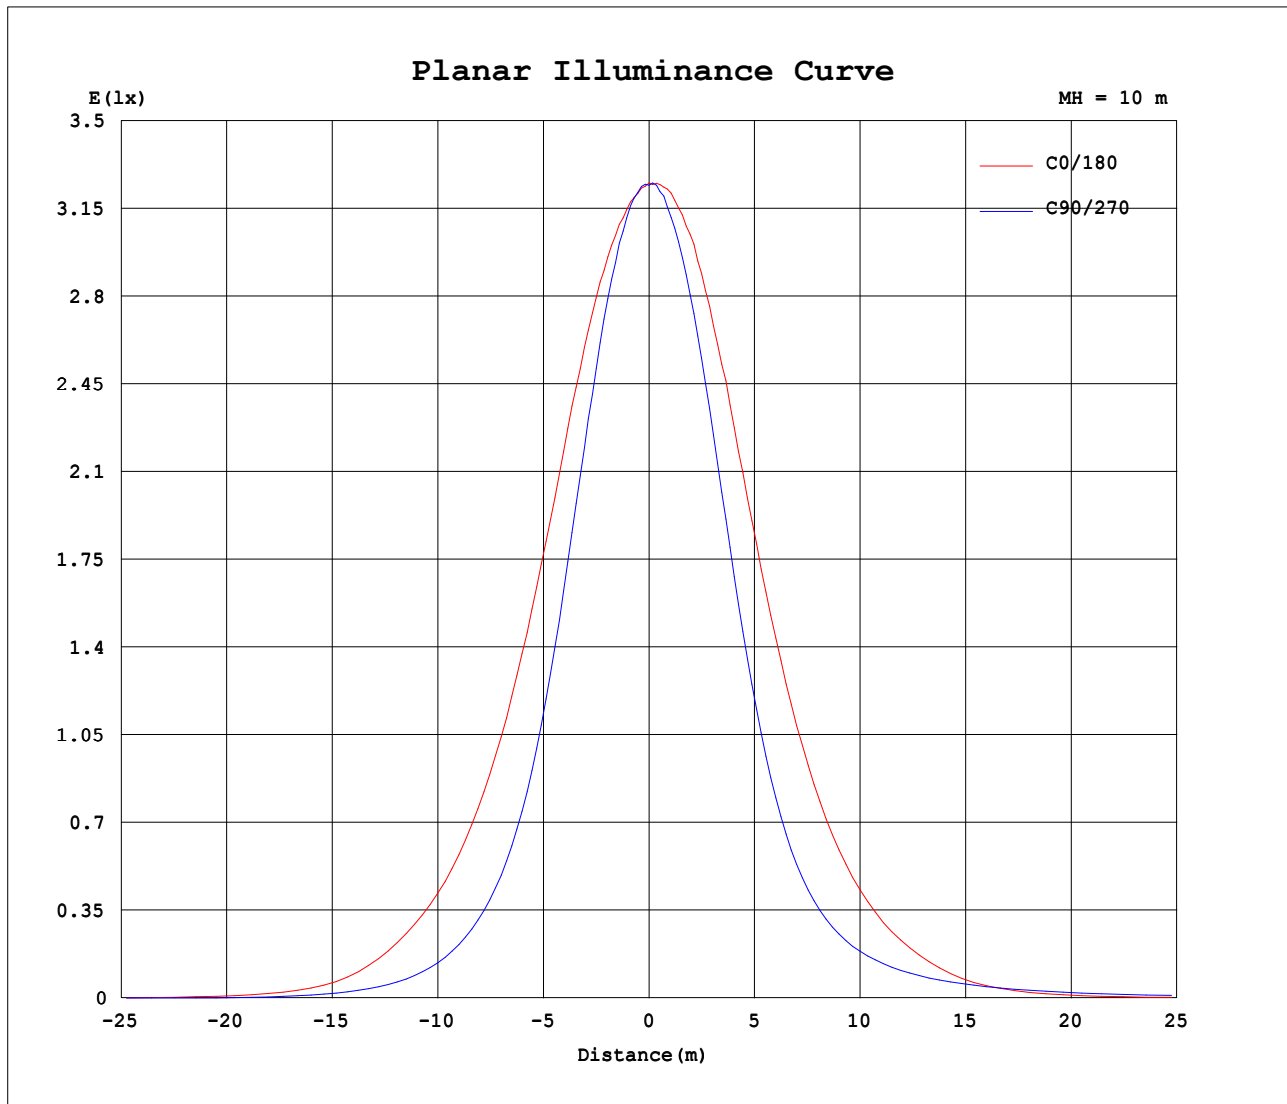


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.17V I:1.093A P:9.625W PF:0.7233 Freq:59.97Hz Lamp Flux:419.294x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 5700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

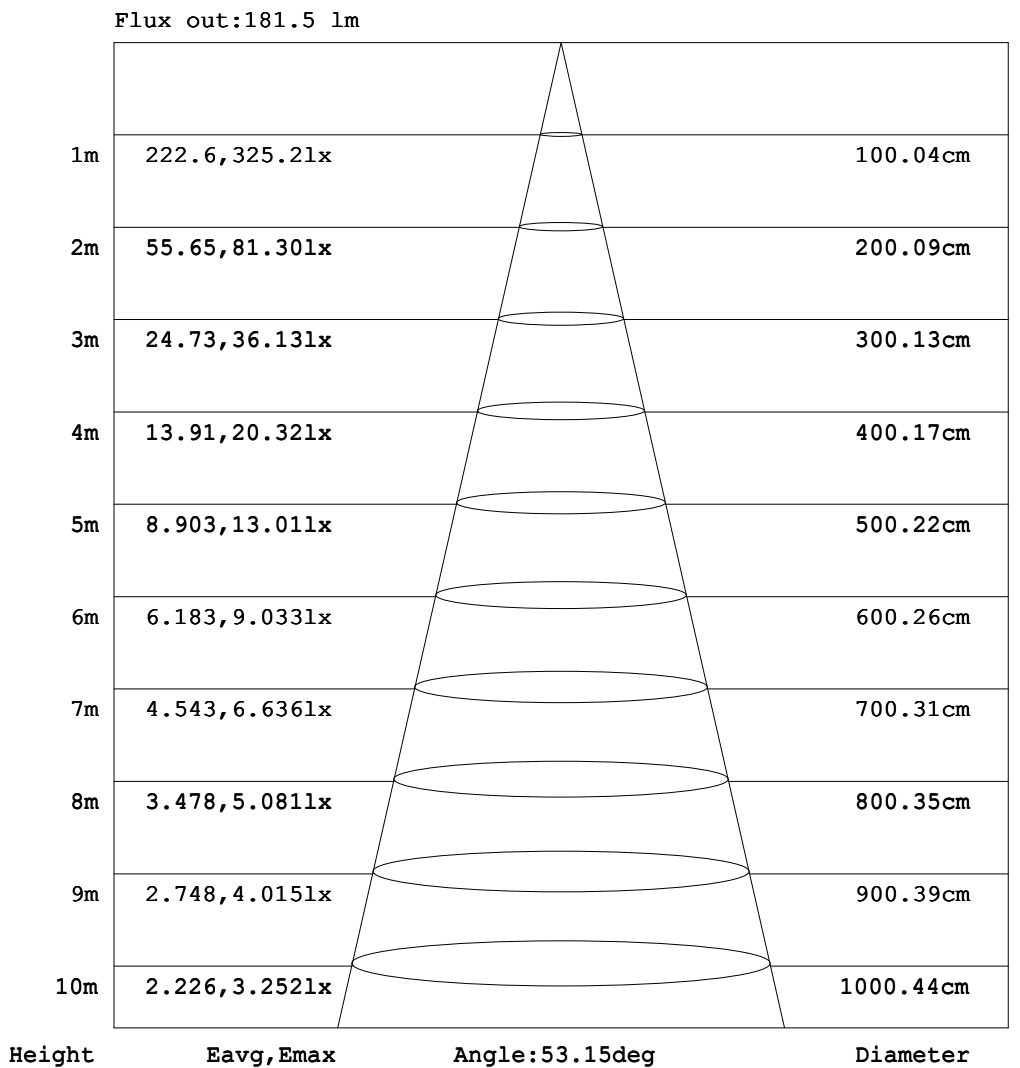

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.17V I:1.093A P:9.625W PF:0.7233 Freq:59.97Hz Lamp Flux:419.294x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 5700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.14	0.33	0.54	0.81	1.07	1.34	1.59	1.84	2.11	2.35	2.61	2.82	2.98	3.09
-170	0.00	0.00	0.00	0.00	0.00	0.13	0.31	0.52	0.77	1.03	1.31	1.56	1.82	2.09	2.35	2.60	2.81	2.96	3.06
-160	0.00	0.00	0.00	0.00	0.01	0.08	0.25	0.45	0.67	0.90	1.14	1.39	1.64	1.88	2.12	2.34	2.51	2.66	2.75
-150	0.00	0.00	0.00	0.00	0.01	0.04	0.18	0.33	0.50	0.70	0.90	1.10	1.32	1.51	1.70	1.87	2.01	2.12	2.19
-140	0.00	0.00	0.00	0.00	0.00	0.02	0.08	0.20	0.33	0.47	0.62	0.75	0.91	1.04	1.17	1.29	1.39	1.44	1.46
-130	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.06	0.15	0.24	0.33	0.43	0.50	0.60	0.67	0.73	0.78	0.81	0.82
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.06	0.11	0.16	0.21	0.26	0.29	0.33	0.35	0.37	0.37
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.06	0.07	0.08	0.09	0.11	0.11
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.03	0.02	0.02	0.01	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.05	0.10	0.15	0.17	0.21	0.22	0.25	0.26	0.27	0.27	0.26	0.21	0.12	0.00
-60	0.00	0.00	0.00	0.01	0.12	0.21	0.30	0.43	0.68	1.69	2.83	3.84	4.88	5.93	6.69	7.10	7.06	6.49	5.50
-50	0.00	0.00	0.00	0.13	0.25	0.43	0.84	3.04	5.72	9.27	13.9	19.3	24.6	29.1	31.7	32.4	31.2	28.4	24.4
-40	0.00	0.00	0.02	0.21	0.41	0.96	4.43	9.08	16.5	27.3	40.6	52.3	60.8	67.7	72.0	73.9	72.7	68.4	61.3
-30	0.00	0.00	0.09	0.28	0.66	3.58	9.28	19.2	35.5	56.3	74.0	90.8	106	119	129	136	138	136	127
-20	0.00	0.00	0.14	0.39	1.05	6.35	15.2	32.4	58.6	83.6	108	133	157	179	199	215	226	230	224
-10	0.00	0.00	0.15	0.43	1.73	8.59	20.8	44.8	77.1	107	139	172	204	234	260	281	295	302	300
0	0.00	0.00	0.15	0.45	2.07	9.73	23.8	51.7	87.3	122	159	197	235	268	297	313	322	326	325
10	0.00	0.04	0.32	0.83	2.46	9.74	22.3	46.4	78.8	109	140	173	206	236	263	283	297	304	302
20	0.00	0.08	0.47	1.14	2.41	8.51	18.1	35.7	62.1	87.0	111	135	160	183	203	220	231	236	230
30	0.00	0.11	0.54	1.29	2.48	6.46	13.3	24.0	40.9	61.9	79.6	95.8	110	123	134	141	145	143	135
40	0.00	0.13	0.53	1.36	2.45	4.19	9.11	15.2	23.7	35.3	49.0	61.0	69.4	75.9	79.9	81.6	80.4	76.5	69.9
50	0.00	0.13	0.51	1.27	2.28	3.59	5.41	9.28	13.8	18.8	24.6	31.1	37.2	42.4	45.7	47.0	46.6	44.7	41.8
60	0.00	0.12	0.45	1.02	1.89	2.96	4.24	5.74	7.59	10.3	13.4	16.3	19.0	21.6	23.8	25.6	27.0	27.8	28.2
70	0.00	0.09	0.34	0.75	1.32	2.08	2.99	4.02	5.16	6.40	7.72	9.10	10.5	12.0	13.5	14.9	16.2	17.4	18.4
80	0.00	0.06	0.20	0.42	0.72	1.10	1.54	2.06	2.63	3.26	3.92	4.62	5.35	6.08	6.78	7.45	8.10	8.70	9.25
90	0.00	0.02	0.04	0.06	0.08	0.11	0.13	0.15	0.17	0.19	0.21	0.23	0.25	0.27	0.30	0.32	0.34	0.36	0.38
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.06	0.07	0.06	0.05	0.04	0.02	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.12	0.16	0.19	0.21	0.30	0.30	0.32	0.33	0.32	0.29
140	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.13	0.21	0.29	0.42	0.50	0.61	0.68	0.77	0.84	0.85	0.86	0.84
150	0.00	0.00	0.00	0.00	0.00	0.02	0.13	0.26	0.38	0.54	0.71	0.88	1.04	1.17	1.30	1.44	1.50	1.53	1.52
160	0.00	0.00	0.00	0.00	0.00	0.07	0.21	0.38	0.58	0.79	0.99	1.21	1.41	1.62	1.80	1.96	2.08	2.16	2.15
170	0.00	0.00	0.00	0.00	0.00	0.12	0.29	0.48	0.72	0.97	1.22	1.45	1.70	1.94	2.17	2.39	2.57	2.68	2.73
180	0.00	0.00	0.00	0.00	0.00	0.14	0.33	0.54	0.81	1.07	1.34	1.59	1.84	2.11	2.35	2.61	2.82	2.98	3.07

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.17V I:1.093A P:9.625W PF:0.7233 Freq:59.97Hz Lamp Flux:419.294x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 5700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.05	3.02	2.91	2.74	2.58	2.31	2.10	1.84	1.55	1.24	0.93	0.65	0.44	0.17	0.00	0.00	0.00	0.00	
-170	3.02	2.93	2.79	2.63	2.43	2.25	2.00	1.75	1.46	1.16	0.88	0.60	0.39	0.16	0.00	0.00	0.00	0.00	
-160	2.72	2.63	2.53	2.36	2.20	1.98	1.75	1.53	1.28	1.00	0.75	0.56	0.31	0.14	0.00	0.00	0.00	0.00	
-150	2.18	2.13	2.02	1.90	1.77	1.59	1.39	1.22	0.99	0.78	0.58	0.41	0.25	0.11	0.00	0.00	0.00	0.00	
-140	1.48	1.48	1.41	1.34	1.23	1.13	0.97	0.86	0.69	0.54	0.40	0.27	0.13	0.01	0.00	0.00	0.00	0.00	
-130	0.84	0.84	0.82	0.79	0.74	0.66	0.59	0.50	0.41	0.32	0.23	0.13	0.02	0.00	0.00	0.00	0.00	0.00	
-120	0.39	0.39	0.39	0.38	0.35	0.32	0.27	0.23	0.18	0.12	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.12	0.11	0.10	0.10	0.10	0.09	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.05	0.09	0.12	0.14	0.15	0.15	0.14	0.12	0.11	0.09	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-60	6.19	6.48	6.29	5.73	4.88	3.80	2.72	1.60	0.61	0.36	0.24	0.16	0.10	0.03	0.00	0.00	0.00	0.00	
-50	28.1	30.5	31.2	29.9	26.5	21.8	16.5	11.5	7.31	4.05	1.35	0.44	0.23	0.13	0.02	0.00	0.00	0.00	
-40	68.0	71.9	72.7	70.7	66.3	59.6	49.5	36.2	23.3	13.4	6.93	2.48	0.50	0.22	0.08	0.00	0.00	0.00	
-30	134	136	133	126	116	103	88.7	72.4	52.0	30.4	15.5	6.93	1.52	0.37	0.16	0.00	0.00	0.00	
-20	228	223	210	194	174	152	129	105	81.6	53.3	27.1	11.9	4.10	0.55	0.20	0.01	0.00	0.00	
-10	299	290	274	252	225	196	166	135	104	72.6	38.3	16.6	6.06	0.74	0.23	0.03	0.00	0.00	
0	321	314	303	285	256	224	190	154	119	83.4	44.4	19.0	6.98	0.84	0.25	0.04	0.00	0.00	
10	301	292	276	254	227	198	167	136	106	74.3	39.9	18.0	7.20	1.47	0.64	0.21	0.04	0.00	
20	234	228	215	198	177	154	132	108	85.0	56.8	30.4	14.8	6.25	1.91	0.96	0.35	0.08	0.00	
30	142	143	138	131	120	108	93.7	77.9	57.6	35.9	20.4	11.0	4.40	2.18	1.17	0.45	0.11	0.00	
40	76.0	79.6	80.4	78.5	74.6	68.2	58.1	44.6	31.3	20.6	13.0	7.16	3.73	2.27	1.23	0.51	0.13	0.00	
50	44.4	45.9	45.8	43.9	39.8	34.4	28.3	22.2	16.8	12.1	7.60	5.01	3.40	2.16	1.16	0.51	0.13	0.00	
60	27.5	26.4	24.8	22.9	20.5	18.0	15.2	12.2	9.27	7.26	5.55	4.10	2.85	1.80	1.00	0.45	0.12	0.00	
70	17.3	16.1	14.7	13.3	11.9	10.4	8.98	7.62	6.30	5.08	3.93	2.91	2.03	1.32	0.75	0.34	0.09	0.00	
80	8.70	8.09	7.43	6.75	6.04	5.32	4.60	3.91	3.26	2.63	2.06	1.54	1.10	0.72	0.42	0.20	0.06	0.00	
90	0.36	0.34	0.32	0.30	0.27	0.25	0.23	0.21	0.19	0.17	0.15	0.13	0.11	0.08	0.06	0.04	0.02	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.01	0.02	0.03	0.03	0.04	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.04	0.08	0.11	0.15	0.15	0.17	0.16	0.15	0.12	0.09	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.35	0.39	0.40	0.42	0.44	0.37	0.36	0.33	0.29	0.24	0.19	0.11	0.01	0.00	0.00	0.00	0.00	0.00	
140	0.91	0.93	0.96	0.94	0.87	0.83	0.73	0.67	0.52	0.43	0.33	0.23	0.12	0.00	0.00	0.00	0.00	0.00	
150	1.59	1.61	1.59	1.51	1.43	1.31	1.17	1.03	0.83	0.66	0.50	0.37	0.23	0.10	0.00	0.00	0.00	0.00	
160	2.22	2.19	2.16	2.04	1.94	1.75	1.57	1.38	1.17	0.91	0.68	0.52	0.29	0.13	0.00	0.00	0.00	0.00	
170	2.74	2.69	2.59	2.45	2.28	2.13	1.89	1.66	1.39	1.11	0.84	0.58	0.38	0.16	0.00	0.00	0.00	0.00	
180	3.05	3.02	2.91	2.74	2.58	2.31	2.10	1.84	1.55	1.24	0.93	0.65	0.44	0.17	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: