

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	752.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	106.4V x 116.8H
	At 50% of Imax	55.2V x 80.5H
	At 90% of Imax	24.0V x 38.7H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	945.0 lumens per klm.
	To 50% of Imax	618.0 lumens per klm.
	To 90% of Imax	172.5 lumens per klm.

Upward LOR	0.2 %
Downward LOR	99.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.17V I:1.088A P:9.578W PF:0.7233 Freq:59.98Hz Lamp Flux:63.7219x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W BLUE 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

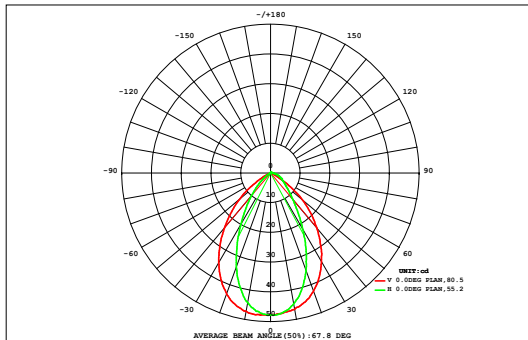

DATA OF LAMP		Eff:6.65lm/W	
MODEL	F9B1-10W-A	Imax (cd)	47.93
NOMINAL POWER (W)	10	AVAILABILITY (%)	94.6
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	60.25
NOMINAL FLUX (lm)	63.7219	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	63.72
TEST VOLTAGE (V)	12	θ @50% (H,V)	80,55DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.10	0.00
90	0.00	0.00	0.00	0.01	0.01	0.02	0.04	0.05	0.06	0.06	0.05	0.04	0.02	0.01	0.01	0.00	0.00	0.00	0.38	0.00
80	0.00	0.00	0.00	0.01	0.02	0.04	0.07	0.09	0.11	0.10	0.09	0.07	0.04	0.02	0.01	0.00	0.00	0.00	0.69	0.00
70	0.00	0.00	0.01	0.02	0.04	0.09	0.13	0.16	0.17	0.17	0.16	0.13	0.09	0.04	0.02	0.01	0.00	0.00	1.25	0.71
60	0.00	0.00	0.01	0.03	0.09	0.18	0.26	0.30	0.29	0.29	0.30	0.26	0.18	0.09	0.03	0.01	0.00	0.00	2.31	2.11
50	0.00	0.00	0.01	0.05	0.17	0.31	0.43	0.51	0.52	0.52	0.51	0.43	0.31	0.17	0.05	0.01	0.00	0.00	3.99	3.87
40	0.00	0.00	0.01	0.09	0.25	0.45	0.65	0.81	0.88	0.87	0.81	0.65	0.45	0.26	0.09	0.01	0.00	0.00	6.27	6.19
30	0.00	0.00	0.02	0.12	0.33	0.59	0.87	1.11	1.23	1.22	1.10	0.86	0.59	0.34	0.12	0.02	0.00	0.00	8.53	8.46
	0.00	0.00	0.02	0.14	0.39	0.70	1.04	1.29	1.42	1.40	1.27	1.02	0.70	0.40	0.14	0.02	0.00	0.00	9.95	9.89
	0.00	0.00	0.02	0.14	0.39	0.70	1.03	1.29	1.41	1.40	1.27	1.01	0.70	0.39	0.14	0.02	0.00	0.00	9.90	9.84
	0.00	0.00	0.01	0.11	0.32	0.58	0.86	1.09	1.21	1.20	1.08	0.85	0.58	0.33	0.11	0.01	0.00	0.00	8.35	8.29
	0.00	0.00	0.01	0.07	0.24	0.43	0.63	0.78	0.84	0.83	0.77	0.62	0.43	0.24	0.07	0.01	0.00	0.00	5.98	5.90
-30	0.00	0.00	0.00	0.04	0.14	0.27	0.40	0.47	0.48	0.48	0.47	0.40	0.28	0.14	0.04	0.00	0.00	0.00	3.61	3.50
-40	0.00	0.00	0.00	0.01	0.06	0.13	0.20	0.24	0.22	0.23	0.24	0.21	0.13	0.05	0.01	0.00	0.00	0.00	1.74	1.51
-50	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.08	0.07	0.07	0.08	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.51	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.00	0.01	0.12	0.85	2.47	4.55	6.67	8.29	8.92	8.88	8.21	6.61	4.55	2.51	0.84	0.11	0.01	0.00	64	---
Φ a	0.00	0.00	0.00	0.57	2.24	4.32	6.42	8.02	8.62	8.58	7.94	6.37	4.32	2.28	0.56	0.00	0.00	0.00	---	60

one-half-peak spread: U:26.7,D:26.4 , L:34.4,R:36.5


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.17V I:1.088A P:9.578W PF:0.7233 Freq:59.98Hz Lamp Flux:63.7219x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W BLUE 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

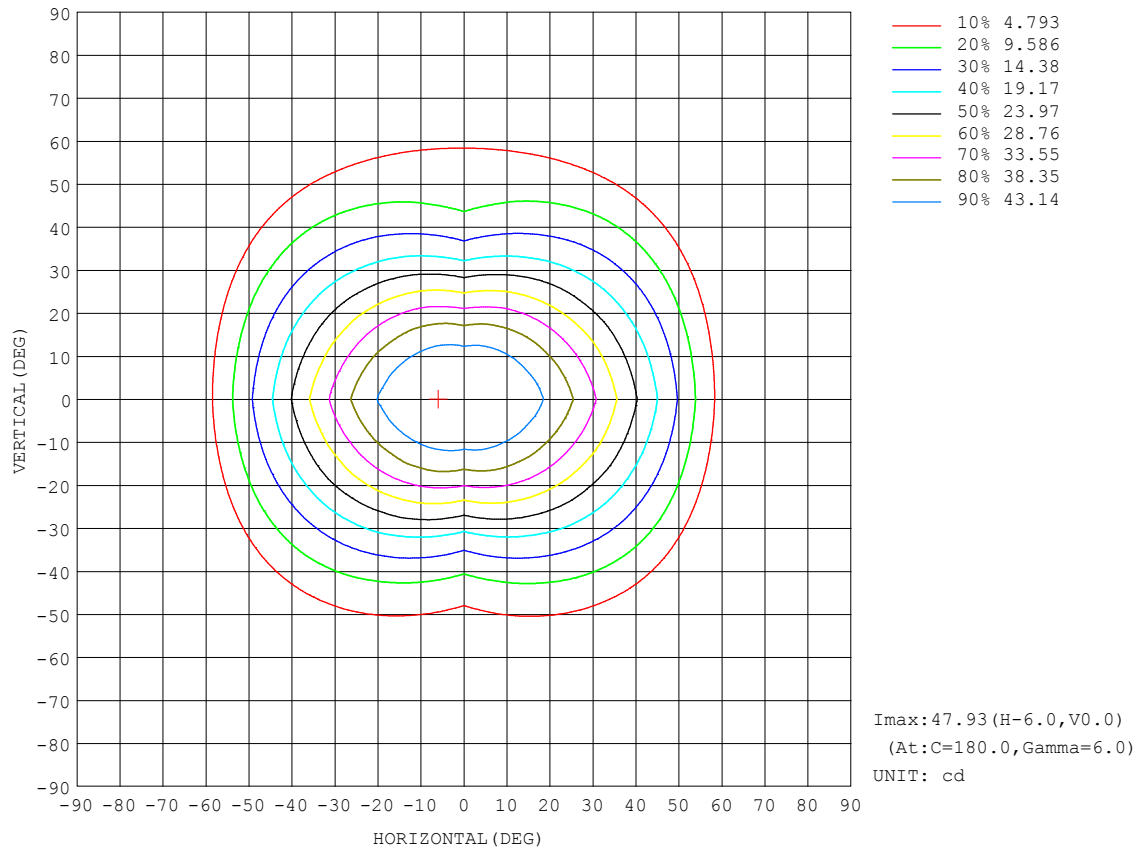


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.17V I:1.088A P:9.578W PF:0.7233 Freq:59.98Hz Lamp Flux:63.7219x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W BLUE 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

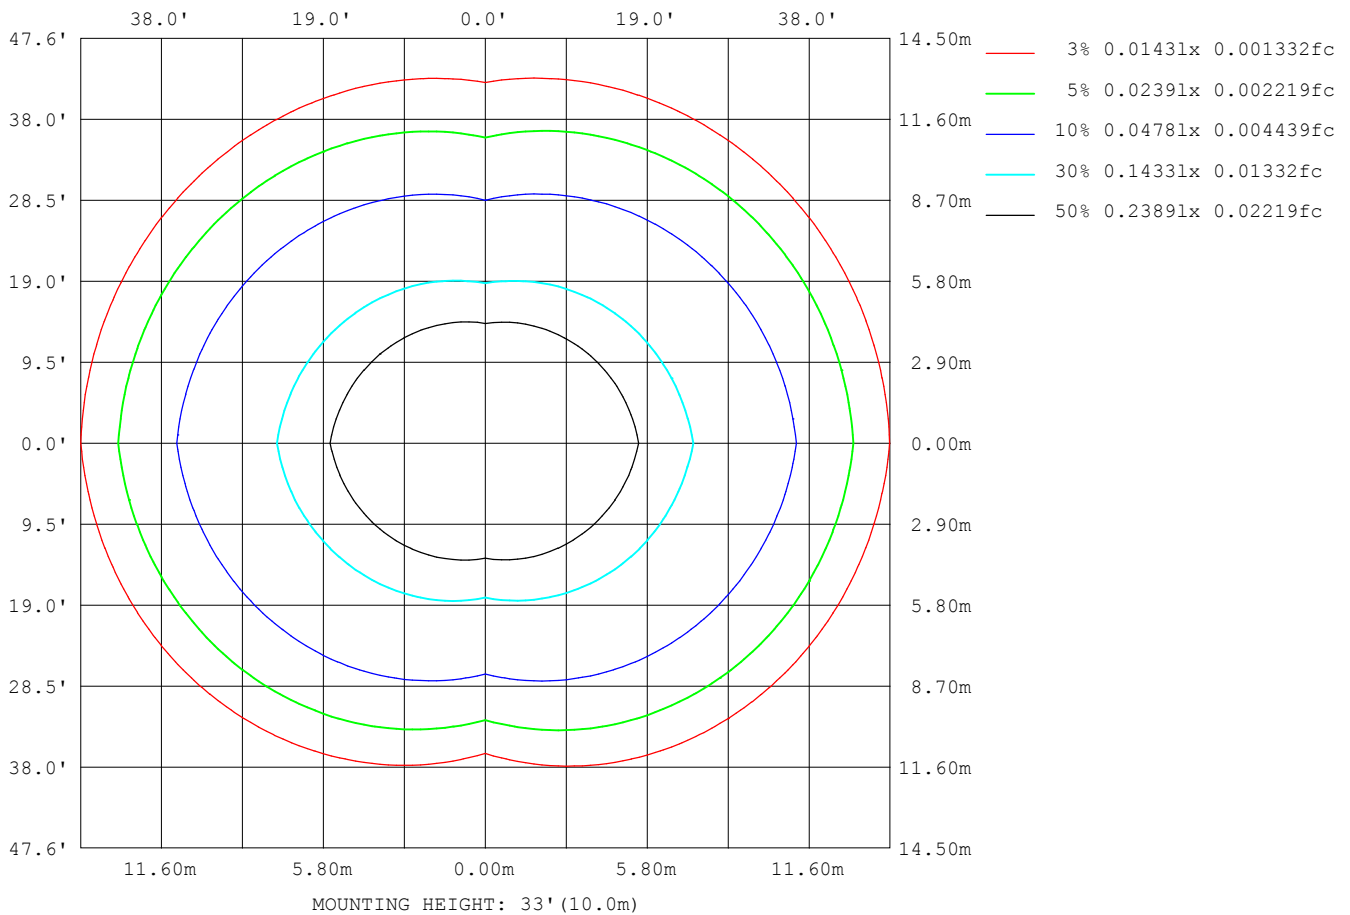

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

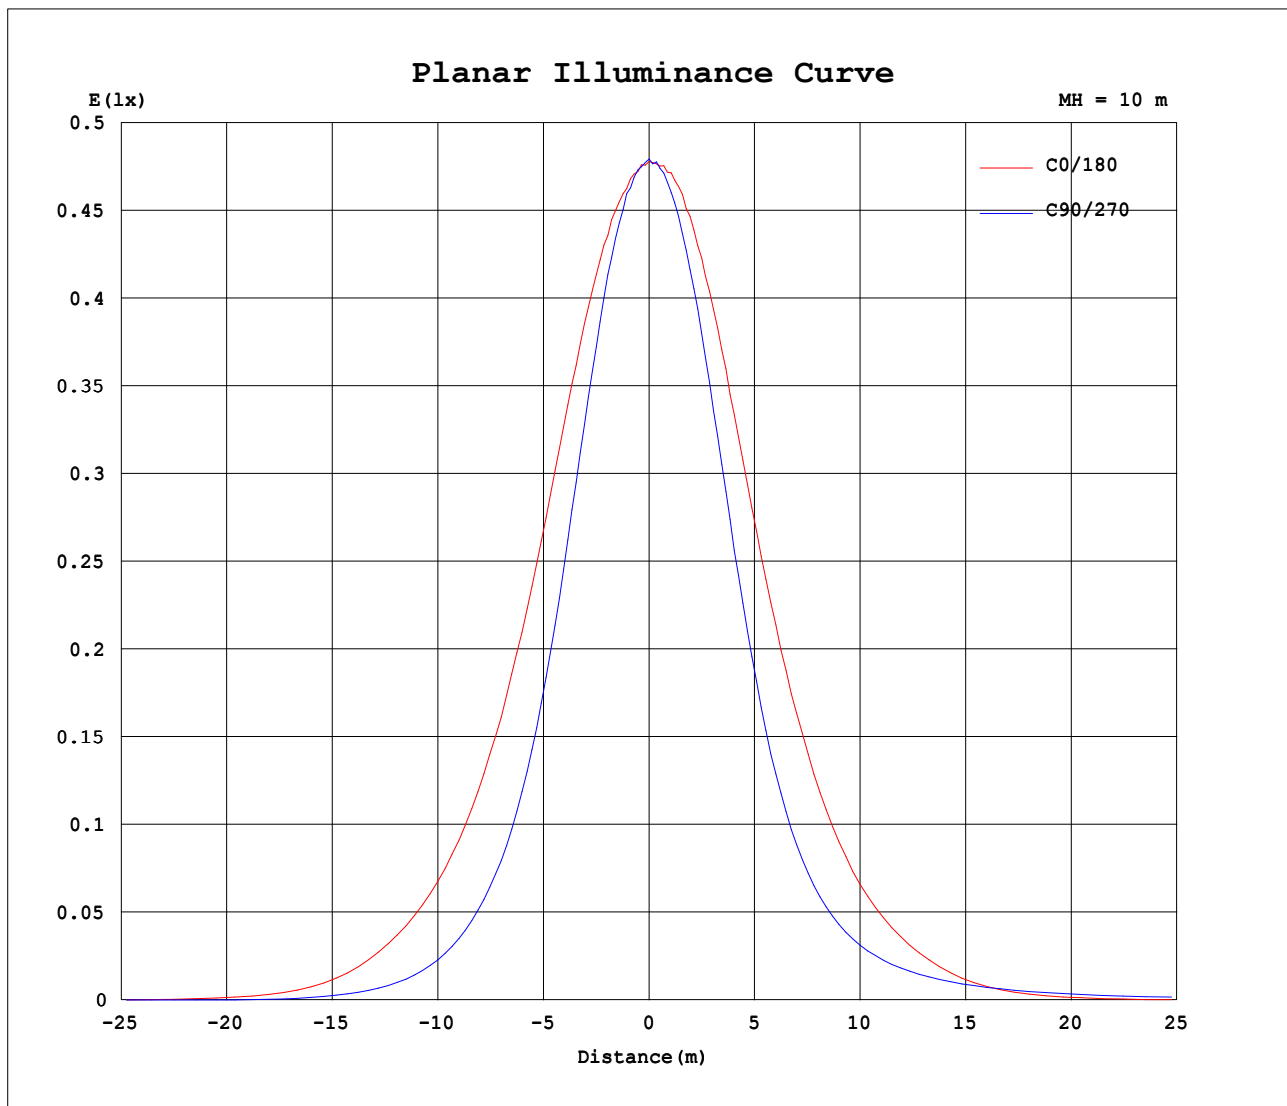


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.17V I:1.088A P:9.578W PF:0.7233 Freq:59.98Hz Lamp Flux:63.7219x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W BLUE 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

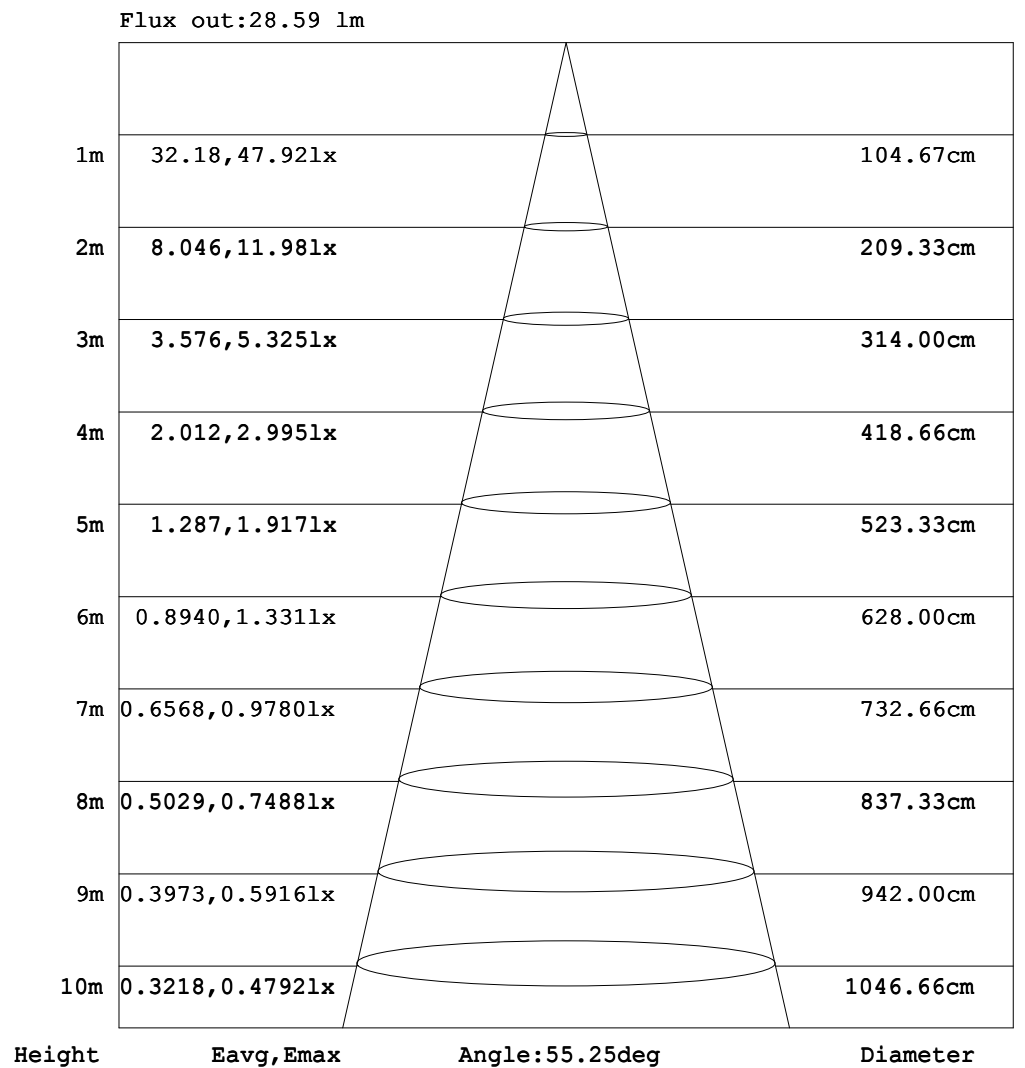

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.17V I:1.088A P:9.578W PF:0.7233 Freq:59.98Hz Lamp Flux:63.7219x1 lm									
NAME: LED LANDSCAPE LIGHT					TYPE:Copper Spotlight RGBWW WEIGHT:				
SPEC.:10W BLUE 60°LENS					DIM.:		SERIAL No.:1		
MFR.: EVERFINE					SUR.:		Shielding Angle:FLOODLIGHT SHROUD		

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.08	0.13	0.16	0.19	0.21	0.23
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.08	0.12	0.16	0.19	0.21	0.22
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.09	0.11	0.15	0.17	0.18
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.07	0.08	0.09
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.24	0.40	0.52	0.65	0.77	0.86	0.84	0.74	0.57
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	0.63	1.17	1.97	2.89	3.78	4.49	4.90	4.99	4.83	4.43	3.81
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.38	1.13	2.40	4.26	6.35	8.10	9.52	10.6	11.3	11.7	11.6	11.1	10.1
-30	0.00	0.00	0.00	0.00	0.00	0.21	1.15	2.83	5.60	8.79	11.6	14.0	16.4	18.4	20.1	21.1	21.6	21.3	20.1
-20	0.00	0.00	0.00	0.00	0.00	0.63	2.14	5.11	9.23	13.0	16.7	20.4	24.0	27.1	30.0	32.3	33.8	34.4	33.7
-10	0.00	0.00	0.00	0.00	0.00	0.99	3.11	7.12	12.0	16.5	21.2	26.1	30.6	34.8	38.5	41.5	43.5	44.6	44.3
0	0.00	0.00	0.00	0.00	0.00	1.16	3.59	8.23	13.6	18.7	24.2	29.7	34.9	39.5	43.4	45.8	47.2	47.7	47.8
10	0.00	0.01	0.02	0.06	0.11	1.17	3.36	7.41	12.3	16.8	21.5	26.3	30.9	35.2	38.9	41.9	43.9	44.9	44.7
20	0.00	0.01	0.05	0.11	0.21	0.97	2.63	5.68	9.84	13.6	17.2	20.9	24.5	27.8	30.8	33.3	34.8	35.6	34.9
30	0.00	0.01	0.06	0.15	0.27	0.65	1.81	3.68	6.54	9.79	12.5	14.9	17.3	19.3	21.0	22.2	22.8	22.7	21.6
40	0.00	0.01	0.07	0.16	0.30	0.49	1.11	2.15	3.64	5.63	7.84	9.64	11.0	12.1	12.8	13.2	13.1	12.7	11.8
50	0.00	0.01	0.07	0.16	0.30	0.47	0.70	1.16	1.91	2.78	3.82	4.91	5.97	6.84	7.37	7.59	7.56	7.30	6.87
60	0.00	0.01	0.05	0.13	0.24	0.40	0.58	0.79	1.05	1.38	1.88	2.37	2.85	3.30	3.71	4.03	4.27	4.42	4.51
70	0.00	0.00	0.03	0.09	0.17	0.27	0.40	0.55	0.72	0.91	1.11	1.32	1.54	1.79	2.01	2.23	2.45	2.64	2.82
80	0.00	0.00	0.01	0.03	0.07	0.12	0.18	0.25	0.34	0.42	0.52	0.62	0.72	0.82	0.92	1.02	1.12	1.20	1.28
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.03	0.04	0.05	0.05
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.05	0.08	0.13	0.17	0.17	0.15
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.08	0.13	0.16	0.19	0.21	0.23

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-08-18

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.17V I:1.088A P:9.578W PF:0.7233 Freq:59.98Hz Lamp Flux:63.7219x1 lm																	
NAME: LED LANDSCAPE LIGHT									TYPE:Copper Spotlight RGBWW WEIGHT:								
SPEC.:10W BLUE 60°LENS									DIM.:			SERIAL No.:1					
MFR.: EVERFINE									SUR.:			Shielding Angle:FLOODLIGHT SHROUD					

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.22	0.18	0.16	0.16	0.13	0.12	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.21	0.19	0.18	0.16	0.14	0.10	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.17	0.16	0.14	0.12	0.10	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.09	0.08	0.07	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.73	0.82	0.83	0.73	0.61	0.49	0.35	0.19	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	4.46	4.88	5.06	4.93	4.50	3.77	2.82	1.88	1.09	0.56	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	11.1	11.6	11.8	11.5	10.7	9.72	8.31	6.37	4.18	2.29	1.06	0.30	0.00	0.00	0.00	0.00	0.00	0.00	
-30	21.2	21.5	21.0	19.9	18.5	16.5	14.3	11.9	8.95	5.58	2.71	1.07	0.12	0.00	0.00	0.00	0.00	0.00	
-20	34.3	33.6	32.0	29.6	26.9	23.8	20.5	17.0	13.4	9.32	5.00	2.01	0.54	0.00	0.00	0.00	0.00	0.00	
-10	44.3	43.0	40.9	37.9	34.2	30.2	25.9	21.4	16.9	12.3	7.11	2.95	0.88	0.00	0.00	0.00	0.00	0.00	
0	47.4	46.6	44.9	42.3	38.7	34.3	29.3	24.3	19.2	14.0	8.21	3.45	1.06	0.00	0.00	0.00	0.00	0.00	
10	44.5	43.4	41.3	38.3	34.6	30.5	26.1	21.6	17.2	12.6	7.39	3.20	1.07	0.11	0.06	0.02	0.01	0.00	
20	35.4	34.6	32.9	30.5	27.6	24.3	21.0	17.5	14.0	9.94	5.57	2.50	0.88	0.21	0.11	0.05	0.01	0.00	
30	22.6	22.7	22.1	20.9	19.3	17.4	15.3	12.8	9.95	6.52	3.55	1.73	0.56	0.27	0.15	0.06	0.01	0.00	
40	12.7	13.2	13.2	13.0	12.2	11.3	9.84	7.86	5.56	3.53	2.08	1.02	0.49	0.30	0.16	0.07	0.01	0.00	
50	7.33	7.61	7.66	7.41	6.85	5.96	4.84	3.73	2.71	1.83	1.08	0.70	0.47	0.30	0.16	0.07	0.01	0.00	
60	4.41	4.25	4.00	3.67	3.26	2.82	2.32	1.82	1.35	1.05	0.79	0.58	0.40	0.24	0.13	0.05	0.01	0.00	
70	2.64	2.45	2.23	2.01	1.79	1.54	1.32	1.11	0.91	0.72	0.55	0.40	0.27	0.17	0.09	0.03	0.00	0.00	
80	1.20	1.12	1.02	0.92	0.82	0.72	0.62	0.52	0.42	0.34	0.25	0.18	0.12	0.07	0.03	0.01	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.01	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.05	0.05	0.06	0.06	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.16	0.16	0.15	0.11	0.11	0.09	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.22	0.18	0.16	0.16	0.13	0.12	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-08-18

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks: