

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	753.1 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	106.2V x 116.7H
	At 50% of Imax	54.8V x 79.9H
	At 90% of Imax	24.1V x 38.2H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	937.7 lumens per klm.
	To 50% of Imax	616.2 lumens per klm.
	To 90% of Imax	172.6 lumens per klm.

Upward LOR	0.7 %
Downward LOR	99.4 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.18V I:1.083A P:9.532W PF:0.7231 Freq:59.97Hz Lamp Flux:147.092x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W RED 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

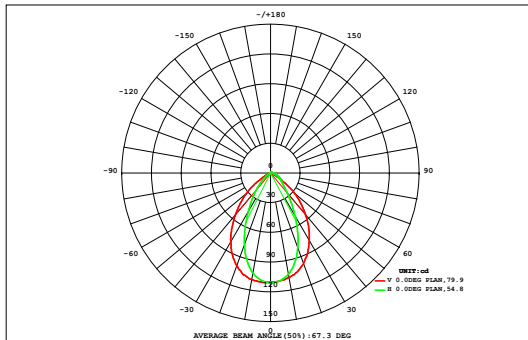

DATA OF LAMP		Eff:15.43lm/W	
MODEL	F9B1-10W-A	Imax (cd)	110.8
NOMINAL POWER (W)	10	AVAILABILITY (%)	93.8
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	138.0
NOMINAL FLUX (lm)	147.092	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	147.1
TEST VOLTAGE (V)	12	θ @50% (H,V)	80,55DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.05	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.31	0.00
90	0.00	0.00	0.01	0.02	0.04	0.06	0.09	0.12	0.14	0.14	0.12	0.09	0.06	0.04	0.02	0.01	0.00	0.00	0.93	0.00
80	0.00	0.00	0.01	0.03	0.06	0.11	0.16	0.21	0.24	0.24	0.21	0.16	0.10	0.06	0.03	0.01	0.00	0.00	1.64	0.00
70	0.00	0.00	0.01	0.04	0.11	0.20	0.31	0.38	0.39	0.39	0.37	0.30	0.20	0.10	0.04	0.01	0.00	0.00	2.87	1.61
60	0.00	0.00	0.02	0.07	0.21	0.41	0.58	0.67	0.66	0.66	0.67	0.58	0.40	0.20	0.07	0.02	0.00	0.00	5.23	4.75
50	0.00	0.00	0.02	0.13	0.38	0.70	0.97	1.16	1.18	1.18	1.15	0.97	0.70	0.38	0.12	0.02	0.00	0.00	9.07	8.77
40	0.00	0.00	0.03	0.20	0.58	1.02	1.49	1.86	2.02	2.01	1.84	1.47	1.02	0.58	0.19	0.03	0.00	0.00	14.4	14.2
30	0.00	0.00	0.04	0.28	0.76	1.36	2.01	2.56	2.84	2.83	2.53	1.97	1.35	0.76	0.27	0.04	0.00	0.00	19.6	19.4
	0.00	0.00	0.05	0.33	0.89	1.62	2.39	2.99	3.27	3.25	2.93	2.33	1.59	0.90	0.32	0.04	0.00	0.00	22.9	22.8
	0.00	0.00	0.05	0.33	0.89	1.61	2.38	2.98	3.26	3.23	2.92	2.32	1.59	0.89	0.32	0.04	0.00	0.00	22.8	22.6
	0.00	0.00	0.04	0.26	0.74	1.34	1.98	2.51	2.78	2.76	2.47	1.94	1.32	0.74	0.25	0.03	0.00	0.00	19.2	19.0
-30	0.00	0.00	0.02	0.18	0.54	0.99	1.44	1.79	1.91	1.90	1.77	1.42	0.98	0.55	0.17	0.02	0.00	0.00	13.7	13.5
-40	0.00	0.00	0.01	0.09	0.33	0.63	0.90	1.08	1.08	1.07	1.07	0.90	0.63	0.32	0.08	0.01	0.00	0.00	8.20	7.93
-50	0.00	0.00	0.00	0.03	0.14	0.31	0.47	0.54	0.51	0.51	0.54	0.47	0.31	0.13	0.03	0.00	0.00	0.00	3.99	3.43
-60	0.00	0.00	0.00	0.01	0.03	0.09	0.15	0.19	0.17	0.17	0.18	0.14	0.08	0.03	0.00	0.00	0.00	0.00	1.24	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.12	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.00	0.02	0.32	2.01	5.71	10.5	15.4	19.1	20.5	20.4	18.8	15.1	10.4	5.68	1.92	0.28	0.02	0.00	146	---
Φ a	0.00	0.00	0.00	1.33	5.16	9.91	14.8	18.4	19.8	19.7	18.2	14.5	9.81	5.13	1.25	0.00	0.00	0.00	---	138

one-half-peak spread: U:27.4,D:27.8 , L:34.2,R:39.1


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.18V I:1.083A P:9.532W PF:0.7231 Freq:59.97Hz Lamp Flux:147.092x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W RED 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

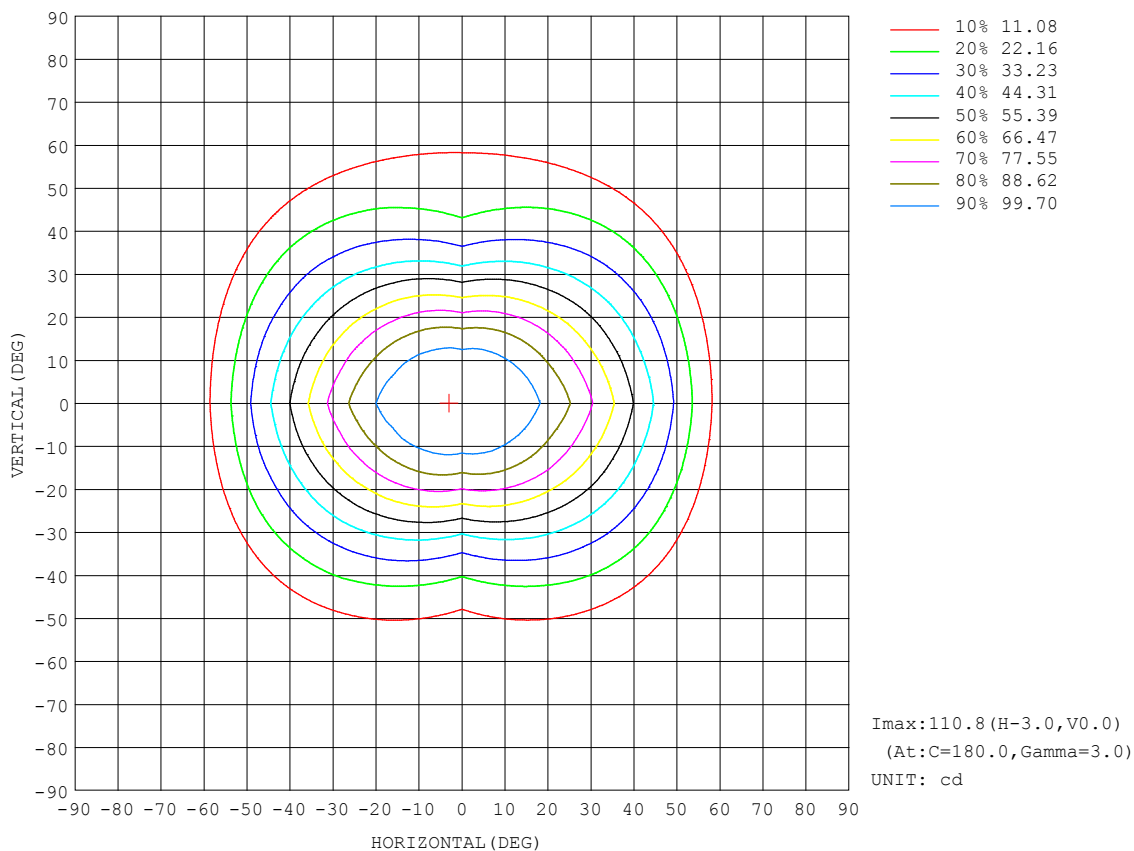


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.18V I:1.083A P:9.532W PF:0.7231 Freq:59.97Hz Lamp Flux:147.092x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W RED 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

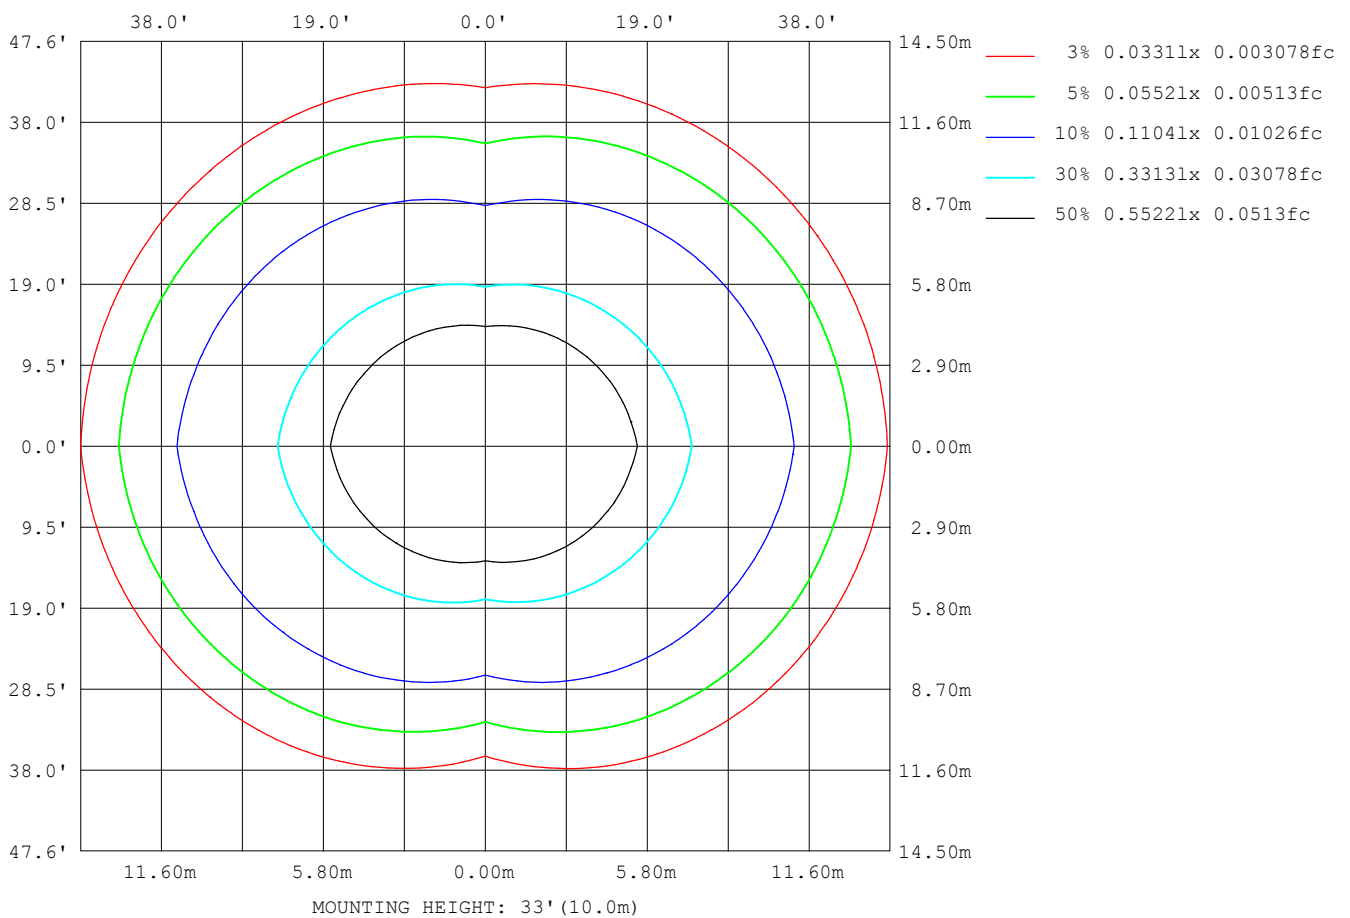

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

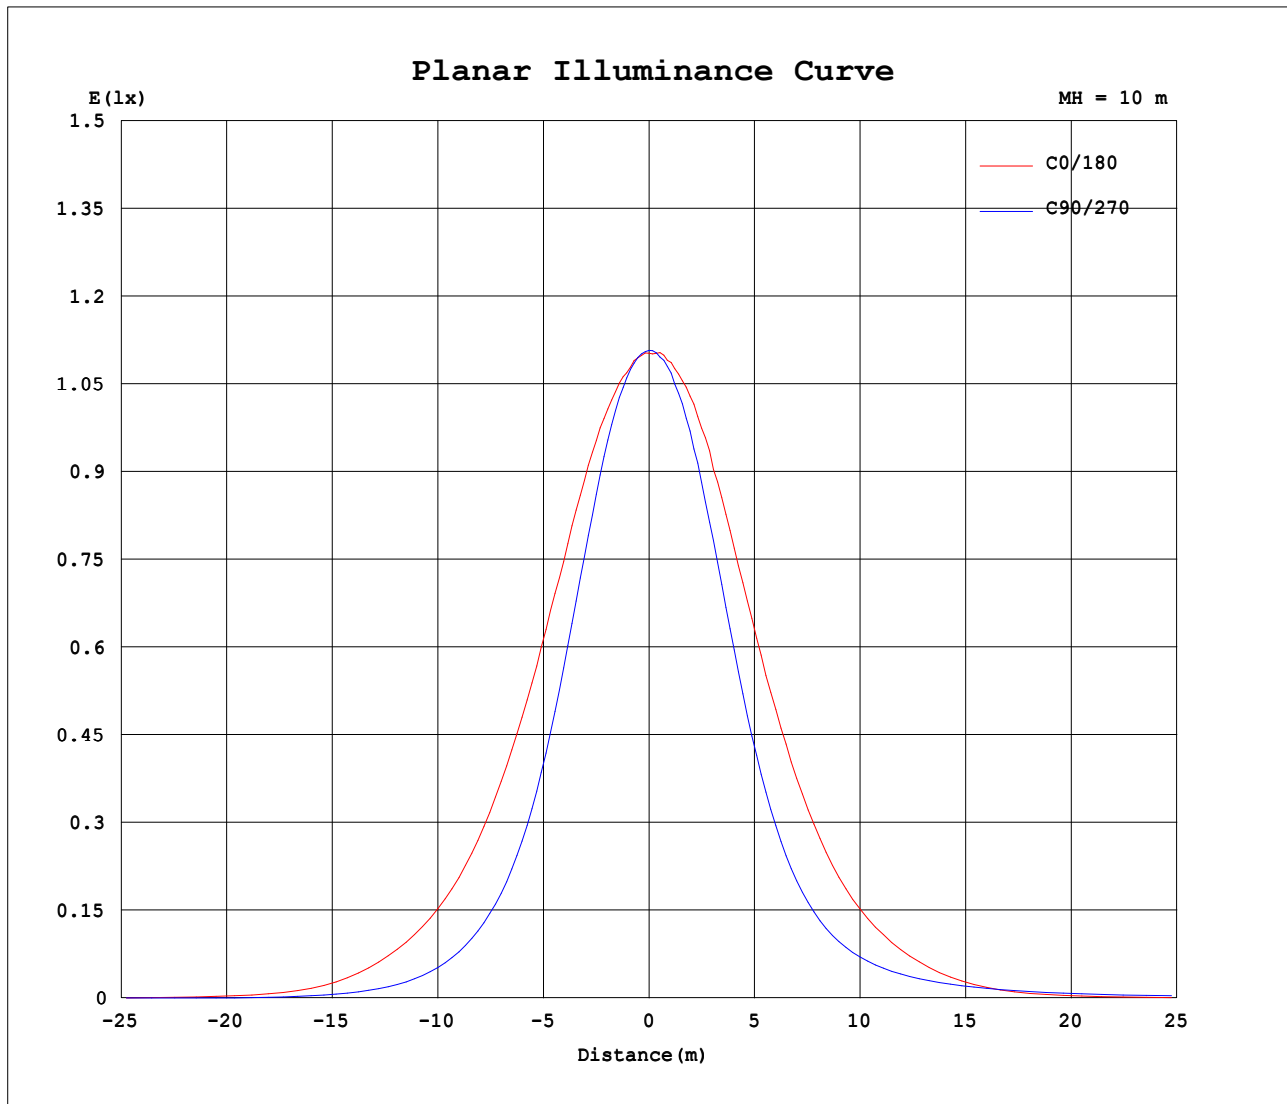


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.18V I:1.083A P:9.532W PF:0.7231 Freq:59.97Hz Lamp Flux:147.092x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W RED 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

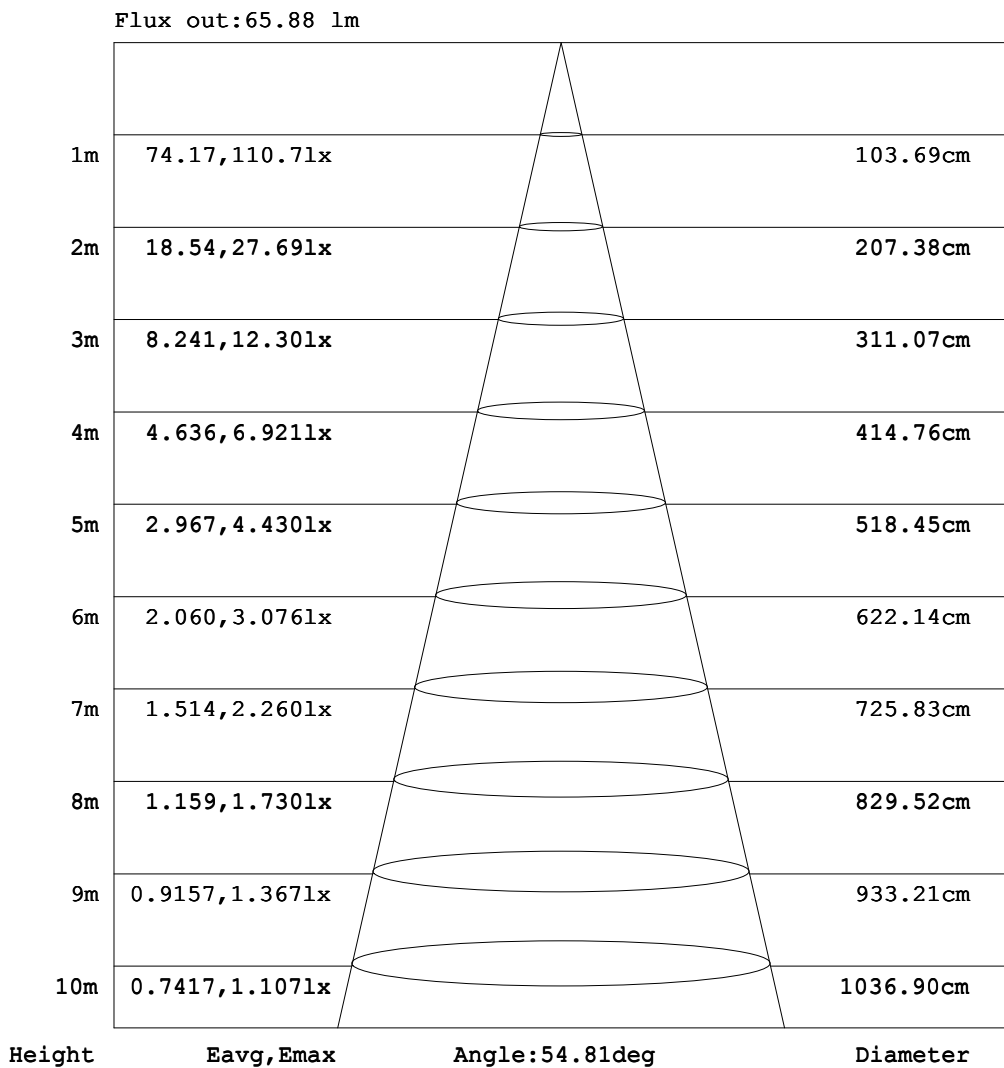

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:1.083A P:9.532W PF:0.7231 Freq:59.97Hz Lamp Flux:147.092x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W RED 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOODLIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.10	0.20	0.27	0.36	0.45	0.54	0.63	0.70	0.77	0.82	0.86
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.19	0.26	0.36	0.45	0.52	0.62	0.69	0.76	0.81	0.84
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.14	0.21	0.29	0.39	0.46	0.53	0.61	0.67	0.72	0.76
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.14	0.21	0.27	0.33	0.41	0.46	0.50	0.54	0.56
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.14	0.19	0.22	0.27	0.30	0.32	0.33
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.07	0.09	0.10	0.11
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.04	0.04	0.02	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.10	0.40	0.81	1.15	1.50	1.89	2.18	2.38	2.35	2.12	1.73
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.80	1.78	3.09	4.91	6.96	8.92	10.4	11.4	11.6	11.2	10.3	8.84
-40	0.00	0.00	0.00	0.00	0.00	0.14	1.28	3.00	5.90	10.00	14.6	18.7	21.9	24.2	25.9	26.6	26.3	25.1	22.7
-30	0.00	0.00	0.00	0.00	0.04	0.93	3.06	6.90	13.1	20.3	26.7	32.3	37.4	42.1	45.7	48.1	49.1	48.3	45.4
-20	0.00	0.00	0.00	0.00	0.16	1.96	5.30	11.9	21.2	30.1	38.2	46.8	54.9	62.3	69.0	74.3	77.9	79.1	77.2
-10	0.00	0.00	0.00	0.00	0.33	2.77	7.51	16.5	27.5	37.9	48.5	59.8	70.4	80.1	88.6	95.7	100	103	103
0	0.00	0.00	0.00	0.00	0.42	3.18	8.66	19.0	31.1	43.1	55.5	68.3	80.5	91.2	99.7	106	109	110	110
10	0.00	0.02	0.06	0.14	0.59	3.19	8.05	17.1	28.2	38.5	49.0	60.4	71.2	81.1	89.7	96.8	101	104	104
20	0.00	0.03	0.12	0.27	0.64	2.74	6.36	13.2	22.5	31.4	39.4	47.9	56.2	64.0	71.0	76.5	80.6	82.0	80.5
30	0.00	0.04	0.16	0.36	0.69	1.97	4.57	8.74	15.1	22.5	28.8	34.3	39.3	44.1	48.0	50.8	52.3	52.0	49.7
40	0.00	0.04	0.18	0.40	0.73	1.30	2.98	5.29	8.60	13.0	17.8	22.1	25.3	27.5	29.0	29.8	29.6	28.5	26.5
50	0.00	0.04	0.18	0.40	0.72	1.13	1.76	3.05	4.75	6.66	8.94	11.4	13.7	15.6	16.7	17.3	17.1	16.5	15.5
60	0.00	0.04	0.15	0.35	0.62	0.97	1.40	1.91	2.58	3.52	4.63	5.73	6.79	7.77	8.61	9.30	9.81	10.1	10.3
70	0.00	0.03	0.11	0.25	0.45	0.71	1.01	1.36	1.76	2.20	2.67	3.18	3.69	4.25	4.77	5.29	5.79	6.24	6.63
80	0.00	0.01	0.06	0.13	0.24	0.37	0.52	0.70	0.91	1.13	1.36	1.61	1.87	2.12	2.37	2.61	2.85	3.06	3.26
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.07	0.07	0.06	0.07	0.11	0.11
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.09	0.12	0.15	0.22	0.25	0.29	0.32	0.31	0.30
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.11	0.16	0.23	0.30	0.37	0.41	0.48	0.50	0.52	0.55
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.16	0.23	0.32	0.40	0.46	0.54	0.62	0.66	0.73	0.75
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.10	0.20	0.27	0.36	0.45	0.54	0.63	0.70	0.77	0.82	0.86

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-08-18

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:1.083A P:9.532W PF:0.7231 Freq:59.97Hz Lamp Flux:147.092x1 lm																	
NAME: LED LANDSCAPE LIGHT									TYPE:Copper Spotlight RGBWW WEIGHT:								
SPEC.:10W RED 60°LENS									DIM.:			SERIAL No.:1					
MFR.: EVERFINE									SUR.:			Shielding Angle:FLOODLIGHT SHROUD					

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.83	0.79	0.77	0.76	0.62	0.59	0.47	0.45	0.30	0.24	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.82	0.80	0.77	0.71	0.60	0.57	0.45	0.41	0.28	0.20	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.74	0.71	0.65	0.59	0.55	0.46	0.42	0.30	0.25	0.15	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.55	0.53	0.52	0.45	0.40	0.36	0.27	0.23	0.15	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.33	0.33	0.30	0.26	0.23	0.21	0.14	0.11	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.11	0.10	0.10	0.09	0.07	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.01	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	2.06	2.24	2.22	2.00	1.68	1.27	0.91	0.58	0.20	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	10.3	11.3	11.6	11.3	10.3	8.61	6.56	4.45	2.70	1.43	0.51	0.05	0.00	0.00	0.00	0.00	0.00	0.00	
-40	25.0	26.3	26.6	26.0	24.3	22.0	18.8	14.4	9.50	5.31	2.54	0.91	0.07	0.00	0.00	0.00	0.00	0.00	
-30	48.0	48.7	47.7	45.3	41.8	37.4	32.4	26.8	20.1	12.5	6.20	2.56	0.57	0.00	0.00	0.00	0.00	0.00	
-20	78.7	77.0	73.4	67.6	61.2	54.3	46.5	38.5	30.2	21.0	11.3	4.67	1.48	0.06	0.00	0.00	0.00	0.00	
-10	102	99.2	94.0	86.6	78.4	68.9	59.0	48.5	38.1	27.7	15.9	6.69	2.24	0.16	0.00	0.00	0.00	0.00	
0	109	107	104	97.3	89.1	78.5	67.5	55.1	43.3	31.4	18.4	7.76	2.63	0.20	0.00	0.00	0.00	0.00	
10	103	100	95.1	87.7	79.3	69.7	59.6	49.0	38.7	28.4	16.5	7.24	2.67	0.42	0.14	0.06	0.02	0.00	
20	81.6	79.7	75.6	69.6	62.9	55.6	47.5	39.7	31.5	22.3	12.5	5.73	2.27	0.55	0.27	0.12	0.03	0.00	
30	51.8	51.9	50.4	47.6	43.7	39.3	34.4	28.9	22.3	14.6	8.04	4.08	1.60	0.65	0.36	0.16	0.04	0.00	
40	28.5	29.6	29.8	29.2	27.6	25.3	22.1	17.6	12.5	8.00	4.83	2.61	1.22	0.73	0.40	0.18	0.04	0.00	
50	16.5	17.2	17.3	16.7	15.4	13.4	11.0	8.48	6.27	4.40	2.75	1.69	1.13	0.72	0.40	0.18	0.04	0.00	
60	10.1	9.70	9.14	8.42	7.56	6.56	5.49	4.40	3.32	2.52	1.90	1.40	0.97	0.62	0.35	0.15	0.04	0.00	
70	6.23	5.77	5.27	4.75	4.22	3.68	3.17	2.67	2.20	1.76	1.36	1.01	0.71	0.45	0.25	0.11	0.03	0.00	
80	3.06	2.85	2.61	2.37	2.12	1.87	1.61	1.36	1.13	0.91	0.70	0.52	0.37	0.24	0.13	0.06	0.01	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.02	0.03	0.04	0.05	0.05	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.12	0.10	0.10	0.11	0.11	0.13	0.10	0.09	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.33	0.35	0.35	0.29	0.29	0.24	0.18	0.18	0.13	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.54	0.53	0.52	0.47	0.46	0.36	0.35	0.24	0.22	0.14	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.74	0.69	0.70	0.64	0.54	0.53	0.41	0.38	0.26	0.19	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.83	0.79	0.77	0.76	0.62	0.59	0.47	0.45	0.30	0.24	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: