

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2930.7 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	53.0V x 55.4H
	At 50% of Imax	32.4V x 33.0H
	At 90% of Imax	12.1V x 12.7H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	854.5 lumens per klm.
	To 50% of Imax	547.4 lumens per klm.
	To 90% of Imax	98.1 lumens per klm.
	Upward LOR	1.3 %
	Downward LOR	98.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.05V I:0.9187A P:10.06W PF:0.9087 Freq:59.98Hz Lamp Flux:682.487x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:10W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

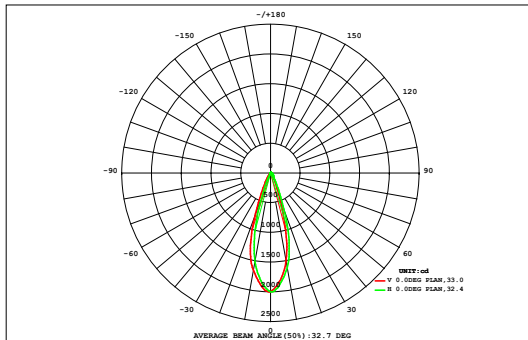

DATA OF LAMP		Eff:67.85lm/W	
MODEL	D6B1-10W-30K-A	Imax (cd)	2000
NOMINAL POWER (W)	10	AVAILABILITY (%)	85.3
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	582.0
NOMINAL FLUX (lm)	682.487	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	682.5
TEST VOLTAGE (V)	12	θ @50% (H,V)	33,32DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.06	0.08	0.11	0.16	0.21	0.26	0.32	0.36	0.39	0.39	0.36	0.31	0.25	0.20	0.15	0.11	0.08	0.06	3.86	0.00
45	0.06	0.10	0.15	0.21	0.30	0.39	0.48	0.56	0.61	0.60	0.54	0.46	0.36	0.28	0.20	0.14	0.10	0.06	5.59	0.00
40	0.07	0.12	0.20	0.30	0.44	0.61	0.79	0.94	1.03	1.02	0.90	0.73	0.55	0.40	0.27	0.18	0.12	0.07	8.77	0.00
35	0.09	0.16	0.27	0.45	0.69	1.01	1.36	1.68	1.87	1.82	1.57	1.23	0.89	0.60	0.38	0.24	0.14	0.08	14.5	6.08
30	0.11	0.20	0.38	0.66	1.08	1.67	2.41	3.18	3.65	3.54	2.90	2.10	1.41	0.89	0.53	0.31	0.17	0.10	25.3	19.8
25	0.12	0.26	0.50	0.93	1.63	2.76	4.45	6.20	7.19	6.94	5.56	3.70	2.21	1.29	0.73	0.39	0.21	0.11	45.2	40.9
20	0.14	0.31	0.64	1.25	2.34	4.46	7.38	9.68	10.8	10.5	8.86	6.08	3.35	1.74	0.93	0.48	0.24	0.12	69.4	65.6
15	0.16	0.36	0.76	1.54	3.15	6.30	9.76	12.1	13.2	13.0	11.4	8.21	4.54	2.16	1.09	0.54	0.26	0.12	88.6	85.1
10	0.16	0.38	0.84	1.73	3.73	7.46	11.0	13.2	14.6	14.4	12.6	9.32	5.17	2.37	1.16	0.57	0.27	0.12	99.1	95.6
5	0.15	0.36	0.80	1.67	3.63	7.31	10.8	13.1	14.5	14.2	12.4	9.17	5.02	2.27	1.10	0.53	0.25	0.11	97.5	94.1
0	0.13	0.31	0.67	1.36	2.88	5.89	9.28	11.6	12.7	12.5	10.9	7.74	4.13	1.89	0.92	0.45	0.21	0.10	83.7	80.2
-5	0.10	0.24	0.51	0.99	1.95	3.86	6.56	8.75	9.73	9.49	7.93	5.26	2.74	1.35	0.67	0.34	0.17	0.08	60.7	56.8
-10	0.08	0.17	0.35	0.65	1.16	2.10	3.49	4.93	5.63	5.39	4.29	2.74	1.55	0.82	0.44	0.24	0.12	0.06	34.2	29.8
-15	0.05	0.11	0.22	0.39	0.63	0.99	1.51	2.01	2.21	2.09	1.73	1.20	0.73	0.44	0.27	0.15	0.08	0.04	14.9	8.18
-20	0.03	0.07	0.13	0.21	0.32	0.45	0.56	0.65	0.64	0.60	0.54	0.43	0.32	0.23	0.15	0.09	0.05	0.03	5.50	0.00
-25	0.02	0.04	0.07	0.11	0.16	0.20	0.22	0.21	0.16	0.14	0.17	0.16	0.14	0.11	0.08	0.05	0.03	0.02	2.08	0.00
-30	0.01	0.02	0.03	0.05	0.07	0.09	0.09	0.07	0.04	0.03	0.05	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.84	0.00
-35	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.01	0.01	0.02	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.35	0.00
-40																				
-45																				
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	1.56	3.31	6.64	12.7	24.4	45.9	70.5	89.2	99.0	96.8	82.7	58.9	33.5	17.1	9.14	4.88	2.54	1.29	660	---
Φ a	0.00	0.00	0.00	5.38	19.2	41.4	66.6	85.7	95.5	93.5	79.0	54.9	28.8	11.2	0.70	0.00	0.00	0.00	---	582

one-half-peak spread: U:16.3,D:16.3 , L:17.2,R:16.0


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.05V I:0.9187A P:10.06W PF:0.9087 Freq:59.98Hz Lamp Flux:682.487x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:10W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

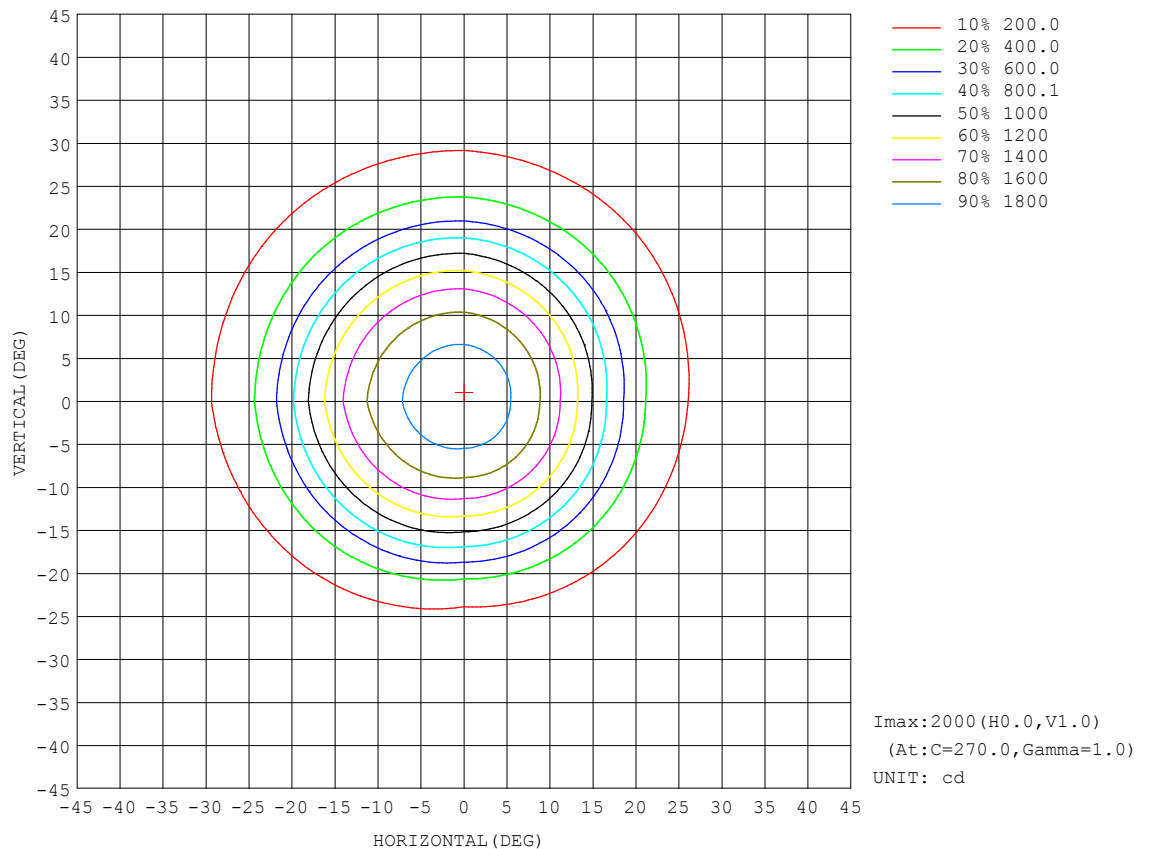


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.05V I:0.9187A P:10.06W PF:0.9087 Freq:59.98Hz Lamp Flux:682.487x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:10W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

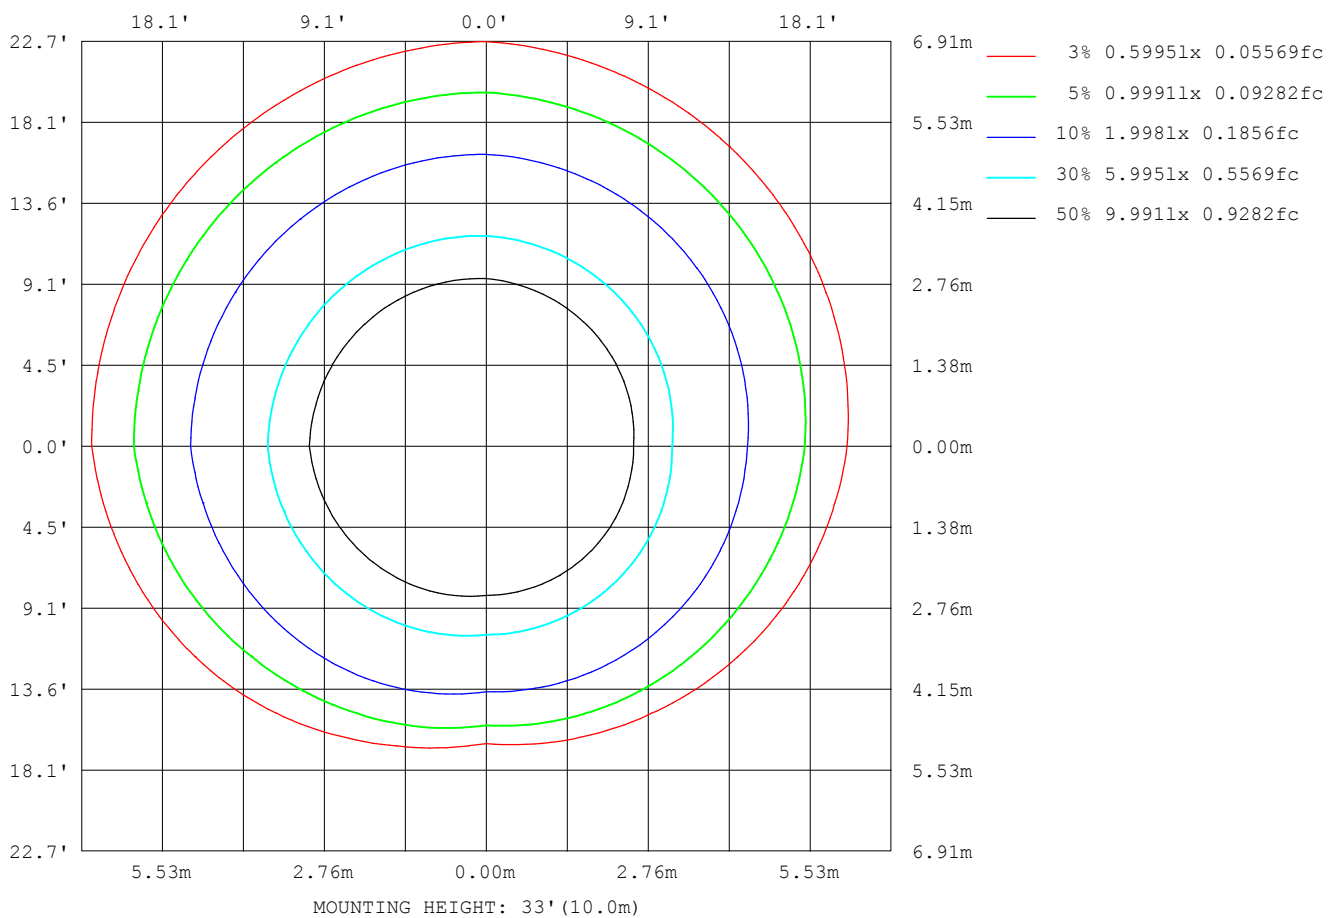

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

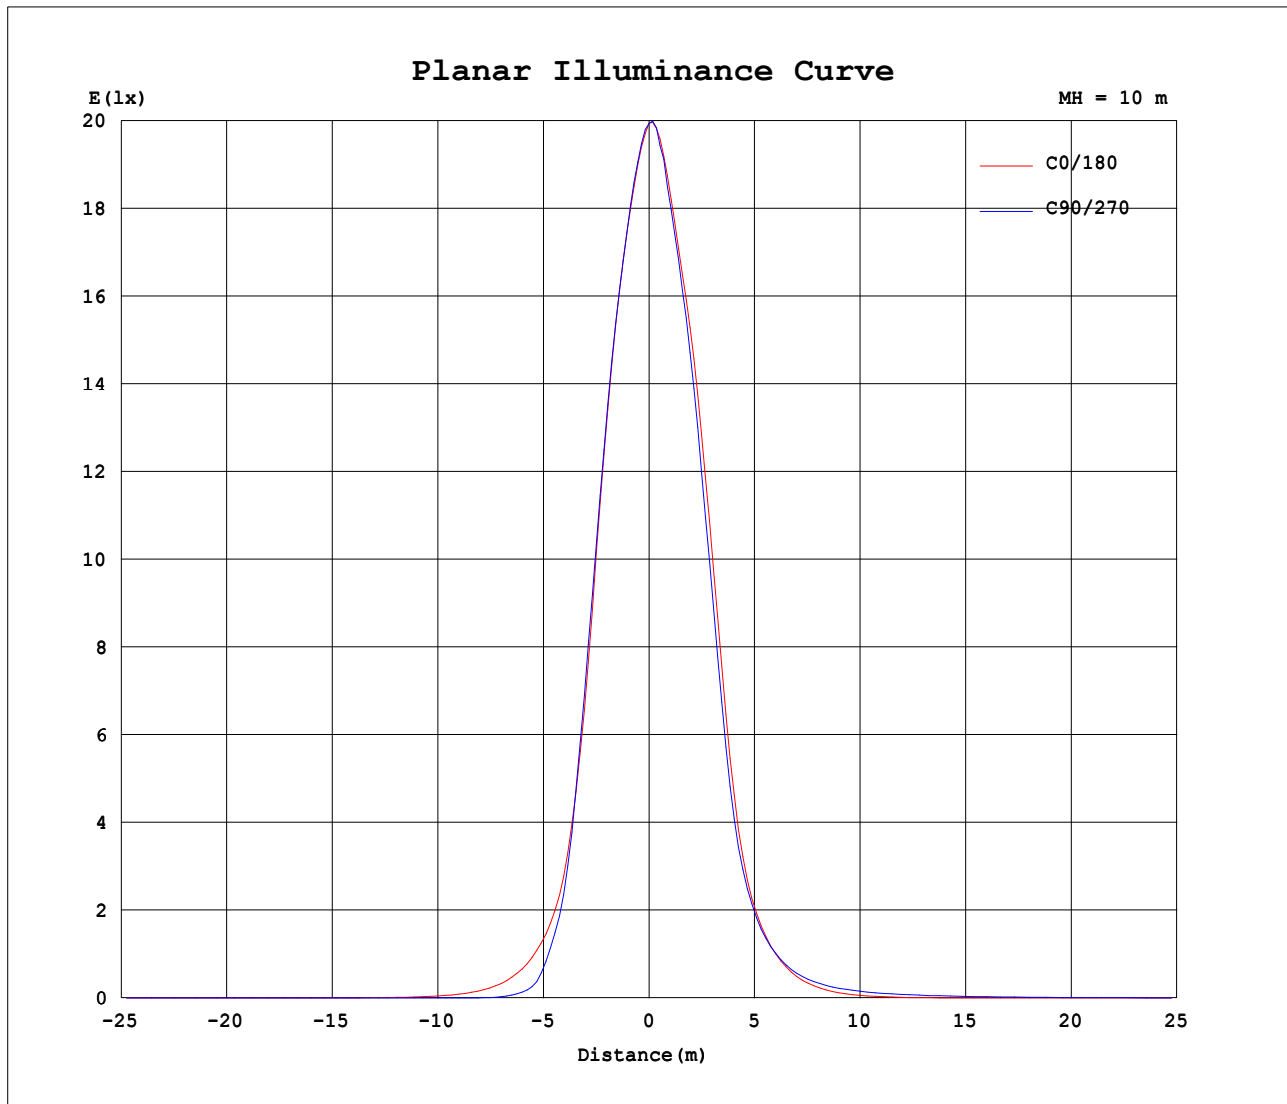


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.05V I:0.9187A P:10.06W PF:0.9087 Freq:59.98Hz Lamp Flux:682.487x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:10W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

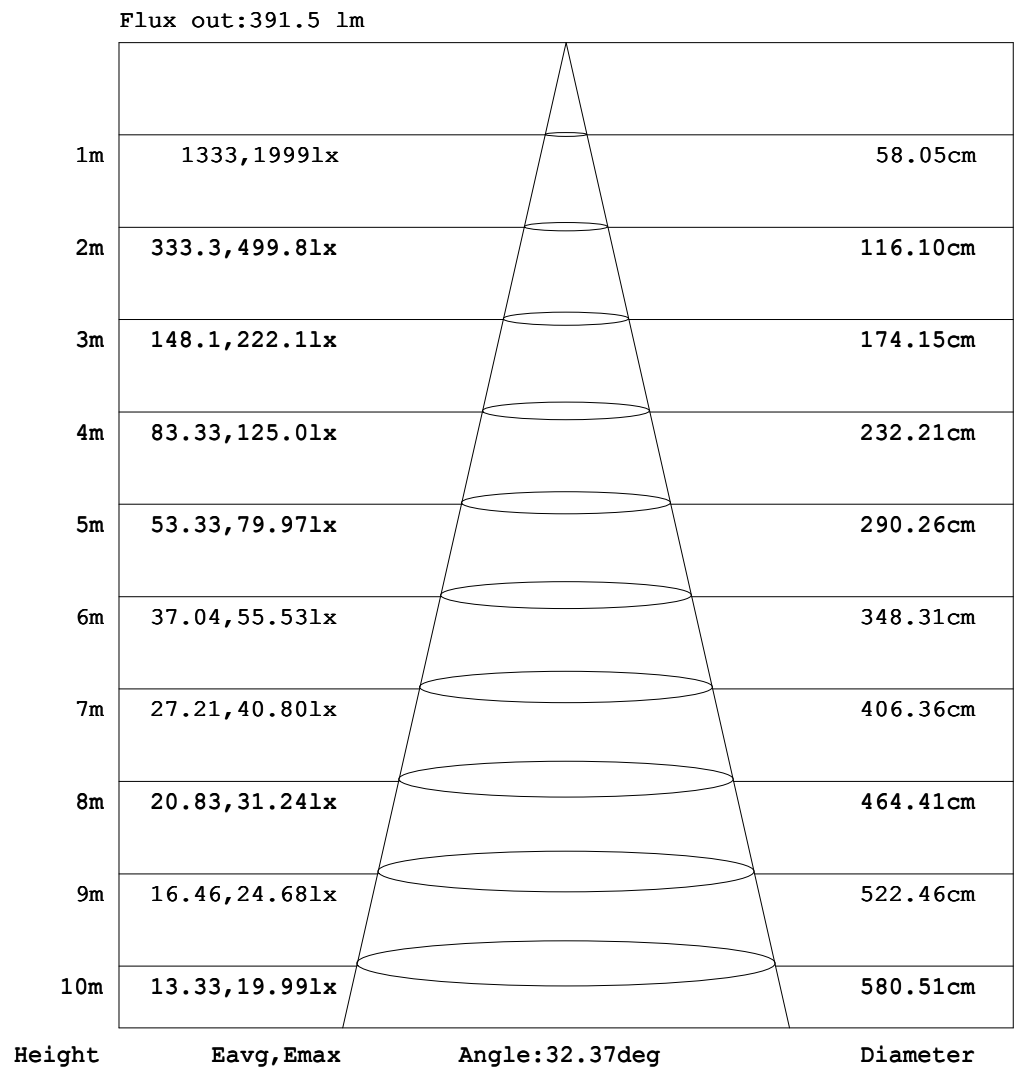

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:0.9187A P:10.06W PF:0.9087 Freq:59.98Hz Lamp Flux:682.487x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:10W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.35	0.90	1.84	3.13	4.57	5.88	6.74	7.10	7.33	7.50
-170	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.13	0.45	1.03	1.99	3.30	4.78	6.20	7.27	7.87	8.19	8.51
-160	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.13	0.38	0.86	1.61	2.67	3.93	5.26	6.48	7.49	8.23	8.78
-150	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.13	0.24	0.53	0.99	1.65	2.46	3.39	4.31	5.15	5.83	6.30
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.09	0.16	0.27	0.45	0.75	1.14	1.58	2.07	2.52	2.89	3.15
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.08	0.13	0.20	0.30	0.40	0.53	0.68	0.84	0.97	1.06
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.07	0.11	0.14	0.17	0.21	0.24	0.27	0.29
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.03	0.03
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.08	0.10	0.14	0.14	0.16	0.16	0.14	0.13	0.10	0.07	0.03	0.00
-60	0.00	0.00	0.00	0.00	0.01	0.11	0.20	0.28	0.33	0.35	0.40	0.43	0.44	0.42	0.38	0.31	0.22	0.11	0.00
-50	0.00	0.00	0.00	0.00	0.14	0.28	0.40	0.50	0.66	0.78	0.90	0.96	1.05	1.10	1.12	1.05	0.84	0.48	0.00
-40	0.00	0.00	0.00	0.11	0.27	0.46	0.63	0.90	1.17	1.44	1.92	2.83	4.40	5.72	6.84	7.43	6.62	4.34	1.04
-30	0.00	0.00	0.00	0.16	0.40	0.61	0.97	1.37	1.90	3.10	6.21	10.8	18.4	27.1	36.0	44.3	47.5	42.4	28.6
-20	0.00	0.00	0.00	0.25	0.50	0.82	1.30	1.89	3.27	7.57	15.7	31.8	56.3	95.1	151	251	365	455	456
-10	0.00	0.00	0.01	0.28	0.56	1.00	1.59	2.51	5.32	13.2	30.9	63.5	125	237	479	893	1259	1472	1518
0	0.00	0.00	0.01	0.30	0.58	1.10	1.77	2.91	6.86	17.2	42.0	89.8	183	362	778	1316	1667	1896	1995
10	0.00	0.01	0.05	0.42	0.89	1.63	2.68	4.28	8.15	17.7	38.5	77.1	150	277	539	976	1348	1562	1623
20	0.00	0.02	0.08	0.51	1.10	1.95	3.22	4.98	8.07	15.0	27.3	50.6	88.0	148	234	356	513	646	690
30	0.00	0.03	0.10	0.48	1.14	2.01	3.34	5.10	7.53	11.4	18.3	28.4	44.2	65.2	91.8	123	152	173	180
40	0.00	0.04	0.11	0.44	1.01	1.88	3.00	4.56	6.55	9.03	12.4	17.0	23.3	30.5	38.7	47.4	55.1	60.9	64.0
50	0.00	0.04	0.12	0.28	0.77	1.47	2.41	3.55	5.06	6.81	8.95	11.4	14.1	17.2	20.5	23.9	27.1	30.0	32.1
60	0.00	0.04	0.11	0.22	0.45	0.93	1.58	2.38	3.35	4.44	5.75	7.19	8.72	10.3	11.9	13.6	15.1	16.5	17.6
70	0.00	0.04	0.10	0.19	0.30	0.46	0.72	1.16	1.64	2.24	2.88	3.59	4.36	5.13	5.91	6.65	7.35	7.97	8.49
80	0.00	0.04	0.09	0.15	0.22	0.30	0.39	0.49	0.61	0.73	0.87	1.03	1.22	1.41	1.62	1.82	2.01	2.18	2.33
90	0.00	0.04	0.09	0.13	0.17	0.21	0.26	0.30	0.34	0.38	0.43	0.47	0.51	0.55	0.60	0.64	0.68	0.72	0.77
100	0.00	0.04	0.08	0.11	0.13	0.16	0.18	0.19	0.20	0.21	0.22	0.23	0.24	0.25	0.26	0.27	0.28	0.29	0.31
110	0.00	0.04	0.06	0.08	0.09	0.10	0.10	0.09	0.07	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.03	0.05	0.06	0.06	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.03	0.04	0.04	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00
140	0.00	0.02	0.03	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.11	0.18	0.32	0.46	0.55	0.56
150	0.00	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.23	0.54	1.00	1.55	2.09	2.54	2.83	2.92
160	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.34	0.85	1.62	2.59	3.62	4.56	5.26	5.65	5.76
170	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.04	0.26	0.71	1.53	2.68	4.01	5.30	6.24	6.70	6.86	6.85
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.35	0.90	1.84	3.13	4.57	5.88	6.74	7.10	7.33	7.49

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:0.9187A P:10.06W PF:0.9087 Freq:59.98Hz Lamp Flux:682.487x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:10W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	7.71	8.04	8.54	8.40	7.56	6.15	4.56	3.05	1.78	0.87	0.32	0.06	0.00	0.00	0.00	0.00	0.00	0.00	
-170	8.52	8.71	8.68	8.19	7.14	5.72	4.20	2.79	1.60	0.79	0.30	0.04	0.01	0.00	0.00	0.00	0.00	0.00	
-160	8.64	8.33	7.74	6.84	5.70	4.43	3.17	2.05	1.15	0.56	0.20	0.03	0.01	0.00	0.00	0.00	0.00	0.00	
-150	6.16	5.79	5.21	4.46	3.60	2.72	1.87	1.16	0.63	0.31	0.10	0.03	0.01	0.00	0.00	0.00	0.00	0.00	
-140	3.07	2.86	2.53	2.10	1.64	1.20	0.81	0.50	0.27	0.11	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-130	1.03	0.94	0.82	0.68	0.53	0.40	0.26	0.15	0.08	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.27	0.25	0.21	0.17	0.14	0.11	0.07	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.03	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.04	0.07	0.10	0.12	0.14	0.15	0.15	0.15	0.13	0.11	0.09	0.05	0.02	0.00	0.00	0.00	0.00	0.00	
-60	0.10	0.20	0.28	0.35	0.40	0.42	0.41	0.39	0.36	0.32	0.26	0.20	0.14	0.06	0.00	0.00	0.00	0.00	
-50	0.39	0.71	0.90	0.99	1.00	0.94	0.89	0.82	0.74	0.62	0.49	0.39	0.27	0.16	0.06	0.00	0.00	0.00	
-40	3.32	4.90	5.53	5.29	4.66	3.58	2.41	1.73	1.31	1.06	0.85	0.61	0.44	0.27	0.13	0.01	0.00	0.00	
-30	35.8	36.6	32.1	25.3	19.1	13.3	8.54	5.05	2.69	1.71	1.24	0.92	0.60	0.38	0.19	0.03	0.00	0.00	
-20	411	297	193	109	65.7	38.6	22.4	12.1	6.16	2.87	1.73	1.21	0.79	0.49	0.25	0.06	0.00	0.00	
-10	1412	1108	667	320	161	84.3	43.6	22.1	10.7	4.46	2.27	1.45	0.94	0.56	0.29	0.07	0.00	0.00	
0	1821	1508	983	479	229	120	60.4	29.5	13.7	5.55	2.65	1.61	1.03	0.60	0.31	0.08	0.00	0.00	
10	1502	1198	750	380	202	109	57.1	29.7	15.2	7.29	4.04	2.54	1.58	0.89	0.43	0.12	0.01	0.00	
20	602	446	298	192	119	70.3	41.2	23.8	13.6	7.67	4.82	3.13	1.92	1.08	0.50	0.14	0.02	0.00	
30	167	141	110	81.1	57.1	39.1	26.2	17.2	11.0	7.33	4.98	3.28	2.00	1.13	0.51	0.14	0.03	0.00	
40	59.8	53.4	45.5	37.1	29.4	22.5	16.6	12.2	8.91	6.44	4.51	2.99	1.86	1.02	0.46	0.12	0.04	0.00	
50	29.9	27.0	23.7	20.4	17.1	14.0	11.3	8.87	6.77	5.03	3.54	2.39	1.47	0.79	0.34	0.12	0.04	0.00	
60	16.5	15.1	13.6	11.9	10.3	8.69	7.17	5.74	4.45	3.34	2.37	1.58	0.96	0.50	0.23	0.11	0.04	0.00	
70	7.97	7.35	6.65	5.91	5.13	4.35	3.58	2.88	2.23	1.66	1.18	0.77	0.47	0.30	0.19	0.10	0.04	0.00	
80	2.18	2.02	1.83	1.63	1.42	1.23	1.04	0.87	0.73	0.61	0.49	0.39	0.30	0.22	0.15	0.09	0.04	0.00	
90	0.72	0.68	0.64	0.60	0.55	0.51	0.47	0.43	0.38	0.34	0.30	0.26	0.21	0.17	0.13	0.09	0.04	0.00	
100	0.29	0.28	0.27	0.26	0.25	0.24	0.23	0.22	0.21	0.20	0.19	0.18	0.16	0.13	0.11	0.08	0.04	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.09	0.10	0.10	0.09	0.08	0.06	0.04	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.06	0.06	0.05	0.03	0.00	
130	0.06	0.11	0.14	0.15	0.13	0.10	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.03	0.04	0.04	0.03	0.00	
140	0.73	0.80	0.78	0.70	0.62	0.51	0.38	0.23	0.11	0.02	0.00	0.00	0.00	0.00	0.03	0.03	0.02	0.00	
150	3.16	3.19	2.99	2.62	2.13	1.61	1.11	0.72	0.40	0.18	0.04	0.00	0.00	0.00	0.01	0.02	0.02	0.00	
160	6.06	6.10	5.82	5.21	4.37	3.38	2.41	1.53	0.88	0.43	0.14	0.00	0.00	0.00	0.00	0.01	0.01	0.00	
170	7.20	7.54	7.64	7.28	6.37	5.10	3.73	2.47	1.41	0.70	0.26	0.03	0.00	0.00	0.00	0.01	0.01	0.00	
180	7.71	8.04	8.54	8.40	7.56	6.15	4.56	3.05	1.78	0.87	0.32	0.06	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: