

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1995.1 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	63.1V x 66.6H
	At 50% of Imax	39.2V x 40.0H
	At 90% of Imax	16.2V x 16.3H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	881.9 lumens per klm.
	To 50% of Imax	560.5 lumens per klm.
	To 90% of Imax	127.6 lumens per klm.
	Upward LOR	1.3 %
	Downward LOR	98.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.05V I:1.120A P:9.813W PF:0.7269 Freq:59.97Hz Lamp Flux:513.784x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight CW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

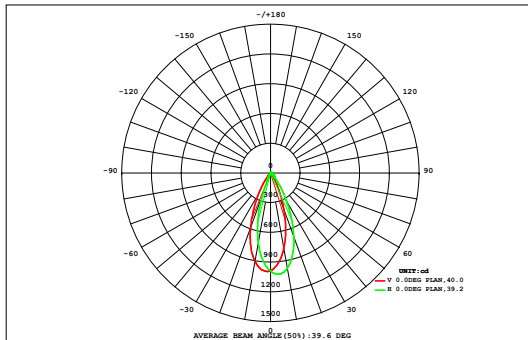

DATA OF LAMP		Eff:52.36lm/W	
MODEL	D7B1-10W-A	Imax (cd)	1025
NOMINAL POWER (W)	10	AVAILABILITY (%)	87.5
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	449.7
NOMINAL FLUX (lm)	513.784	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	513.8
TEST VOLTAGE (V)	12	θ @50% (H,V)	40,39DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.07	0.10	0.15	0.20	0.26	0.34	0.42	0.49	0.55	0.54	0.47	0.39	0.31	0.24	0.18	0.13	0.09	0.07	5.00	0.00
45	0.07	0.10	0.15	0.20	0.26	0.34	0.42	0.49	0.55	0.54	0.47	0.39	0.31	0.24	0.18	0.13	0.09	0.07	5.00	0.00
40	0.09	0.13	0.19	0.28	0.40	0.55	0.73	0.89	1.01	0.99	0.85	0.67	0.50	0.35	0.24	0.16	0.11	0.07	8.19	3.57
35	0.10	0.16	0.26	0.42	0.66	0.98	1.34	1.65	1.85	1.80	1.53	1.18	0.83	0.55	0.34	0.21	0.13	0.08	14.1	11.2
30	0.12	0.21	0.37	0.65	1.11	1.66	2.22	2.70	3.00	2.93	2.50	1.94	1.35	0.85	0.49	0.28	0.16	0.09	22.6	20.4
25	0.14	0.27	0.52	1.01	1.69	2.49	3.29	3.97	4.40	4.30	3.69	2.87	2.01	1.25	0.69	0.36	0.19	0.10	33.2	31.4
20	0.17	0.34	0.73	1.40	2.32	3.37	4.42	5.28	5.80	5.66	4.90	3.86	2.72	1.69	0.91	0.45	0.22	0.11	44.3	42.8
15	0.19	0.41	0.93	1.78	2.89	4.18	5.40	6.33	6.89	6.73	5.87	4.68	3.33	2.07	1.10	0.51	0.24	0.11	53.6	52.2
10	0.20	0.47	1.08	2.05	3.31	4.74	6.04	6.99	7.53	7.36	6.46	5.18	3.70	2.30	1.21	0.53	0.23	0.11	59.5	58.2
5	0.20	0.50	1.15	2.17	3.50	4.98	6.29	7.21	7.64	7.43	6.55	5.25	3.72	2.30	1.18	0.49	0.21	0.10	60.9	59.6
0	0.19	0.47	1.08	2.05	3.29	4.73	5.99	6.88	7.24	7.03	6.23	4.95	3.47	2.09	1.06	0.43	0.18	0.08	57.4	56.2
-5	0.16	0.39	0.91	1.71	2.71	3.97	5.15	5.96	6.25	6.09	5.44	4.30	2.92	1.70	0.86	0.35	0.15	0.07	49.1	47.8
-10	0.13	0.30	0.69	1.29	2.04	2.90	3.93	4.60	4.78	4.62	4.15	3.21	2.06	1.22	0.62	0.26	0.12	0.06	37.0	35.5
-15	0.10	0.21	0.46	0.88	1.40	1.89	2.40	2.90	3.02	2.88	2.52	1.83	1.24	0.76	0.38	0.18	0.09	0.05	23.2	21.4
-20	0.08	0.14	0.27	0.53	0.85	1.15	1.33	1.35	1.20	1.10	1.07	0.91	0.67	0.41	0.21	0.11	0.06	0.04	11.5	8.61
-25	0.06	0.09	0.15	0.27	0.45	0.62	0.71	0.69	0.54	0.47	0.49	0.43	0.31	0.19	0.11	0.07	0.04	0.03	5.72	0.81
-30	0.04	0.06	0.09	0.13	0.19	0.27	0.32	0.31	0.23	0.19	0.19	0.16	0.12	0.08	0.06	0.04	0.03	0.02	2.53	0.00
-35	0.03	0.04	0.05	0.07	0.09	0.10	0.10	0.09	0.06	0.04	0.05	0.05	0.04	0.04	0.03	0.02	0.02	0.01	0.93	0.00
-40	0.02	0.02	0.03	0.04	0.05	0.05	0.04	0.03	0.01	0.00	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.42	0.00
-45	0.02	0.02	0.03	0.04	0.05	0.05	0.04	0.03	0.01	0.00	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.42	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	2.09	4.31	9.11	16.9	27.2	39.0	50.1	58.3	62.0	60.2	53.0	41.9	29.3	18.1	9.68	4.59	2.27	1.21	489	---
Φ a	0.00	0.35	6.15	14.6	25.2	37.2	48.5	56.8	60.4	58.7	51.3	40.2	27.4	15.9	6.71	0.34	0.00	0.00	---	450

one-half-peak spread: U:19.8,D:19.7 , L:20.6,R:19.6


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.05V I:1.120A P:9.813W PF:0.7269 Freq:59.97Hz Lamp Flux:513.784x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight CW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

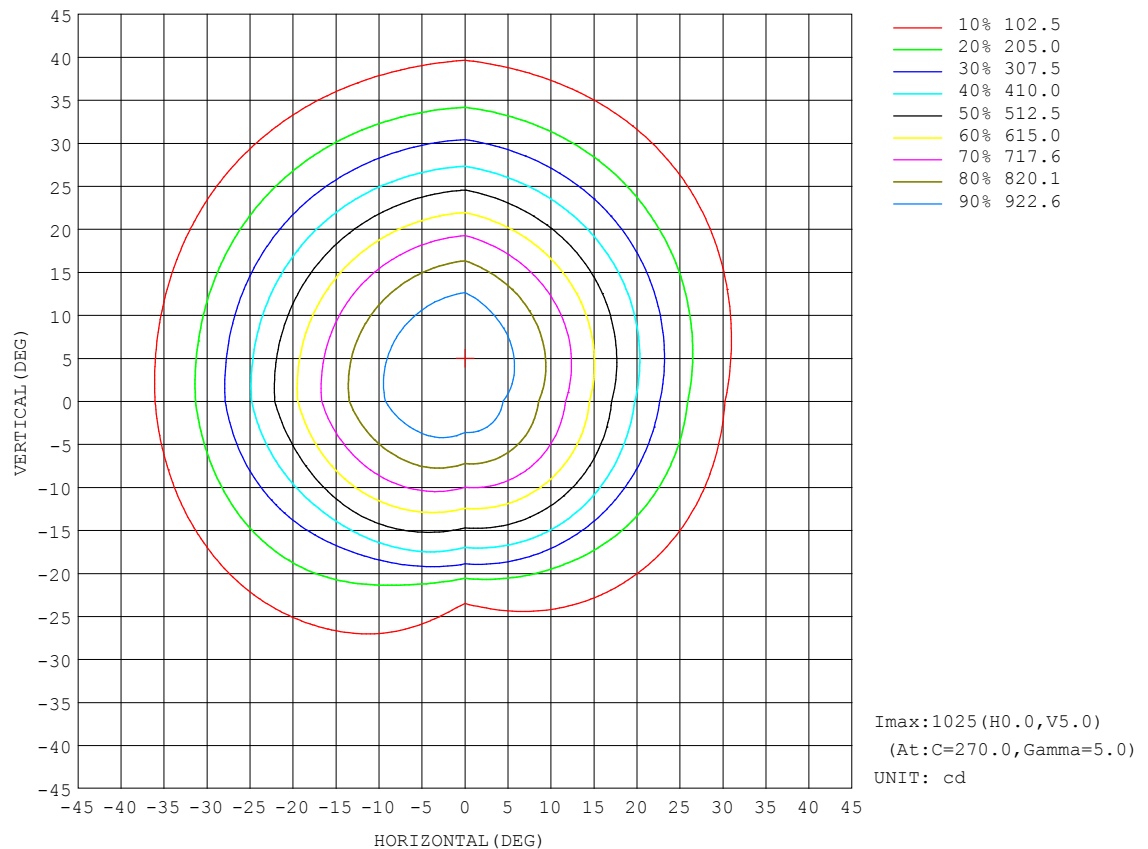


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.05V I:1.120A P:9.813W PF:0.7269 Freq:59.97Hz Lamp Flux:513.784x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight CW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

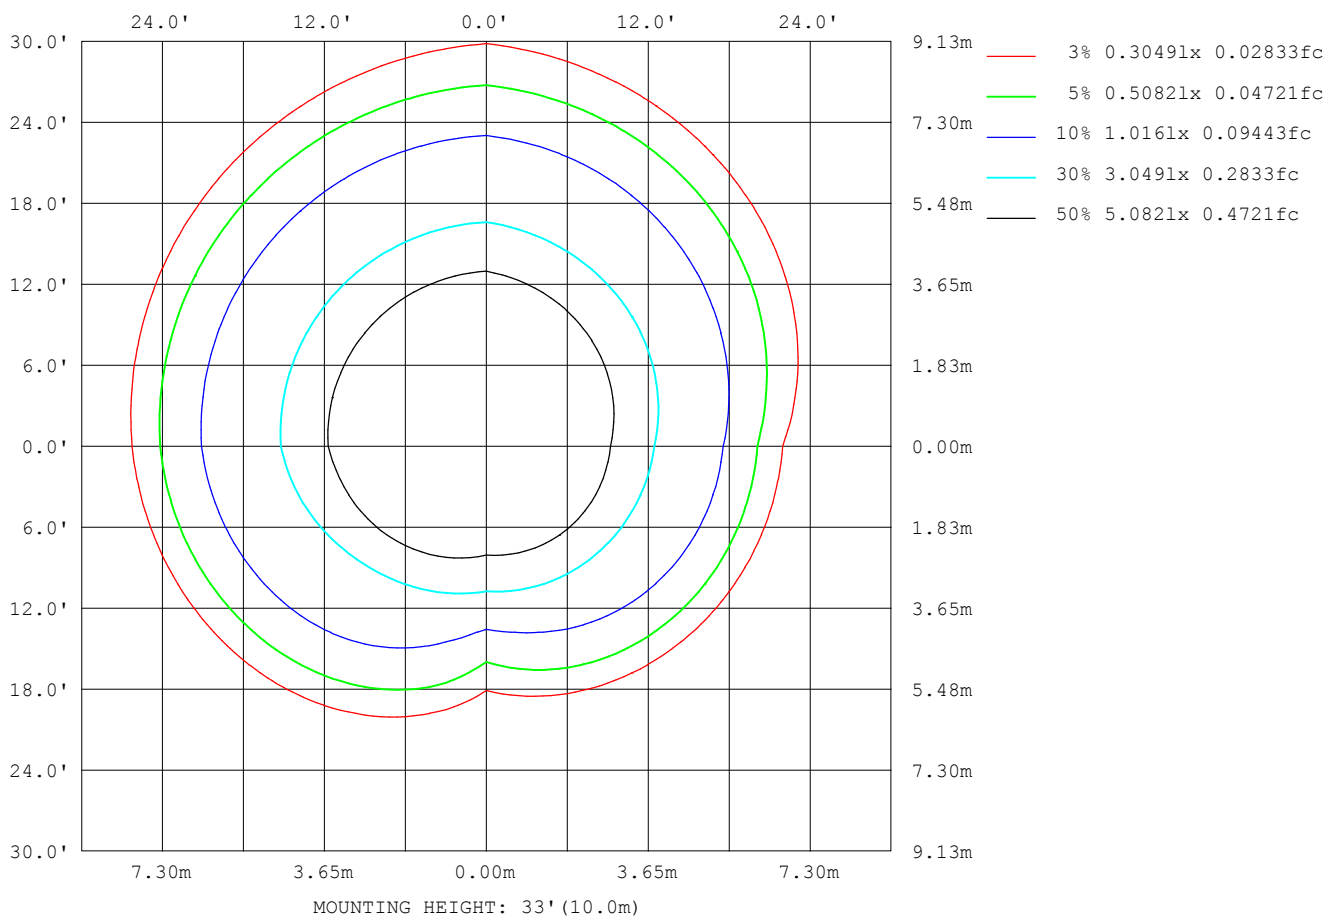

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

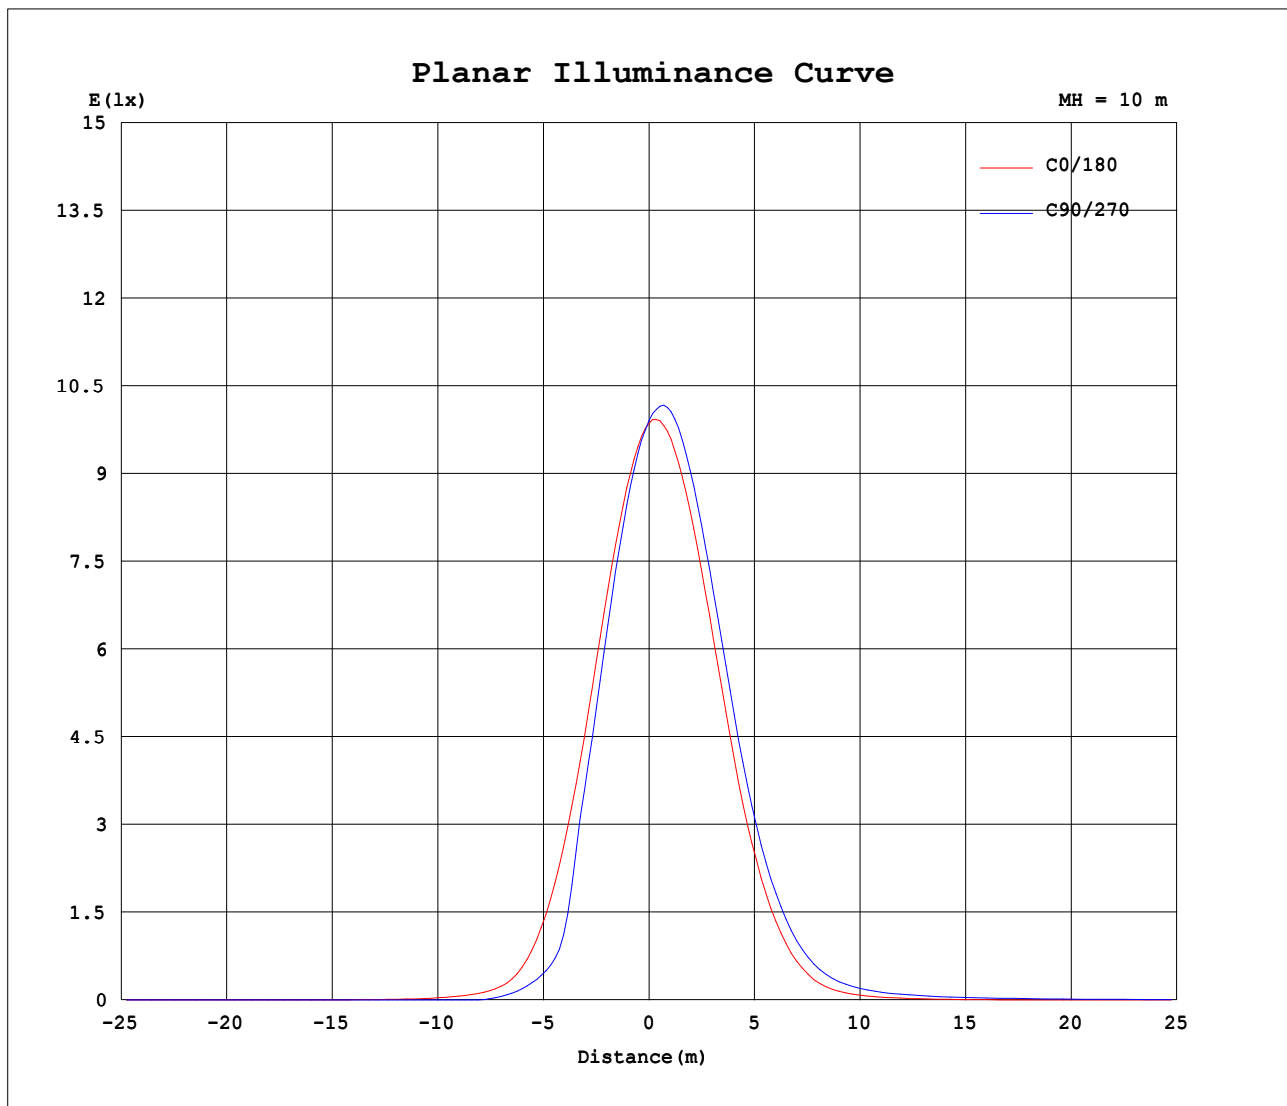


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.05V I:1.120A P:9.813W PF:0.7269 Freq:59.97Hz Lamp Flux:513.784x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight CW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

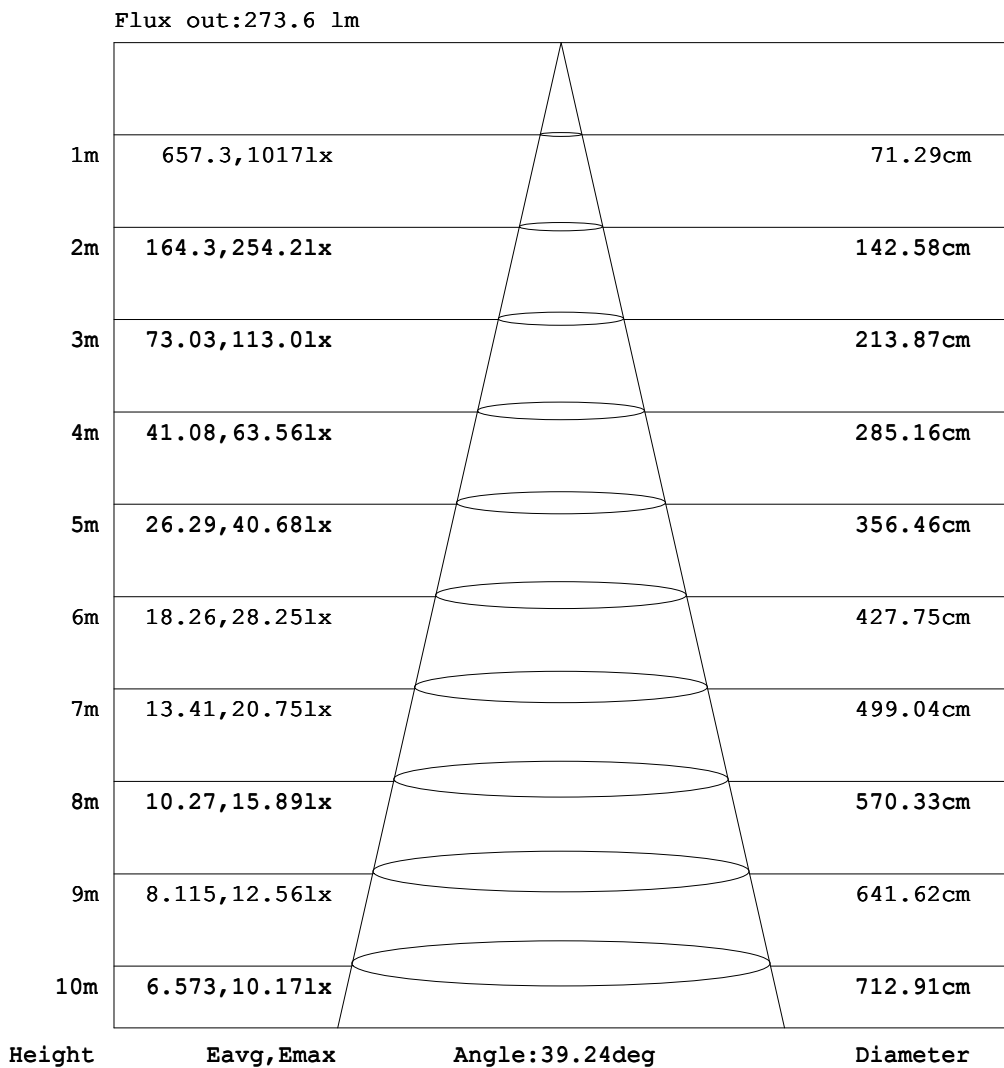

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:1.120A P:9.813W PF:0.7269 Freq:59.97Hz Lamp Flux:513.784x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight CW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.33	0.77	1.43	2.13	2.92	3.61	4.20	4.69	5.13	5.35
-170	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.14	0.47	0.96	1.64	2.43	3.27	4.04	4.69	5.18	5.54	5.90
-160	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.11	0.21	0.46	0.91	1.51	2.25	3.02	3.81	4.52	5.12	5.62	6.05
-150	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.11	0.21	0.37	0.67	1.12	1.66	2.29	2.95	3.56	4.12	4.60	4.98
-140	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.15	0.27	0.43	0.66	0.99	1.37	1.79	2.21	2.59	2.93	3.20
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.08	0.14	0.23	0.34	0.48	0.65	0.84	1.04	1.24	1.40	1.53
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.08	0.12	0.18	0.23	0.30	0.36	0.42	0.47	0.51
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.04	0.06	0.07	0.08	0.09
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.09	0.12	0.15	0.19	0.20	0.21	0.19	0.17	0.14	0.10	0.05	0.00
-60	0.00	0.00	0.00	0.00	0.01	0.13	0.25	0.35	0.44	0.54	0.62	0.69	0.72	0.70	0.65	0.55	0.40	0.21	0.00
-50	0.00	0.00	0.00	0.01	0.17	0.34	0.53	0.77	1.05	1.32	1.64	1.95	2.23	2.40	2.39	2.14	1.62	0.88	0.00
-40	0.00	0.00	0.00	0.13	0.36	0.60	0.98	1.47	2.12	3.01	4.18	5.63	7.06	8.29	9.03	8.83	7.22	4.16	0.02
-30	0.00	0.00	0.00	0.21	0.52	0.94	1.58	2.53	4.05	6.49	9.97	14.8	21.9	33.3	50.5	62.6	65.2	56.3	37.2
-20	0.00	0.00	0.01	0.29	0.67	1.30	2.26	3.93	6.97	12.1	20.8	37.9	76.9	129	183	221	246	263	238
-10	0.00	0.00	0.02	0.37	0.82	1.60	2.90	5.39	10.2	18.9	36.9	85.0	169	279	401	559	672	733	718
0	0.00	0.00	0.02	0.41	0.90	1.78	3.31	6.30	12.4	23.9	50.1	121	242	403	594	773	907	984	987
10	0.00	0.02	0.08	0.60	1.35	2.53	4.31	7.48	13.5	24.6	48.1	108	215	362	533	705	843	933	976
20	0.00	0.03	0.12	0.69	1.63	3.01	4.85	7.67	12.6	21.0	36.1	67.3	132	228	343	463	572	652	690
30	0.00	0.04	0.15	0.68	1.74	3.12	4.97	7.31	10.7	16.1	24.4	37.5	59.3	95.7	148	207	261	300	319
40	0.00	0.05	0.17	0.59	1.57	2.89	4.63	6.66	9.08	12.2	16.4	22.2	29.6	39.1	50.9	64.6	78.7	90.6	97.5
50	0.00	0.06	0.17	0.42	1.10	2.30	3.76	5.52	7.56	9.71	12.0	14.7	17.8	21.2	25.0	28.8	32.4	35.4	37.7
60	0.00	0.06	0.16	0.34	0.65	1.32	2.44	3.82	5.30	6.97	8.85	10.7	12.6	14.5	16.3	18.0	19.6	21.1	22.5
70	0.00	0.06	0.15	0.27	0.44	0.69	1.05	1.62	2.40	3.45	4.63	5.84	7.10	8.29	9.47	10.6	11.7	12.6	13.4
80	0.00	0.05	0.12	0.21	0.30	0.42	0.56	0.71	0.89	1.09	1.32	1.56	1.82	2.09	2.38	2.65	2.91	3.15	3.35
90	0.00	0.05	0.10	0.14	0.19	0.24	0.29	0.34	0.38	0.43	0.48	0.53	0.57	0.62	0.67	0.72	0.77	0.81	0.86
100	0.00	0.04	0.07	0.10	0.12	0.14	0.15	0.16	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.16	0.16	0.17	0.17
110	0.00	0.03	0.06	0.07	0.08	0.07	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.03	0.04	0.05	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.02	0.03	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.10	0.13	0.14	0.23	0.21
150	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.20	0.38	0.65	0.93	1.19	1.39	1.50	1.48
160	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.30	0.63	1.11	1.61	2.14	2.59	2.92	3.09	3.11
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.23	0.59	1.13	1.78	2.49	3.15	3.70	4.11	4.34	4.36
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.33	0.77	1.43	2.13	2.92	3.61	4.20	4.69	5.13	5.35

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:1.120A P:9.813W PF:0.7269 Freq:59.97Hz Lamp Flux:513.784x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight CW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	5.51	5.51	5.50	5.33	4.88	4.20	3.35	2.46	1.65	0.94	0.44	0.17	0.00	0.00	0.00	0.00	0.00	0.00	
-170	5.82	5.80	5.70	5.38	4.84	4.11	3.25	2.37	1.58	0.94	0.45	0.17	0.01	0.00	0.00	0.00	0.00	0.00	
-160	5.90	5.69	5.35	4.88	4.25	3.51	2.73	1.96	1.28	0.74	0.35	0.08	0.02	0.00	0.00	0.00	0.00	0.00	
-150	4.83	4.57	4.19	3.71	3.15	2.53	1.93	1.35	0.88	0.49	0.23	0.05	0.02	0.00	0.00	0.00	0.00	0.00	
-140	3.08	2.86	2.60	2.25	1.87	1.46	1.11	0.76	0.45	0.25	0.08	0.04	0.01	0.00	0.00	0.00	0.00	0.00	
-130	1.47	1.37	1.22	1.02	0.83	0.64	0.46	0.31	0.14	0.08	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.48	0.44	0.38	0.31	0.23	0.18	0.12	0.08	0.05	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.08	0.07	0.06	0.04	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.02	0.04	0.06	0.07	0.07	0.07	0.06	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.10	0.19	0.26	0.30	0.33	0.32	0.31	0.27	0.23	0.17	0.12	0.03	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.40	0.73	0.96	1.08	1.09	1.02	0.92	0.77	0.61	0.47	0.33	0.21	0.09	0.00	0.00	0.00	0.00	0.00	
-40	1.78	3.15	3.95	4.13	3.82	3.21	2.52	1.90	1.40	1.00	0.67	0.43	0.24	0.07	0.00	0.00	0.00	0.00	
-30	41.9	39.3	31.2	21.8	13.6	9.60	6.81	4.53	2.91	1.86	1.19	0.71	0.40	0.18	0.00	0.00	0.00	0.00	
-20	233	190	148	103	58.1	29.6	15.8	9.50	5.50	3.15	1.83	1.04	0.57	0.27	0.02	0.00	0.00	0.00	
-10	690	586	437	267	154	71.3	31.4	16.1	8.71	4.60	2.47	1.37	0.72	0.34	0.06	0.00	0.00	0.00	
0	911	776	595	401	232	107	43.2	21.1	11.0	5.59	2.88	1.56	0.80	0.38	0.08	0.00	0.00	0.00	
10	890	757	583	400	237	118	54.8	27.3	14.4	7.91	4.56	2.78	1.65	0.87	0.29	0.06	0.02	0.00	
20	621	516	390	264	157	85.1	45.2	24.8	14.4	8.75	5.57	3.64	2.29	1.22	0.43	0.12	0.03	0.00	
30	286	235	175	119	76.0	47.1	29.5	19.0	12.5	8.55	5.97	4.10	2.59	1.40	0.48	0.15	0.04	0.00	
40	88.2	74.6	59.7	46.0	34.7	25.8	19.1	14.1	10.6	7.95	5.86	4.08	2.52	1.28	0.46	0.17	0.05	0.00	
50	35.0	31.5	27.6	23.7	19.9	16.6	13.7	11.2	9.00	6.98	5.09	3.43	2.05	0.93	0.41	0.17	0.06	0.00	
60	21.0	19.4	17.7	15.9	14.1	12.2	10.4	8.50	6.66	5.04	3.59	2.23	1.19	0.64	0.34	0.16	0.06	0.00	
70	12.6	11.6	10.5	9.37	8.17	6.97	5.71	4.47	3.30	2.28	1.53	1.04	0.69	0.44	0.27	0.15	0.06	0.00	
80	3.15	2.91	2.65	2.38	2.09	1.82	1.56	1.32	1.09	0.89	0.71	0.56	0.42	0.30	0.21	0.12	0.05	0.00	
90	0.81	0.77	0.72	0.67	0.62	0.57	0.53	0.48	0.43	0.38	0.34	0.29	0.24	0.19	0.14	0.10	0.05	0.00	
100	0.17	0.16	0.16	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.16	0.15	0.14	0.12	0.10	0.07	0.04	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.07	0.08	0.07	0.06	0.03	0.00	
120	0.01	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.05	0.04	0.03	0.00	
130	0.07	0.13	0.17	0.18	0.18	0.16	0.12	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.03	0.02	0.00	
140	0.36	0.50	0.53	0.59	0.59	0.53	0.45	0.33	0.19	0.10	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.00	
150	1.73	1.84	1.82	1.70	1.51	1.25	1.02	0.75	0.51	0.29	0.13	0.00	0.00	0.00	0.00	0.01	0.01	0.00	
160	3.37	3.49	3.42	3.21	2.85	2.37	1.85	1.35	0.91	0.53	0.25	0.03	0.00	0.00	0.00	0.01	0.01	0.00	
170	4.62	4.73	4.71	4.48	4.07	3.47	2.73	2.00	1.35	0.81	0.38	0.14	0.00	0.00	0.00	0.00	0.00	0.00	
180	5.51	5.51	5.50	5.33	4.88	4.20	3.35	2.46	1.65	0.94	0.44	0.17	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: