

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1507.2 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	73.4V x 76.1H
	At 50% of Imax	46.3V x 47.7H
	At 90% of Imax	19.1V x 18.4H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	893.7 lumens per klm.
	To 50% of Imax	567.6 lumens per klm.
	To 90% of Imax	119.0 lumens per klm.
	Upward LOR	0.8 %
	Downward LOR	99.2 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.19V I:1.085A P:9.538W PF:0.7210 Freq:59.98Hz Lamp Flux:158.366x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W RED 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UPLIGHT SHROUD

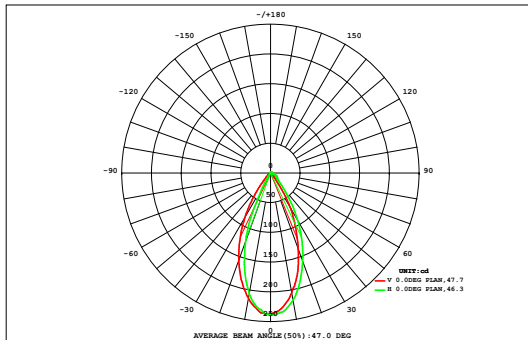

DATA OF LAMP		Eff:16.60lm/W	
MODEL	D9B1-10W-A	Imax (cd)	238.7
NOMINAL POWER (W)	10	AVAILABILITY (%)	88.7
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	140.5
NOMINAL FLUX (lm)	158.366	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	158.4
TEST VOLTAGE (V)	12	θ @50% (H,V)	48,46DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.10	0.12	0.12	0.10	0.08	0.06	0.04	0.02	0.01	0.00	0.00	0.90	0.00
72	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.10	0.12	0.12	0.10	0.08	0.06	0.04	0.02	0.01	0.00	0.00	0.90	0.00
64	0.00	0.01	0.02	0.04	0.07	0.10	0.13	0.16	0.19	0.18	0.16	0.13	0.10	0.07	0.04	0.02	0.01	0.00	1.44	0.00
56	0.00	0.01	0.03	0.06	0.10	0.14	0.18	0.22	0.26	0.25	0.21	0.17	0.13	0.09	0.05	0.03	0.01	0.00	1.96	0.00
48	0.01	0.02	0.04	0.08	0.13	0.19	0.28	0.37	0.44	0.43	0.35	0.25	0.17	0.11	0.06	0.03	0.01	0.00	2.98	0.50
40	0.01	0.02	0.05	0.10	0.17	0.31	0.55	0.83	1.02	0.99	0.75	0.47	0.26	0.14	0.07	0.04	0.02	0.00	5.81	4.41
32	0.01	0.02	0.06	0.12	0.26	0.61	1.15	1.67	1.98	1.94	1.56	0.98	0.46	0.19	0.09	0.04	0.02	0.00	11.2	10.2
24	0.01	0.03	0.06	0.15	0.43	1.06	1.87	2.58	3.01	2.96	2.44	1.66	0.81	0.28	0.10	0.04	0.02	0.00	17.5	16.7
	0.01	0.02	0.07	0.18	0.61	1.47	2.47	3.36	3.92	3.87	3.20	2.20	1.18	0.37	0.11	0.04	0.01	0.00	23.1	22.5
	0.01	0.02	0.07	0.20	0.73	1.70	2.81	3.82	4.45	4.39	3.64	2.49	1.35	0.41	0.10	0.03	0.01	0.00	26.2	25.7
	0.01	0.02	0.06	0.19	0.68	1.60	2.73	3.75	4.39	4.34	3.57	2.41	1.26	0.37	0.09	0.03	0.01	0.00	25.5	24.9
	0.00	0.02	0.05	0.14	0.50	1.20	2.17	3.11	3.66	3.61	2.95	1.91	0.91	0.25	0.07	0.02	0.00	0.00	20.6	20.0
-24	0.00	0.01	0.04	0.10	0.28	0.72	1.29	1.98	2.38	2.33	1.84	1.08	0.47	0.13	0.05	0.02	0.00	0.00	12.7	12.0
-32	0.00	0.01	0.03	0.06	0.13	0.32	0.58	0.77	0.83	0.79	0.65	0.40	0.16	0.06	0.03	0.01	0.00	0.00	4.83	3.57
-40	0.00	0.01	0.02	0.04	0.06	0.11	0.17	0.22	0.19	0.16	0.14	0.09	0.05	0.03	0.01	0.01	0.00	0.00	1.31	0.00
-48	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.04	0.02	0.01	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.32	0.00
-56	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.12	0.00
-64	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.07	0.24	0.63	1.52	4.25	9.68	16.5	23.0	26.9	26.4	21.6	14.4	7.40	2.55	0.91	0.36	0.13	0.03	157	---
Φ a	0.00	0.00	0.00	0.00	2.81	8.47	15.4	21.9	25.8	25.3	20.5	13.3	6.17	0.85	0.00	0.00	0.00	0.00	---	141

one-half-peak spread: U:18.6,D:25.5 , L:21.5,R:22.5


NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.19V I:1.085A P:9.538W PF:0.7210 Freq:59.98Hz Lamp Flux:158.366x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W RED 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UPLIGHT SHROUD

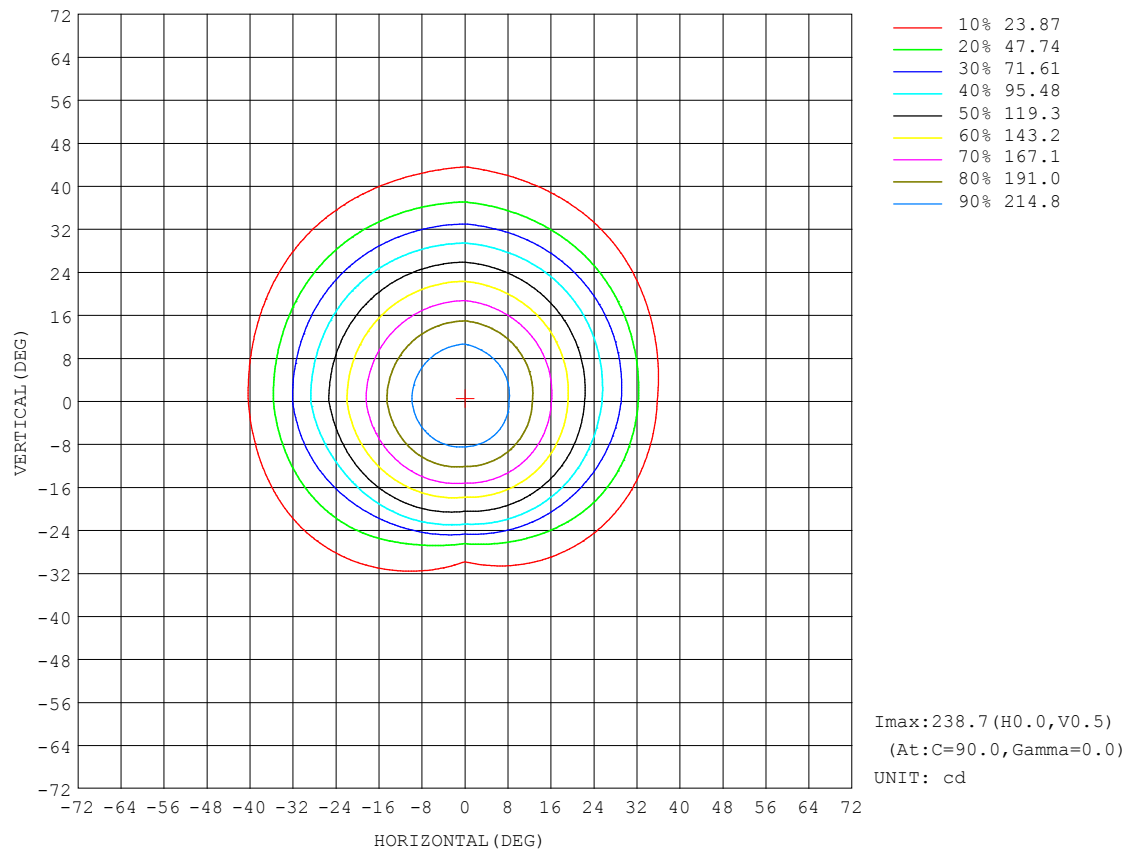


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.19V I:1.085A P:9.538W PF:0.7210 Freq:59.98Hz Lamp Flux:158.366x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W RED 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UPLIGHT SHROUD

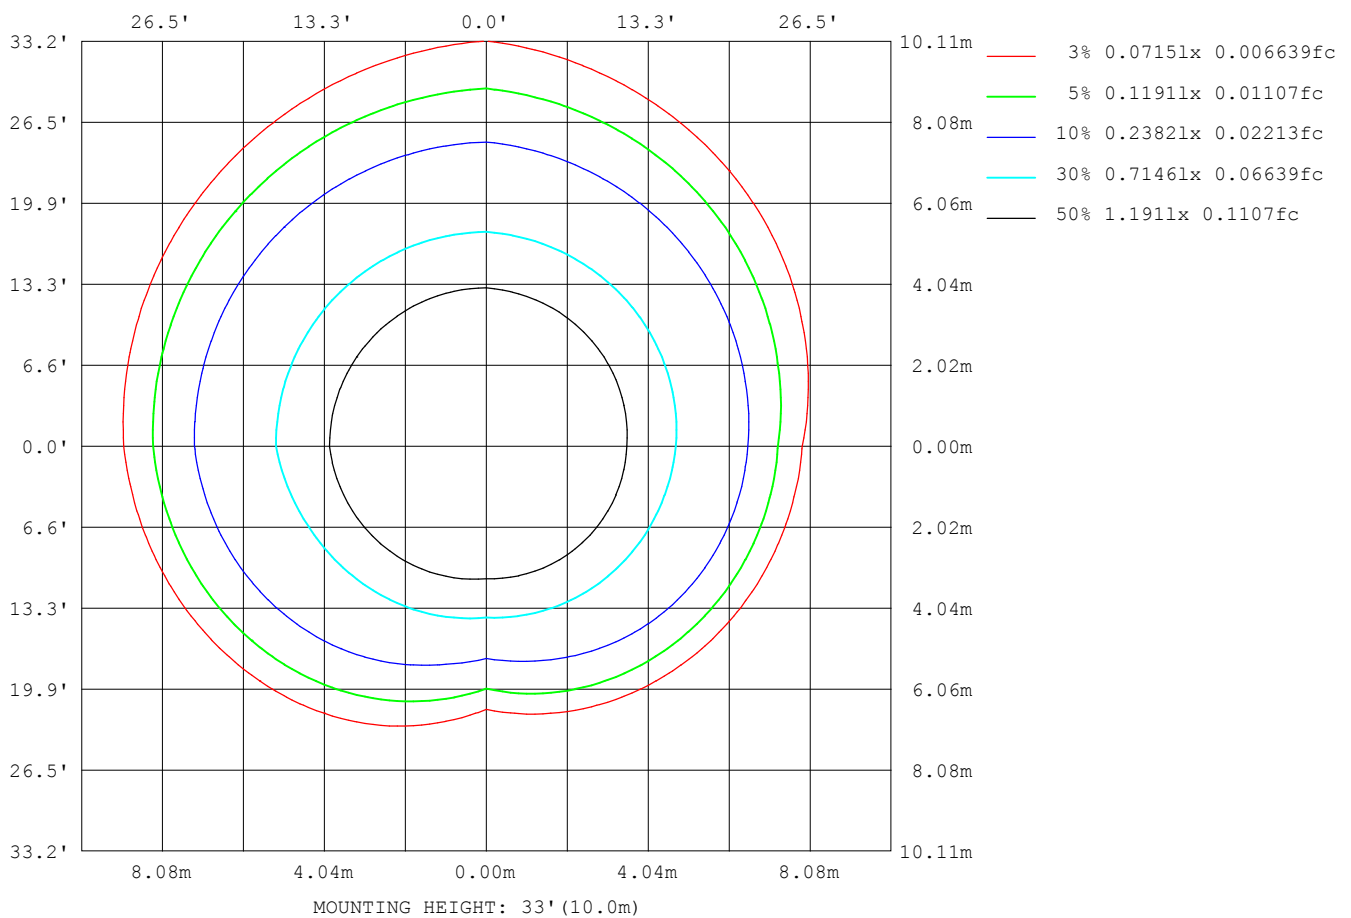

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

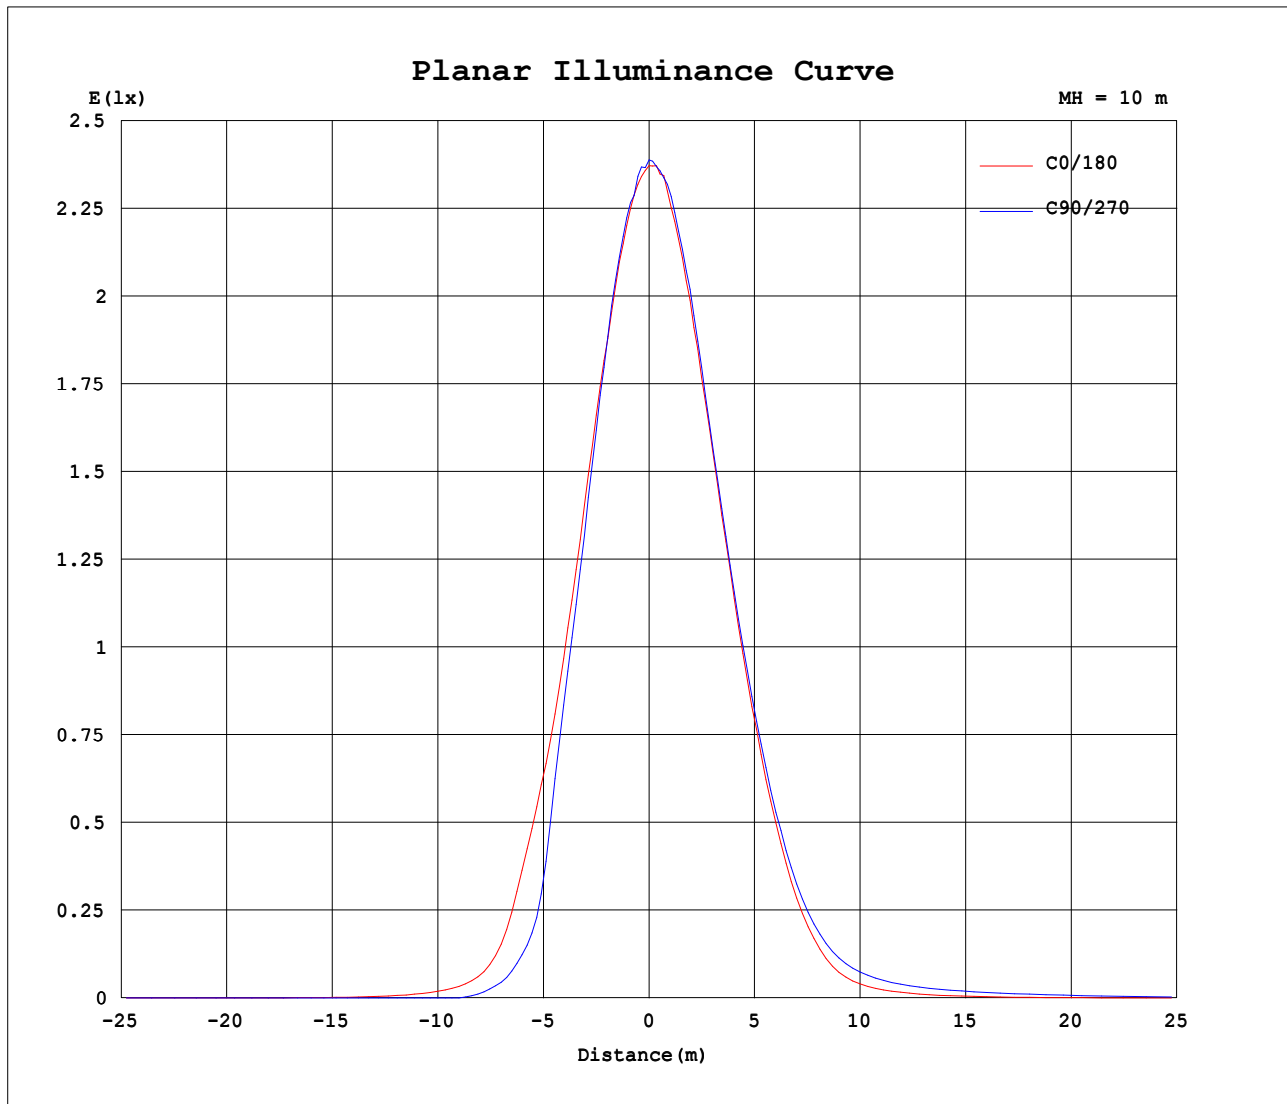


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.19V I:1.085A P:9.538W PF:0.7210 Freq:59.98Hz Lamp Flux:158.366x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W RED 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UPLIGHT SHROUD

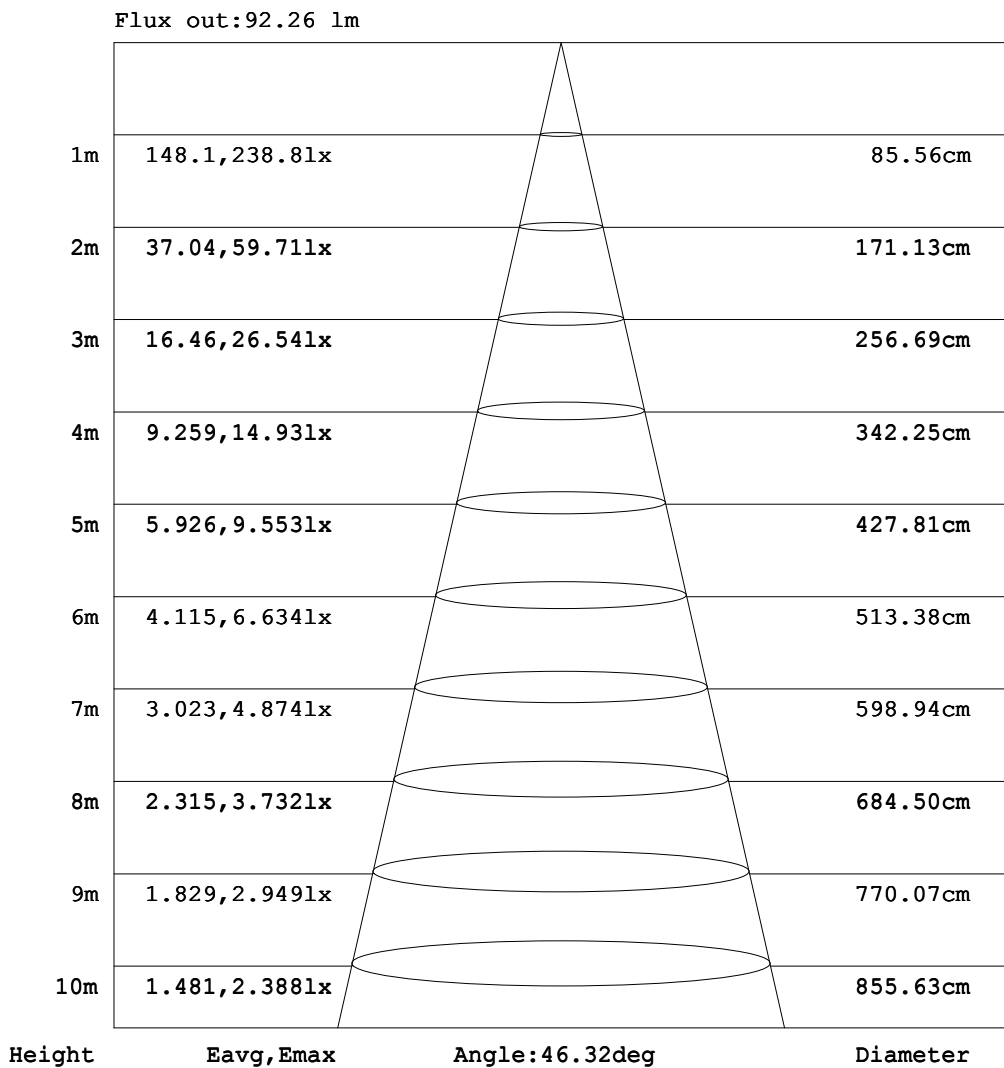

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.19V I:1.085A P:9.538W PF:0.7210 Freq:59.98Hz Lamp Flux:158.366x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W RED 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UPLIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.30	0.49	0.68	0.84	1.00	1.15	1.28	1.39
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.16	0.34	0.54	0.75	0.92	1.10	1.26	1.39	1.50
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.12	0.29	0.46	0.65	0.84	1.01	1.15	1.29	1.40
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.10	0.17	0.30	0.46	0.60	0.75	0.87	0.98	1.06
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.09	0.15	0.23	0.31	0.41	0.50	0.58	0.64
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.07	0.10	0.15	0.18	0.22	0.24
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.06	0.07	0.08	0.08	0.07	0.05	0.03	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.11	0.21	0.30	0.37	0.42	0.45	0.45	0.41	0.34	0.24	0.13	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.11	0.26	0.46	0.63	0.84	1.01	1.17	1.29	1.34	1.30	1.13	0.83	0.45	0.00
-40	0.00	0.00	0.00	0.00	0.10	0.30	0.59	0.92	1.31	1.78	2.33	2.91	3.49	3.97	4.31	4.37	4.11	3.22	1.46
-30	0.00	0.00	0.00	0.00	0.19	0.55	0.98	1.55	2.35	3.46	4.93	7.09	11.0	17.6	23.8	28.5	30.5	28.7	23.3
-20	0.00	0.00	0.00	0.02	0.33	0.77	1.43	2.33	3.77	5.97	9.89	19.4	34.5	51.8	68.5	92.6	114	124	124
-10	0.00	0.00	0.00	0.09	0.42	0.97	1.79	3.09	5.26	9.06	18.4	38.4	65.2	94.5	130	160	185	201	207
0	0.00	0.00	0.00	0.11	0.46	1.09	2.03	3.58	6.28	11.4	25.1	51.8	86.4	122	157	188	214	233	237
10	0.00	0.01	0.03	0.18	0.63	1.38	2.42	3.99	6.58	11.2	22.3	45.5	77.0	110	142	171	195	212	217
20	0.00	0.01	0.05	0.18	0.71	1.50	2.59	3.97	6.09	9.42	15.6	29.3	51.1	77.2	103	125	143	154	158
30	0.00	0.01	0.06	0.19	0.65	1.47	2.47	3.70	5.24	7.42	10.5	15.6	24.3	37.7	53.1	67.9	80.2	88.0	91.1
40	0.00	0.01	0.06	0.19	0.55	1.21	2.13	3.21	4.43	5.79	7.47	9.60	12.2	15.6	19.7	24.6	29.2	32.8	34.6
50	0.00	0.02	0.06	0.16	0.38	0.83	1.54	2.45	3.44	4.54	5.68	6.81	8.02	9.31	10.6	12.0	13.2	14.2	14.9
60	0.00	0.02	0.05	0.12	0.25	0.50	0.87	1.42	2.14	2.99	3.85	4.74	5.65	6.52	7.39	8.16	8.88	9.52	10.1
70	0.00	0.01	0.04	0.08	0.16	0.25	0.41	0.65	0.93	1.26	1.71	2.17	2.69	3.22	3.77	4.29	4.77	5.20	5.54
80	0.00	0.01	0.03	0.05	0.08	0.12	0.17	0.24	0.31	0.39	0.47	0.57	0.68	0.80	0.92	1.04	1.16	1.26	1.34
90	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.09	0.10	0.11	0.12	0.13	0.14	0.15	0.16	0.17	0.18	0.19
100	0.00	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.01	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.09	0.20	0.24	0.31	0.33	0.33
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.10	0.23	0.37	0.51	0.64	0.68	0.75	0.76
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.23	0.40	0.59	0.73	0.86	0.97	1.06	1.05
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.30	0.49	0.68	0.84	1.00	1.15	1.28	1.37

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.19V I:1.085A P:9.538W PF:0.7210 Freq:59.98Hz Lamp Flux:158.366x1 lm																	
NAME: LED LANDSCAPE LIGHT									TYPE:Copper Spotlight RGBWW WEIGHT:								
SPEC.:10W RED 40°LENS									DIM.:			SERIAL No.:1					
MFR.: EVERFINE									SUR.:			Shielding Angle:UPLIGHT SHROUD					

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.38	1.37	1.35	1.20	1.07	0.90	0.72	0.46	0.29	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	1.46	1.42	1.31	1.21	1.08	0.86	0.65	0.45	0.26	0.09	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	1.35	1.27	1.17	1.03	0.89	0.72	0.54	0.33	0.17	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	1.03	0.96	0.87	0.76	0.65	0.49	0.34	0.19	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.61	0.56	0.50	0.40	0.32	0.22	0.12	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.22	0.19	0.15	0.10	0.07	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.04	0.07	0.09	0.10	0.09	0.08	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.20	0.37	0.48	0.53	0.53	0.48	0.38	0.28	0.18	0.09	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	2.06	2.13	2.06	2.08	1.93	1.62	1.27	0.93	0.62	0.37	0.17	0.05	0.00	0.00	0.00	0.00	0.00	0.00	
-30	26.4	25.7	21.1	14.5	8.77	5.09	3.45	2.29	1.45	0.86	0.44	0.18	0.02	0.00	0.00	0.00	0.00	0.00	
-20	121	107	83.0	57.3	38.7	19.1	8.82	4.78	2.78	1.54	0.81	0.33	0.09	0.00	0.00	0.00	0.00	0.00	
-10	198	179	149	114	77.4	47.3	19.4	8.31	4.40	2.33	1.17	0.50	0.15	0.00	0.00	0.00	0.00	0.00	
0	228	205	175	137	99.0	65.5	28.0	11.0	5.56	2.83	1.39	0.59	0.18	0.00	0.00	0.00	0.00	0.00	
10	208	189	159	126	92.9	59.1	26.5	12.2	6.55	3.66	2.07	1.13	0.55	0.22	0.09	0.03	0.01	0.00	
20	151	136	115	91.7	64.1	35.7	18.7	10.4	6.22	3.86	2.45	1.49	0.82	0.38	0.15	0.05	0.01	0.00	
30	85.6	75.4	60.5	43.7	28.9	18.4	11.9	7.88	5.40	3.76	2.59	1.66	0.94	0.46	0.19	0.06	0.01	0.00	
40	31.6	27.2	22.3	17.5	13.5	10.3	7.96	6.06	4.64	3.48	2.46	1.59	0.91	0.45	0.19	0.06	0.01	0.00	
50	13.9	12.7	11.3	9.88	8.50	7.21	6.02	4.95	3.87	2.90	2.02	1.28	0.73	0.38	0.16	0.06	0.02	0.00	
60	9.43	8.70	7.91	7.07	6.16	5.28	4.38	3.51	2.69	1.93	1.30	0.82	0.50	0.25	0.12	0.05	0.02	0.00	
70	5.17	4.72	4.22	3.68	3.13	2.61	2.11	1.65	1.25	0.93	0.65	0.41	0.25	0.16	0.08	0.04	0.01	0.00	
80	1.26	1.16	1.04	0.92	0.80	0.68	0.57	0.47	0.39	0.31	0.24	0.17	0.12	0.08	0.05	0.03	0.01	0.00	
90	0.18	0.17	0.16	0.15	0.14	0.13	0.12	0.11	0.10	0.09	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	
130	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.04	0.07	0.10	0.09	0.09	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.38	0.40	0.37	0.35	0.29	0.23	0.17	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.81	0.80	0.80	0.69	0.60	0.49	0.35	0.22	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	1.13	1.13	1.07	1.01	0.92	0.73	0.55	0.37	0.22	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	1.38	1.37	1.35	1.20	1.07	0.90	0.72	0.46	0.29	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: