

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1075.5 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	100.6V x 100.3H
	At 50% of Imax	52.2V x 54.3H
	At 90% of Imax	16.0V x 17.9H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	951.9 lumens per klm.
	To 50% of Imax	498.5 lumens per klm.
	To 90% of Imax	67.2 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.07V I:0.7791A P:6.461W PF:0.6873 Freq:59.98Hz Lamp Flux:24.0663x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW	WEIGHT:
SPEC.:7W BLUE Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

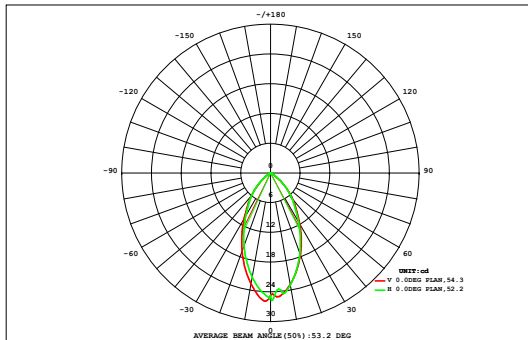

DATA OF LAMP		Eff:3.72lm/W	
MODEL	A9B1-7W-A	Imax (cd)	25.88
NOMINAL POWER (W)	7	AVAILABILITY (%)	95.4
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	22.95
NOMINAL FLUX (lm)	24.0663	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	24.07
TEST VOLTAGE (V)	12	θ @50% (H,V)	54,52DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.04	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.20	0.01
40	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.12	0.14	0.14	0.12	0.08	0.04	0.01	0.00	0.00	0.00	0.00	0.77	0.63
30	0.00	0.00	0.00	0.00	0.03	0.08	0.15	0.22	0.26	0.26	0.23	0.17	0.10	0.03	0.00	0.00	0.00	0.00	1.54	1.46
20	0.00	0.00	0.00	0.01	0.05	0.14	0.24	0.34	0.42	0.42	0.35	0.25	0.15	0.06	0.01	0.00	0.00	0.00	2.46	2.40
10	0.00	0.00	0.00	0.01	0.08	0.18	0.32	0.48	0.59	0.60	0.49	0.34	0.20	0.09	0.02	0.00	0.00	0.00	3.40	3.35
0	0.00	0.00	0.00	0.02	0.09	0.20	0.37	0.57	0.72	0.72	0.58	0.40	0.23	0.11	0.03	0.00	0.00	0.00	4.02	3.98
-10	0.00	0.00	0.00	0.02	0.09	0.20	0.37	0.56	0.70	0.70	0.57	0.39	0.22	0.11	0.03	0.00	0.00	0.00	3.95	3.91
-20	0.00	0.00	0.00	0.01	0.07	0.17	0.31	0.46	0.55	0.56	0.47	0.33	0.19	0.09	0.02	0.00	0.00	0.00	3.23	3.18
-30	0.00	0.00	0.00	0.01	0.05	0.13	0.22	0.32	0.38	0.38	0.33	0.24	0.15	0.06	0.01	0.00	0.00	0.00	2.28	2.22
-40	0.00	0.00	0.00	0.00	0.02	0.08	0.14	0.20	0.23	0.24	0.21	0.15	0.09	0.03	0.00	0.00	0.00	0.00	1.40	1.32
-50	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.10	0.12	0.12	0.11	0.07	0.03	0.01	0.00	0.00	0.00	0.00	0.67	0.49
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.00	0.00	0.00	0.09	0.49	1.25	2.29	3.42	4.20	4.22	3.52	2.45	1.41	0.60	0.12	0.00	0.00	0.00	24	---
Φ a	0.00	0.00	0.00	0.00	0.35	1.16	2.21	3.34	4.12	4.14	3.44	2.37	1.32	0.49	0.01	0.00	0.00	0.00	---	23

one-half-peak spread: U:26.1,D:21.5 , L:24.5,R:25.3


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.07V I:0.7791A P:6.461W PF:0.6873 Freq:59.98Hz Lamp Flux:24.0663x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW WEIGHT:	
SPEC.:7W BLUE Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

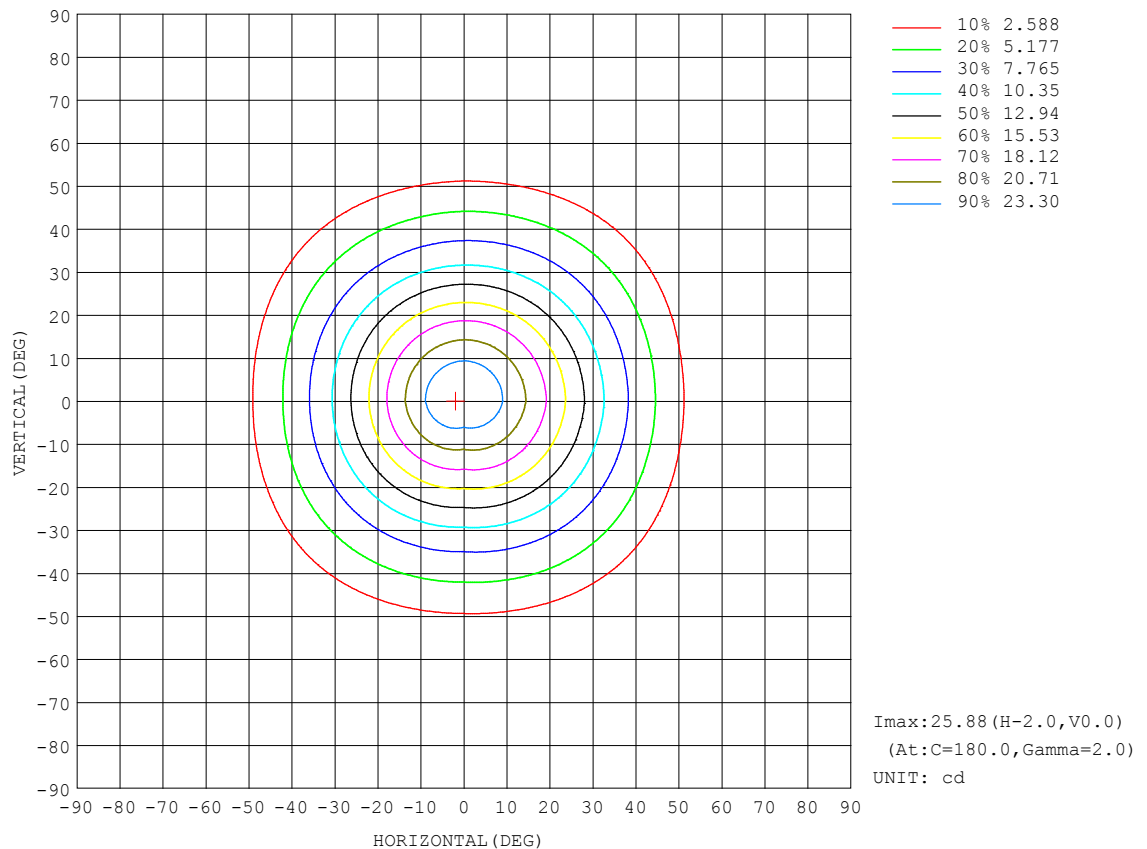


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.07V I:0.7791A P:6.461W PF:0.6873 Freq:59.98Hz Lamp Flux:24.0663x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW WEIGHT:	
SPEC.:7W BLUE Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

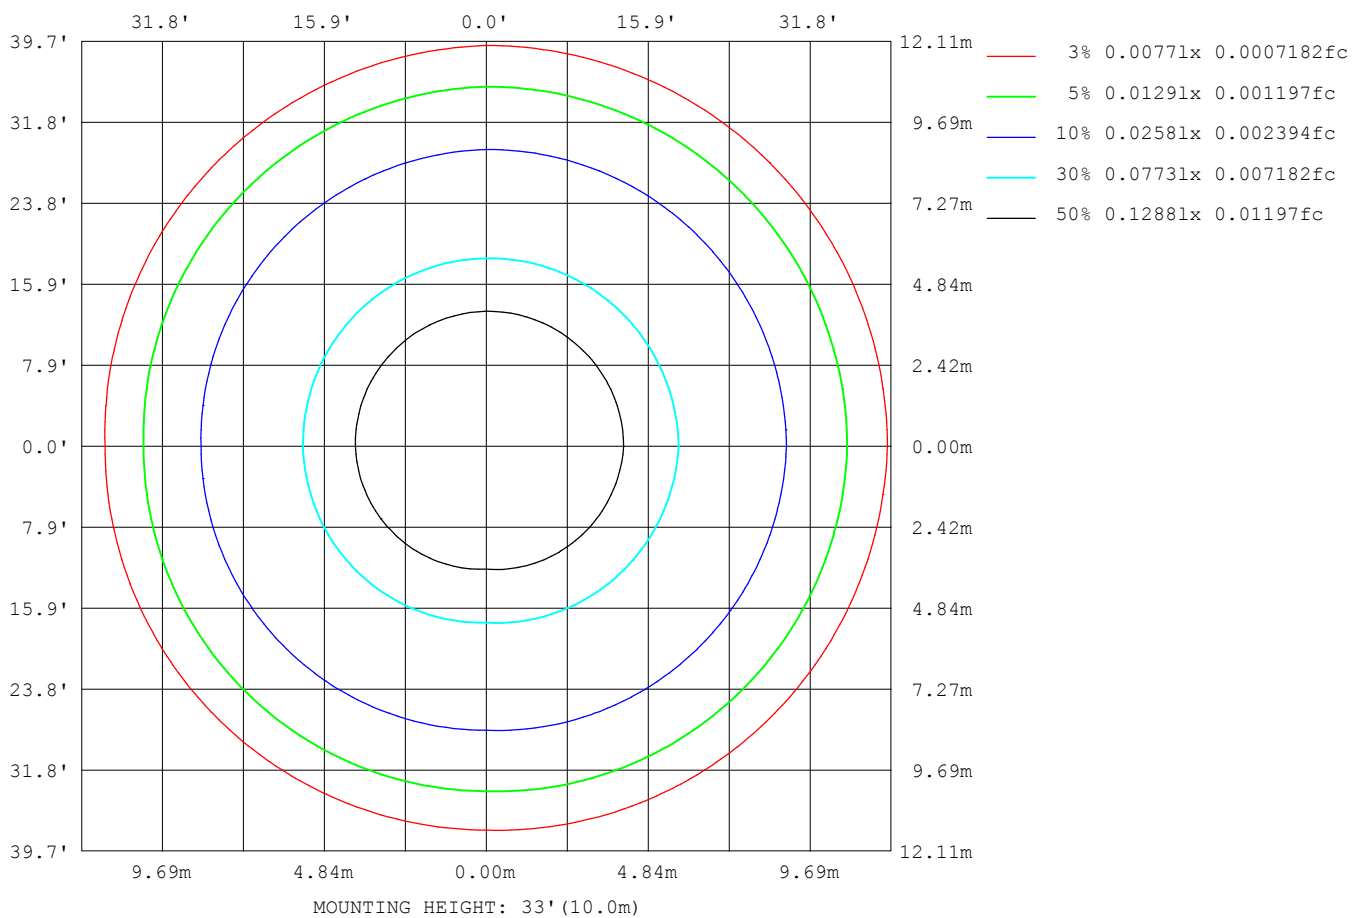

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

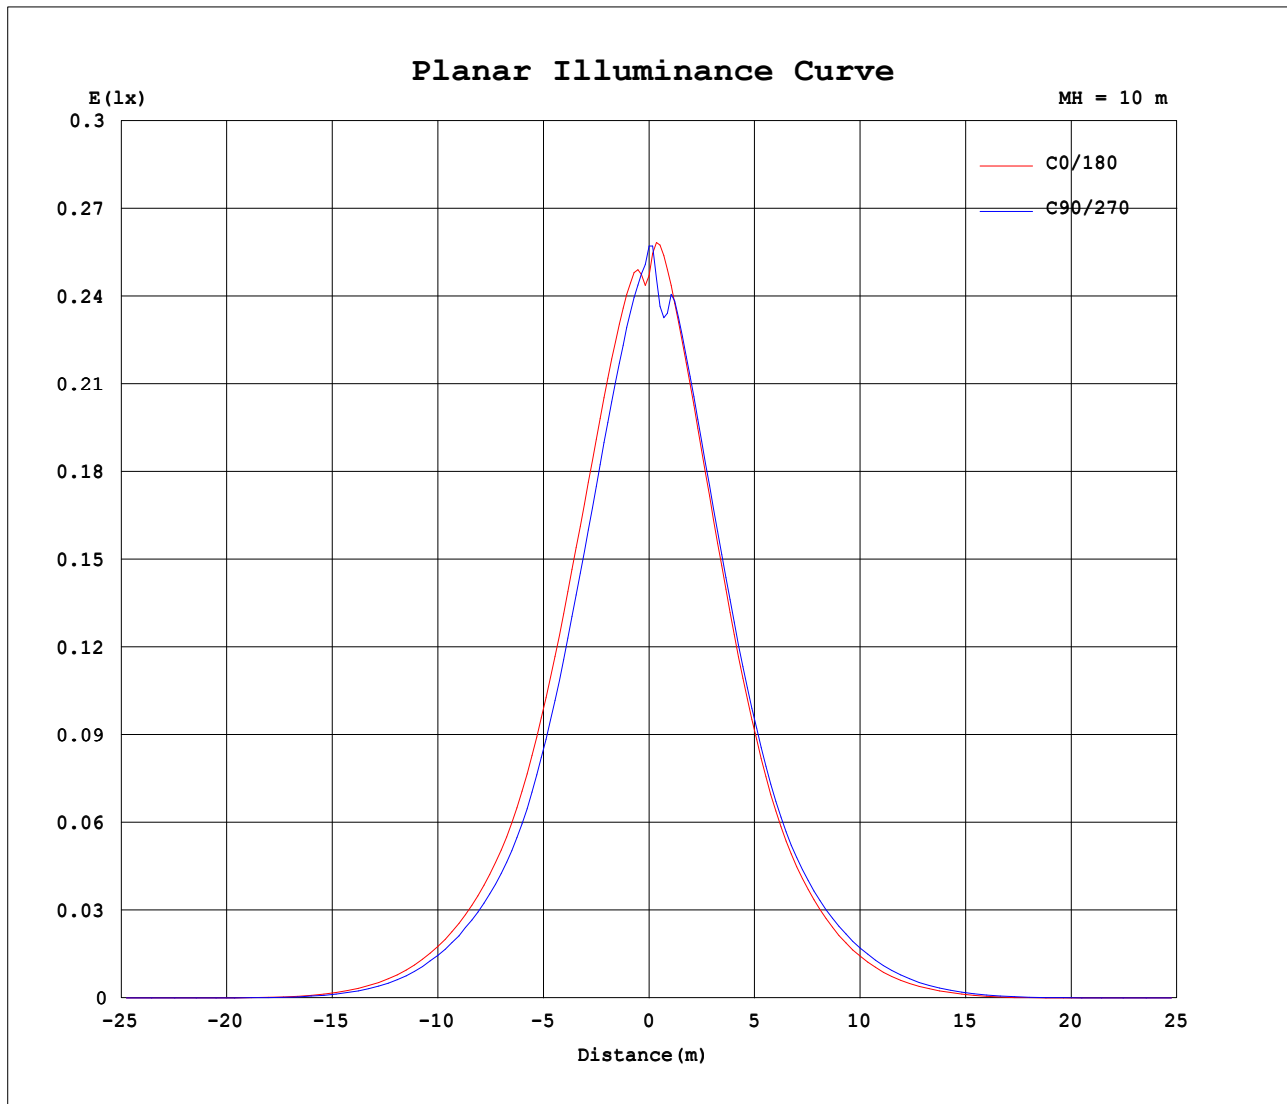


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.07V I:0.7791A P:6.461W PF:0.6873 Freq:59.98Hz Lamp Flux:24.0663x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW	WEIGHT:
SPEC.:7W BLUE Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

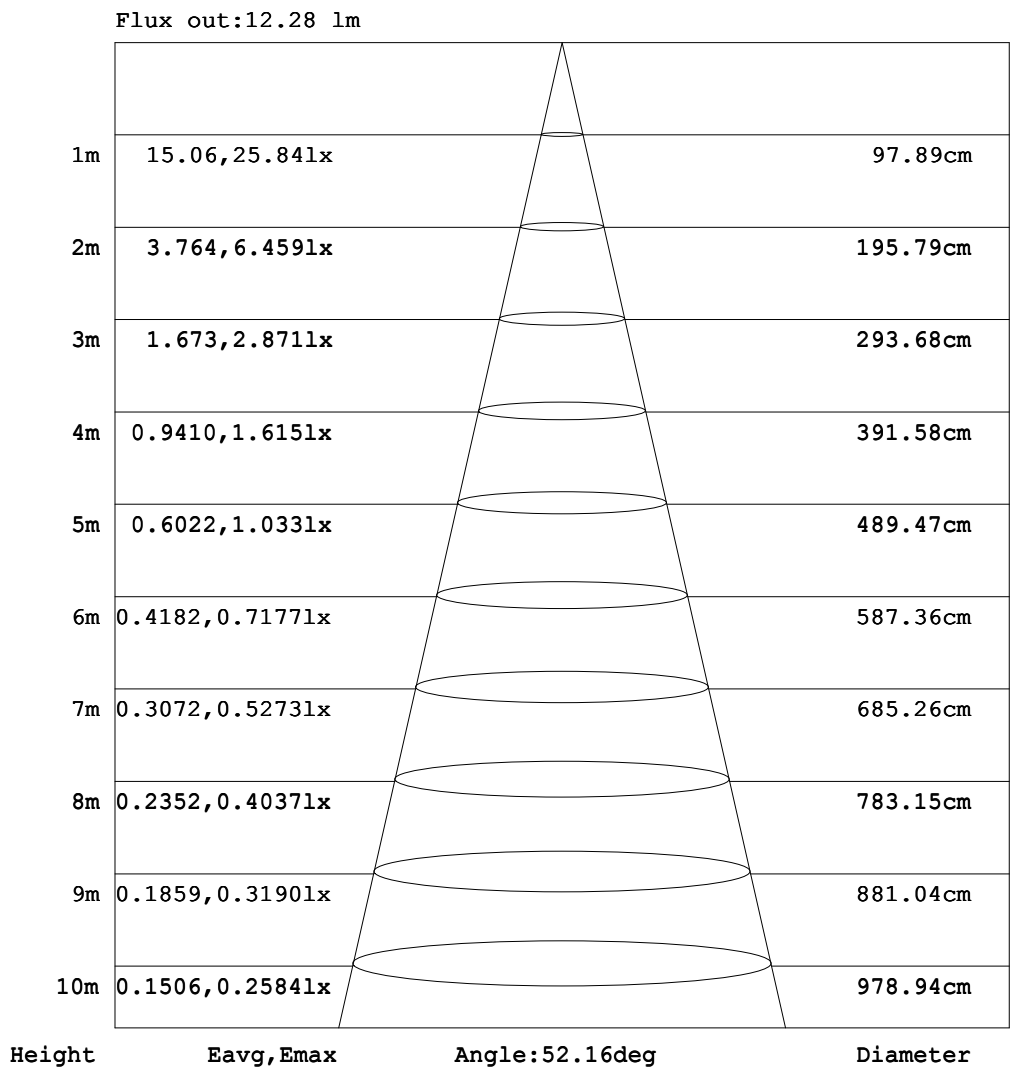

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.07V I:0.7791A P:6.461W PF:0.6873 Freq:59.98Hz Lamp Flux:24.0663x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW	WEIGHT:
SPEC.:7W BLUE Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.12	0.16	0.17	0.18	0.18
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.16	0.41	0.73	1.13	1.51	1.86	2.14	2.32	2.38
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.54	1.18	1.99	2.85	3.73	4.48	5.11	5.60	5.86	5.94
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.72	1.66	2.84	4.16	5.45	6.63	7.70	8.63	9.39	9.85	9.96
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.52	1.50	2.85	4.46	6.14	7.81	9.57	11.5	13.3	14.7	15.5	15.7
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.85	2.08	3.74	5.63	7.57	9.78	12.4	15.1	17.7	19.8	21.1	21.3
0	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.99	2.30	4.07	6.05	8.18	10.7	13.7	16.8	19.9	22.7	25.2	24.7
10	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.88	2.14	3.81	5.73	7.72	10.00	12.8	15.6	18.3	20.6	22.3	23.0
20	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.56	1.59	2.99	4.65	6.37	8.13	10.0	12.2	14.2	15.8	16.9	17.3
30	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.19	0.82	1.81	3.06	4.45	5.80	7.07	8.28	9.36	10.3	11.0	11.3
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.20	0.65	1.38	2.26	3.21	4.15	4.98	5.68	6.23	6.57	6.72
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.22	0.53	0.94	1.42	1.88	2.30	2.65	2.87	2.98
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.16	0.21	0.28	0.34	0.37
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-10-09

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.07V I:0.7791A P:6.461W PF:0.6873 Freq:59.98Hz Lamp Flux:24.0663x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW	WEIGHT:
SPEC.:7W BLUE Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.19	0.19	0.17	0.13	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	2.37	2.24	1.99	1.66	1.28	0.87	0.49	0.22	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	5.94	5.77	5.36	4.80	4.10	3.23	2.33	1.45	0.71	0.23	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	9.97	9.61	8.96	8.11	7.11	6.00	4.72	3.36	2.06	0.98	0.25	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-20	15.7	15.0	13.7	12.1	10.2	8.48	6.85	5.20	3.48	1.93	0.73	0.14	0.00	0.00	0.00	0.00	0.00	0.00	
-10	21.2	20.0	18.1	15.8	13.2	10.6	8.44	6.49	4.55	2.70	1.18	0.24	0.01	0.00	0.00	0.00	0.00	0.00	
0	24.7	22.9	20.4	17.7	14.7	11.8	9.20	7.04	4.99	3.01	1.36	0.29	0.01	0.00	0.00	0.00	0.00	0.00	
10	22.4	20.8	18.7	16.2	13.6	10.9	8.59	6.59	4.62	2.75	1.21	0.25	0.01	0.00	0.00	0.00	0.00	0.00	
20	17.0	16.1	14.6	12.7	10.7	8.81	7.08	5.38	3.62	2.02	0.77	0.15	0.00	0.00	0.00	0.00	0.00	0.00	
30	11.1	10.5	9.69	8.69	7.55	6.35	5.01	3.59	2.21	1.07	0.29	0.03	0.00	0.00	0.00	0.00	0.00	0.00	
40	6.65	6.40	5.94	5.30	4.51	3.58	2.61	1.65	0.83	0.27	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	2.92	2.75	2.43	2.03	1.57	1.08	0.62	0.27	0.11	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.34	0.30	0.23	0.17	0.11	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-10-09

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks: