

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1063.6 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	103.4V x 102.5H
	At 50% of Imax	50.0V x 53.8H
	At 90% of Imax	14.0V x 18.9H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	942.7 lumens per klm.
	To 50% of Imax	462.5 lumens per klm.
	To 90% of Imax	64.4 lumens per klm.
	Upward LOR	0.3 %
	Downward LOR	99.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.07V I:0.7748A P:6.419W PF:0.6865 Freq:59.98Hz Lamp Flux:77.1497x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW	WEIGHT:
SPEC.:7W GREEN Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

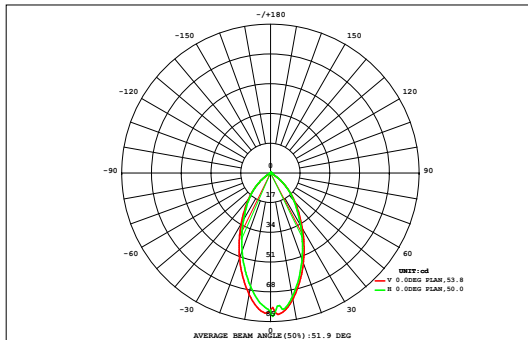

DATA OF LAMP		Eff:12.02lm/W	
MODEL	A9B1-7W-A	Imax (cd)	82.06
NOMINAL POWER (W)	7	AVAILABILITY (%)	94.4
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	72.83
NOMINAL FLUX (lm)	77.1497	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	77.15
TEST VOLTAGE (V)	12	θ @50% (H,V)	54,50DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.13	0.00
60	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.13	0.17	0.17	0.13	0.08	0.03	0.01	0.00	0.00	0.00	0.00	0.84	0.14
50	0.00	0.00	0.00	0.01	0.04	0.13	0.27	0.39	0.46	0.47	0.40	0.28	0.15	0.04	0.01	0.00	0.00	0.00	2.64	2.21
40	0.00	0.00	0.00	0.02	0.11	0.29	0.50	0.69	0.81	0.81	0.71	0.52	0.32	0.13	0.02	0.00	0.00	0.00	4.92	4.67
30	0.00	0.00	0.00	0.04	0.19	0.44	0.74	1.06	1.28	1.29	1.09	0.78	0.48	0.22	0.05	0.01	0.00	0.00	7.67	7.48
20	0.00	0.00	0.01	0.06	0.26	0.57	0.99	1.47	1.83	1.84	1.51	1.04	0.61	0.30	0.08	0.01	0.00	0.00	10.6	10.4
10	0.00	0.00	0.01	0.07	0.30	0.65	1.15	1.75	2.25	2.28	1.82	1.22	0.70	0.34	0.09	0.01	0.00	0.00	12.7	12.5
0	0.00	0.00	0.01	0.07	0.30	0.64	1.14	1.72	2.18	2.21	1.79	1.21	0.70	0.34	0.09	0.01	0.00	0.00	12.4	12.2
-10	0.00	0.00	0.01	0.06	0.26	0.56	0.96	1.40	1.69	1.71	1.44	1.01	0.60	0.29	0.08	0.01	0.00	0.00	10.1	9.90
-20	0.00	0.00	0.00	0.04	0.19	0.43	0.71	0.99	1.17	1.18	1.02	0.74	0.46	0.21	0.05	0.01	0.00	0.00	7.19	7.00
-30	0.00	0.00	0.00	0.02	0.10	0.27	0.47	0.64	0.74	0.74	0.66	0.49	0.30	0.12	0.02	0.00	0.00	0.00	4.58	4.31
-40	0.00	0.00	0.00	0.01	0.03	0.12	0.24	0.35	0.41	0.42	0.36	0.26	0.13	0.04	0.01	0.00	0.00	0.00	2.40	1.92
-50	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.11	0.14	0.14	0.11	0.07	0.03	0.01	0.00	0.00	0.00	0.00	0.72	0.05
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.10	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.00	0.00	0.04	0.40	1.81	4.17	7.31	10.7	13.2	13.3	11.1	7.72	4.52	2.06	0.51	0.06	0.00	0.00	77	---
Φ a	0.00	0.00	0.00	0.00	1.38	3.85	7.01	10.4	12.9	13.0	10.8	7.43	4.21	1.68	0.08	0.00	0.00	0.00	---	73

one-half-peak spread: U:25.0,D:21.4 , L:24.3,R:24.9


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.07V I:0.7748A P:6.419W PF:0.6865 Freq:59.98Hz Lamp Flux:77.1497x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW WEIGHT:	
SPEC.:7W GREEN Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

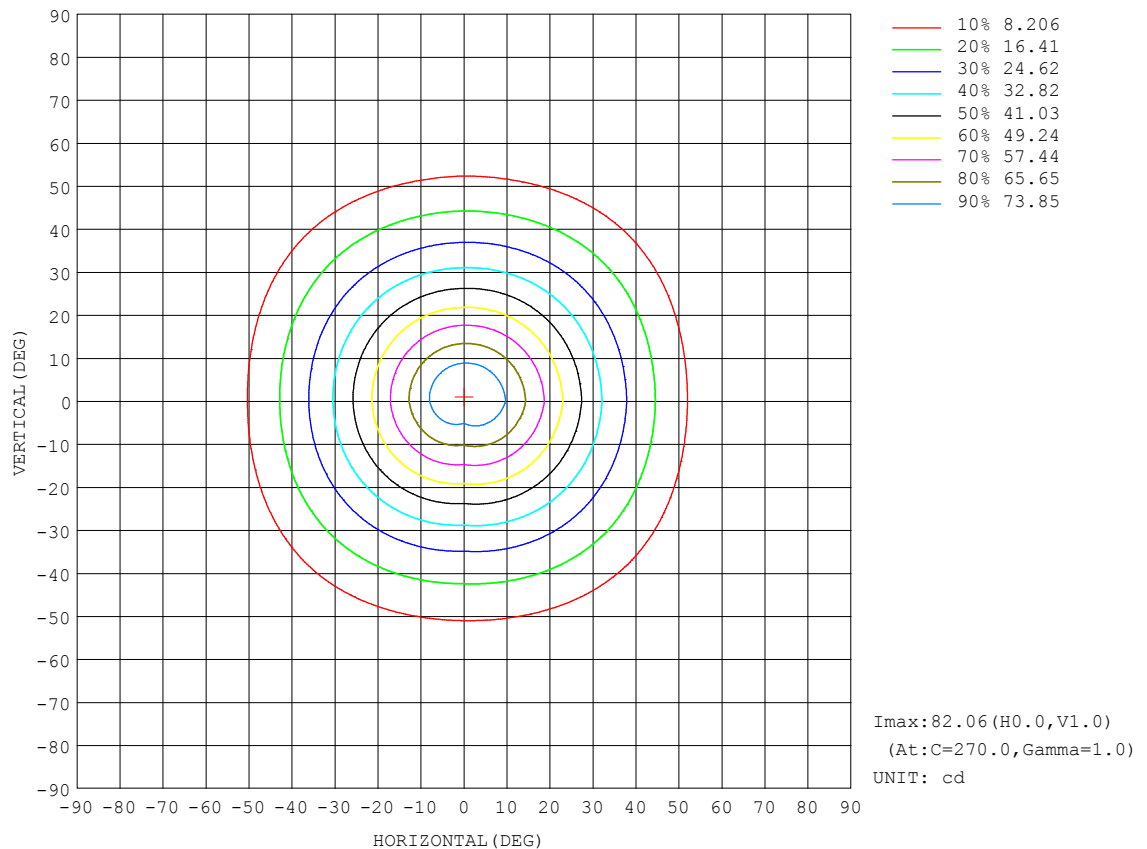


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.07V I:0.7748A P:6.419W PF:0.6865 Freq:59.98Hz Lamp Flux:77.1497x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW WEIGHT:	
SPEC.:7W GREEN Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

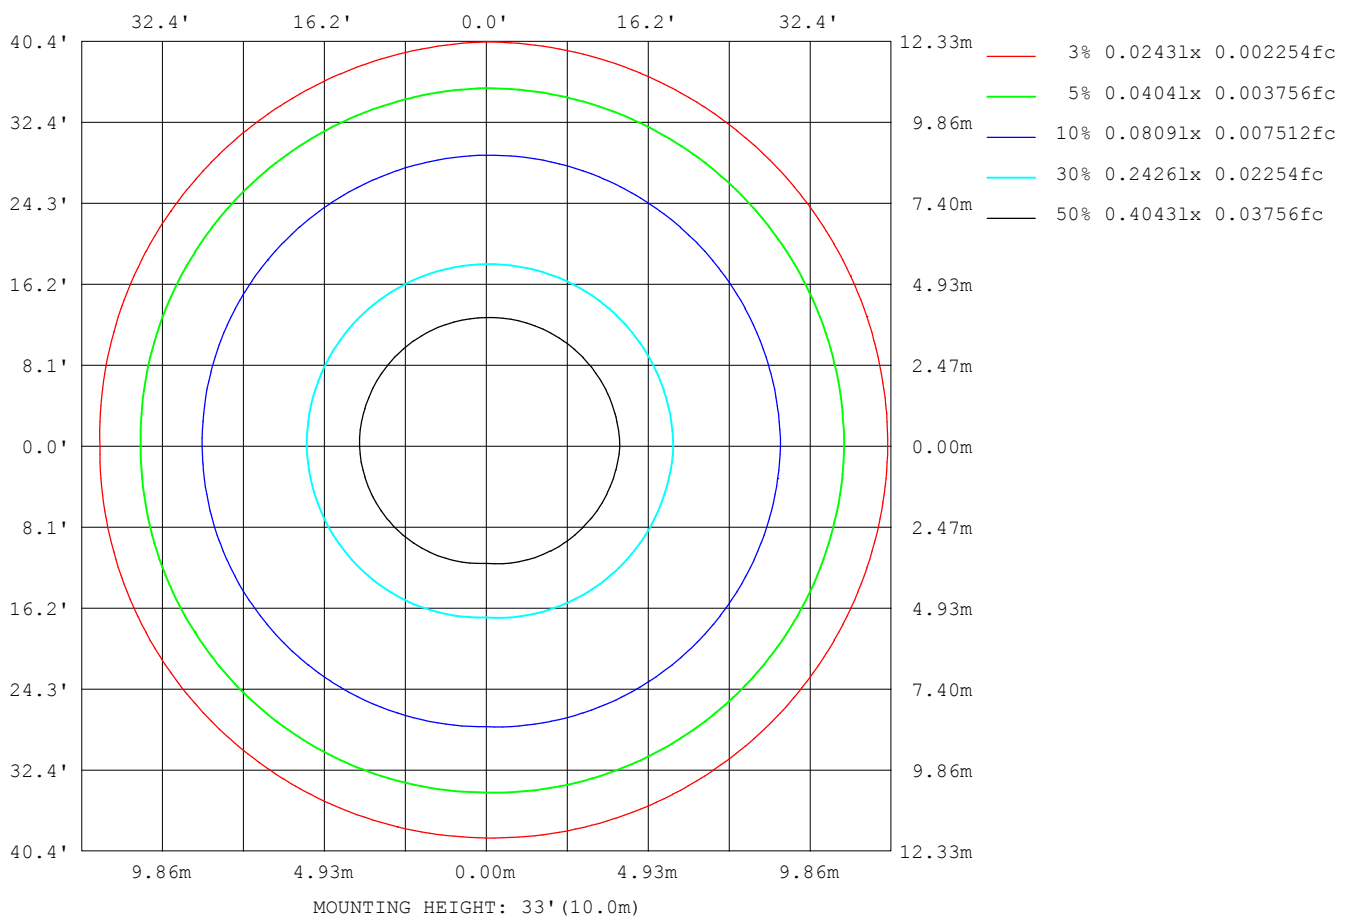

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

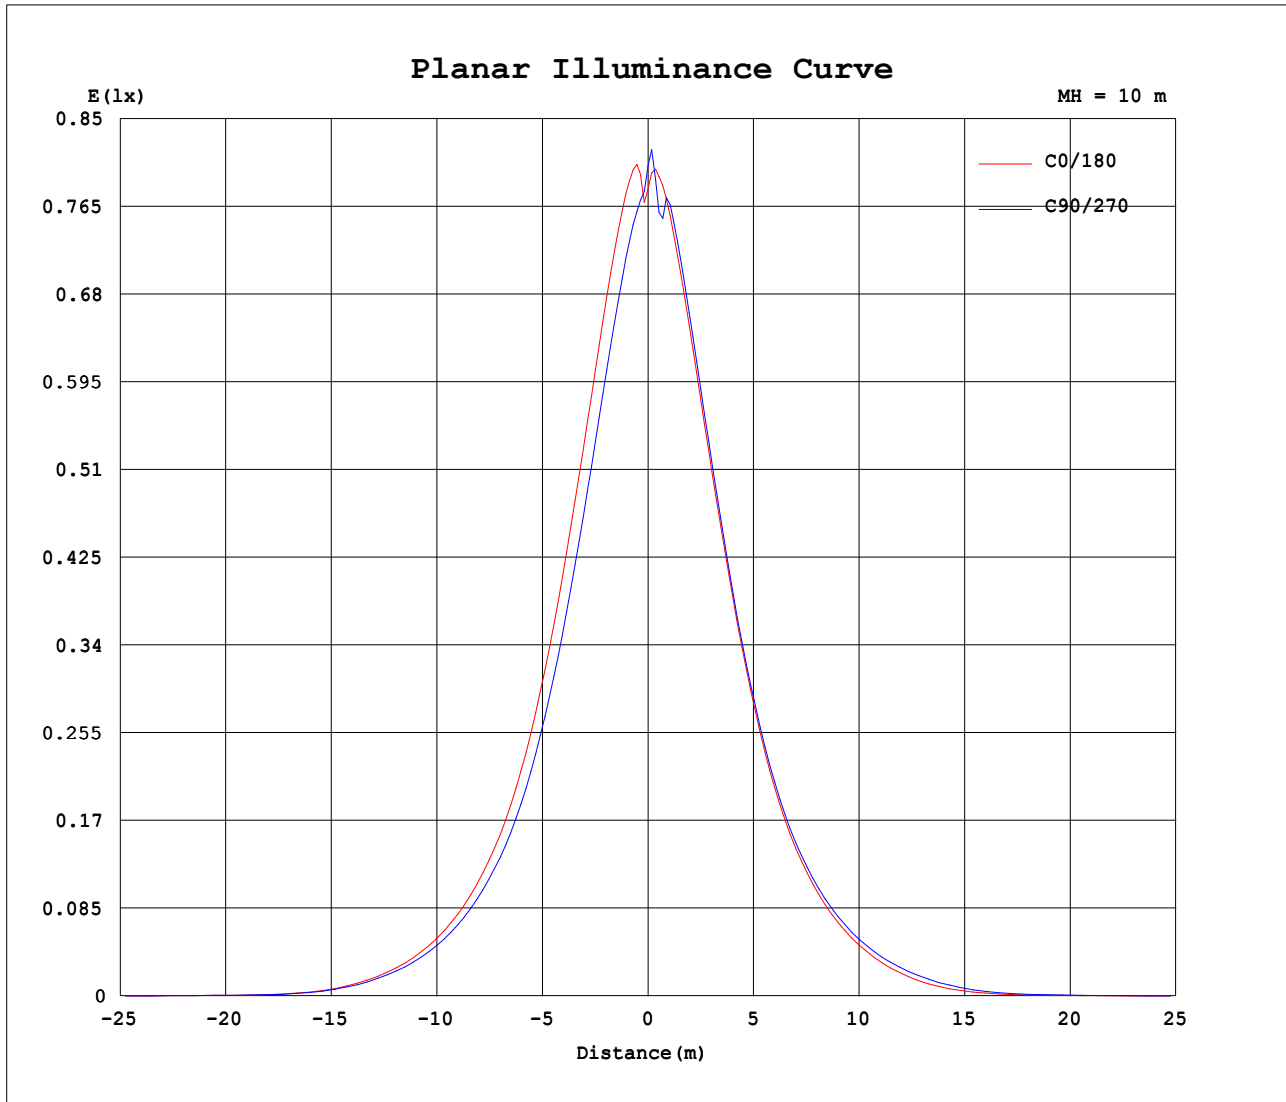


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.07V I:0.7748A P:6.419W PF:0.6865 Freq:59.98Hz Lamp Flux:77.1497x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW	WEIGHT:
SPEC.:7W GREEN Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

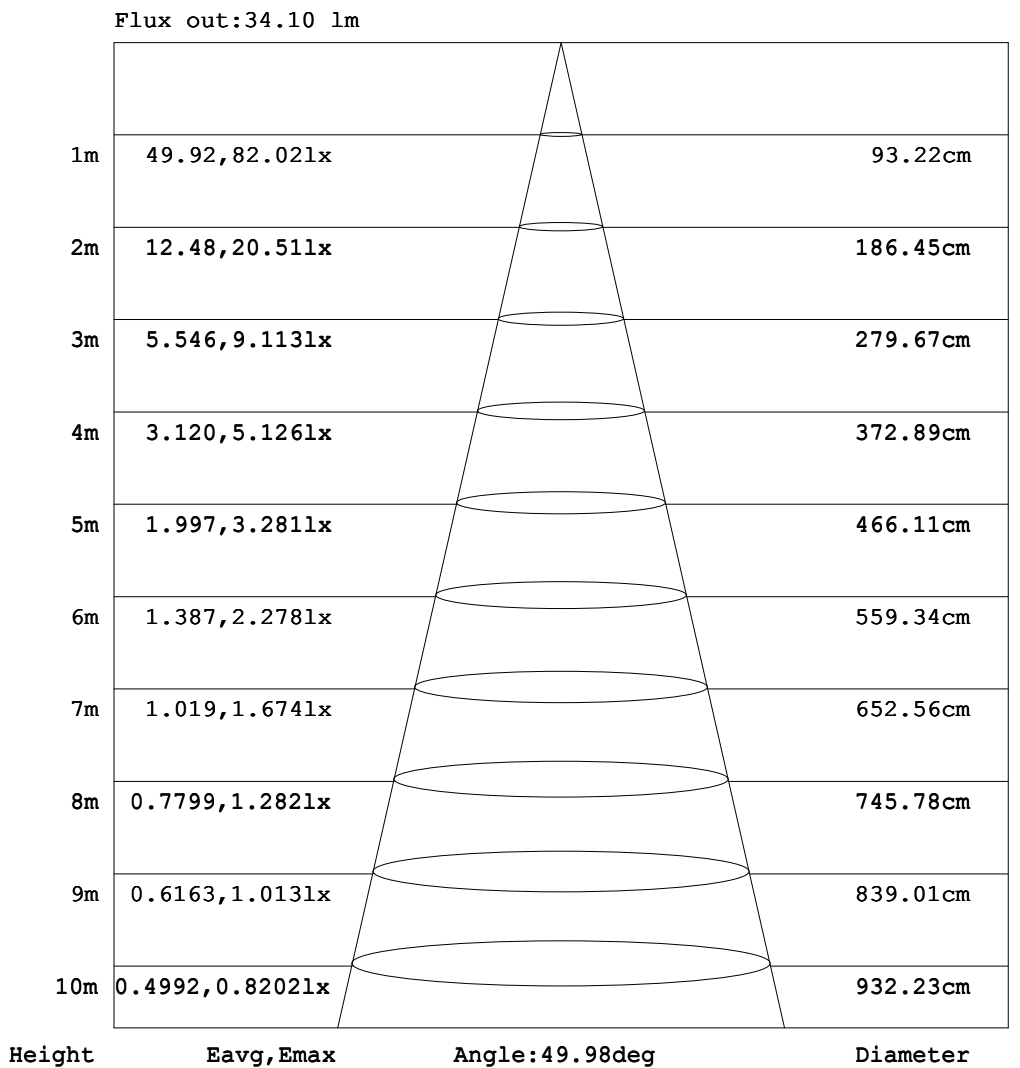

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.07V I:0.7748A P:6.419W PF:0.6865 Freq:59.98Hz Lamp Flux:77.1497x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW WEIGHT:	
SPEC.:7W GREEN Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.11	0.16	0.22	0.28	0.32	0.34	0.36
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.10	0.18	0.22	0.27	0.30	0.34	0.34
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.12	0.19	0.23	0.26	0.30	0.32
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.13	0.17	0.20	0.21
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.04	0.05
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.10	0.13
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.15	0.32	0.48	0.67	0.84	1.02	1.14	1.29	1.40	1.45
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.23	0.50	0.83	1.21	2.04	3.35	4.86	6.30	7.50	8.39	8.95	9.16
-40	0.00	0.00	0.00	0.00	0.00	0.03	0.31	0.70	1.18	2.52	4.92	7.73	10.4	12.9	15.0	16.7	18.0	18.7	18.9
-30	0.00	0.00	0.00	0.00	0.00	0.21	0.65	1.22	3.11	6.51	10.4	14.1	17.8	21.3	24.5	27.2	29.4	30.8	31.0
-20	0.00	0.00	0.00	0.00	0.02	0.38	0.92	2.30	5.84	10.4	15.1	19.9	24.9	30.1	35.7	40.8	44.9	47.3	47.7
-10	0.00	0.00	0.00	0.00	0.10	0.52	1.14	3.38	7.87	13.0	18.4	24.2	30.8	38.5	46.5	54.2	60.9	65.3	66.0
0	0.00	0.00	0.00	0.00	0.13	0.55	1.20	3.78	8.55	14.0	19.7	26.1	33.6	42.5	51.9	61.5	70.5	78.1	78.2
10	0.00	0.00	0.00	0.00	0.10	0.53	1.15	3.45	8.00	13.2	18.7	24.6	31.4	39.4	47.8	56.2	63.7	69.4	71.9
20	0.00	0.00	0.00	0.00	0.03	0.39	0.94	2.41	6.04	10.7	15.5	20.5	25.7	31.4	37.5	43.2	48.1	51.4	52.7
30	0.00	0.00	0.00	0.00	0.00	0.23	0.68	1.29	3.32	6.87	10.9	14.8	18.7	22.4	26.0	29.2	31.9	33.8	34.5
40	0.00	0.00	0.00	0.00	0.00	0.05	0.33	0.75	1.28	2.78	5.37	8.36	11.2	13.9	16.2	18.1	19.6	20.6	21.0
50	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.27	0.57	0.90	1.36	2.35	3.84	5.54	7.14	8.50	9.54	10.2	10.5
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.07	0.21	0.38	0.58	0.78	0.96	1.13	1.34	1.56	1.72	1.80
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.12	0.17	0.20	0.23	0.24
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.03	0.03
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.13	0.17	0.18	0.18	0.17
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.15	0.19	0.22	0.28	0.30	0.30
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.11	0.16	0.22	0.28	0.32	0.34	0.35

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.07V I:0.7748A P:6.419W PF:0.6865 Freq:59.98Hz Lamp Flux:77.1497x1 lm																	
NAME: LED LANDSCAPE LIGHT									TYPE:Copper Path light RGBWW WEIGHT:								
SPEC.:7W GREEN Min beam angle									DIM.:			SERIAL No.:1					
MFR.: EVERFINE									SUR.:			Shielding Angle:LAB-039					

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.36	0.31	0.30	0.29	0.19	0.16	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.33	0.31	0.31	0.28	0.19	0.17	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.31	0.29	0.25	0.20	0.18	0.13	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.21	0.19	0.16	0.13	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.04	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.13	0.11	0.08	0.05	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	1.43	1.33	1.19	1.08	0.90	0.72	0.54	0.39	0.22	0.09	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	9.08	8.63	7.86	6.76	5.37	3.83	2.38	1.38	0.93	0.59	0.31	0.10	0.00	0.00	0.00	0.00	0.00	0.00	
-40	18.9	18.3	17.2	15.6	13.6	11.3	8.63	5.80	3.11	1.40	0.81	0.42	0.12	0.00	0.00	0.00	0.00	0.00	
-30	31.1	30.0	28.0	25.4	22.3	18.9	15.3	11.5	7.70	3.97	1.50	0.76	0.31	0.03	0.00	0.00	0.00	0.00	
-20	47.8	45.8	42.0	37.2	31.7	26.4	21.4	16.5	11.8	7.18	3.06	1.11	0.52	0.12	0.00	0.00	0.00	0.00	
-10	66.1	62.4	56.1	48.6	40.7	33.0	26.2	20.2	14.7	9.45	4.55	1.43	0.64	0.19	0.00	0.00	0.00	0.00	
0	79.9	73.3	64.5	54.9	45.4	36.4	28.5	21.9	15.9	10.3	5.15	1.61	0.69	0.22	0.00	0.00	0.00	0.00	
10	70.2	65.2	58.1	49.9	41.6	33.5	26.6	20.5	14.8	9.57	4.62	1.45	0.65	0.20	0.00	0.00	0.00	0.00	
20	51.9	49.0	44.5	38.9	32.9	27.3	22.0	17.0	12.1	7.39	3.16	1.13	0.54	0.13	0.00	0.00	0.00	0.00	
30	34.1	32.5	30.0	26.9	23.5	19.8	16.0	12.0	8.06	4.18	1.58	0.79	0.33	0.03	0.00	0.00	0.00	0.00	
40	20.7	20.0	18.6	16.8	14.6	12.1	9.26	6.24	3.37	1.50	0.85	0.45	0.14	0.00	0.00	0.00	0.00	0.00	
50	10.3	9.79	8.86	7.60	6.05	4.32	2.69	1.53	1.00	0.65	0.35	0.13	0.00	0.00	0.00	0.00	0.00	0.00	
60	1.74	1.60	1.38	1.18	1.02	0.83	0.64	0.45	0.28	0.14	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.23	0.22	0.19	0.14	0.09	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.04	0.04	0.05	0.05	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.19	0.20	0.18	0.14	0.10	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.30	0.29	0.26	0.25	0.17	0.13	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.36	0.31	0.30	0.29	0.19	0.16	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: