

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2559.4 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	61.2V x 54.6H
	At 50% of Imax	34.5V x 35.7H
	At 90% of Imax	13.7V x 13.6H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	913.6 lumens per klm.
	To 50% of Imax	549.7 lumens per klm.
	To 90% of Imax	102.8 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.10V I:0.4314A P:3.465W PF:0.6640 Freq:59.98Hz Lamp Flux:15.7454x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 BLUE	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

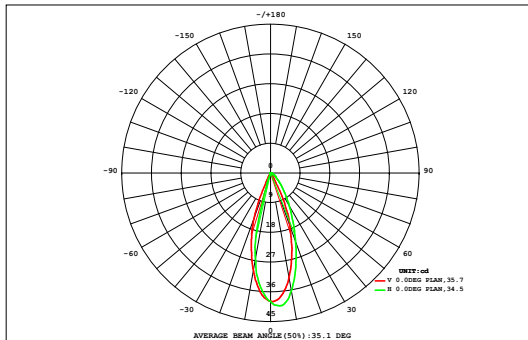

DATA OF LAMP		Eff:4.54lm/W	
MODEL	D1B2-A	Imax (cd)	40.30
NOMINAL POWER (W)	3.5	AVAILABILITY (%)	88.5
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	13.93
NOMINAL FLUX (lm)	15.7454	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	15.75
TEST VOLTAGE (V)	12	θ @50% (H,V)	36,34DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.28	0.05
45	0.00	0.01	0.01	0.01	0.02	0.03	0.03	0.04	0.05	0.05	0.04	0.03	0.03	0.02	0.01	0.01	0.01	0.00	0.39	0.24
40	0.00	0.01	0.01	0.02	0.02	0.03	0.05	0.06	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.54	0.42
35	0.00	0.01	0.01	0.02	0.03	0.05	0.06	0.08	0.10	0.10	0.09	0.07	0.05	0.03	0.02	0.01	0.01	0.00	0.74	0.64
30	0.00	0.01	0.01	0.02	0.04	0.06	0.09	0.12	0.14	0.14	0.12	0.10	0.07	0.04	0.03	0.01	0.01	0.00	1.02	0.93
25	0.00	0.01	0.01	0.03	0.05	0.08	0.13	0.16	0.19	0.19	0.17	0.14	0.10	0.06	0.03	0.02	0.01	0.00	1.37	1.29
20	0.00	0.01	0.01	0.03	0.06	0.11	0.16	0.21	0.24	0.24	0.22	0.17	0.13	0.08	0.04	0.02	0.01	0.00	1.73	1.66
15	0.00	0.00	0.01	0.02	0.07	0.13	0.19	0.24	0.28	0.28	0.25	0.20	0.15	0.09	0.04	0.02	0.01	0.00	2.00	1.94
10	0.00	0.00	0.01	0.02	0.07	0.14	0.20	0.25	0.29	0.30	0.27	0.21	0.15	0.10	0.04	0.01	0.00	0.00	2.08	2.03
5	0.00	0.00	0.00	0.02	0.06	0.13	0.19	0.24	0.28	0.28	0.25	0.20	0.14	0.09	0.04	0.01	0.00	0.00	1.94	1.90
0	0.00	0.00	0.00	0.01	0.04	0.10	0.15	0.20	0.23	0.24	0.21	0.16	0.11	0.07	0.03	0.01	0.00	0.00	1.57	1.53
-5	0.00	0.00	0.00	0.01	0.02	0.06	0.09	0.13	0.16	0.16	0.13	0.10	0.07	0.05	0.02	0.01	0.00	0.00	0.99	0.95
-10	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.05	0.05	0.05	0.05	0.04	0.02	0.01	0.00	0.00	0.00	0.41	0.34
-15	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.14	0.01
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45				
Φ t	0.03	0.05	0.11	0.22	0.51	0.96	1.41	1.84	2.11	2.14	1.93	1.54	1.11	0.70	0.33	0.14	0.07	0.03	15	---
Φ a	0.00	0.00	0.00	0.05	0.41	0.89	1.36	1.80	2.09	2.11	1.88	1.48	1.04	0.62	0.19	0.00	0.00	0.00	---	14

one-half-peak spread: U:17.0,D:17.7 , L:18.3,R:17.6


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.10V I:0.4314A P:3.465W PF:0.6640 Freq:59.98Hz Lamp Flux:15.7454x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 BLUE	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

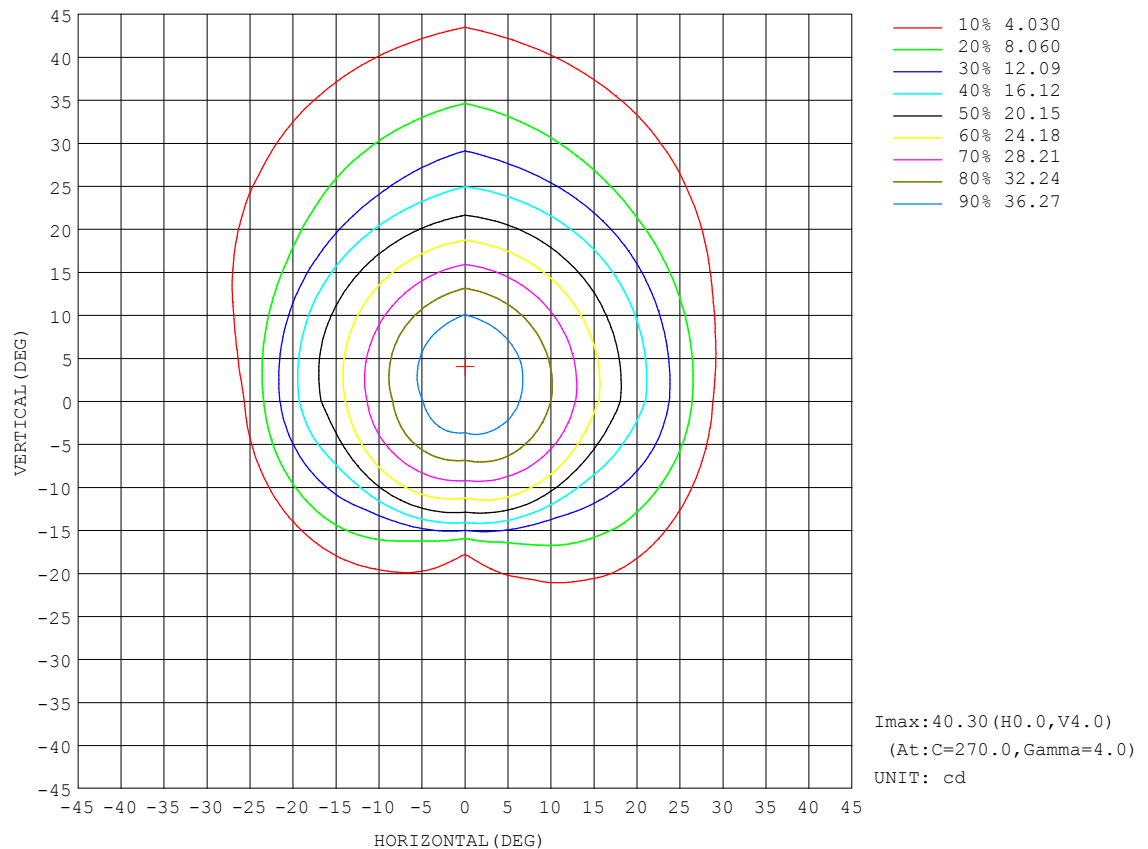


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.10V I:0.4314A P:3.465W PF:0.6640 Freq:59.98Hz Lamp Flux:15.7454x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 BLUE	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

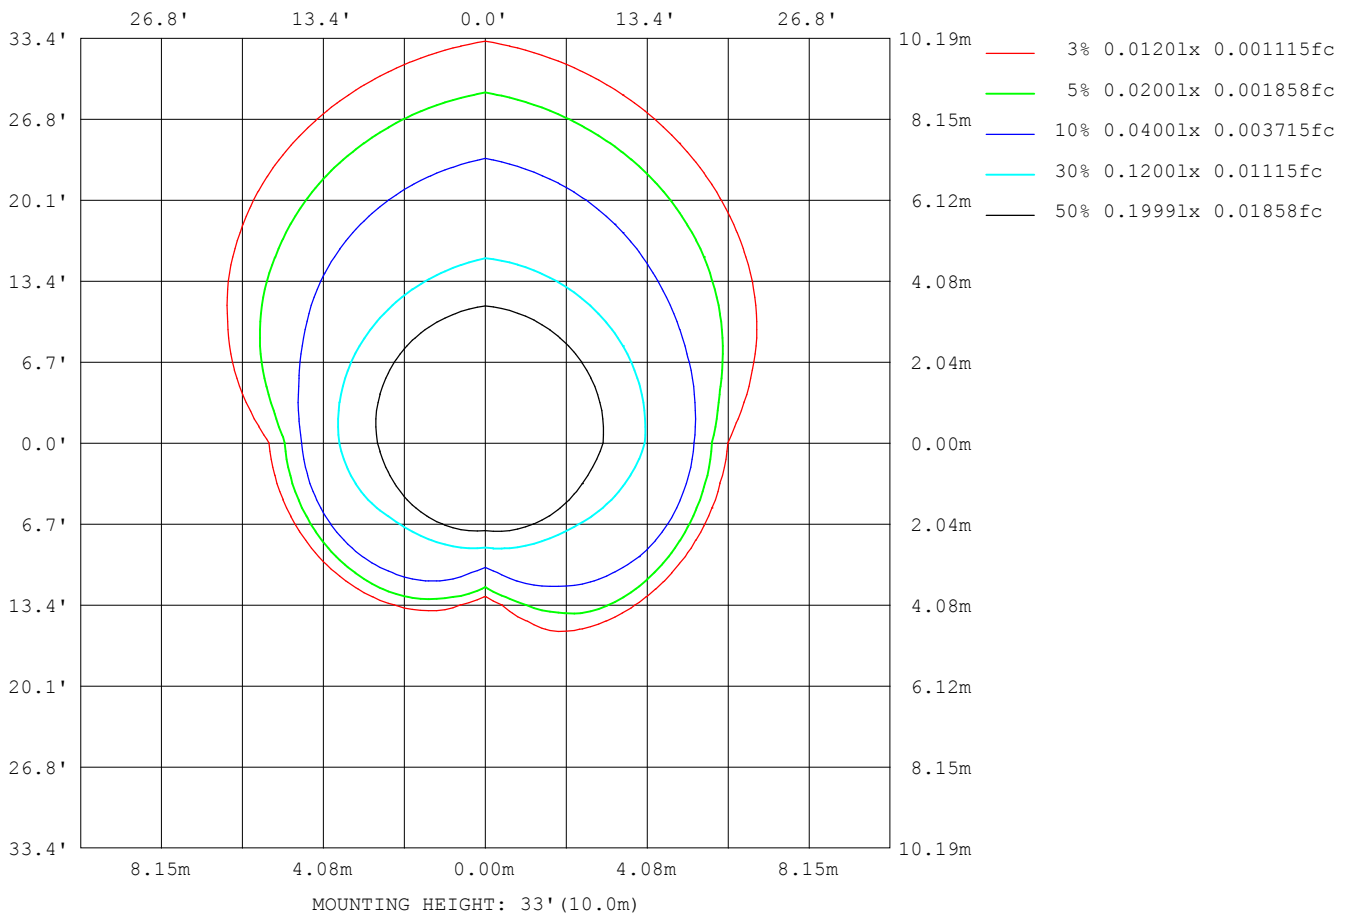

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

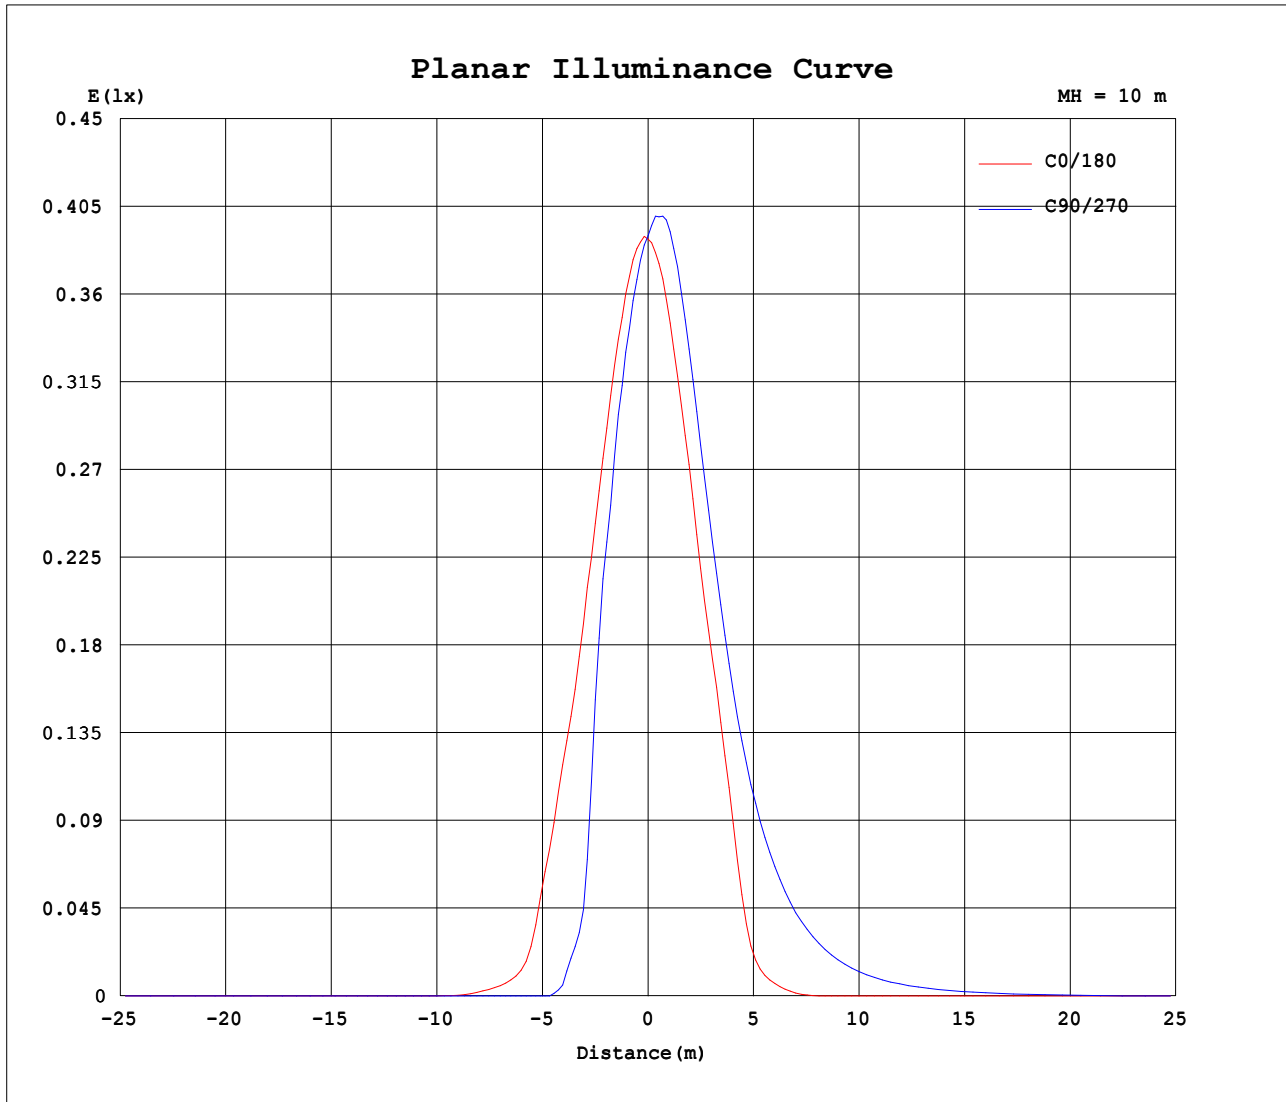


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.10V I:0.4314A P:3.465W PF:0.6640 Freq:59.98Hz Lamp Flux:15.7454x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 BLUE	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

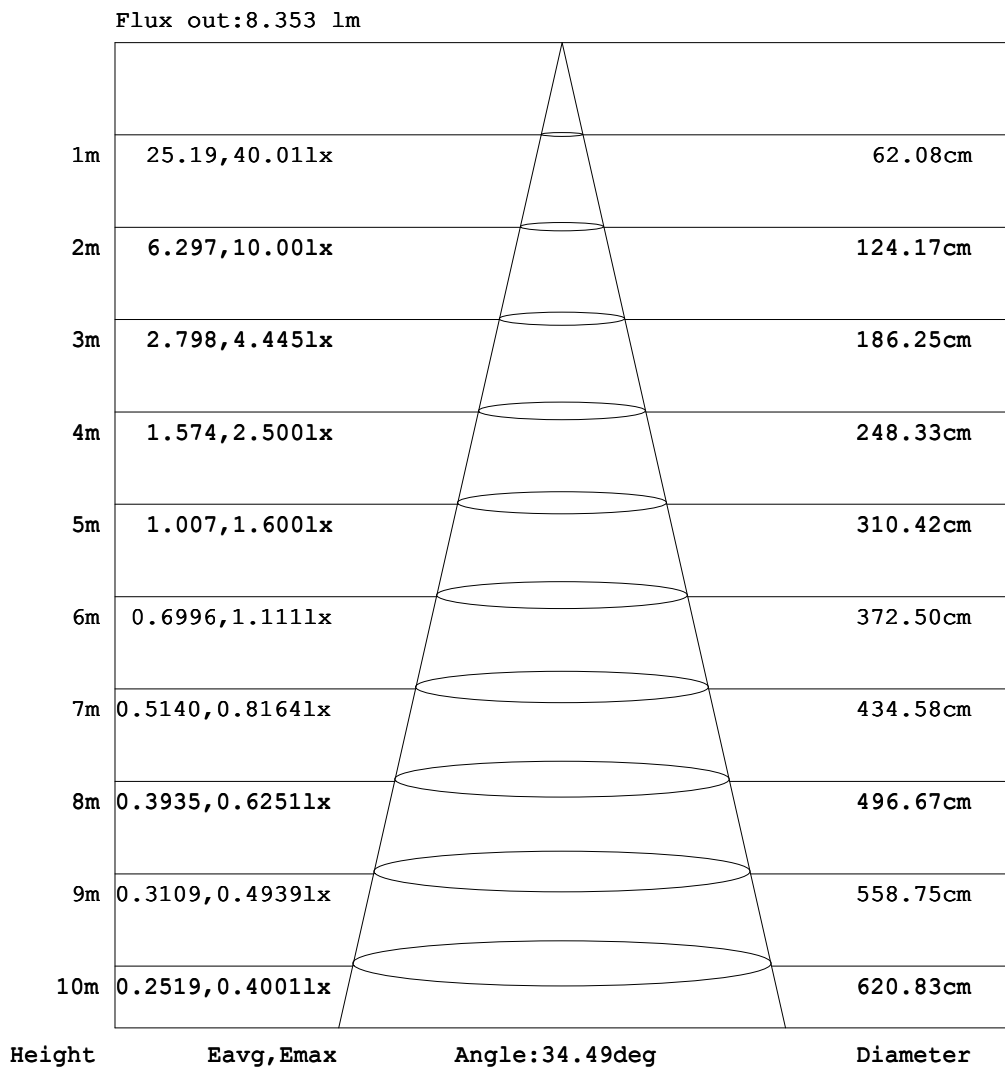

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.10V I:0.4314A P:3.465W PF:0.6640 Freq:59.98Hz Lamp Flux:15.7454x1 lm					
NAME: LED LANDSCAPE LIGHT			TYPE:Spot Light Non LED		WEIGHT:
SPEC.:3.5W MR16 BLUE			DIM.:		SERIAL No.:1
MFR.: EVERFINE			SUR.:		Shielding Angle:Downlight Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.09	0.18	0.20	0.13	0.00
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.53	1.05	2.27	3.62	3.80	2.35
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.75	2.16	7.71	13.1	20.0	25.6	26.4
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.29	1.28	4.98	14.9	22.5	30.1	36.1	38.8
10	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.11	0.20	0.36	0.64	1.24	2.64	5.38	13.0	20.9	27.3	33.0	36.3
20	0.00	0.00	0.00	0.00	0.00	0.01	0.09	0.18	0.33	0.57	0.95	1.58	2.70	4.60	7.31	11.6	16.6	20.3	22.3
30	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.19	0.34	0.57	0.92	1.42	2.16	3.20	4.58	6.33	8.20	9.97	11.4
40	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.12	0.27	0.45	0.68	1.01	1.43	1.96	2.60	3.32	4.06	4.76	5.31
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.09	0.24	0.40	0.59	0.80	1.04	1.32	1.61	1.90	2.15	2.35
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.13	0.25	0.40	0.52	0.64	0.74	0.83	0.90
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2025-07-25

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.10V I:0.4314A P:3.465W PF:0.6640 Freq:59.98Hz Lamp Flux:15.7454x1 lm																	
NAME: LED LANDSCAPE LIGHT									TYPE:Spot Light Non LED						WEIGHT:		
SPEC.:3.5W MR16 BLUE									DIM.:						SERIAL No.:1		
MFR.: EVERFINE									SUR.:						Shielding Angle:Downlight Shroud		

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.02	0.03	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	0.28	0.41	0.43	0.36	0.24	0.08	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-20	4.24	4.84	4.42	2.76	1.10	0.60	0.22	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-10	26.2	21.3	14.3	10.6	5.73	1.55	0.67	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
0	37.4	32.2	25.0	17.3	10.1	2.74	0.98	0.27	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10	33.6	28.6	22.1	15.9	8.95	3.45	1.78	0.79	0.36	0.20	0.11	0.05	0.01	0.00	0.00	0.00	0.00	0.00	
20	20.7	17.8	13.8	9.02	5.17	3.15	1.80	0.99	0.57	0.33	0.18	0.09	0.01	0.00	0.00	0.00	0.00	0.00	
30	10.1	8.41	6.58	4.86	3.42	2.24	1.43	0.92	0.57	0.34	0.19	0.07	0.00	0.00	0.00	0.00	0.00	0.00	
40	4.78	4.09	3.34	2.61	1.96	1.43	1.01	0.68	0.45	0.27	0.12	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
50	2.15	1.90	1.61	1.32	1.04	0.80	0.59	0.40	0.24	0.09	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.83	0.74	0.64	0.52	0.40	0.25	0.13	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2025-07-25

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks: