

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2626.6 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	57.5V x 56.8H
	At 50% of Imax	32.8V x 35.8H
	At 90% of Imax	13.4V x 13.4H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	885.5 lumens per klm.
	To 50% of Imax	532.1 lumens per klm.
	To 90% of Imax	109.1 lumens per klm.
	Upward LOR	0.8 %
	Downward LOR	99.2 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.11V I:0.4087A P:3.262W PF:0.6593 Freq:59.97Hz Lamp Flux:96.4582x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 GREEN	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

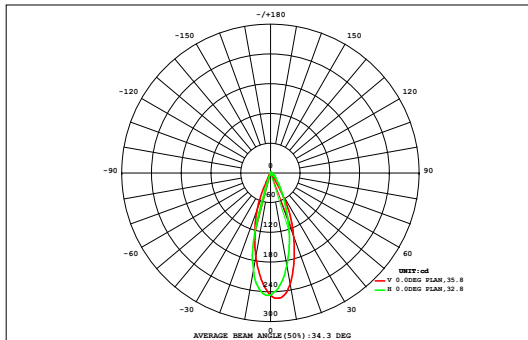

DATA OF LAMP		Eff:29.57lm/W	
MODEL	D1B2-A	Imax (cd)	253.4
NOMINAL POWER (W)	3.5	AVAILABILITY (%)	87.0
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	83.95
NOMINAL FLUX (lm)	96.4582	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	96.46
TEST VOLTAGE (V)	12	θ @50% (H,V)	36,33DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.02	0.03	0.04	0.06	0.07	0.09	0.11	0.12	0.12	0.11	0.09	0.07	0.06	0.04	0.03	0.02	0.01	1.11	0.00
45	0.02	0.02	0.04	0.05	0.07	0.10	0.13	0.16	0.18	0.18	0.16	0.13	0.10	0.08	0.05	0.04	0.02	0.02	1.57	0.17
40	0.02	0.03	0.04	0.07	0.10	0.14	0.19	0.23	0.28	0.28	0.25	0.20	0.15	0.10	0.07	0.05	0.03	0.02	2.24	1.26
35	0.02	0.03	0.05	0.08	0.13	0.19	0.27	0.35	0.42	0.44	0.41	0.34	0.23	0.15	0.09	0.06	0.03	0.02	3.31	2.58
30	0.02	0.03	0.06	0.10	0.16	0.26	0.40	0.55	0.64	0.67	0.64	0.55	0.41	0.24	0.12	0.07	0.04	0.02	5.00	4.40
25	0.02	0.03	0.06	0.11	0.21	0.39	0.62	0.81	0.93	0.97	0.92	0.80	0.62	0.41	0.18	0.08	0.04	0.02	7.22	6.74
20	0.02	0.03	0.06	0.12	0.28	0.56	0.84	1.08	1.24	1.30	1.24	1.06	0.82	0.57	0.28	0.10	0.04	0.02	9.66	9.25
15	0.01	0.03	0.05	0.12	0.36	0.69	1.01	1.32	1.54	1.62	1.53	1.30	1.00	0.70	0.39	0.12	0.04	0.02	11.8	11.5
10	0.01	0.02	0.04	0.11	0.40	0.74	1.09	1.46	1.74	1.84	1.76	1.48	1.13	0.79	0.45	0.13	0.04	0.01	13.2	12.9
5	0.01	0.01	0.03	0.09	0.36	0.70	1.09	1.48	1.77	1.88	1.78	1.48	1.09	0.75	0.43	0.12	0.03	0.01	13.1	12.8
0	0.01	0.01	0.02	0.06	0.26	0.55	0.95	1.34	1.61	1.69	1.56	1.25	0.86	0.60	0.33	0.09	0.03	0.01	11.2	11.0
-5	0.00	0.01	0.02	0.04	0.13	0.34	0.60	0.97	1.21	1.27	1.12	0.82	0.60	0.43	0.20	0.05	0.02	0.01	7.85	7.56
-10	0.00	0.01	0.01	0.02	0.05	0.14	0.27	0.38	0.48	0.52	0.50	0.44	0.38	0.25	0.09	0.03	0.01	0.01	3.59	3.23
-15	0.00	0.00	0.01	0.01	0.02	0.04	0.08	0.11	0.10	0.13	0.20	0.23	0.19	0.10	0.04	0.02	0.01	0.00	1.28	0.48
-20	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.01	0.03	0.08	0.09	0.06	0.03	0.02	0.01	0.01	0.00	0.40	0.00
-25	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.01	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.13	0.00
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.05	0.00
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45 -40 -35 -30 -25 -20 -15 -10 HORIZONTAL (DEG) 10 15 20 25 30 35 40 45																				
Φ t	0.17	0.30	0.53	1.05	2.60	4.95	7.65	10.4	12.3	13.0	12.3	10.3	7.74	5.28	2.80	0.98	0.41	0.21	93	---
Φ a	0.00	0.00	0.00	0.06	1.87	4.41	7.20	9.96	11.9	12.6	11.8	9.83	7.25	4.74	2.14	0.12	0.00	0.00	---	84

one-half-peak spread: U:14.0,D:18.9 , L:18.8,R:17.3


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.11V I:0.4087A P:3.262W PF:0.6593 Freq:59.97Hz Lamp Flux:96.4582x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 GREEN	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

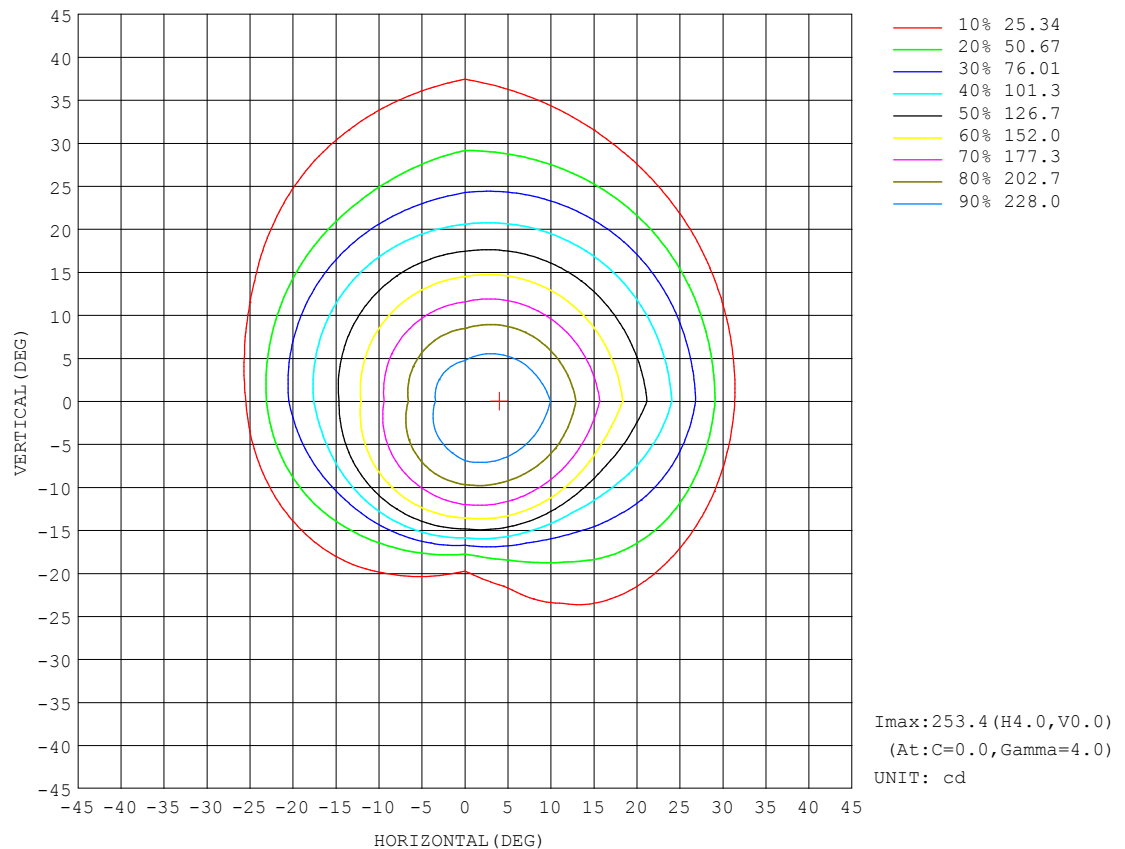


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.11V I:0.4087A P:3.262W PF:0.6593 Freq:59.97Hz Lamp Flux:96.4582x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 GREEN	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

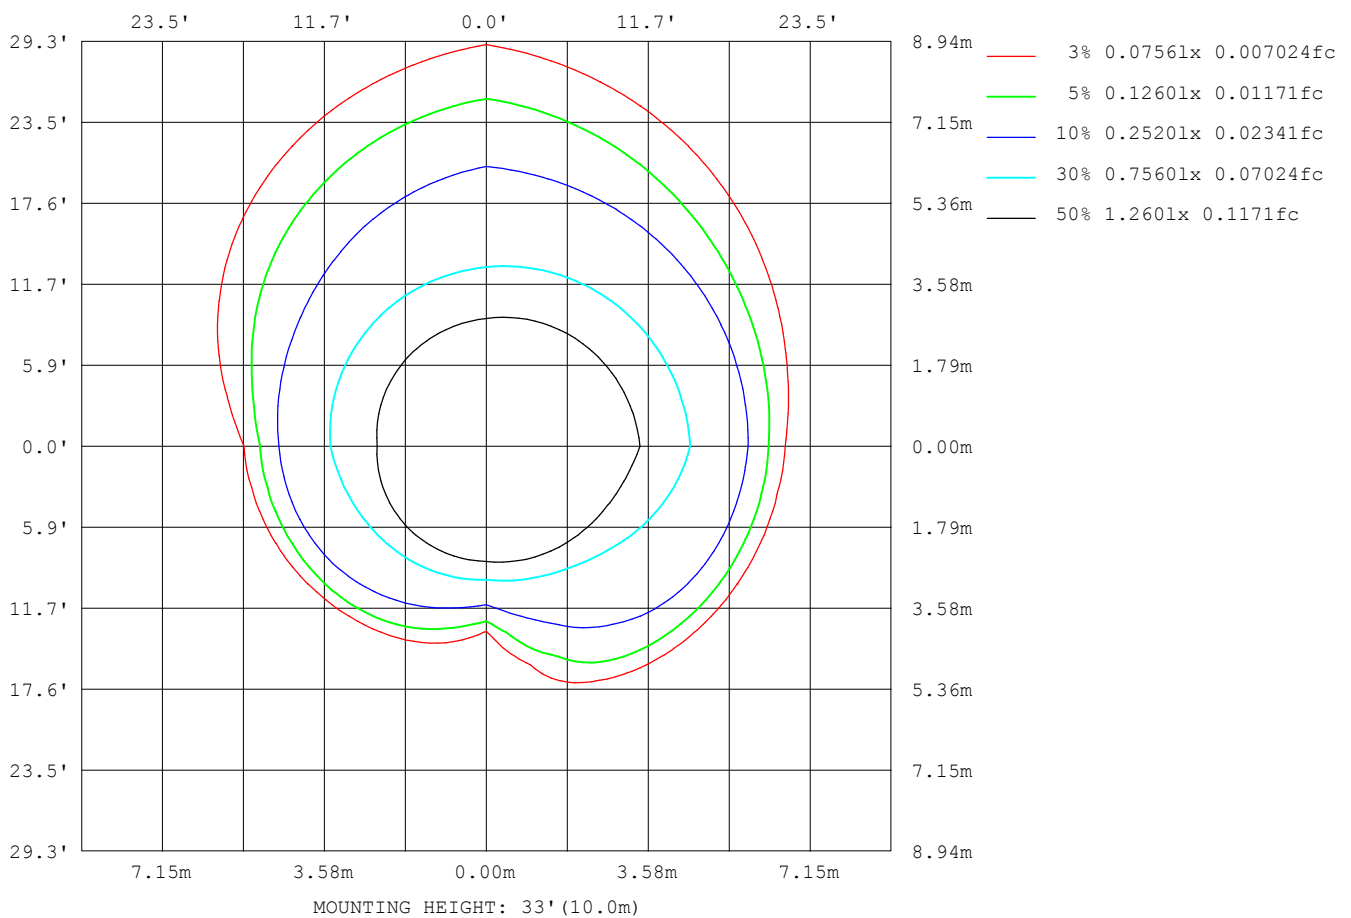

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

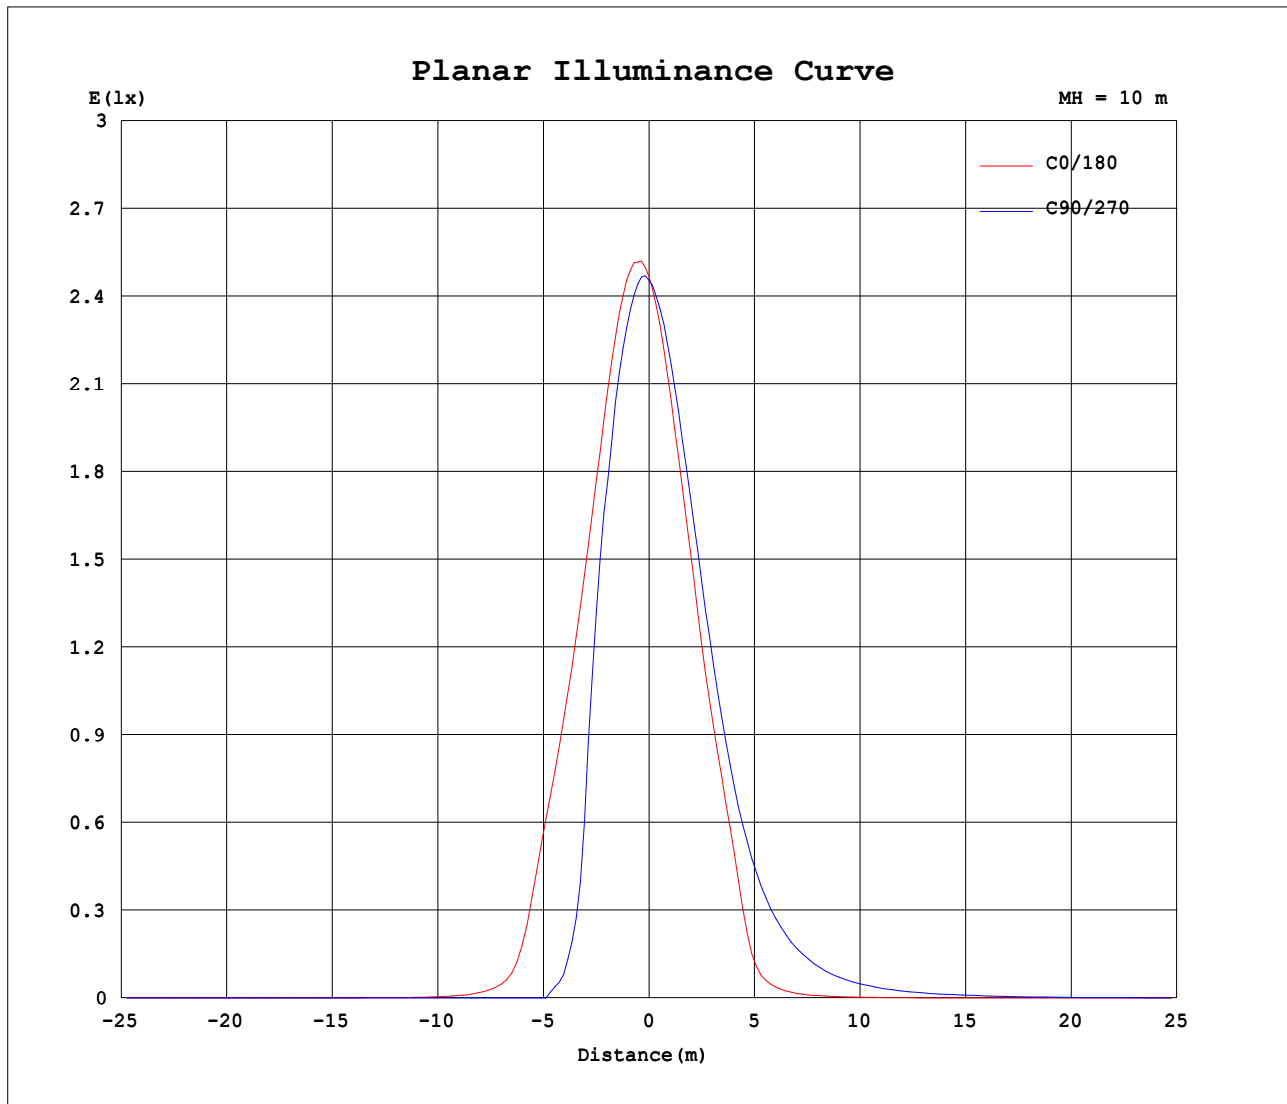


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.11V I:0.4087A P:3.262W PF:0.6593 Freq:59.97Hz Lamp Flux:96.4582x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 GREEN	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

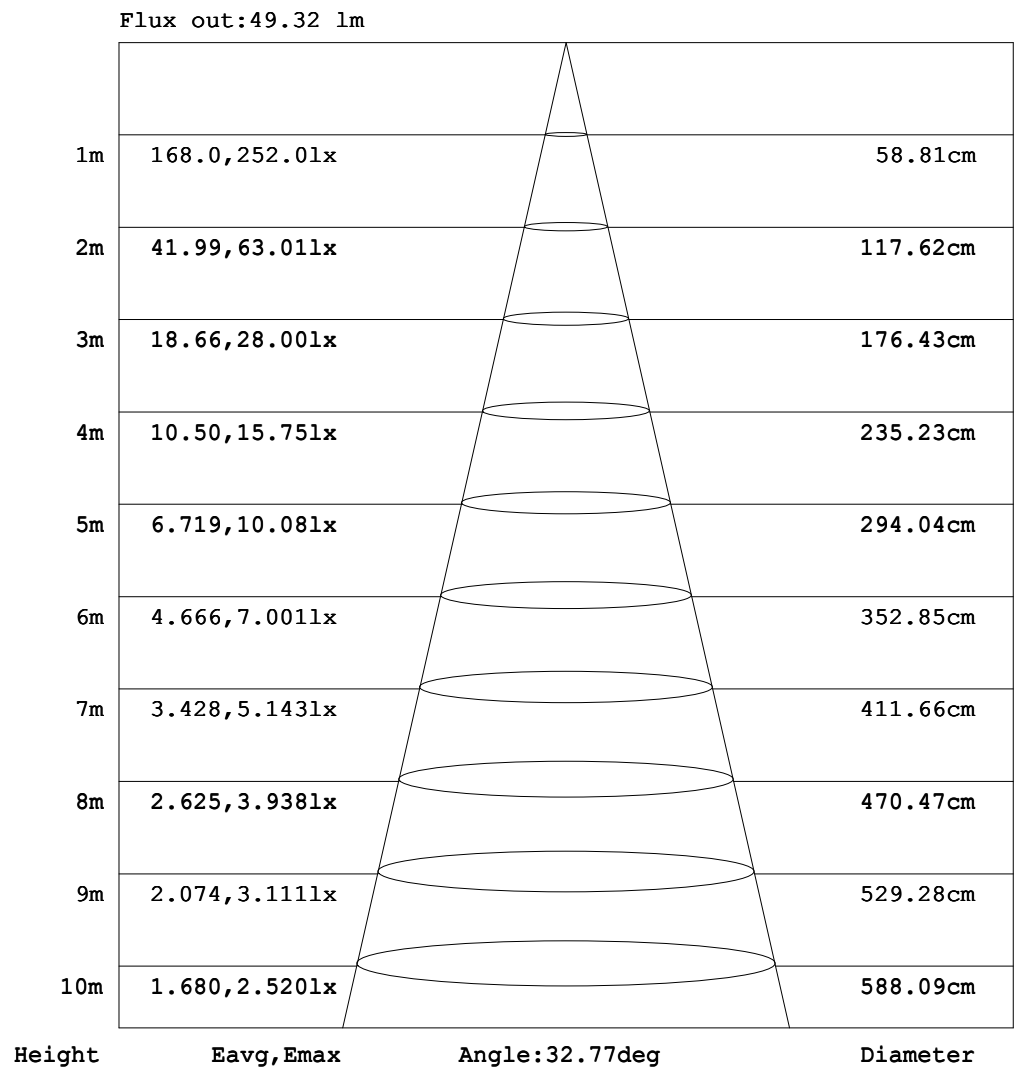

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.11V I:0.4087A P:3.262W PF:0.6593 Freq:59.97Hz Lamp Flux:96.4582x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 GREEN	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.24	0.41	0.55	0.67	0.73	0.77	0.81	0.78
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.23	0.42	0.59	0.74	0.82	0.90	0.93	0.96
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.15	0.32	0.49	0.64	0.79	0.91	0.99	1.05
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.14	0.27	0.41	0.52	0.62	0.70	0.75
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.14	0.19	0.26	0.31	0.34
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.03	0.04
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.03	0.03	0.02	0.01	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.07	0.08	0.13	0.13	0.15	0.13	0.11	0.08	0.04	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.11	0.18	0.25	0.29	0.30	0.30	0.30	0.28	0.22	0.12	0.00
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.13	0.23	0.33	0.42	0.50	0.67	0.86	1.09	1.27	1.20	0.75	0.00
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.24	0.37	0.51	0.68	1.09	1.79	3.24	5.93	15.2	24.6	28.1	23.2
-10	0.00	0.00	0.00	0.00	0.00	0.03	0.15	0.32	0.53	0.68	1.13	2.03	4.53	12.5	45.3	79.2	137	178	199
0	0.00	0.00	0.00	0.00	0.00	0.05	0.17	0.39	0.61	0.81	1.48	2.98	7.31	29.6	80.0	123	171	216	247
10	0.00	0.00	0.01	0.02	0.04	0.13	0.40	0.79	1.35	2.09	3.57	6.37	12.3	26.5	67.8	107	143	175	190
20	0.00	0.01	0.02	0.03	0.07	0.17	0.52	1.05	1.72	2.74	4.36	7.17	11.9	19.8	32.7	55.3	80.0	97.0	106
30	0.00	0.01	0.02	0.05	0.09	0.19	0.48	1.02	1.72	2.69	4.04	6.02	8.96	13.2	18.9	25.9	33.8	41.3	47.0
40	0.00	0.01	0.03	0.05	0.10	0.17	0.34	0.75	1.38	2.17	3.13	4.39	5.95	7.94	10.3	13.0	15.8	18.4	20.4
50	0.00	0.01	0.03	0.06	0.09	0.15	0.24	0.43	0.73	1.31	1.99	2.79	3.60	4.55	5.60	6.69	7.72	8.64	9.39
60	0.00	0.01	0.03	0.06	0.09	0.13	0.18	0.26	0.37	0.55	0.77	1.09	1.53	2.06	2.57	3.08	3.54	3.94	4.26
70	0.00	0.02	0.03	0.06	0.08	0.11	0.15	0.18	0.23	0.28	0.35	0.43	0.51	0.61	0.70	0.80	0.91	1.00	1.07
80	0.00	0.02	0.03	0.05	0.07	0.09	0.12	0.14	0.17	0.19	0.22	0.25	0.28	0.32	0.35	0.38	0.41	0.44	0.47
90	0.00	0.01	0.03	0.04	0.06	0.07	0.09	0.10	0.11	0.13	0.14	0.16	0.17	0.19	0.20	0.22	0.23	0.24	0.26
100	0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.07
110	0.00	0.01	0.02	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.01	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.09	0.09	0.08	0.07	0.05
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.14	0.21	0.30	0.40	0.47	0.47	0.45
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.15	0.29	0.43	0.56	0.64	0.68	0.65	0.61
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.24	0.41	0.55	0.67	0.73	0.77	0.81	0.76

H(β) Range:-90 - 90DEGH(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:ADMIN

Test Date:2025-07-25

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352

Humidity:65.0%

Test Distance:13.563m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.11V I:0.4087A P:3.262W PF:0.6593 Freq:59.97Hz Lamp Flux:96.4582x1 lm																		
NAME: LED LANDSCAPE LIGHT									TYPE:Spot Light Non LED					WEIGHT:				
SPEC.:3.5W MR16 GREEN									DIM.:					SERIAL No.:1				
MFR.: EVERFINE									SUR.:					Shielding Angle:Downlight Shroud				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.88	0.89	0.81	0.76	0.62	0.43	0.17	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.97	0.96	0.87	0.80	0.65	0.39	0.19	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	1.01	0.94	0.81	0.64	0.47	0.28	0.13	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.70	0.62	0.52	0.38	0.27	0.13	0.07	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.31	0.25	0.19	0.14	0.08	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.03	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.01	0.03	0.04	0.04	0.04	0.03	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.05	0.09	0.13	0.15	0.15	0.15	0.13	0.11	0.07	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.25	0.43	0.51	0.52	0.46	0.37	0.33	0.26	0.20	0.14	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-30	3.86	5.29	4.29	3.10	2.09	1.29	0.85	0.53	0.39	0.27	0.17	0.07	0.00	0.00	0.00	0.00	0.00	0.00	
-20	37.1	42.1	42.0	33.0	14.0	5.10	2.35	1.20	0.64	0.42	0.26	0.14	0.03	0.00	0.00	0.00	0.00	0.00	
-10	195	168	116	86.7	59.0	20.0	5.59	2.19	1.06	0.58	0.35	0.19	0.06	0.00	0.00	0.00	0.00	0.00	
0	252	228	184	136	93.4	38.8	8.66	3.08	1.36	0.66	0.39	0.22	0.07	0.00	0.00	0.00	0.00	0.00	
10	192	174	143	109	72.9	27.7	9.92	4.63	2.47	1.40	0.82	0.45	0.17	0.04	0.02	0.01	0.00	0.00	
20	106	97.5	82.1	59.7	30.5	15.2	8.43	4.87	2.87	1.78	1.07	0.57	0.20	0.07	0.03	0.02	0.01	0.00	
30	44.4	37.9	29.0	20.9	14.4	9.58	6.37	4.15	2.75	1.76	1.06	0.50	0.20	0.09	0.05	0.02	0.01	0.00	
40	18.5	16.0	13.3	10.5	8.10	6.02	4.42	3.13	2.19	1.41	0.76	0.35	0.17	0.10	0.05	0.03	0.01	0.00	
50	8.65	7.73	6.71	5.62	4.55	3.62	2.79	2.01	1.31	0.76	0.43	0.24	0.15	0.09	0.06	0.03	0.01	0.00	
60	3.95	3.55	3.09	2.59	2.06	1.54	1.11	0.78	0.55	0.37	0.26	0.18	0.13	0.09	0.06	0.03	0.01	0.00	
70	1.00	0.91	0.80	0.70	0.61	0.51	0.43	0.35	0.28	0.23	0.18	0.15	0.11	0.08	0.06	0.03	0.02	0.00	
80	0.44	0.41	0.38	0.35	0.32	0.28	0.25	0.22	0.19	0.17	0.14	0.12	0.09	0.07	0.05	0.03	0.02	0.00	
90	0.24	0.23	0.22	0.20	0.19	0.17	0.16	0.14	0.13	0.11	0.10	0.09	0.07	0.06	0.04	0.03	0.01	0.00	
100	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.05	0.05	0.04	0.03	0.02	0.01	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.02	0.01	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.01	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	
150	0.07	0.07	0.08	0.06	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	
160	0.48	0.50	0.42	0.30	0.19	0.10	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.69	0.74	0.69	0.63	0.49	0.27	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.88	0.89	0.81	0.76	0.62	0.43	0.17	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2025-07-25

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks: