

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2680.6 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	59.1V x 55.2H
	At 50% of Imax	33.9V x 34.2H
	At 90% of Imax	14.4V x 13.1H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	902.3 lumens per klm.
	To 50% of Imax	537.5 lumens per klm.
	To 90% of Imax	108.0 lumens per klm.
	Upward LOR	0.1 %
	Downward LOR	100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.12V I:0.3845A P:3.047W PF:0.6538 Freq:59.98Hz Lamp Flux:27.7485x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 RED	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

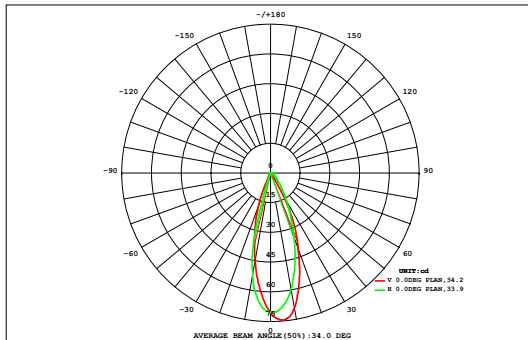

DATA OF LAMP		Eff:9.11lm/W	
MODEL	D1B2-A	Imax (cd)	74.38
NOMINAL POWER (W)	3.5	AVAILABILITY (%)	88.2
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	24.47
NOMINAL FLUX (lm)	27.7485	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	27.75
TEST VOLTAGE (V)	12	θ @50% (H,V)	34,34DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.04	0.04	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.37	0.00
45	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.53	0.17
40	0.01	0.01	0.01	0.02	0.03	0.05	0.06	0.08	0.10	0.10	0.09	0.07	0.05	0.04	0.02	0.01	0.01	0.01	0.76	0.51
35	0.01	0.01	0.02	0.03	0.04	0.06	0.09	0.12	0.14	0.15	0.14	0.11	0.08	0.05	0.03	0.02	0.01	0.01	1.11	0.91
30	0.01	0.01	0.02	0.03	0.05	0.08	0.13	0.17	0.21	0.22	0.21	0.18	0.13	0.08	0.04	0.02	0.01	0.01	1.62	1.45
25	0.01	0.01	0.02	0.04	0.06	0.11	0.18	0.25	0.30	0.31	0.30	0.25	0.20	0.13	0.06	0.03	0.01	0.01	2.27	2.12
20	0.00	0.01	0.02	0.04	0.07	0.15	0.24	0.32	0.39	0.41	0.39	0.33	0.26	0.18	0.09	0.03	0.01	0.01	2.95	2.83
15	0.00	0.01	0.02	0.03	0.09	0.18	0.28	0.38	0.46	0.50	0.47	0.40	0.31	0.21	0.11	0.04	0.01	0.00	3.51	3.41
10	0.00	0.00	0.01	0.03	0.09	0.19	0.29	0.41	0.50	0.54	0.53	0.45	0.34	0.24	0.13	0.04	0.01	0.00	3.80	3.71
5	0.00	0.00	0.01	0.02	0.07	0.17	0.28	0.40	0.49	0.54	0.52	0.44	0.33	0.22	0.12	0.03	0.01	0.00	3.66	3.58
0	0.00	0.00	0.01	0.01	0.05	0.13	0.23	0.35	0.43	0.47	0.44	0.36	0.25	0.18	0.09	0.03	0.01	0.00	3.04	2.97
-5	0.00	0.00	0.00	0.01	0.02	0.07	0.14	0.23	0.30	0.33	0.30	0.23	0.18	0.13	0.06	0.02	0.01	0.00	2.02	1.93
-10	0.00	0.00	0.00	0.01	0.01	0.03	0.06	0.08	0.10	0.12	0.13	0.13	0.11	0.07	0.03	0.01	0.00	0.00	0.88	0.75
-15	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.06	0.07	0.05	0.03	0.01	0.00	0.00	0.00	0.33	0.13
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.11	0.00
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45				
Φ t	0.04	0.08	0.16	0.30	0.65	1.29	2.08	2.91	3.56	3.83	3.69	3.13	2.36	1.60	0.84	0.30	0.12	0.05	27	---
Φ a	0.00	0.00	0.00	0.00	0.42	1.14	1.96	2.81	3.47	3.74	3.58	3.00	2.23	1.45	0.64	0.04	0.00	0.00	---	24

one-half-peak spread: U:15.0,D:19.0 , L:17.9,R:16.6


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.12V I:0.3845A P:3.047W PF:0.6538 Freq:59.98Hz Lamp Flux:27.7485x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 RED	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

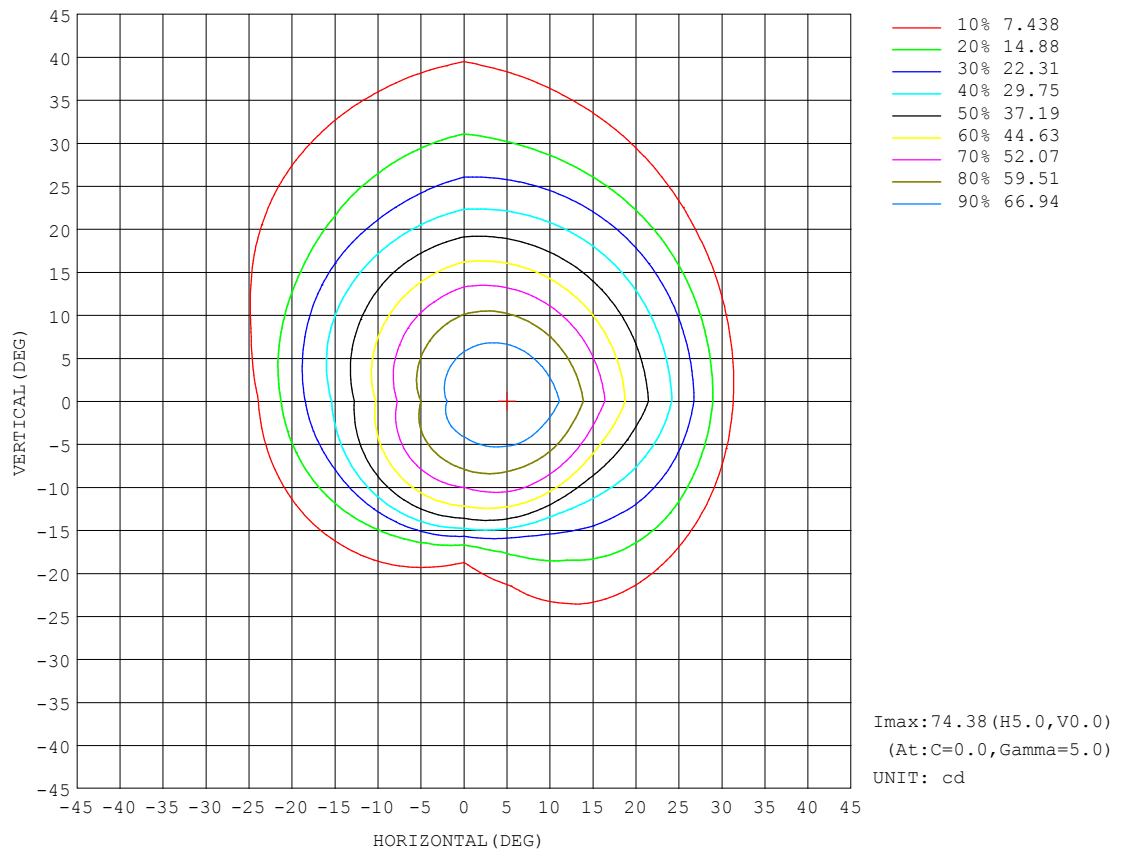


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.12V I:0.3845A P:3.047W PF:0.6538 Freq:59.98Hz Lamp Flux:27.7485x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 RED	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

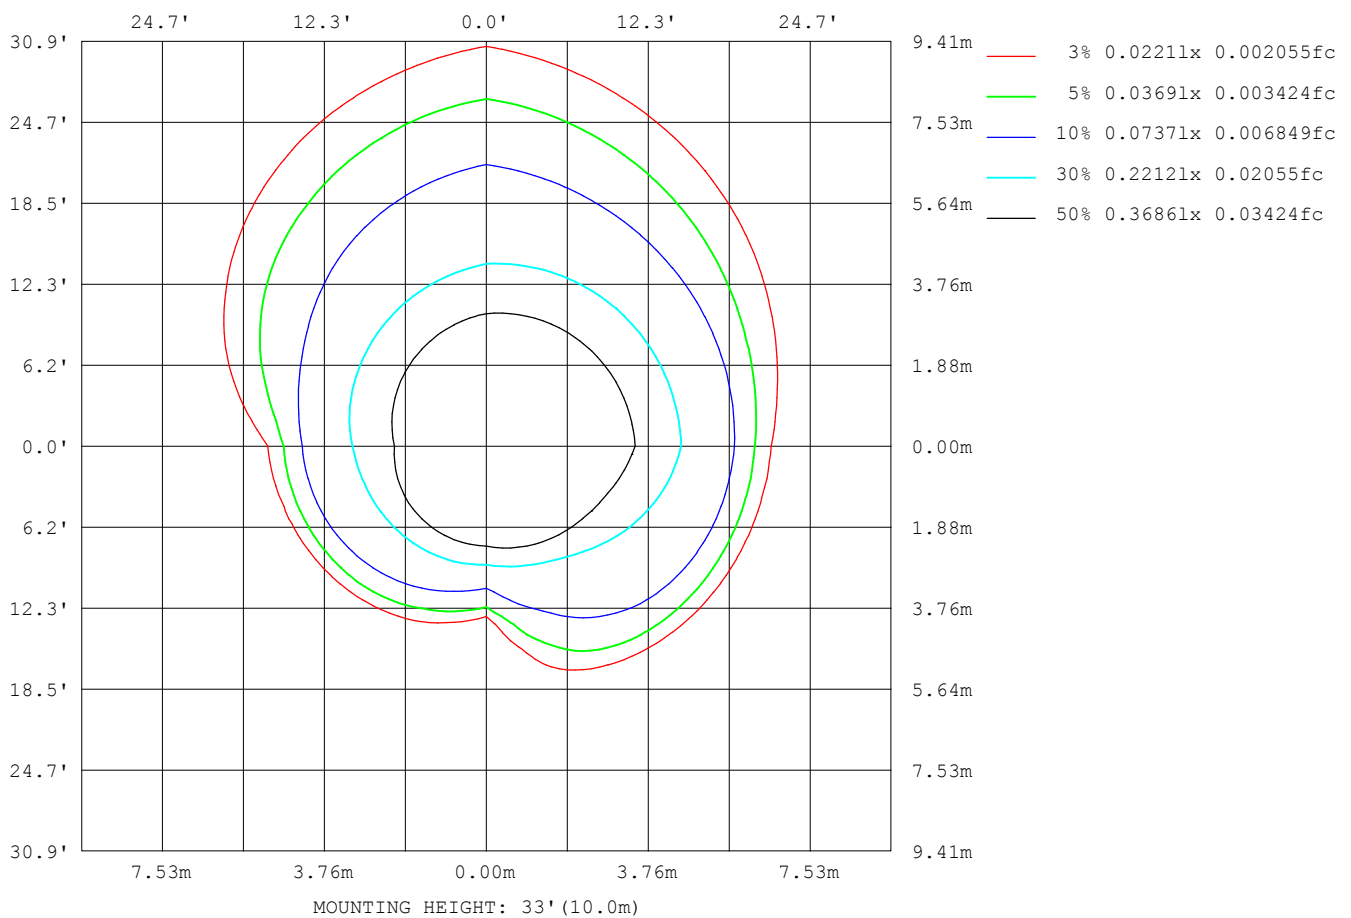

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

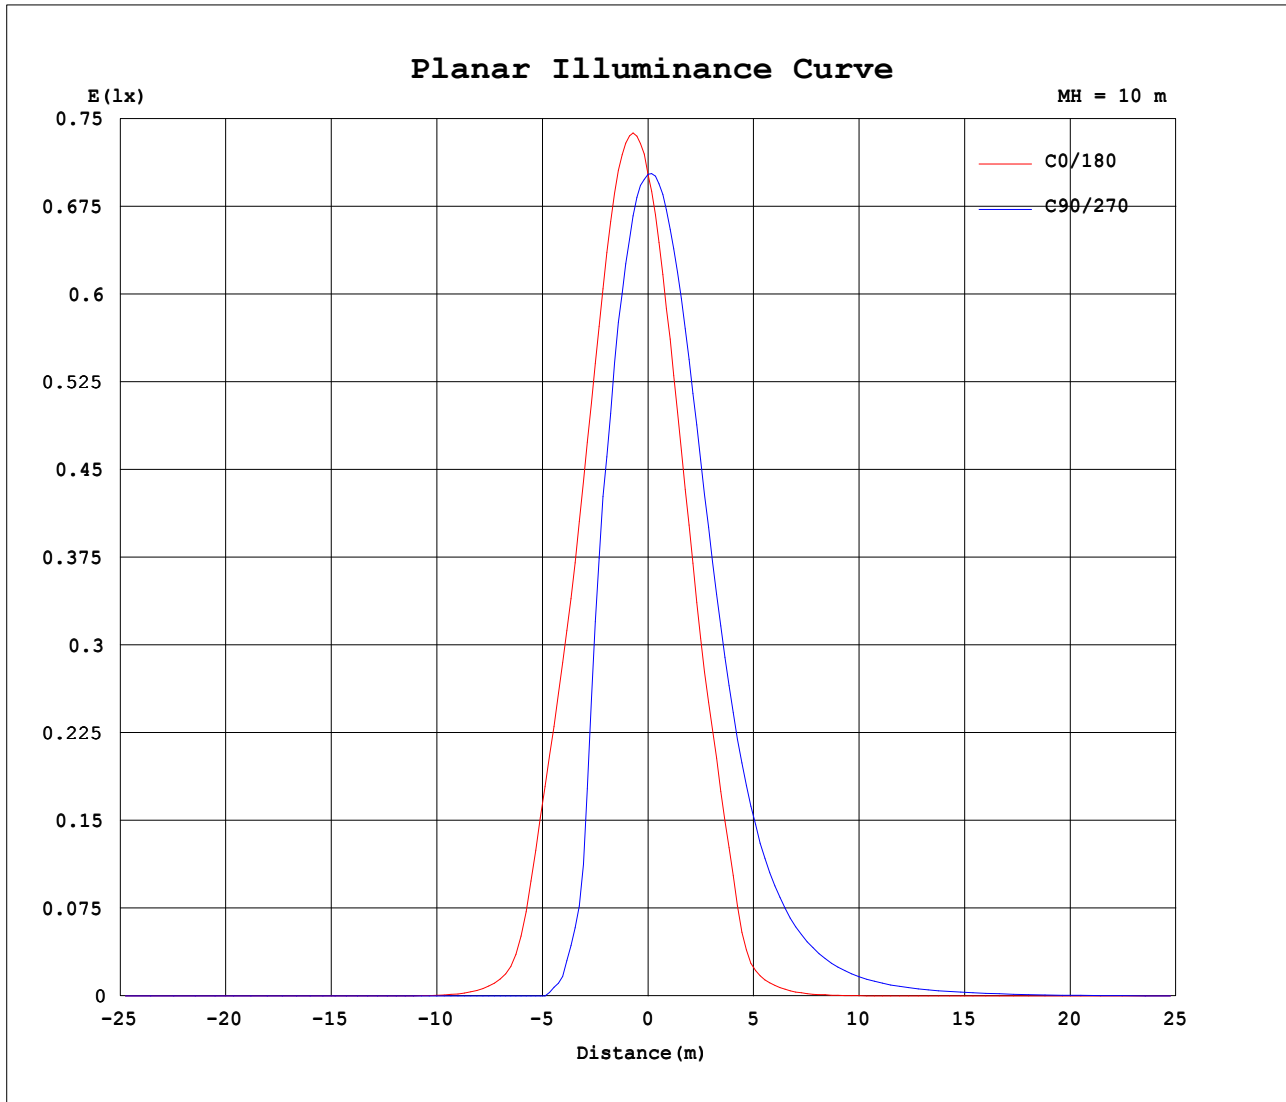


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.12V I:0.3845A P:3.047W PF:0.6538 Freq:59.98Hz Lamp Flux:27.7485x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 RED	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

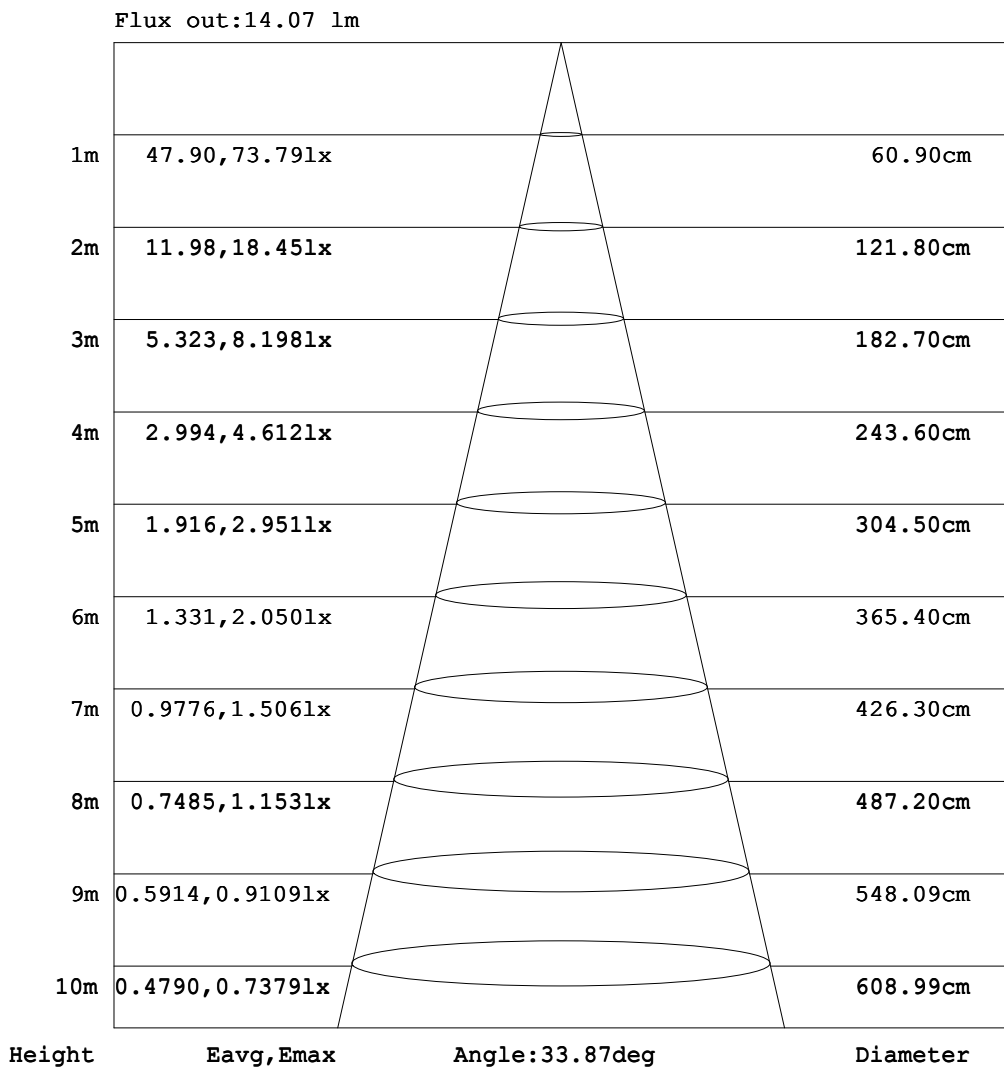

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:0.3845A P:3.047W PF:0.6538 Freq:59.98Hz Lamp Flux:27.7485x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 RED	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.05	0.06	0.05	0.06
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.08	0.10	0.12
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.05
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.04	0.03	0.02	0.00
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.09	0.15	0.23	0.30	0.29	0.18	0.00
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.19	0.38	0.78	1.31	2.70	5.00	6.28	5.21
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.15	0.43	1.09	2.49	9.22	18.4	33.8	46.4	52.1
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.26	0.62	1.76	5.32	18.0	30.8	45.3	59.5	70.2
10	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.15	0.27	0.53	1.00	1.94	3.78	7.26	17.1	29.7	41.5	52.7	59.7
20	0.00	0.00	0.00	0.00	0.01	0.04	0.12	0.25	0.44	0.75	1.36	2.31	3.90	6.53	10.4	16.6	24.4	30.8	34.9
30	0.00	0.00	0.00	0.00	0.01	0.03	0.11	0.27	0.47	0.77	1.21	1.95	2.97	4.45	6.42	8.89	11.6	14.2	16.2
40	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.18	0.38	0.62	0.93	1.35	1.89	2.61	3.49	4.45	5.45	6.39	7.12
50	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.17	0.35	0.57	0.82	1.10	1.42	1.77	2.15	2.53	2.87	3.14
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.15	0.25	0.39	0.57	0.75	0.91	1.06	1.19	1.29
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.07	0.09	0.11	0.12	0.13
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:0.3845A P:3.047W PF:0.6538 Freq:59.98Hz Lamp Flux:27.7485x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 RED	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.06	0.06	0.05	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.10	0.08	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.06	0.10	0.11	0.09	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	1.10	1.52	1.28	0.95	0.60	0.29	0.13	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-20	9.92	12.0	12.2	9.42	4.04	1.56	0.62	0.21	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-10	53.7	46.7	33.3	25.7	17.1	5.75	1.70	0.51	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
0	74.4	69.3	56.3	40.9	27.6	11.1	2.67	0.80	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10	60.0	54.5	44.6	33.6	21.9	8.43	3.21	1.36	0.61	0.27	0.15	0.08	0.03	0.00	0.00	0.00	0.00	0.00	
20	34.5	31.4	26.1	18.6	9.79	5.08	2.74	1.48	0.77	0.44	0.25	0.12	0.04	0.01	0.00	0.00	0.00	0.00	
30	15.1	12.8	9.87	7.14	4.90	3.17	2.02	1.23	0.77	0.47	0.27	0.11	0.03	0.01	0.00	0.00	0.00	0.00	
40	6.44	5.52	4.52	3.54	2.64	1.90	1.35	0.93	0.62	0.38	0.18	0.07	0.02	0.00	0.00	0.00	0.00	0.00	
50	2.87	2.53	2.15	1.77	1.42	1.10	0.82	0.57	0.35	0.17	0.07	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
60	1.19	1.06	0.91	0.75	0.57	0.39	0.25	0.15	0.08	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.12	0.11	0.09	0.07	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2025-07-25

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks: