

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2440.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	57.7V x 56.1H
	At 50% of Imax	35.8V x 39.3H
	At 90% of Imax	16.7V x 17.5H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	912.9 lumens per klm.
	To 50% of Imax	634.3 lumens per klm.
	To 90% of Imax	164.4 lumens per klm.

Upward LOR	1.3 %
Downward LOR	98.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.14V I:0.6207A P:5.297W PF:0.7031 Freq:59.98Hz Lamp Flux:345.292x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

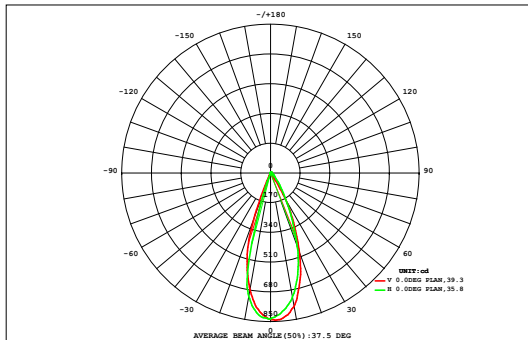

DATA OF LAMP		Eff:65.19lm/W	
MODEL	D1B2-A	Imax (cd)	842.7
NOMINAL POWER (W)	5.5	AVAILABILITY (%)	89.4
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	308.6
NOMINAL FLUX (lm)	345.292	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	345.3
TEST VOLTAGE (V)	12	θ @50% (H,V)	39,36DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.03	0.04	0.07	0.10	0.14	0.20	0.26	0.32	0.37	0.37	0.32	0.27	0.20	0.15	0.10	0.07	0.05	0.03	3.10	0.00
45	0.03	0.04	0.07	0.10	0.14	0.20	0.26	0.32	0.37	0.37	0.32	0.27	0.20	0.15	0.10	0.07	0.05	0.03	3.10	0.00
40	0.03	0.05	0.09	0.14	0.22	0.31	0.42	0.52	0.62	0.62	0.53	0.43	0.32	0.23	0.15	0.10	0.06	0.04	4.89	0.67
35	0.04	0.07	0.12	0.20	0.31	0.46	0.63	0.82	0.99	1.02	0.89	0.70	0.50	0.33	0.21	0.13	0.08	0.05	7.54	4.62
30	0.04	0.08	0.15	0.26	0.42	0.65	0.96	1.31	1.62	1.72	1.57	1.28	0.88	0.51	0.29	0.17	0.09	0.05	12.1	9.88
25	0.05	0.09	0.17	0.31	0.53	0.92	1.49	2.13	2.63	2.76	2.53	2.10	1.56	0.93	0.42	0.21	0.11	0.06	19.0	17.3
20	0.05	0.10	0.18	0.34	0.68	1.35	2.40	3.34	3.88	3.99	3.69	3.07	2.29	1.52	0.71	0.25	0.12	0.06	28.0	26.6
15	0.04	0.09	0.17	0.35	0.84	2.04	3.46	4.40	4.93	5.04	4.73	4.05	3.05	2.04	1.11	0.34	0.12	0.06	36.9	35.7
10	0.03	0.06	0.12	0.32	1.04	2.72	4.15	5.14	5.69	5.80	5.52	4.77	3.69	2.47	1.42	0.45	0.11	0.05	43.6	42.7
5	0.02	0.03	0.06	0.23	1.13	3.03	4.46	5.52	6.11	6.24	5.97	5.21	4.06	2.73	1.60	0.52	0.09	0.04	47.1	46.3
0	0.01	0.01	0.02	0.15	0.97	2.82	4.39	5.53	6.17	6.29	5.98	5.14	3.86	2.58	1.51	0.48	0.08	0.03	46.0	45.4
-5	0.01	0.01	0.02	0.10	0.62	2.09	3.73	5.08	5.73	5.84	5.46	4.35	3.06	2.05	1.20	0.35	0.06	0.03	39.8	39.1
-10	0.01	0.01	0.01	0.05	0.25	1.10	2.29	3.57	4.44	4.55	3.90	2.88	2.11	1.45	0.81	0.19	0.04	0.02	27.7	27.0
-15	0.01	0.01	0.01	0.02	0.08	0.32	0.90	1.42	1.66	1.77	1.77	1.57	1.27	0.92	0.40	0.08	0.03	0.02	12.2	11.4
-20	0.00	0.01	0.01	0.01	0.02	0.06	0.15	0.30	0.34	0.47	0.70	0.76	0.69	0.42	0.12	0.04	0.02	0.01	4.13	2.06
-25	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.01	0.11	0.28	0.34	0.24	0.10	0.04	0.02	0.02	0.01	1.26	0.00
-30	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.03	0.07	0.07	0.04	0.03	0.02	0.01	0.01	0.01	0.33	0.00
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.12	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.08	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00
-45 -40 -35 -30 -25 -20 -15 -10 HORIZONTAL (DEG) 10 15 20 25 30 35 40 45																				
Φ t	0.37	0.68	1.23	2.60	7.27	18.1	29.7	39.4	45.2	46.6	43.9	37.0	27.9	18.5	10.1	3.43	1.11	0.57	334	---
Φ a	0.00	0.00	0.00	0.00	4.74	16.5	28.5	38.4	44.2	45.5	42.6	35.5	26.4	16.9	8.34	1.03	0.00	0.00	---	309

one-half-peak spread: U:15.0,D:21.0 , L:19.7,R:19.9


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.14V I:0.6207A P:5.297W PF:0.7031 Freq:59.98Hz Lamp Flux:345.292x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

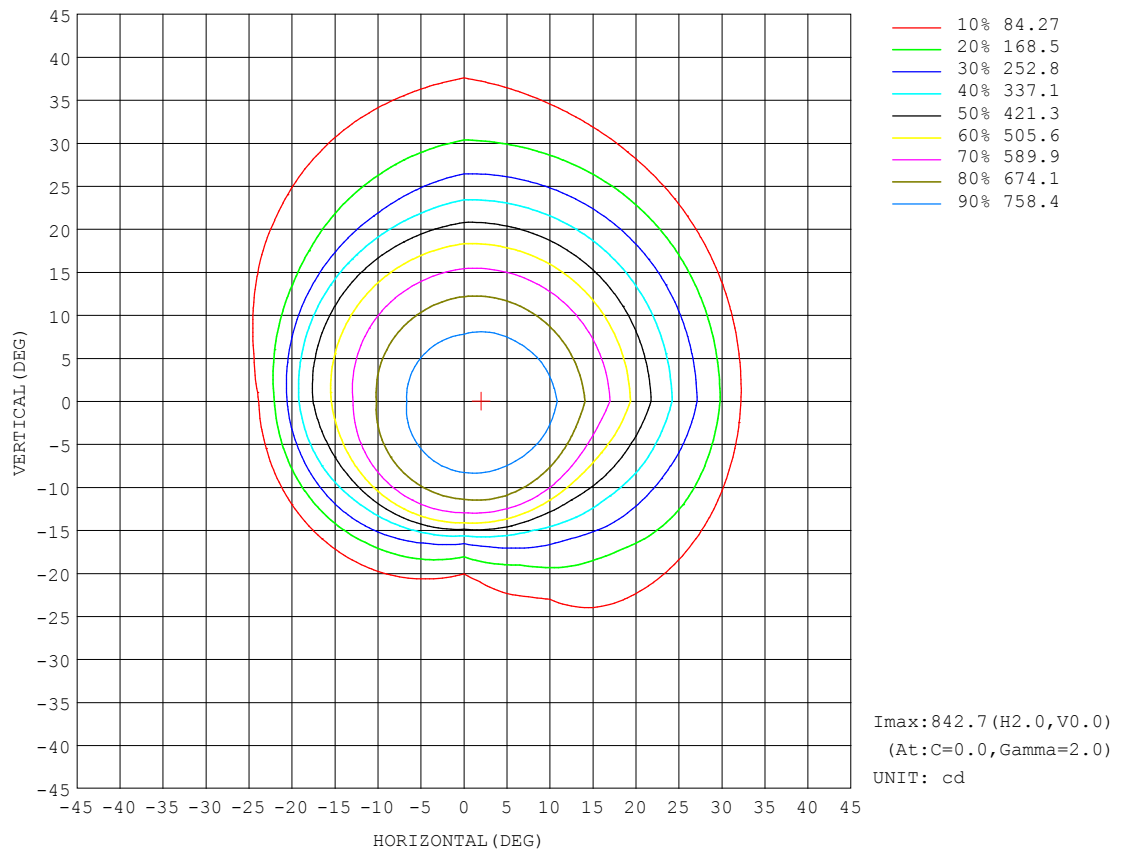


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.14V I:0.6207A P:5.297W PF:0.7031 Freq:59.98Hz Lamp Flux:345.292x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

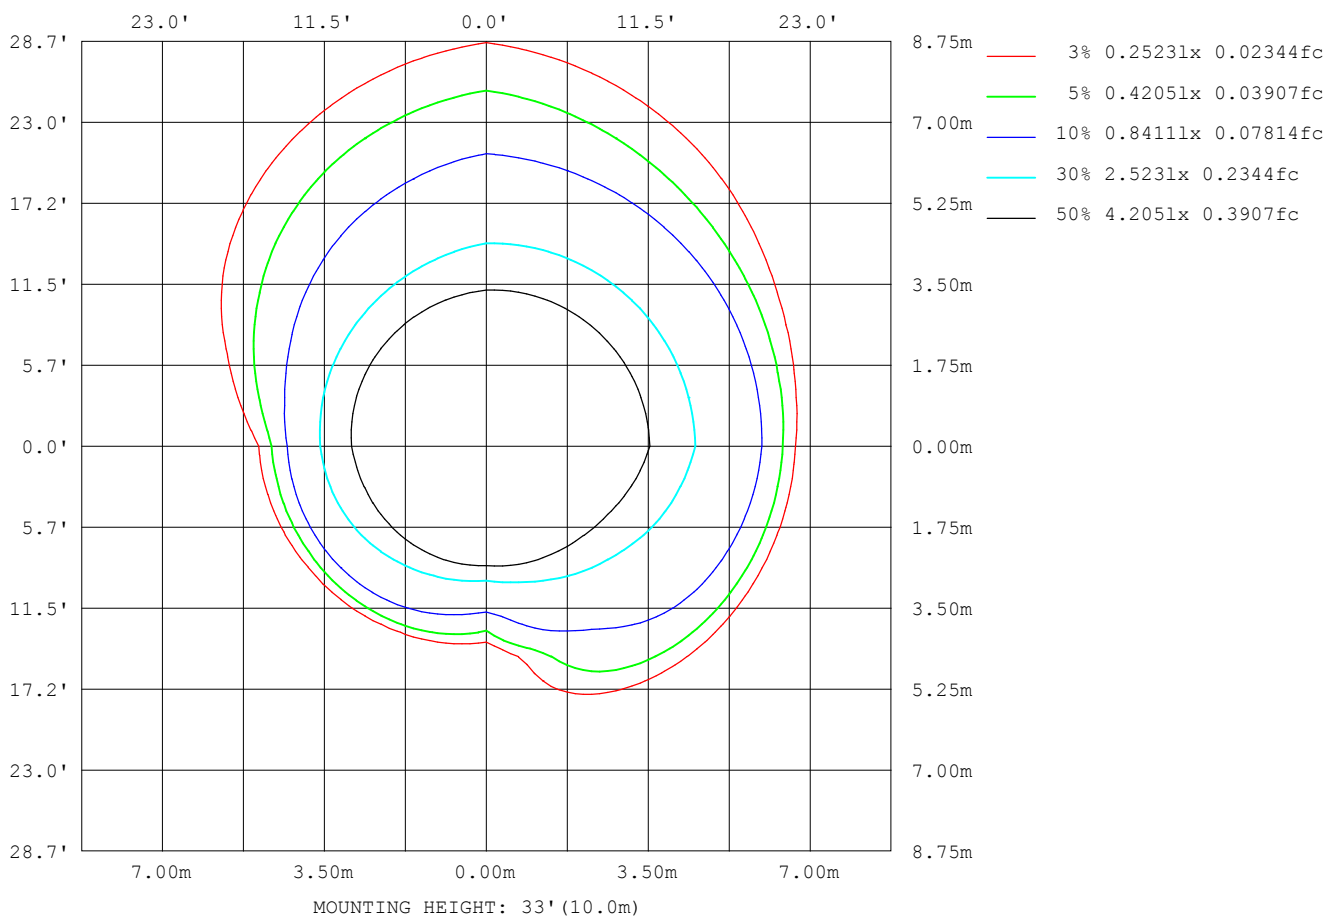

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

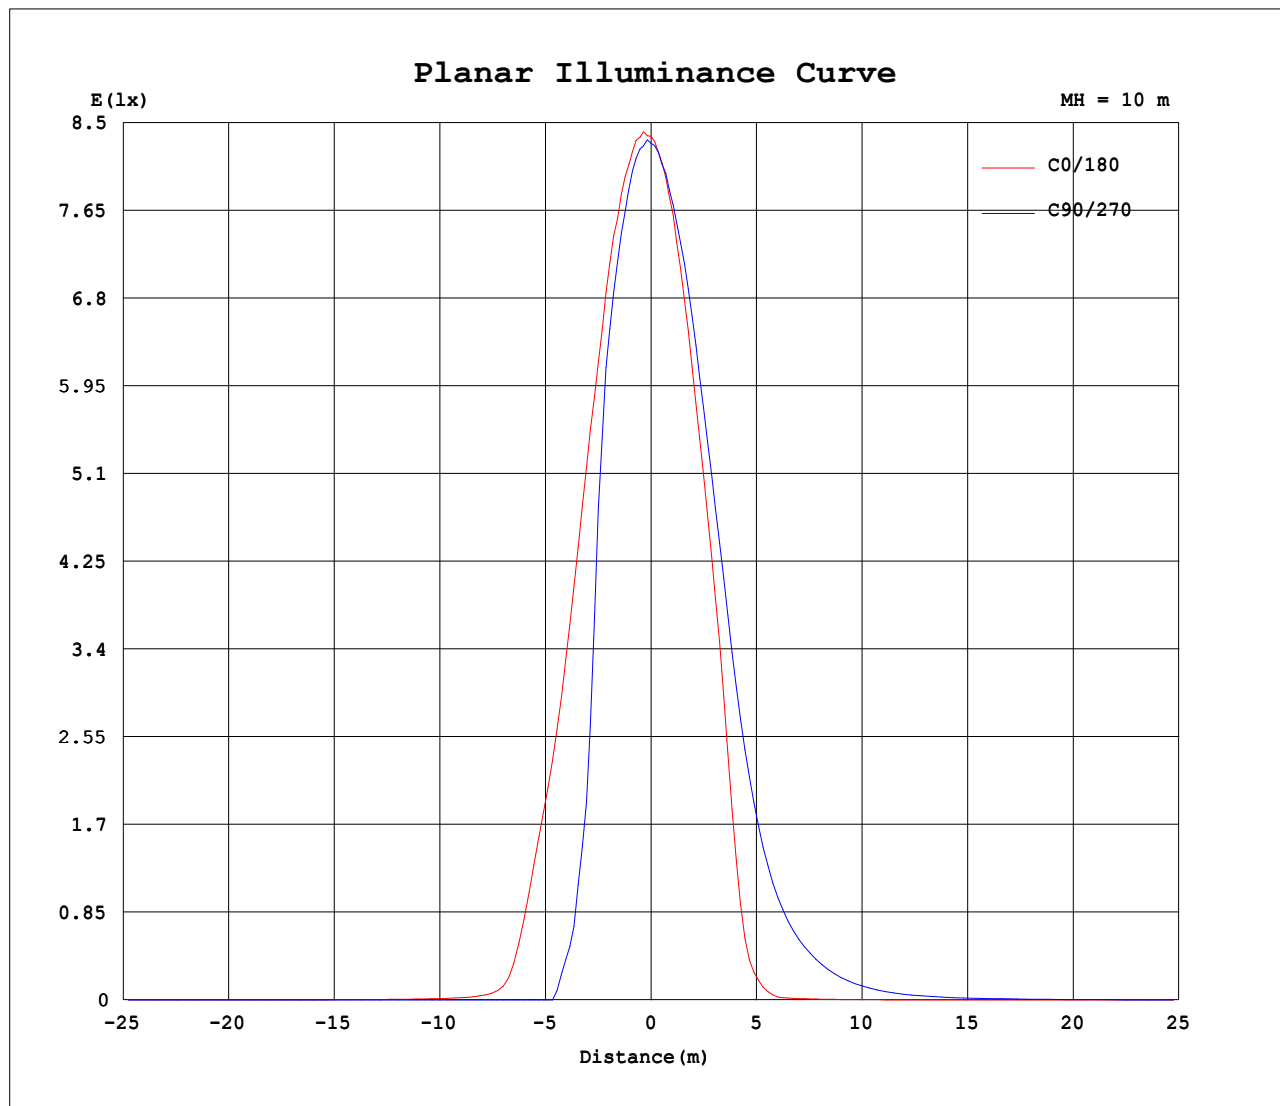


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.14V I:0.6207A P:5.297W PF:0.7031 Freq:59.98Hz Lamp Flux:345.292x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

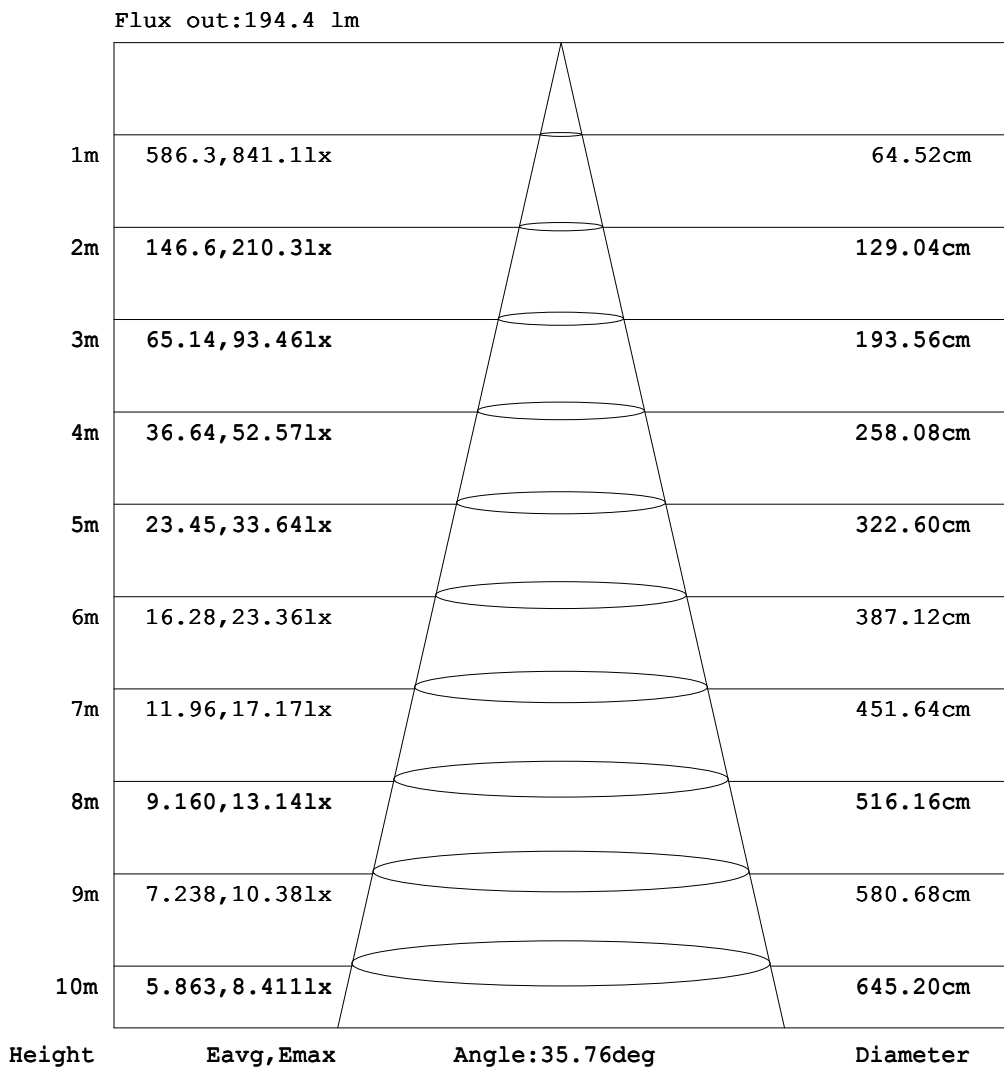

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.14V I:0.6207A P:5.297W PF:0.7031 Freq:59.98Hz Lamp Flux:345.292x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.39	0.88	1.47	2.10	2.65	3.08	3.35	3.55	3.74	3.61
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.11	0.42	0.91	1.52	2.17	2.79	3.33	3.71	3.97	4.23
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.10	0.33	0.73	1.24	1.83	2.45	3.02	3.54	3.96	4.30
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.09	0.19	0.43	0.79	1.22	1.69	2.16	2.60	2.98	3.27
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.11	0.21	0.35	0.59	0.86	1.16	1.44	1.67	1.87	2.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.08	0.14	0.22	0.31	0.42	0.54	0.65	0.76	0.83
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.05	0.09	0.11	0.14	0.17	0.18
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.07	0.09	0.09	0.08	0.07	0.05	0.03	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.10	0.17	0.21	0.25	0.25	0.24	0.21	0.18	0.13	0.06	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.19	0.28	0.38	0.42	0.46	0.47	0.47	0.44	0.37	0.27	0.14	0.00
-30	0.00	0.00	0.00	0.00	0.00	0.08	0.19	0.33	0.46	0.57	0.67	0.76	0.85	0.92	0.99	1.00	0.95	0.74	0.00
-20	0.00	0.00	0.00	0.00	0.00	0.13	0.28	0.50	0.62	0.80	1.01	1.23	1.63	2.54	9.64	25.5	78.5	101	86.3
-10	0.00	0.00	0.00	0.00	0.01	0.16	0.38	0.58	0.81	1.06	1.39	1.96	3.58	22.2	125	320	531	671	718
0	0.00	0.00	0.00	0.00	0.01	0.18	0.43	0.65	0.90	1.24	1.68	2.60	7.80	52.4	287	522	679	787	837
10	0.00	0.01	0.03	0.05	0.10	0.37	0.88	1.53	2.68	4.89	9.08	16.8	31.7	77.3	218	445	588	681	721
20	0.00	0.02	0.06	0.10	0.18	0.48	1.11	2.08	3.50	6.33	11.7	21.0	36.5	62.6	113	195	308	400	449
30	0.00	0.04	0.08	0.14	0.22	0.48	1.08	2.07	3.42	5.66	9.60	16.3	26.8	41.9	62.3	88.2	119	151	175
40	0.00	0.04	0.10	0.17	0.26	0.42	0.80	1.61	2.77	4.27	6.40	9.65	14.4	21.0	29.6	39.4	49.4	59.0	66.1
50	0.00	0.05	0.12	0.19	0.28	0.40	0.59	0.94	1.59	2.67	3.94	5.41	7.14	9.33	11.8	14.7	17.5	20.0	21.9
60	0.00	0.06	0.12	0.20	0.29	0.40	0.52	0.66	0.89	1.22	1.63	2.30	3.20	4.17	5.11	6.08	6.95	7.71	8.30
70	0.00	0.06	0.13	0.20	0.28	0.38	0.47	0.58	0.70	0.83	0.96	1.11	1.26	1.45	1.70	1.94	2.15	2.34	2.51
80	0.00	0.06	0.13	0.20	0.27	0.34	0.42	0.51	0.59	0.68	0.77	0.86	0.95	1.05	1.14	1.23	1.32	1.41	1.49
90	0.00	0.06	0.12	0.18	0.24	0.30	0.36	0.42	0.48	0.55	0.61	0.67	0.73	0.79	0.85	0.91	0.97	1.03	1.09
100	0.00	0.06	0.11	0.16	0.21	0.25	0.29	0.33	0.37	0.41	0.44	0.47	0.51	0.55	0.58	0.62	0.65	0.69	0.73
110	0.00	0.05	0.10	0.14	0.18	0.20	0.23	0.25	0.27	0.30	0.31	0.32	0.32	0.30	0.29	0.27	0.27	0.27	0.28
120	0.00	0.05	0.09	0.12	0.14	0.16	0.18	0.18	0.15	0.10	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.04	0.07	0.10	0.11	0.12	0.10	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00
140	0.00	0.03	0.06	0.07	0.09	0.07	0.02	0.00	0.00	0.00	0.00	0.01	0.07	0.12	0.16	0.16	0.13	0.07	0.00
150	0.00	0.03	0.04	0.05	0.06	0.02	0.00	0.00	0.00	0.00	0.10	0.25	0.40	0.53	0.73	0.92	1.04	1.09	1.02
160	0.00	0.02	0.03	0.04	0.03	0.00	0.00	0.00	0.00	0.13	0.37	0.65	1.03	1.45	1.85	2.17	2.40	2.48	2.44
170	0.00	0.01	0.01	0.02	0.01	0.00	0.00	0.00	0.04	0.28	0.67	1.16	1.71	2.24	2.70	2.99	3.16	3.17	3.04
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.39	0.88	1.47	2.10	2.65	3.08	3.35	3.55	3.74	3.59

H(β) Range:-90 - 90DEGH(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:ADMIN

Test Date:2025-07-24

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352

Humidity:65.0%

Test Distance:13.563m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.14V I:0.6207A P:5.297W PF:0.7031 Freq:59.98Hz Lamp Flux:345.292x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.83	3.83	3.79	3.54	3.04	2.29	1.56	0.88	0.38	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	4.17	4.18	4.00	3.64	3.03	2.29	1.55	0.90	0.39	0.07	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-160	4.38	4.09	3.71	3.15	2.53	1.87	1.25	0.71	0.30	0.10	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-150	3.29	3.01	2.63	2.18	1.70	1.21	0.78	0.41	0.19	0.09	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-140	1.87	1.67	1.43	1.14	0.84	0.57	0.34	0.21	0.11	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.76	0.65	0.54	0.42	0.31	0.22	0.14	0.08	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.17	0.14	0.11	0.09	0.05	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.01	0.02	0.02	0.03	0.03	0.03	0.04	0.03	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.04	0.08	0.11	0.14	0.16	0.17	0.18	0.17	0.17	0.15	0.13	0.10	0.07	0.03	0.00	0.00	0.00	0.00	
-60	0.10	0.19	0.27	0.33	0.38	0.41	0.42	0.42	0.39	0.36	0.30	0.24	0.17	0.12	0.06	0.00	0.00	0.00	
-50	0.20	0.39	0.55	0.67	0.75	0.79	0.79	0.77	0.71	0.62	0.54	0.44	0.32	0.21	0.12	0.02	0.00	0.00	
-40	0.59	1.02	1.31	1.44	1.50	1.46	1.38	1.27	1.14	1.00	0.83	0.66	0.49	0.32	0.18	0.07	0.00	0.00	
-30	16.3	23.5	17.4	8.29	4.85	3.13	2.49	2.06	1.73	1.44	1.16	0.90	0.66	0.44	0.24	0.09	0.00	0.00	
-20	135	153	136	119	62.2	13.6	5.42	3.31	2.49	1.95	1.51	1.14	0.82	0.55	0.31	0.12	0.00	0.00	
-10	703	592	417	302	202	88.6	13.8	5.20	3.38	2.44	1.84	1.36	0.95	0.63	0.34	0.14	0.00	0.00	
0	832	776	649	483	312	161	24.6	7.09	4.05	2.81	2.07	1.50	1.03	0.67	0.36	0.15	0.00	0.00	
10	713	649	542	395	257	117	28.6	12.9	7.20	4.31	2.79	1.87	1.16	0.72	0.40	0.17	0.01	0.00	
20	433	382	305	222	122	48.5	25.2	14.0	8.02	4.82	3.08	1.98	1.17	0.72	0.41	0.18	0.02	0.00	
30	166	142	105	69.6	45.8	29.0	18.1	11.0	6.83	4.40	2.91	1.79	1.06	0.66	0.38	0.17	0.04	0.00	
40	59.4	50.2	40.3	30.6	22.0	15.4	10.6	7.25	5.02	3.49	2.25	1.35	0.91	0.58	0.35	0.17	0.04	0.00	
50	20.2	17.8	15.0	12.3	9.84	7.68	5.95	4.50	3.21	2.11	1.41	1.03	0.72	0.49	0.31	0.14	0.05	0.00	
60	7.78	7.09	6.27	5.36	4.45	3.53	2.65	1.98	1.58	1.25	0.96	0.76	0.57	0.41	0.26	0.12	0.06	0.00	
70	2.38	2.23	2.05	1.84	1.60	1.44	1.28	1.13	1.00	0.84	0.71	0.57	0.44	0.31	0.20	0.13	0.06	0.00	
80	1.42	1.34	1.25	1.17	1.08	0.99	0.90	0.80	0.70	0.61	0.51	0.42	0.34	0.27	0.20	0.13	0.06	0.00	
90	1.03	0.97	0.91	0.85	0.79	0.73	0.67	0.61	0.55	0.48	0.42	0.36	0.30	0.24	0.18	0.12	0.06	0.00	
100	0.69	0.65	0.62	0.58	0.55	0.51	0.47	0.44	0.41	0.37	0.33	0.29	0.25	0.21	0.16	0.11	0.06	0.00	
110	0.27	0.27	0.27	0.29	0.30	0.32	0.32	0.31	0.30	0.27	0.25	0.23	0.20	0.18	0.14	0.10	0.05	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.10	0.15	0.18	0.18	0.16	0.14	0.12	0.09	0.05	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.10	0.12	0.11	0.10	0.07	0.04	0.00	
140	0.07	0.13	0.16	0.15	0.11	0.06	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.09	0.07	0.06	0.03	0.00	
150	1.11	1.08	0.95	0.76	0.54	0.39	0.24	0.08	0.00	0.00	0.00	0.00	0.02	0.06	0.05	0.04	0.03	0.00	
160	2.56	2.53	2.34	1.99	1.54	1.07	0.66	0.34	0.10	0.00	0.00	0.00	0.00	0.03	0.04	0.03	0.02	0.00	
170	3.26	3.36	3.28	3.00	2.48	1.83	1.19	0.66	0.26	0.00	0.00	0.00	0.00	0.01	0.02	0.01	0.01	0.00	
180	3.83	3.83	3.79	3.54	3.04	2.29	1.56	0.88	0.38	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: