

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2485.9 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	56.8V x 56.0H
	At 50% of Imax	35.7V x 39.2H
	At 90% of Imax	15.9V x 15.9H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	910.0 lumens per klm.
	To 50% of Imax	629.1 lumens per klm.
	To 90% of Imax	137.3 lumens per klm.

Upward LOR	1.3 %
Downward LOR	98.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.13V I:0.6259A P:5.346W PF:0.7039 Freq:59.99Hz Lamp Flux:360.941x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 5700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

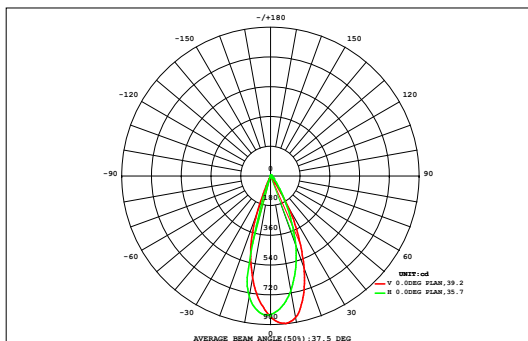

DATA OF LAMP		Eff:67.52lm/W	
MODEL	D1B2-A	Imax (cd)	897.3
NOMINAL POWER (W)	5.5	AVAILABILITY (%)	89.6
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	323.6
NOMINAL FLUX (lm)	360.941	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	360.9
TEST VOLTAGE (V)	12	θ @50% (H,V)	39,36DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT: lm		Φ t	Φ a	
	0.03	0.04	0.06	0.09	0.13	0.18	0.24	0.29	0.34	0.34	0.29	0.24	0.18	0.14	0.10	0.07	0.04	0.03	2.82	0.00
45	0.03	0.04	0.06	0.09	0.13	0.18	0.24	0.29	0.34	0.34	0.29	0.24	0.18	0.14	0.10	0.07	0.04	0.03	2.82	0.00
40	0.03	0.05	0.08	0.13	0.20	0.28	0.38	0.48	0.57	0.57	0.49	0.39	0.29	0.21	0.14	0.09	0.06	0.04	4.49	0.20
35	0.04	0.07	0.11	0.18	0.29	0.43	0.61	0.80	0.97	1.01	0.89	0.69	0.48	0.31	0.19	0.12	0.07	0.04	7.29	4.11
30	0.04	0.08	0.14	0.24	0.40	0.64	0.96	1.33	1.65	1.78	1.67	1.39	0.95	0.52	0.27	0.15	0.09	0.05	12.4	10.1
25	0.05	0.09	0.16	0.30	0.53	0.94	1.50	2.14	2.65	2.86	2.72	2.33	1.77	1.07	0.44	0.19	0.10	0.05	19.9	18.2
20	0.05	0.09	0.17	0.34	0.68	1.33	2.31	3.23	3.79	4.02	3.90	3.41	2.65	1.79	0.85	0.26	0.11	0.05	29.0	27.6
15	0.04	0.08	0.16	0.35	0.83	1.90	3.24	4.19	4.77	5.03	4.95	4.44	3.54	2.45	1.36	0.39	0.12	0.05	37.9	36.7
10	0.03	0.06	0.13	0.32	0.95	2.46	3.85	4.89	5.57	5.88	5.84	5.29	4.29	3.01	1.78	0.57	0.11	0.05	45.1	44.1
5	0.02	0.03	0.07	0.23	0.97	2.68	4.10	5.25	6.05	6.44	6.47	5.90	4.80	3.39	2.03	0.69	0.10	0.03	49.3	48.5
0	0.01	0.02	0.03	0.14	0.81	2.49	4.07	5.31	6.14	6.54	6.53	5.88	4.60	3.24	1.95	0.65	0.08	0.03	48.5	47.9
-5	0.01	0.01	0.02	0.10	0.52	1.85	3.51	4.99	5.79	6.11	5.94	4.95	3.68	2.58	1.56	0.47	0.06	0.02	42.2	41.5
-10	0.01	0.01	0.02	0.05	0.23	0.96	2.13	3.52	4.55	4.82	4.28	3.33	2.59	1.85	1.06	0.25	0.05	0.02	29.7	29.0
-15	0.01	0.01	0.01	0.02	0.08	0.28	0.81	1.37	1.69	1.91	2.03	1.91	1.60	1.19	0.53	0.10	0.03	0.02	13.6	12.6
-20	0.01	0.01	0.01	0.01	0.02	0.06	0.13	0.27	0.34	0.54	0.85	0.96	0.90	0.56	0.16	0.04	0.02	0.01	4.91	3.03
-25	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.01	0.14	0.36	0.44	0.33	0.13	0.04	0.02	0.01	0.01	1.60	0.00
-30	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.04	0.10	0.09	0.05	0.03	0.02	0.01	0.01	0.01	0.41	0.00
-35	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.13	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.08	0.00
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)		10	15	20	25	30	35	40	45		
Φ t	0.39	0.67	1.21	2.52	6.66	16.5	27.9	38.1	44.9	48.0	47.3	41.7	32.7	22.5	12.5	4.08	1.07	0.52	349	---
Φ a	0.00	0.00	0.00	0.00	3.86	14.8	26.5	36.9	43.7	46.8	45.8	40.2	31.3	21.0	10.8	1.85	0.00	0.00	---	324

one-half-peak spread: U:15.0,D:20.9 , L:21.6,R:17.8


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.13V I:0.6259A P:5.346W PF:0.7039 Freq:59.99Hz Lamp Flux:360.941x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 5700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

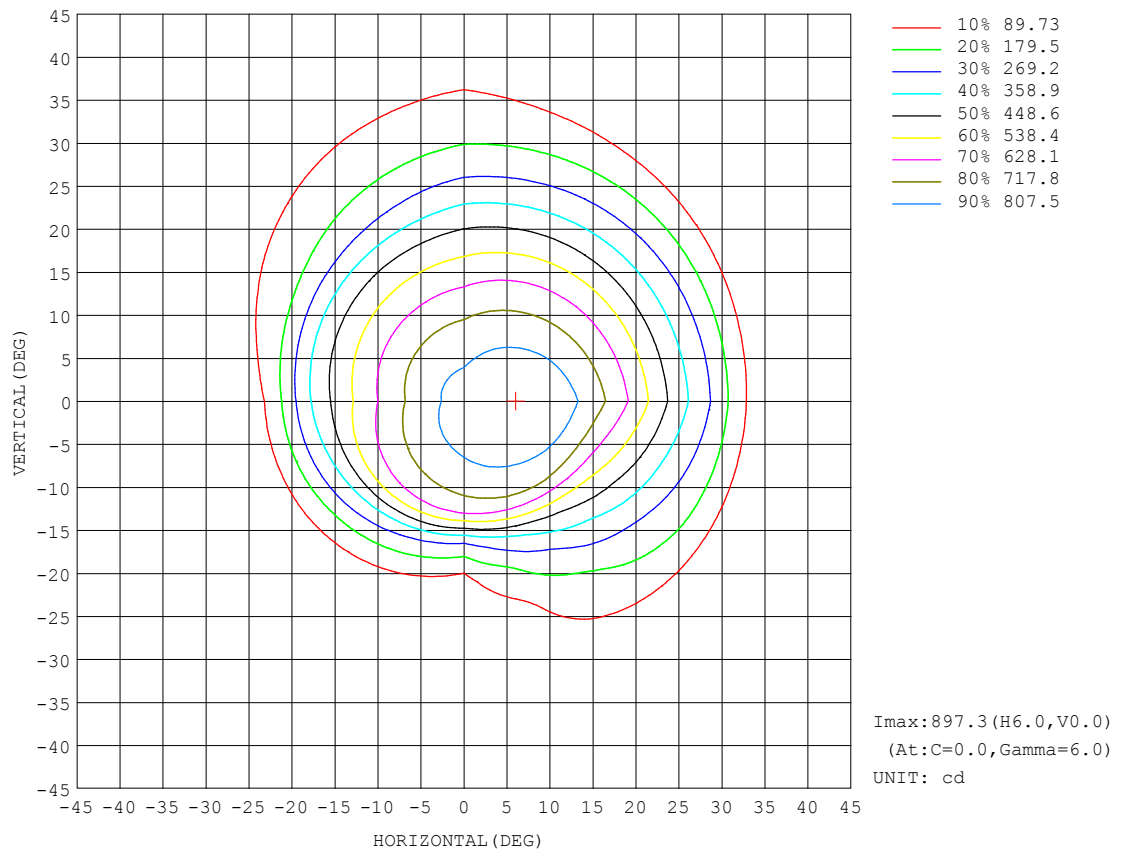


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.13V I:0.6259A P:5.346W PF:0.7039 Freq:59.99Hz Lamp Flux:360.94lx 1m		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 5700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

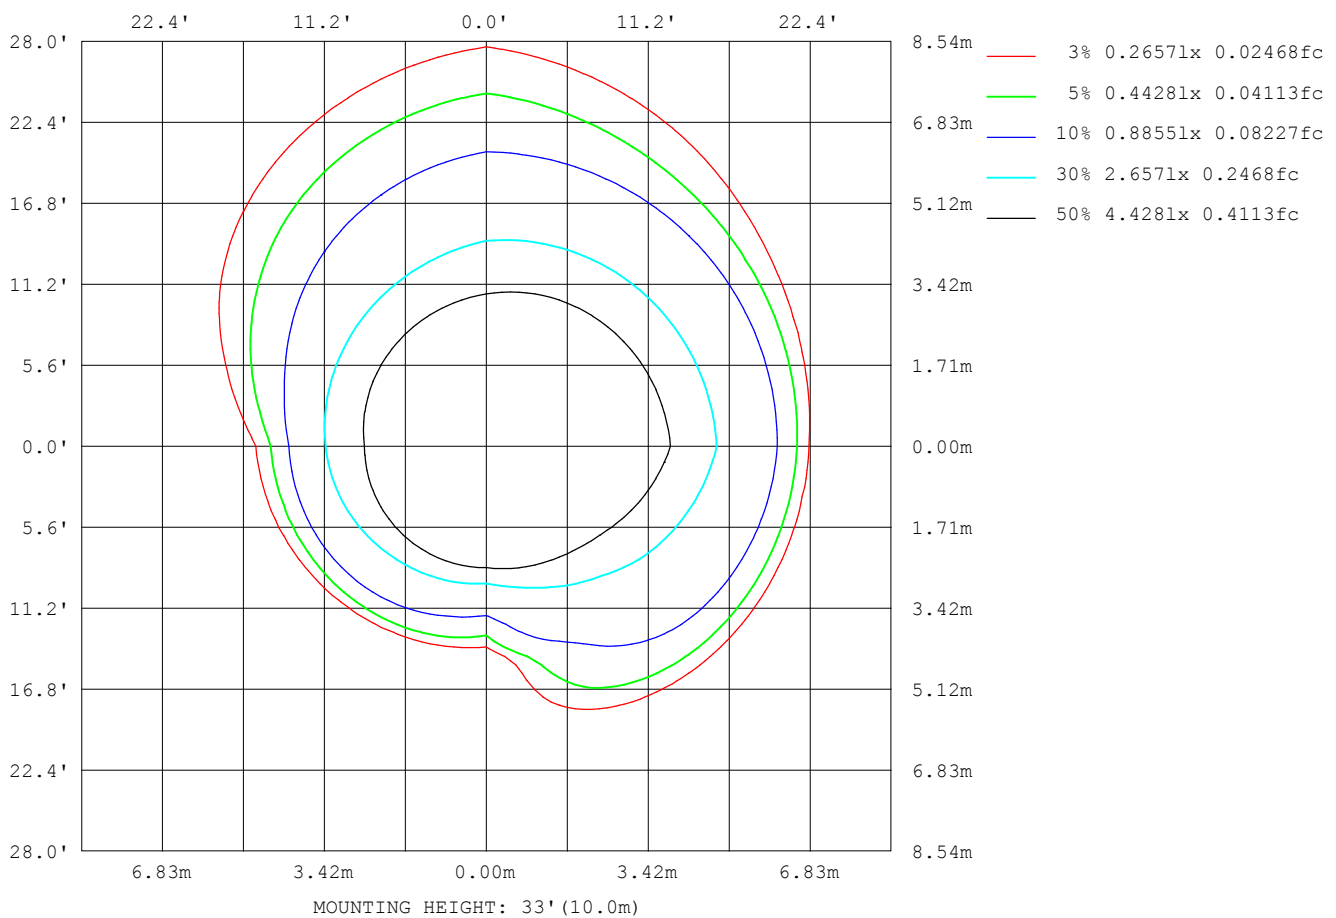

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

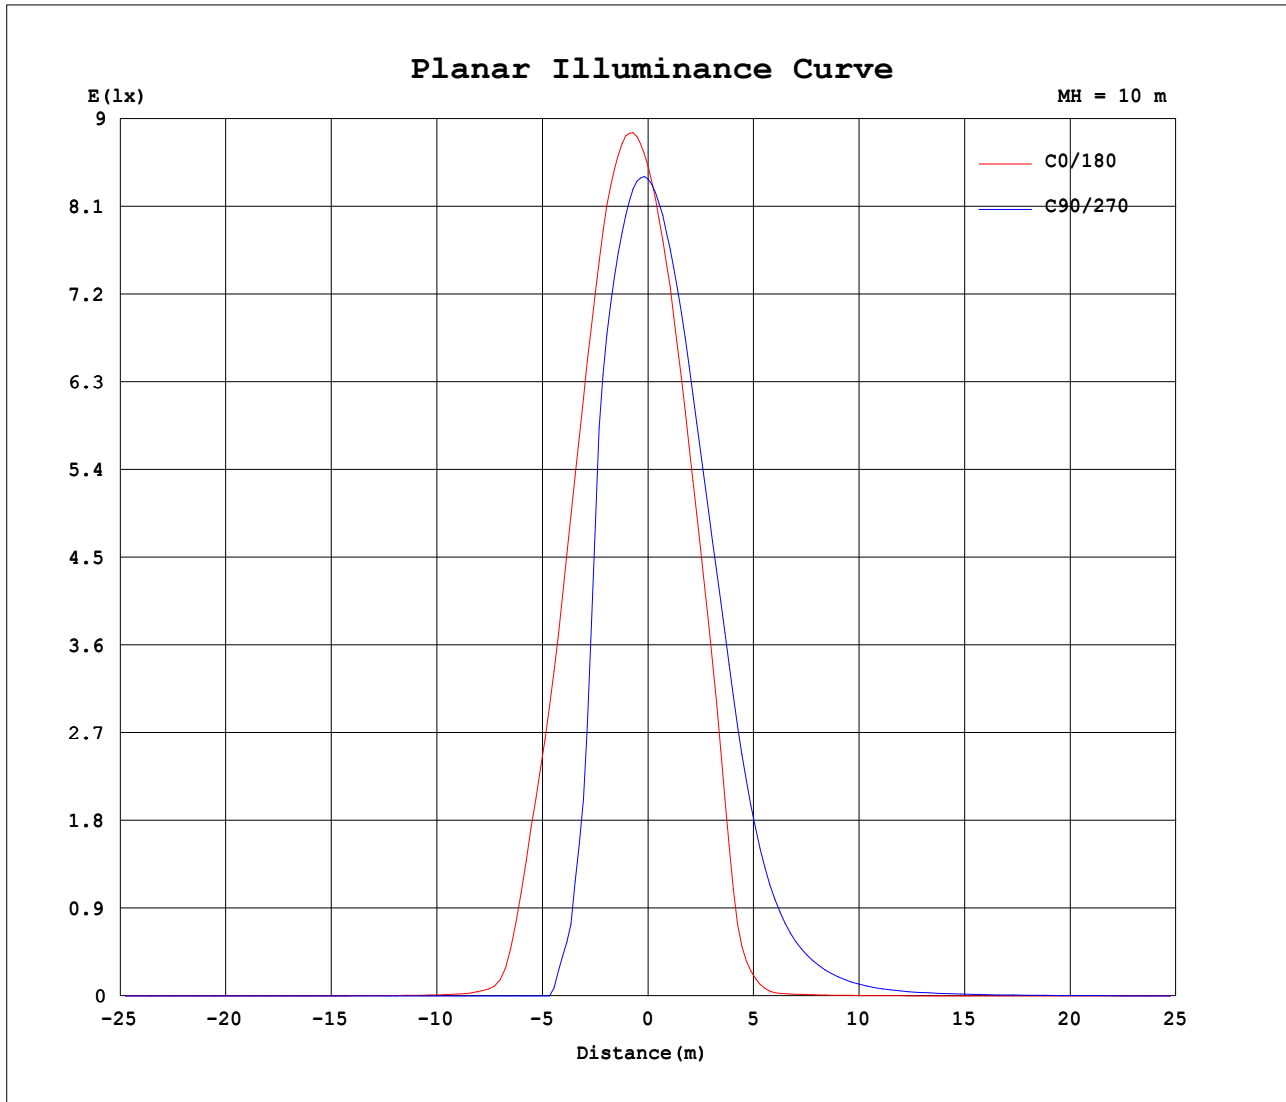


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.13V I:0.6259A P:5.346W PF:0.7039 Freq:59.99Hz Lamp Flux:360.94lx1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 5700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

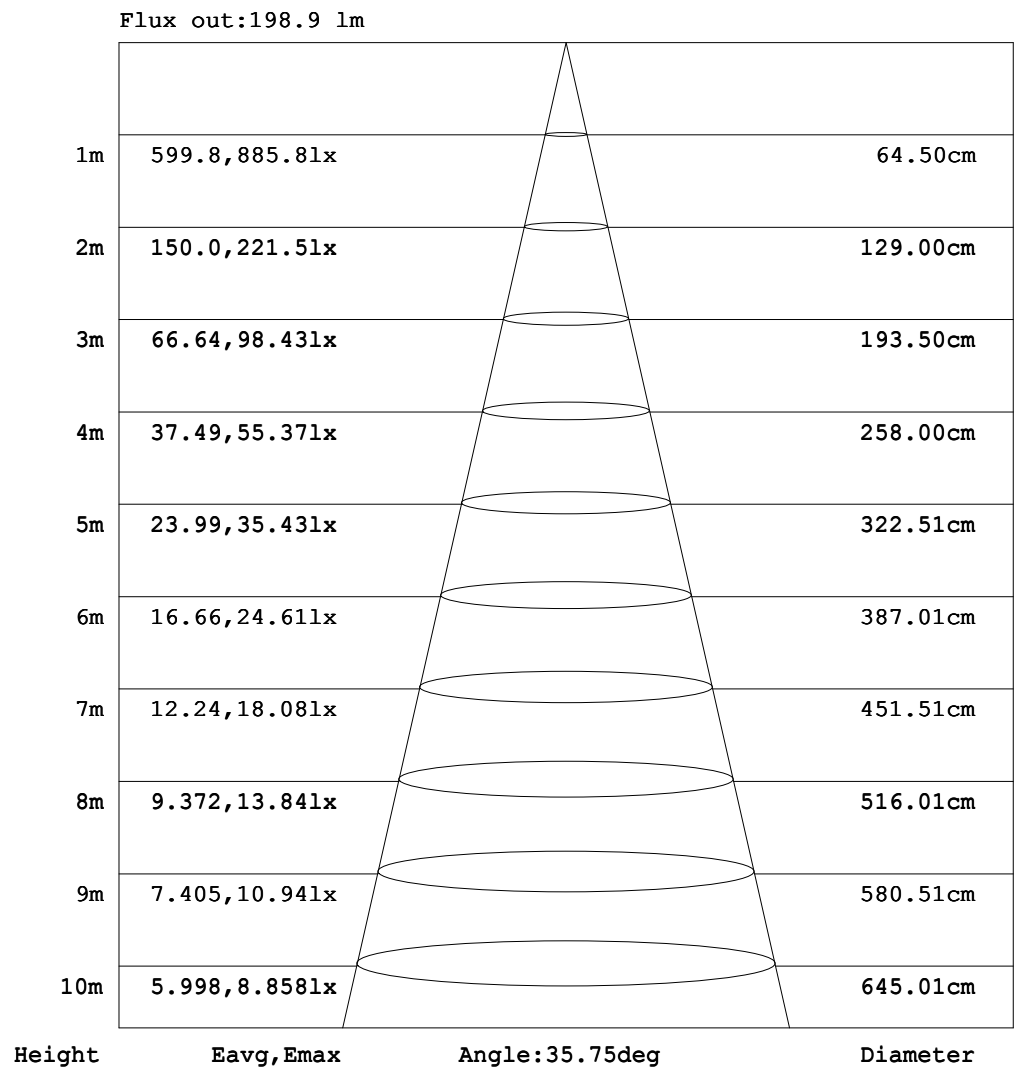

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.13V I:0.6259A P:5.346W PF:0.7039 Freq:59.99Hz Lamp Flux:360.941x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 5700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.57	1.12	1.81	2.47	3.01	3.37	3.60	3.76	3.96	3.82
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.19	0.57	1.12	1.79	2.49	3.11	3.61	3.98	4.18	4.32
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.11	0.42	0.87	1.43	2.07	2.70	3.27	3.76	4.17	4.48
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.09	0.22	0.51	0.91	1.36	1.85	2.32	2.76	3.12	3.40
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.11	0.21	0.40	0.65	0.93	1.22	1.51	1.75	1.93
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.14	0.22	0.32	0.44	0.57	0.68	0.78	0.84
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.05	0.09	0.12	0.15	0.18	0.20
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.08	0.12	0.13	0.15	0.14	0.14	0.12	0.08	0.04
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.13	0.19	0.26	0.33	0.35	0.36	0.35	0.31	0.26	0.18	0.10
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.18	0.31	0.43	0.51	0.60	0.65	0.68	0.66	0.61	0.52	0.38	0.20
-30	0.00	0.00	0.00	0.00	0.01	0.15	0.33	0.50	0.66	0.81	0.96	1.09	1.18	1.26	1.30	1.25	1.09	0.75	0.00
-20	0.00	0.00	0.00	0.00	0.08	0.25	0.50	0.68	0.90	1.16	1.40	1.70	2.14	2.94	9.20	23.1	71.1	98.2	89.2
-10	0.00	0.00	0.00	0.00	0.11	0.30	0.59	0.84	1.15	1.48	1.93	2.60	4.10	20.9	104	290	507	675	744
0	0.00	0.00	0.00	0.00	0.12	0.33	0.63	0.95	1.34	1.80	2.34	3.38	7.60	48.3	243	468	628	761	851
10	0.00	0.01	0.03	0.06	0.22	0.52	1.10	1.77	2.89	4.94	8.90	16.5	32.0	77.3	199	409	553	653	707
20	0.00	0.03	0.06	0.11	0.28	0.62	1.35	2.24	3.64	6.22	11.0	19.7	35.0	62.4	115	196	303	396	450
30	0.00	0.04	0.09	0.16	0.26	0.59	1.24	2.26	3.57	5.62	9.15	15.1	24.6	38.8	59.2	86.3	119	151	176
40	0.00	0.05	0.11	0.19	0.30	0.55	0.93	1.77	2.95	4.37	6.35	9.23	13.5	19.2	26.8	35.6	44.9	53.5	59.9
50	0.00	0.06	0.13	0.22	0.32	0.46	0.73	1.09	1.74	2.81	4.10	5.51	7.14	9.12	11.4	13.9	16.4	18.6	20.3
60	0.00	0.07	0.14	0.23	0.33	0.45	0.59	0.75	1.06	1.39	1.81	2.45	3.34	4.30	5.29	6.21	7.06	7.80	8.39
70	0.00	0.07	0.15	0.23	0.33	0.42	0.54	0.66	0.79	0.94	1.10	1.27	1.45	1.66	1.95	2.19	2.41	2.61	2.78
80	0.00	0.07	0.14	0.22	0.31	0.39	0.48	0.58	0.68	0.78	0.87	0.98	1.08	1.19	1.30	1.41	1.51	1.61	1.71
90	0.00	0.07	0.14	0.21	0.27	0.34	0.41	0.48	0.55	0.62	0.69	0.75	0.82	0.89	0.96	1.03	1.10	1.17	1.23
100	0.00	0.07	0.13	0.19	0.24	0.29	0.34	0.38	0.42	0.46	0.50	0.55	0.58	0.62	0.66	0.70	0.74	0.79	0.83
110	0.00	0.06	0.11	0.16	0.20	0.24	0.26	0.29	0.31	0.33	0.35	0.36	0.36	0.35	0.33	0.31	0.30	0.30	0.31
120	0.00	0.05	0.10	0.13	0.16	0.18	0.20	0.21	0.17	0.11	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.05	0.08	0.11	0.12	0.14	0.11	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.04	0.07	0.08	0.09	0.08	0.02	0.00	0.00	0.00	0.00	0.06	0.12	0.19	0.22	0.22	0.17	0.09	0.00
150	0.00	0.03	0.05	0.06	0.06	0.03	0.00	0.00	0.00	0.03	0.18	0.36	0.52	0.67	0.89	1.09	1.18	1.19	1.10
160	0.00	0.02	0.03	0.04	0.03	0.01	0.00	0.00	0.01	0.22	0.50	0.83	1.26	1.70	2.10	2.42	2.61	2.68	2.62
170	0.00	0.01	0.02	0.02	0.01	0.00	0.00	0.00	0.12	0.43	0.87	1.42	2.03	2.56	2.97	3.23	3.35	3.34	3.20
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.57	1.12	1.81	2.47	3.01	3.37	3.60	3.76	3.96	3.81

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2025-07-24

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.13V I:0.6259A P:5.346W PF:0.7039 Freq:59.99Hz Lamp Flux:360.941x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 5700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Downlight Shroud

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.12	4.10	3.96	3.56	2.93	2.15	1.39	0.77	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	4.44	4.36	4.15	3.66	2.97	2.19	1.45	0.81	0.36	0.07	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-160	4.51	4.19	3.73	3.15	2.48	1.80	1.18	0.67	0.28	0.11	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-150	3.36	3.04	2.64	2.16	1.67	1.18	0.74	0.39	0.19	0.09	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-140	1.90	1.69	1.43	1.13	0.84	0.56	0.35	0.21	0.11	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.76	0.66	0.55	0.43	0.32	0.22	0.14	0.08	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.18	0.15	0.12	0.09	0.05	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.03	0.06	0.09	0.11	0.12	0.13	0.13	0.13	0.12	0.11	0.09	0.06	0.04	0.01	0.00	0.00	0.00	0.00	
-60	0.08	0.15	0.22	0.27	0.31	0.33	0.34	0.33	0.32	0.27	0.23	0.18	0.13	0.07	0.02	0.00	0.00	0.00	
-50	0.17	0.32	0.45	0.55	0.62	0.65	0.65	0.63	0.57	0.50	0.43	0.33	0.24	0.16	0.08	0.01	0.00	0.00	
-40	0.58	0.95	1.20	1.28	1.30	1.24	1.16	1.05	0.94	0.81	0.67	0.52	0.38	0.24	0.13	0.03	0.00	0.00	
-30	21.6	31.7	23.9	10.0	5.16	2.91	2.18	1.75	1.44	1.19	0.95	0.73	0.53	0.33	0.18	0.06	0.00	0.00	
-20	156	186	173	152	84.1	16.5	5.57	2.95	2.11	1.61	1.24	0.93	0.65	0.42	0.22	0.08	0.00	0.00	
-10	753	653	490	375	259	119	15.7	4.86	2.94	2.04	1.52	1.11	0.76	0.48	0.25	0.09	0.00	0.00	
0	895	870	762	595	399	213	30.9	7.19	3.54	2.36	1.70	1.23	0.83	0.52	0.27	0.10	0.00	0.00	
10	731	698	609	470	315	147	29.6	11.8	6.39	3.79	2.45	1.62	0.99	0.59	0.31	0.12	0.01	0.00	
20	454	417	346	258	144	49.3	23.5	12.6	7.18	4.35	2.80	1.79	1.02	0.62	0.33	0.15	0.03	0.00	
30	172	149	109	67.9	42.7	26.3	16.2	9.94	6.24	4.10	2.71	1.64	0.98	0.59	0.34	0.15	0.04	0.00	
40	53.9	45.5	36.3	27.5	19.9	14.0	9.74	6.80	4.79	3.33	2.12	1.27	0.85	0.54	0.33	0.14	0.05	0.00	
50	18.7	16.5	14.1	11.6	9.39	7.43	5.81	4.39	3.12	2.05	1.39	1.00	0.70	0.48	0.29	0.14	0.06	0.00	
60	7.84	7.13	6.30	5.42	4.47	3.53	2.66	2.02	1.63	1.28	0.98	0.76	0.58	0.41	0.25	0.14	0.07	0.00	
70	2.63	2.45	2.26	2.03	1.78	1.58	1.40	1.22	1.06	0.90	0.75	0.60	0.46	0.34	0.23	0.15	0.07	0.00	
80	1.62	1.52	1.42	1.32	1.21	1.10	0.99	0.89	0.79	0.68	0.58	0.48	0.39	0.31	0.22	0.14	0.07	0.00	
90	1.17	1.10	1.03	0.96	0.89	0.82	0.75	0.69	0.62	0.55	0.48	0.41	0.34	0.27	0.21	0.14	0.07	0.00	
100	0.79	0.74	0.70	0.66	0.62	0.58	0.55	0.50	0.46	0.42	0.38	0.34	0.29	0.24	0.19	0.13	0.07	0.00	
110	0.30	0.30	0.31	0.33	0.35	0.36	0.36	0.35	0.33	0.31	0.29	0.26	0.24	0.20	0.16	0.11	0.06	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.11	0.17	0.21	0.20	0.18	0.16	0.13	0.10	0.05	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.11	0.14	0.12	0.11	0.08	0.05	0.00	
140	0.06	0.11	0.14	0.13	0.09	0.04	0.00	0.00	0.00	0.00	0.00	0.02	0.08	0.09	0.08	0.07	0.04	0.00	
150	1.16	1.10	0.96	0.73	0.49	0.34	0.19	0.05	0.00	0.00	0.00	0.00	0.03	0.06	0.06	0.05	0.03	0.00	
160	2.70	2.63	2.39	1.98	1.48	0.98	0.58	0.30	0.07	0.00	0.00	0.00	0.01	0.03	0.04	0.03	0.02	0.00	
170	3.46	3.53	3.41	3.03	2.42	1.73	1.08	0.56	0.22	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.01	0.00	
180	4.12	4.10	3.96	3.56	2.93	2.15	1.39	0.77	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: