

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2266.7 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	64.0V x 59.7H
	At 50% of Imax	35.1V x 35.7H
	At 90% of Imax	13.4V x 13.1H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	895.4 lumens per klm.
	To 50% of Imax	503.6 lumens per klm.
	To 90% of Imax	113.1 lumens per klm.
	Upward LOR	0.7 %
	Downward LOR	99.3 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.08V I:0.4339A P:3.497W PF:0.6671 Freq:59.98Hz Lamp Flux:87.6048x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

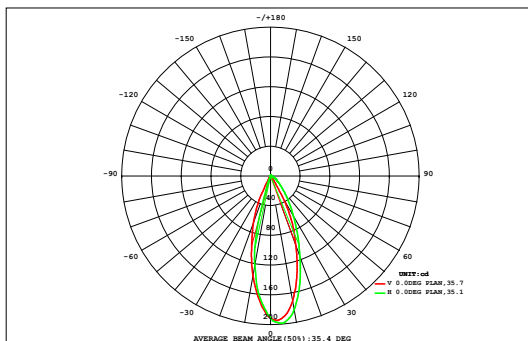

DATA OF LAMP		Eff:25.05lm/W	
MODEL	D1B1-A	Imax (cd)	198.6
NOMINAL POWER (W)	3.5	AVAILABILITY (%)	86.6
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	75.89
NOMINAL FLUX (lm)	87.6048	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	87.60
TEST VOLTAGE (V)	12	θ @50% (H,V)	36,35DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.02	0.03	0.04	0.06	0.08	0.11	0.14	0.16	0.18	0.19	0.16	0.14	0.11	0.08	0.06	0.04	0.03	0.02	1.67	0.69
45	0.02	0.04	0.05	0.08	0.11	0.15	0.19	0.23	0.27	0.27	0.23	0.19	0.15	0.11	0.08	0.06	0.04	0.02	2.29	1.58
40	0.03	0.04	0.07	0.10	0.14	0.20	0.26	0.32	0.38	0.38	0.33	0.27	0.20	0.15	0.10	0.07	0.04	0.03	3.10	2.54
35	0.03	0.05	0.08	0.12	0.18	0.26	0.35	0.45	0.53	0.54	0.48	0.40	0.29	0.19	0.13	0.08	0.05	0.03	4.22	3.74
30	0.03	0.05	0.08	0.14	0.22	0.34	0.50	0.63	0.73	0.75	0.68	0.57	0.43	0.27	0.15	0.09	0.05	0.03	5.73	5.31
25	0.03	0.05	0.09	0.15	0.28	0.46	0.65	0.83	0.97	1.00	0.90	0.75	0.57	0.39	0.20	0.10	0.05	0.03	7.50	7.12
20	0.02	0.04	0.08	0.16	0.35	0.57	0.80	1.03	1.22	1.25	1.13	0.93	0.70	0.49	0.27	0.11	0.05	0.03	9.23	8.90
15	0.02	0.04	0.07	0.18	0.39	0.63	0.89	1.17	1.39	1.43	1.30	1.08	0.81	0.56	0.32	0.12	0.05	0.02	10.5	10.2
10	0.01	0.02	0.05	0.17	0.39	0.63	0.91	1.19	1.42	1.48	1.38	1.15	0.86	0.59	0.35	0.11	0.04	0.02	10.8	10.5
5	0.01	0.02	0.04	0.14	0.35	0.56	0.84	1.12	1.32	1.38	1.30	1.08	0.80	0.55	0.32	0.10	0.03	0.01	9.96	9.76
0	0.01	0.01	0.03	0.10	0.27	0.44	0.68	0.94	1.08	1.13	1.07	0.86	0.62	0.44	0.25	0.07	0.02	0.01	8.03	7.82
-5	0.00	0.01	0.02	0.06	0.18	0.30	0.42	0.61	0.73	0.76	0.70	0.55	0.43	0.32	0.16	0.05	0.02	0.01	5.32	5.09
-10	0.00	0.01	0.01	0.03	0.08	0.17	0.23	0.25	0.25	0.28	0.32	0.32	0.28	0.19	0.08	0.03	0.01	0.01	2.55	2.23
-15	0.00	0.00	0.01	0.02	0.03	0.06	0.10	0.11	0.08	0.10	0.15	0.17	0.15	0.08	0.03	0.02	0.01	0.00	1.13	0.38
-20	0.00	0.00	0.01	0.01	0.01	0.02	0.03	0.03	0.02	0.03	0.06	0.07	0.05	0.03	0.02	0.01	0.00	0.00	0.39	0.00
-25	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.01	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.12	0.00
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.05	0.00
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Φ t	0.23	0.41	0.74	1.52	3.07	4.90	6.98	9.07	10.6	11.0	10.2	8.55	6.48	4.47	2.55	1.06	0.51	0.27	83	---
Φ a	0.00	0.00	0.00	0.78	2.66	4.60	6.76	8.91	10.4	10.8	10.0	8.31	6.20	4.10	2.02	0.22	0.00	0.00	---	76

one-half-peak spread: U:17.5,D:17.8 , L:18.4,R:17.5


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.08V I:0.4339A P:3.497W PF:0.6671 Freq:59.98Hz Lamp Flux:87.6048x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

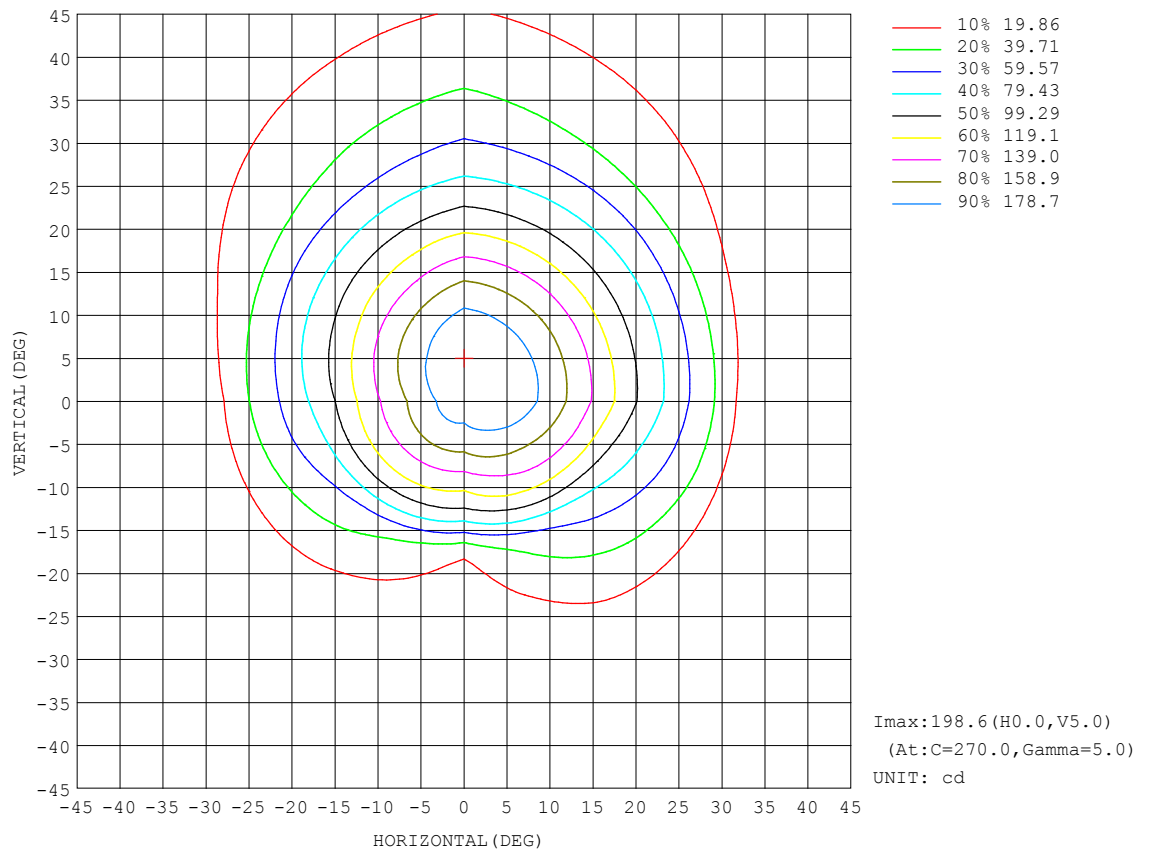


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.08V I:0.4339A P:3.497W PF:0.6671 Freq:59.98Hz Lamp Flux:87.6048x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

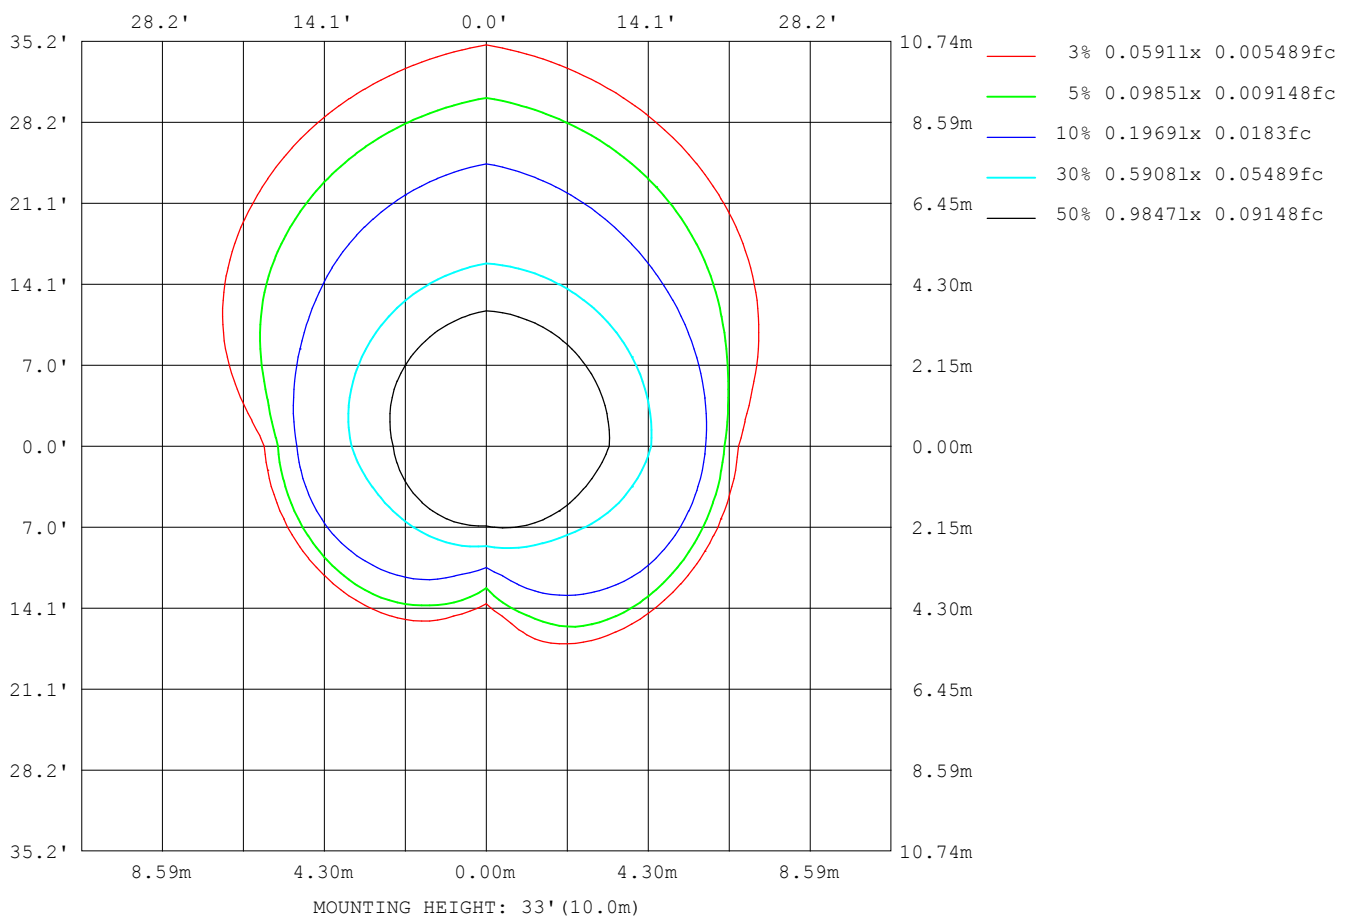

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

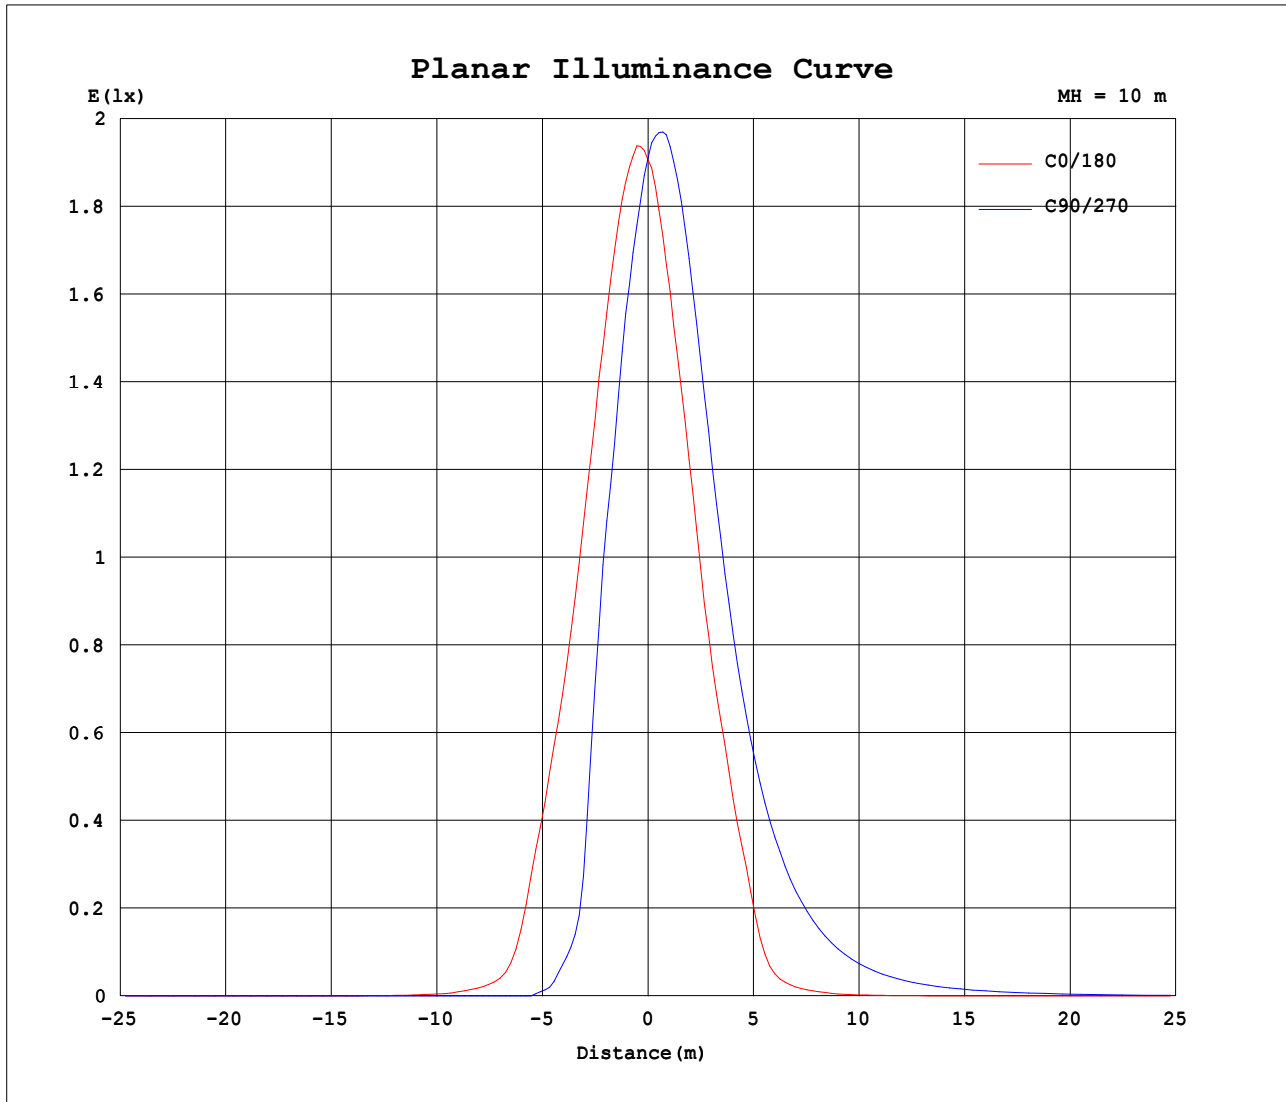


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.08V I:0.4339A P:3.497W PF:0.6671 Freq:59.98Hz Lamp Flux:87.6048x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

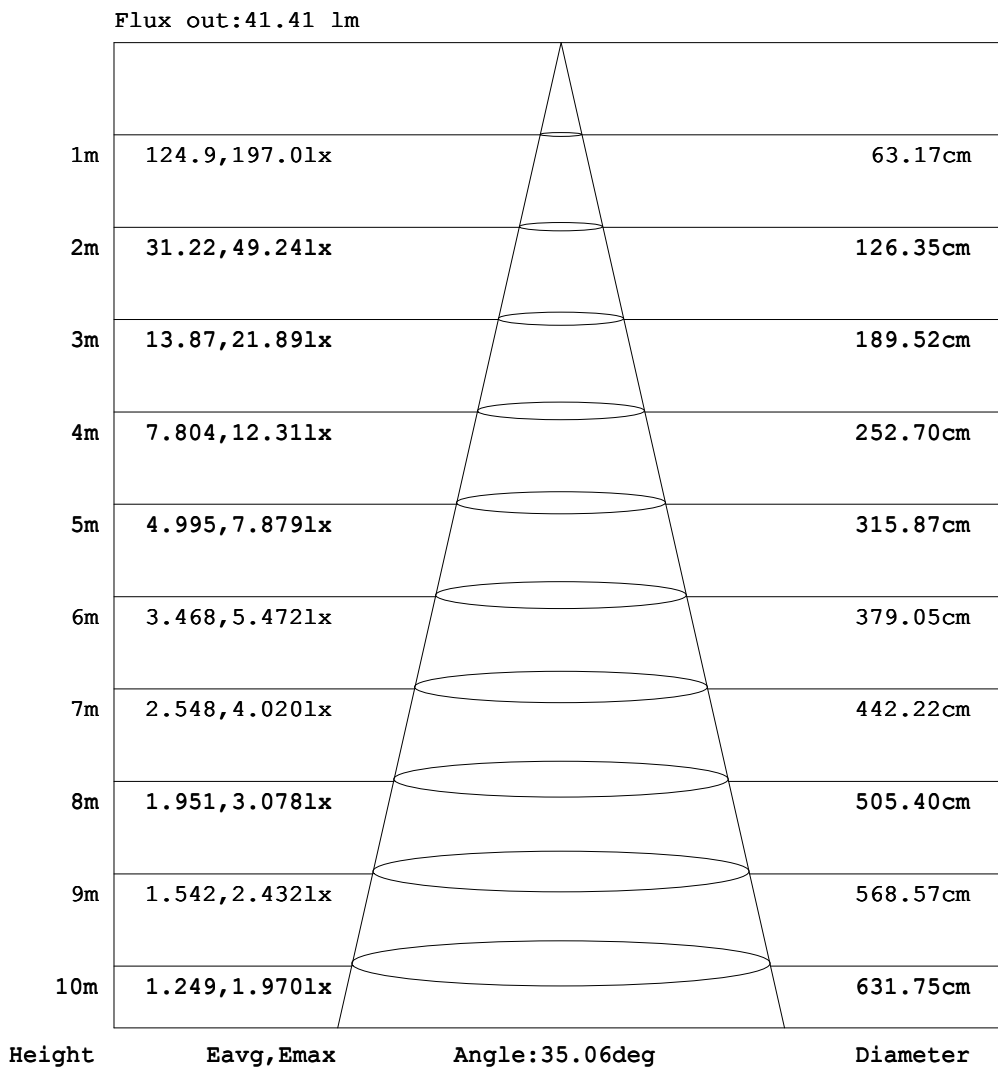

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.08V I:0.4339A P:3.497W PF:0.6671 Freq:59.98Hz Lamp Flux:87.6048x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.27	0.39	0.50	0.56	0.59	0.61	0.59
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.17	0.31	0.44	0.56	0.66	0.68	0.71	0.75
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.07	0.12	0.27	0.40	0.53	0.65	0.75	0.83	0.89
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.11	0.16	0.26	0.38	0.49	0.57	0.65	0.72
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.09	0.13	0.19	0.25	0.31	0.35	0.39
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.07	0.09	0.12	0.13
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.05	0.04	0.03	0.02	0.01	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.07	0.09	0.09	0.09	0.10	0.10	0.08	0.07	0.06	0.03	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.11	0.12	0.13	0.16	0.20	0.25	0.29	0.30	0.30	0.25	0.15	0.00
-30	0.00	0.00	0.00	0.00	0.00	0.01	0.12	0.14	0.19	0.22	0.35	0.49	0.76	1.11	1.42	1.62	1.57	1.06	0.00
-20	0.00	0.00	0.00	0.00	0.00	0.07	0.14	0.17	0.25	0.42	0.68	1.34	2.33	4.21	10.4	18.9	22.4	20.6	13.5
-10	0.00	0.00	0.00	0.00	0.00	0.12	0.16	0.25	0.36	0.65	1.30	2.69	5.91	21.1	41.5	58.8	91.7	117	122
0	0.00	0.00	0.00	0.00	0.00	0.14	0.18	0.28	0.43	0.79	1.79	3.83	10.5	39.4	69.0	99.1	137	169	191
10	0.00	0.00	0.01	0.03	0.09	0.33	0.57	0.98	1.62	2.80	4.96	8.90	16.3	38.0	67.9	98.5	132	162	183
20	0.00	0.01	0.02	0.05	0.14	0.44	0.86	1.41	2.33	3.86	6.27	10.4	16.7	26.5	43.9	67.1	87.3	105	116
30	0.00	0.01	0.03	0.07	0.17	0.43	0.96	1.56	2.48	3.83	5.91	8.89	13.2	19.1	26.7	35.6	45.4	54.5	61.6
40	0.00	0.01	0.04	0.07	0.15	0.35	0.78	1.42	2.16	3.19	4.61	6.48	8.94	11.9	15.5	19.5	23.7	27.4	30.4
50	0.00	0.01	0.04	0.07	0.13	0.25	0.48	0.93	1.57	2.29	3.14	4.19	5.45	6.92	8.48	10.1	11.8	13.3	14.5
60	0.00	0.01	0.04	0.07	0.11	0.17	0.28	0.46	0.73	1.16	1.71	2.32	2.98	3.64	4.35	5.02	5.67	6.26	6.74
70	0.00	0.01	0.03	0.06	0.09	0.14	0.18	0.25	0.32	0.42	0.57	0.74	0.94	1.16	1.40	1.65	1.89	2.10	2.26
80	0.00	0.01	0.03	0.05	0.07	0.10	0.12	0.15	0.19	0.23	0.27	0.31	0.35	0.39	0.43	0.47	0.51	0.55	0.58
90	0.00	0.01	0.02	0.04	0.05	0.06	0.07	0.08	0.09	0.11	0.12	0.13	0.14	0.15	0.16	0.18	0.19	0.20	0.21
100	0.00	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00
110	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.05	0.05	0.03	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.14	0.16	0.23	0.24	0.26	0.26
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.19	0.26	0.36	0.44	0.50	0.49	0.48
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.27	0.39	0.50	0.56	0.59	0.61	0.59

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2025-07-25

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.08V I:0.4339A P:3.497W PF:0.6671 Freq:59.98Hz Lamp Flux:87.6048x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.67	0.67	0.63	0.59	0.45	0.30	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.73	0.72	0.70	0.64	0.52	0.34	0.20	0.05	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.85	0.78	0.67	0.57	0.42	0.29	0.13	0.07	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.66	0.58	0.50	0.39	0.28	0.16	0.11	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.35	0.31	0.25	0.19	0.13	0.09	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.12	0.09	0.07	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.01	0.03	0.04	0.05	0.05	0.05	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.04	0.07	0.10	0.11	0.12	0.12	0.12	0.11	0.09	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.27	0.47	0.56	0.49	0.44	0.35	0.25	0.20	0.18	0.14	0.09	0.04	0.00	0.00	0.00	0.00	0.00	0.00	
-30	3.22	4.54	3.77	2.73	2.03	1.42	0.78	0.49	0.29	0.22	0.16	0.10	0.02	0.00	0.00	0.00	0.00	0.00	
-20	25.4	31.6	31.2	25.6	12.0	4.49	2.44	1.13	0.60	0.31	0.23	0.16	0.06	0.00	0.00	0.00	0.00	0.00	
-10	128	111	81.2	63.2	43.3	17.1	5.04	2.40	1.00	0.46	0.28	0.19	0.10	0.00	0.00	0.00	0.00	0.00	
0	191	171	138	100	68.4	32.2	7.53	3.25	1.25	0.57	0.33	0.21	0.12	0.00	0.00	0.00	0.00	0.00	
10	173	151	121	89.6	60.2	27.5	11.2	6.06	3.15	1.73	1.02	0.60	0.32	0.09	0.03	0.01	0.00	0.00	
20	110	96.5	79.5	59.1	34.3	18.8	11.5	6.72	4.03	2.39	1.47	0.88	0.43	0.14	0.05	0.02	0.01	0.00	
30	56.7	48.3	37.7	28.0	20.1	13.9	9.18	6.06	3.89	2.52	1.58	0.94	0.44	0.17	0.07	0.03	0.01	0.00	
40	27.6	23.9	19.8	15.7	12.1	9.04	6.53	4.65	3.24	2.18	1.40	0.79	0.35	0.15	0.07	0.04	0.01	0.00	
50	13.3	11.8	10.2	8.50	6.94	5.47	4.21	3.16	2.29	1.56	0.94	0.48	0.25	0.13	0.07	0.04	0.01	0.00	
60	6.26	5.68	5.02	4.35	3.64	2.97	2.31	1.71	1.17	0.73	0.46	0.28	0.17	0.11	0.07	0.04	0.01	0.00	
70	2.10	1.89	1.65	1.40	1.16	0.94	0.74	0.57	0.42	0.32	0.25	0.18	0.14	0.09	0.06	0.03	0.01	0.00	
80	0.55	0.51	0.47	0.43	0.39	0.35	0.31	0.27	0.23	0.19	0.15	0.12	0.10	0.07	0.05	0.03	0.01	0.00	
90	0.20	0.19	0.18	0.16	0.15	0.14	0.13	0.12	0.11	0.09	0.08	0.07	0.06	0.05	0.04	0.02	0.01	0.00	
100	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.03	0.06	0.06	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.27	0.27	0.26	0.20	0.16	0.09	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.51	0.53	0.48	0.43	0.34	0.22	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.67	0.67	0.63	0.59	0.45	0.30	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: