

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2389.2 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	60.6V x 61.8H
	At 50% of Imax	33.9V x 35.5H
	At 90% of Imax	13.4V x 12.7H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	884.5 lumens per klm.
	To 50% of Imax	492.3 lumens per klm.
	To 90% of Imax	99.8 lumens per klm.
	Upward LOR	0.8 %
	Downward LOR	99.2 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.08V I:0.4373A P:3.530W PF:0.6684 Freq:59.99Hz Lamp Flux:99.1601x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 5700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

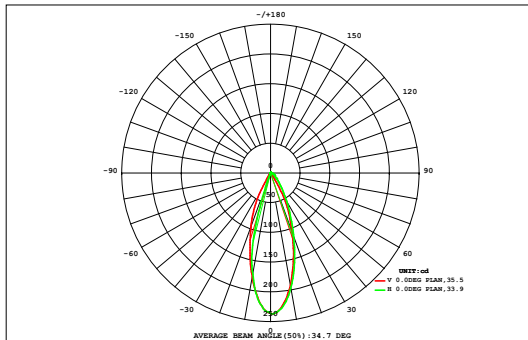

DATA OF LAMP		Eff:28.09lm/W	
MODEL	D1B1-A	Imax (cd)	236.9
NOMINAL POWER (W)	3.5	AVAILABILITY (%)	86.5
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	85.75
NOMINAL FLUX (lm)	99.1601	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	99.16
TEST VOLTAGE (V)	12	θ @50% (H,V)	36,34DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.02	0.03	0.04	0.05	0.07	0.09	0.11	0.13	0.15	0.15	0.13	0.11	0.09	0.07	0.05	0.04	0.03	0.02	1.33	0.00
45	0.02	0.03	0.04	0.06	0.09	0.12	0.15	0.19	0.22	0.22	0.19	0.16	0.12	0.09	0.06	0.05	0.03	0.02	1.85	0.71
40	0.02	0.03	0.05	0.08	0.12	0.17	0.22	0.28	0.32	0.32	0.28	0.23	0.17	0.12	0.08	0.05	0.04	0.02	2.61	1.80
35	0.02	0.04	0.06	0.10	0.16	0.24	0.34	0.43	0.49	0.49	0.44	0.36	0.26	0.17	0.11	0.07	0.04	0.02	3.84	3.20
30	0.02	0.04	0.07	0.13	0.23	0.38	0.53	0.64	0.72	0.72	0.65	0.55	0.41	0.25	0.14	0.08	0.04	0.03	5.62	5.10
25	0.02	0.04	0.08	0.17	0.34	0.54	0.72	0.89	1.00	1.01	0.91	0.75	0.57	0.38	0.19	0.09	0.05	0.03	7.77	7.35
20	0.02	0.04	0.09	0.23	0.46	0.68	0.92	1.15	1.31	1.32	1.19	0.97	0.72	0.49	0.27	0.10	0.05	0.02	10.0	9.67
15	0.02	0.04	0.09	0.28	0.53	0.79	1.08	1.37	1.57	1.59	1.42	1.15	0.85	0.58	0.33	0.12	0.04	0.02	11.9	11.6
10	0.01	0.03	0.09	0.31	0.57	0.83	1.16	1.49	1.73	1.75	1.56	1.26	0.92	0.62	0.36	0.13	0.04	0.02	12.9	12.6
5	0.01	0.02	0.08	0.28	0.53	0.79	1.13	1.46	1.70	1.72	1.54	1.23	0.87	0.58	0.34	0.11	0.03	0.01	12.4	12.2
0	0.01	0.02	0.06	0.22	0.42	0.64	0.96	1.28	1.47	1.49	1.33	1.04	0.70	0.47	0.27	0.08	0.03	0.01	10.5	10.2
-5	0.01	0.01	0.04	0.13	0.30	0.44	0.65	0.92	1.08	1.10	0.96	0.70	0.48	0.34	0.18	0.05	0.02	0.01	7.42	7.16
-10	0.00	0.01	0.02	0.06	0.17	0.27	0.35	0.43	0.49	0.49	0.45	0.37	0.30	0.21	0.09	0.03	0.01	0.01	3.77	3.45
-15	0.00	0.01	0.01	0.03	0.07	0.13	0.17	0.17	0.14	0.14	0.18	0.19	0.16	0.09	0.04	0.02	0.01	0.01	1.56	0.65
-20	0.00	0.00	0.01	0.01	0.02	0.04	0.06	0.06	0.04	0.04	0.07	0.08	0.06	0.03	0.02	0.01	0.01	0.00	0.55	0.00
-25	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.16	0.00
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.06	0.00
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45 -40 -35 -30 -25 -20 -15 -10 HORIZONTAL (DEG) 10 15 20 25 30 35 40 45																				
Φ t	0.21	0.40	0.85	2.15	4.09	6.17	8.58	10.9	12.4	12.6	11.3	9.16	6.70	4.50	2.54	1.04	0.46	0.25	94	---
Φ a	0.00	0.00	0.00	1.43	3.54	5.72	8.17	10.5	12.1	12.3	11.0	8.76	6.24	3.96	1.87	0.17	0.00	0.00	---	86

one-half-peak spread: U:15.5,D:18.6 , L:18.1,R:17.7


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.08V I:0.4373A P:3.530W PF:0.6684 Freq:59.99Hz Lamp Flux:99.1601x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 5700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

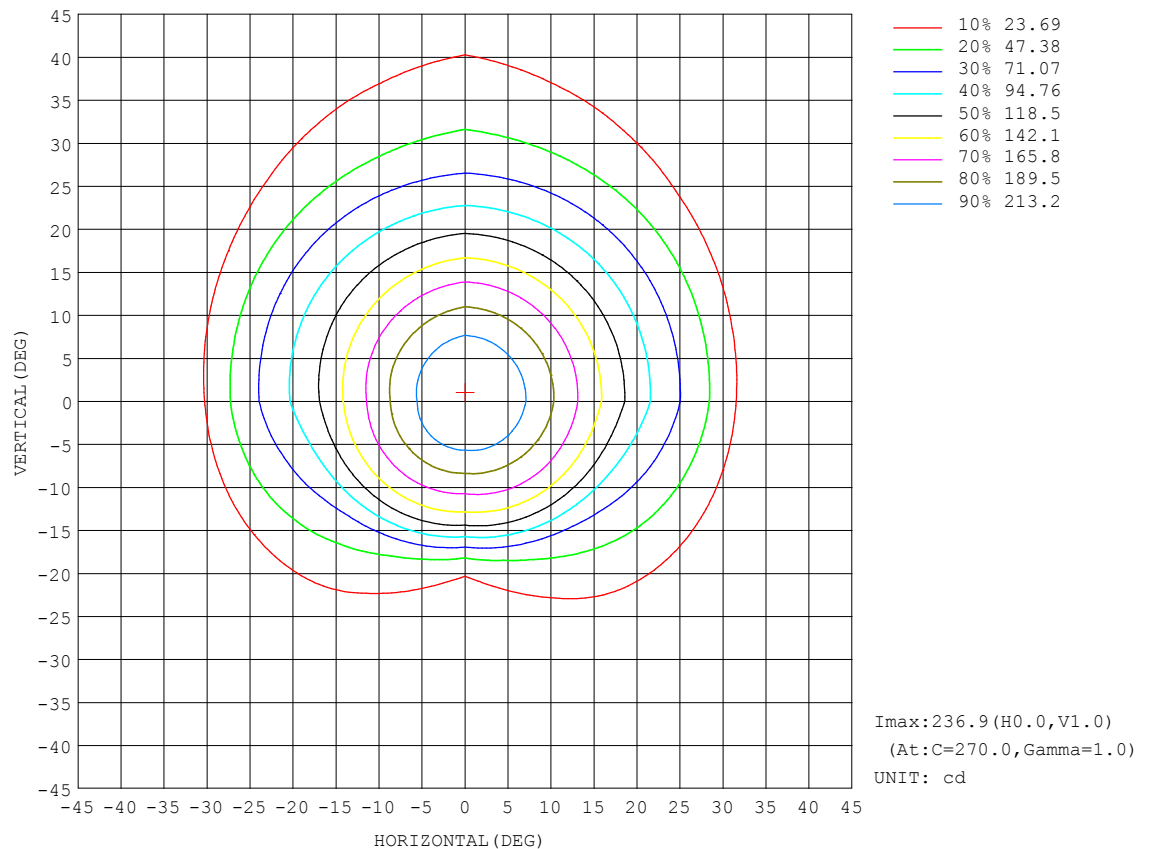


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.08V I:0.4373A P:3.530W PF:0.6684 Freq:59.99Hz Lamp Flux:99.1601x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 5700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

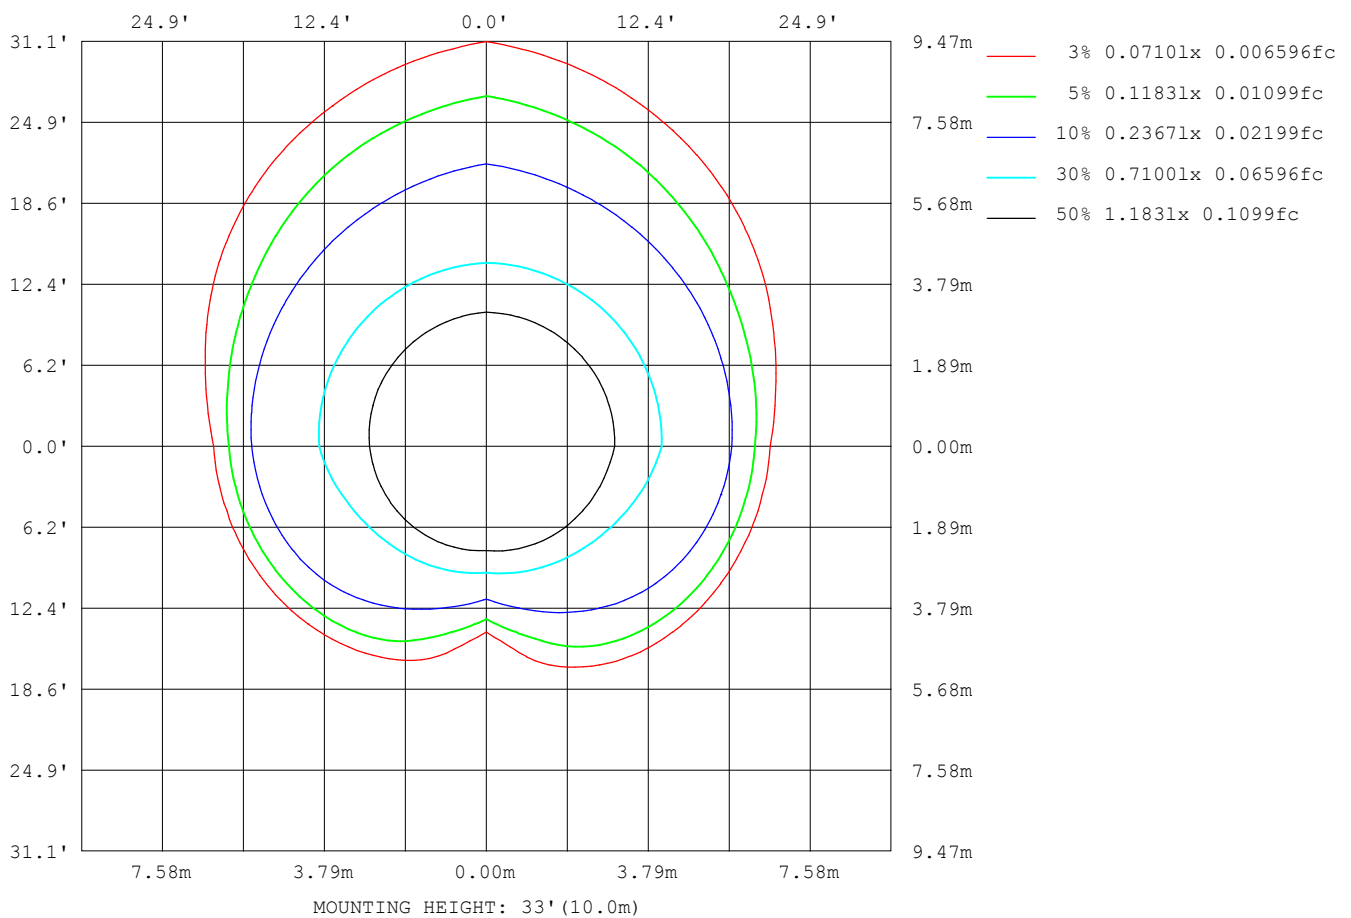

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

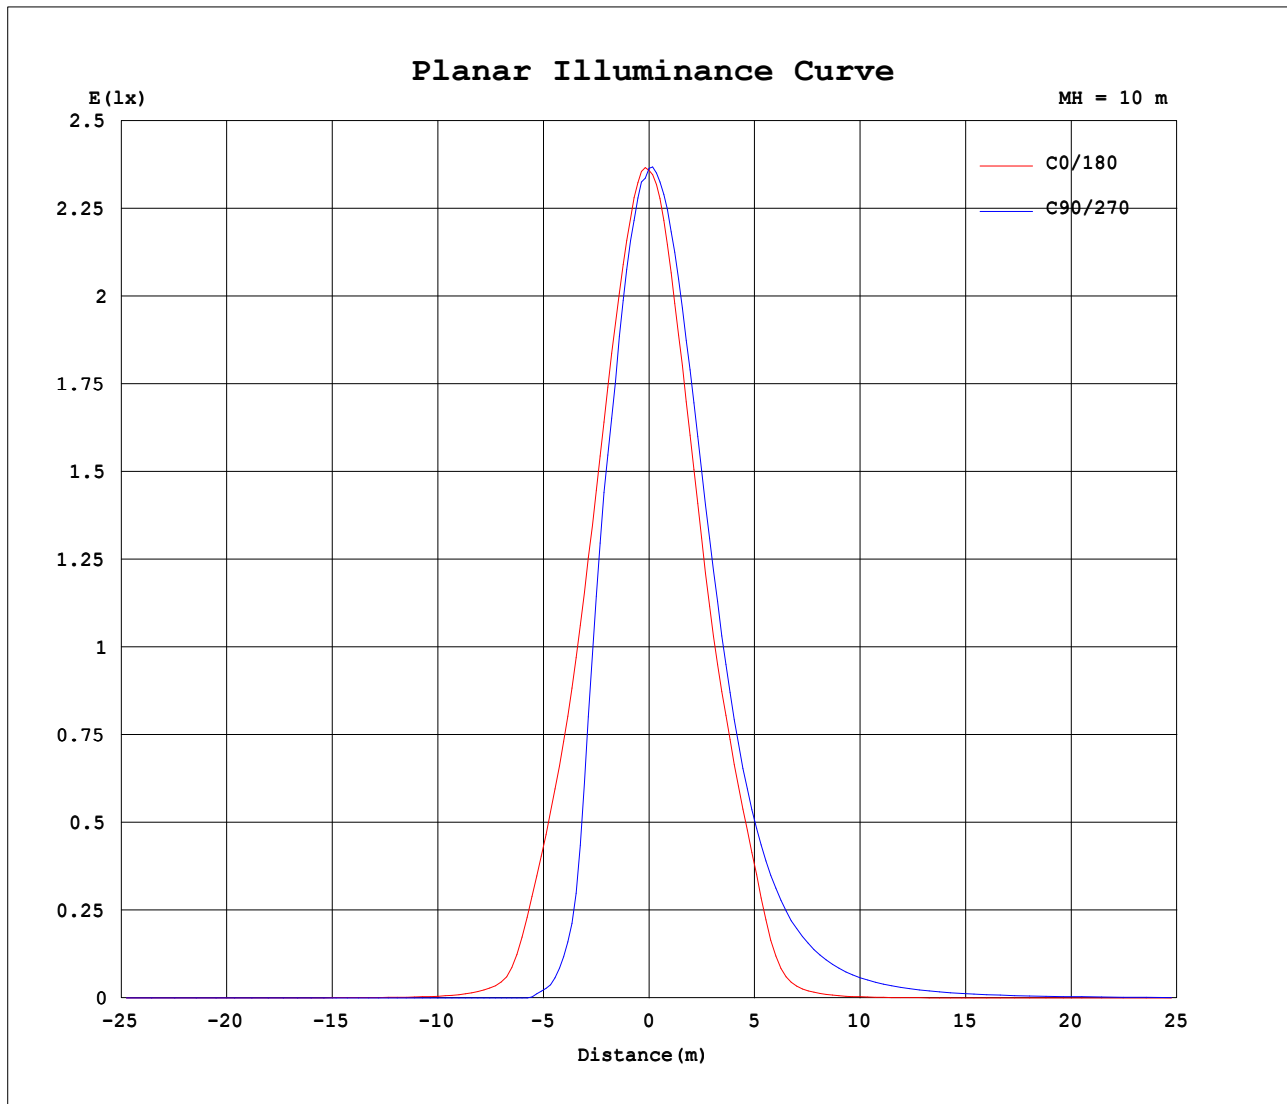


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.08V I:0.4373A P:3.530W PF:0.6684 Freq:59.99Hz Lamp Flux:99.1601x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 5700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

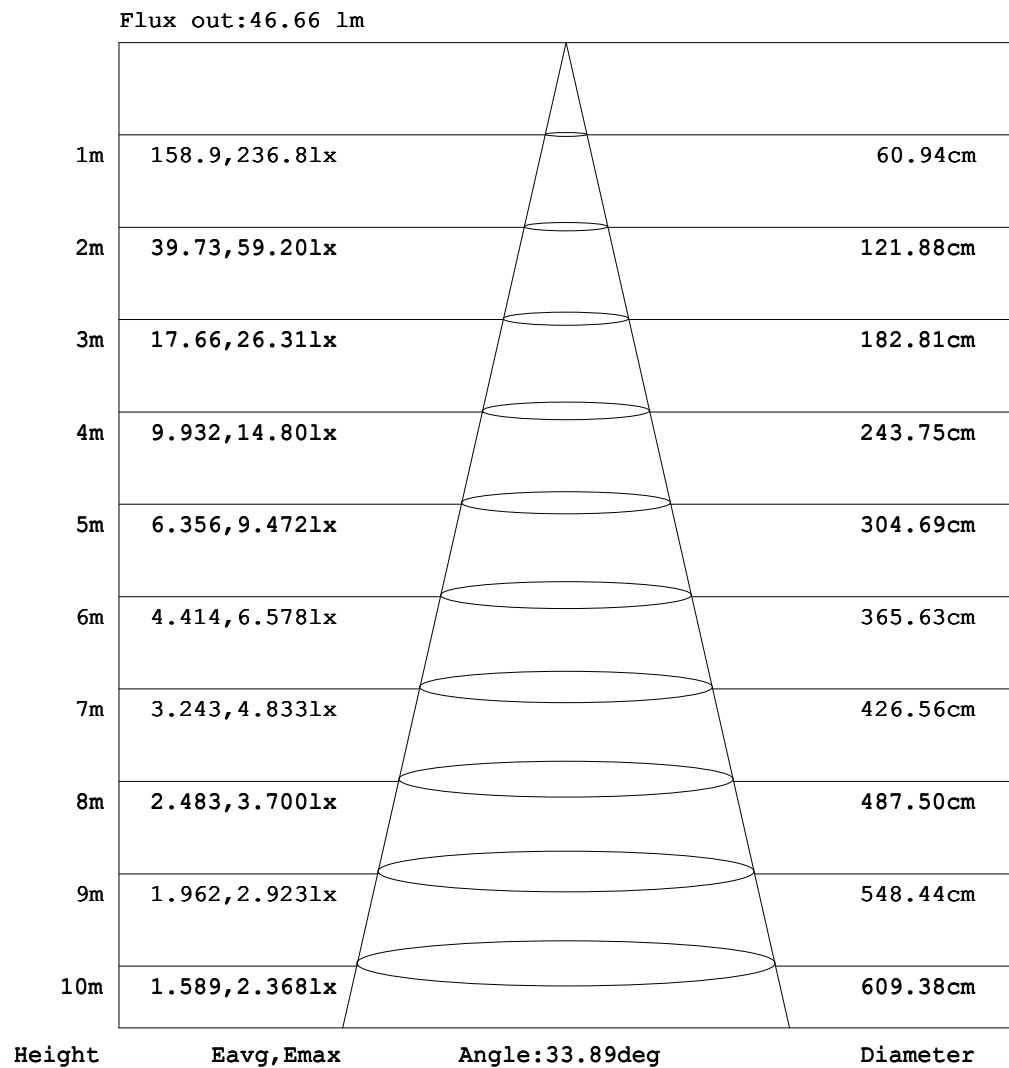

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.08V I:0.4373A P:3.530W PF:0.6684 Freq:59.99Hz Lamp Flux:99.1601x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 5700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.15	0.30	0.45	0.57	0.68	0.73	0.78	0.78
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.18	0.34	0.51	0.66	0.78	0.86	0.88
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.13	0.28	0.44	0.58	0.74	0.85	0.96
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.09	0.16	0.26	0.39	0.51	0.61	0.70	0.77
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.12	0.17	0.23	0.30	0.35	0.38
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.08	0.09
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.05	0.04	0.04	0.03	0.02	0.01	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.08	0.08	0.10	0.11	0.12	0.11	0.09	0.07	0.04	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.10	0.11	0.16	0.20	0.24	0.31	0.36	0.40	0.40	0.34	0.19	0.00
-30	0.00	0.00	0.00	0.00	0.00	0.01	0.11	0.13	0.19	0.30	0.44	0.65	1.01	1.53	2.21	3.04	3.58	2.54	0.00
-20	0.00	0.00	0.00	0.00	0.00	0.05	0.13	0.20	0.33	0.53	0.91	1.77	3.65	9.49	22.4	30.9	34.4	33.5	25.7
-10	0.00	0.00	0.00	0.00	0.00	0.10	0.15	0.25	0.43	0.83	1.71	4.03	13.5	40.2	62.6	89.0	133	164	173
0	0.00	0.00	0.00	0.00	0.00	0.12	0.16	0.30	0.53	1.04	2.34	6.16	25.4	64.3	97.1	134	178	217	236
10	0.00	0.01	0.02	0.04	0.09	0.30	0.50	0.86	1.44	2.52	4.60	9.09	22.4	55.3	86.4	118	153	182	196
20	0.00	0.01	0.03	0.07	0.16	0.39	0.76	1.25	2.01	3.24	5.29	8.96	15.4	28.5	52.0	74.5	92.9	107	115
30	0.00	0.02	0.05	0.10	0.20	0.41	0.86	1.35	2.10	3.20	4.82	7.23	10.8	16.0	22.9	31.5	41.1	49.0	53.8
40	0.00	0.02	0.06	0.11	0.20	0.38	0.73	1.27	1.88	2.72	3.82	5.26	7.16	9.53	12.3	15.6	18.8	21.8	24.2
50	0.00	0.02	0.06	0.11	0.19	0.32	0.54	0.90	1.43	2.05	2.73	3.59	4.54	5.67	6.89	8.16	9.41	10.6	11.5
60	0.00	0.03	0.06	0.11	0.18	0.27	0.38	0.57	0.81	1.15	1.61	2.12	2.68	3.25	3.82	4.38	4.92	5.40	5.81
70	0.00	0.03	0.06	0.10	0.16	0.22	0.29	0.38	0.48	0.59	0.74	0.92	1.12	1.33	1.55	1.77	1.99	2.18	2.34
80	0.00	0.03	0.06	0.09	0.13	0.17	0.22	0.27	0.32	0.38	0.44	0.49	0.55	0.61	0.68	0.74	0.81	0.86	0.92
90	0.00	0.02	0.05	0.07	0.10	0.12	0.15	0.17	0.20	0.22	0.24	0.27	0.29	0.32	0.34	0.37	0.39	0.42	0.44
100	0.00	0.02	0.04	0.06	0.07	0.08	0.09	0.10	0.10	0.11	0.11	0.11	0.11	0.12	0.12	0.12	0.12	0.13	0.13
110	0.00	0.02	0.03	0.04	0.05	0.05	0.04	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.02	0.03	0.03	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.01	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.07	0.06	0.04	0.02
160	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.09	0.15	0.25	0.34	0.39	0.44	0.44
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.21	0.35	0.47	0.56	0.62	0.63	0.59
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.15	0.30	0.45	0.57	0.68	0.73	0.78	0.77

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2025-07-25

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.08V I:0.4373A P:3.530W PF:0.6684 Freq:59.99Hz Lamp Flux:99.1601x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:3.5W MR16 5700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.83	0.83	0.79	0.76	0.63	0.46	0.29	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.92	0.92	0.88	0.81	0.65	0.49	0.30	0.15	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.99	0.92	0.82	0.69	0.54	0.37	0.21	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.72	0.65	0.56	0.45	0.31	0.21	0.09	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.36	0.32	0.25	0.17	0.12	0.07	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.08	0.06	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.03	0.05	0.07	0.09	0.10	0.10	0.09	0.09	0.07	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.06	0.11	0.15	0.18	0.20	0.21	0.21	0.21	0.19	0.14	0.10	0.04	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.28	0.49	0.59	0.57	0.54	0.48	0.39	0.35	0.31	0.27	0.21	0.14	0.04	0.00	0.00	0.00	0.00	0.00	
-30	3.58	5.21	4.32	3.00	2.15	1.48	0.95	0.67	0.47	0.39	0.31	0.23	0.13	0.00	0.00	0.00	0.00	0.00	
-20	34.9	36.9	33.9	27.1	13.8	4.95	2.54	1.32	0.81	0.53	0.40	0.31	0.18	0.04	0.00	0.00	0.00	0.00	
-10	168	141	97.3	68.4	45.9	19.7	5.45	2.51	1.22	0.71	0.50	0.36	0.22	0.08	0.00	0.00	0.00	0.00	
0	225	192	149	106	71.4	35.4	8.42	3.38	1.52	0.84	0.56	0.40	0.25	0.10	0.00	0.00	0.00	0.00	
10	186	161	127	92.1	61.0	28.6	10.5	5.40	2.91	1.71	1.10	0.72	0.42	0.17	0.04	0.02	0.01	0.00	
20	109	95.4	77.6	56.7	32.9	16.7	9.73	5.70	3.52	2.21	1.45	0.94	0.52	0.20	0.07	0.03	0.01	0.00	
30	50.1	42.7	32.7	23.7	16.6	11.3	7.53	5.06	3.38	2.29	1.54	0.98	0.53	0.20	0.10	0.05	0.02	0.00	
40	21.9	18.9	15.8	12.5	9.70	7.33	5.41	3.97	2.87	2.03	1.39	0.84	0.42	0.20	0.11	0.06	0.02	0.00	
50	10.6	9.46	8.22	6.96	5.76	4.65	3.70	2.85	2.15	1.51	0.99	0.57	0.32	0.19	0.11	0.06	0.02	0.00	
60	5.42	4.95	4.42	3.88	3.31	2.74	2.17	1.68	1.22	0.84	0.57	0.38	0.27	0.18	0.11	0.06	0.03	0.00	
70	2.18	2.00	1.79	1.56	1.33	1.12	0.92	0.74	0.59	0.48	0.38	0.29	0.22	0.16	0.10	0.06	0.03	0.00	
80	0.86	0.81	0.74	0.68	0.61	0.55	0.49	0.44	0.38	0.32	0.27	0.22	0.17	0.13	0.09	0.06	0.03	0.00	
90	0.42	0.39	0.37	0.34	0.32	0.29	0.27	0.24	0.22	0.20	0.17	0.15	0.12	0.10	0.07	0.05	0.02	0.00	
100	0.13	0.12	0.12	0.12	0.12	0.11	0.11	0.11	0.11	0.10	0.10	0.09	0.08	0.07	0.06	0.04	0.02	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.04	0.05	0.05	0.04	0.03	0.02	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.03	0.03	0.02	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.01	0.00	
140	0.01	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	
150	0.06	0.09	0.12	0.11	0.08	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	
160	0.47	0.45	0.42	0.35	0.26	0.18	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	
170	0.66	0.68	0.66	0.62	0.49	0.35	0.22	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.83	0.83	0.79	0.76	0.63	0.46	0.29	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEGH(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:ADMIN

Test Date:2025-07-25

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352

Humidity:65.0%

Test Distance:13.563m [K=1.0000]

Remarks: