

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2172.5 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	60.8V x 65.1H
	At 50% of Imax	39.2V x 39.7H
	At 90% of Imax	16.7V x 17.2H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	916.8 lumens per klm.
	To 50% of Imax	589.2 lumens per klm.
	To 90% of Imax	138.9 lumens per klm.
	Upward LOR	1.3 %
	Downward LOR	98.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.15V I:0.5918A P:5.035W PF:0.7003 Freq:59.98Hz Lamp Flux:385.004x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 4110K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

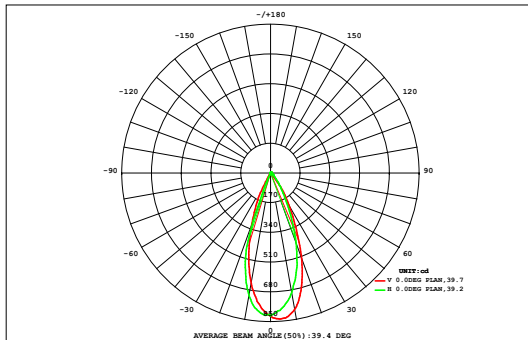

DATA OF LAMP		Eff:76.46lm/W	
MODEL	D1B1-A	Imax (cd)	836.4
NOMINAL POWER (W)	5.5	AVAILABILITY (%)	90.2
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	347.3
NOMINAL FLUX (lm)	385.004	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	385.0
TEST VOLTAGE (V)	12	θ @50% (H,V)	40,39DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.03	0.04	0.07	0.10	0.14	0.20	0.25	0.31	0.36	0.36	0.32	0.26	0.20	0.15	0.10	0.07	0.05	0.03	3.05	0.00
45	0.03	0.06	0.09	0.14	0.21	0.30	0.40	0.50	0.59	0.61	0.55	0.45	0.33	0.23	0.15	0.10	0.06	0.04	4.86	0.72
40	0.04	0.07	0.12	0.20	0.30	0.45	0.62	0.80	0.96	1.01	0.96	0.83	0.64	0.41	0.23	0.13	0.08	0.05	7.90	5.31
35	0.05	0.08	0.15	0.25	0.42	0.67	1.02	1.37	1.61	1.69	1.58	1.36	1.08	0.78	0.43	0.19	0.10	0.05	12.9	10.9
30	0.05	0.09	0.17	0.32	0.60	1.14	1.73	2.24	2.59	2.69	2.51	2.13	1.64	1.17	0.76	0.33	0.12	0.06	20.3	18.9
25	0.05	0.10	0.19	0.40	0.98	1.76	2.53	3.24	3.71	3.85	3.64	3.11	2.37	1.64	1.06	0.56	0.16	0.06	29.4	28.3
20	0.04	0.09	0.19	0.56	1.39	2.31	3.31	4.18	4.71	4.89	4.69	4.08	3.17	2.16	1.36	0.78	0.25	0.07	38.2	37.3
15	0.03	0.07	0.18	0.72	1.66	2.73	3.91	4.90	5.49	5.69	5.50	4.86	3.84	2.64	1.62	0.94	0.33	0.06	45.2	44.5
10	0.02	0.04	0.15	0.79	1.76	2.91	4.19	5.26	5.92	6.16	6.02	5.37	4.27	2.95	1.79	1.03	0.39	0.06	49.1	48.5
5	0.01	0.03	0.11	0.72	1.65	2.87	4.19	5.29	5.98	6.22	6.04	5.37	4.23	2.84	1.72	1.00	0.37	0.05	48.7	48.1
0	0.01	0.02	0.08	0.52	1.34	2.55	3.88	4.94	5.60	5.80	5.55	4.83	3.66	2.32	1.42	0.84	0.28	0.04	43.7	43.1
-5	0.01	0.02	0.04	0.27	0.90	1.77	3.11	4.12	4.72	4.89	4.62	3.88	2.62	1.68	1.08	0.64	0.17	0.03	34.6	33.8
-10	0.01	0.01	0.03	0.09	0.43	0.94	1.67	2.67	3.30	3.44	3.08	2.25	1.55	1.10	0.76	0.40	0.08	0.02	21.8	21.0
-15	0.01	0.01	0.01	0.03	0.12	0.35	0.62	0.85	1.01	1.11	1.13	1.01	0.85	0.68	0.47	0.17	0.04	0.02	8.49	6.74
-20	0.01	0.01	0.01	0.01	0.03	0.06	0.14	0.19	0.17	0.24	0.40	0.47	0.47	0.38	0.19	0.05	0.02	0.01	2.86	0.00
-25	0.00	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.01	0.07	0.18	0.23	0.21	0.12	0.04	0.02	0.01	0.01	0.99	0.00
-30	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.02	0.05	0.06	0.04	0.02	0.02	0.01	0.01	0.01	0.27	0.00
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.09	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HORIZONTAL (DEG)																				
Φ t	0.41	0.75	1.59	5.15	11.9	21.0	31.6	40.9	46.8	48.7	46.8	40.6	31.2	21.3	13.2	7.26	2.52	0.68	372	---
Φ a	0.00	0.00	0.00	2.57	10.1	19.4	30.3	39.7	45.7	47.6	45.5	39.1	29.7	19.8	11.7	5.59	0.48	0.00	---	347

one-half-peak spread: U:16.6,D:20.8 , L:21.0,R:18.9


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.15V I:0.5918A P:5.035W PF:0.7003 Freq:59.98Hz Lamp Flux:385.004x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 4110K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

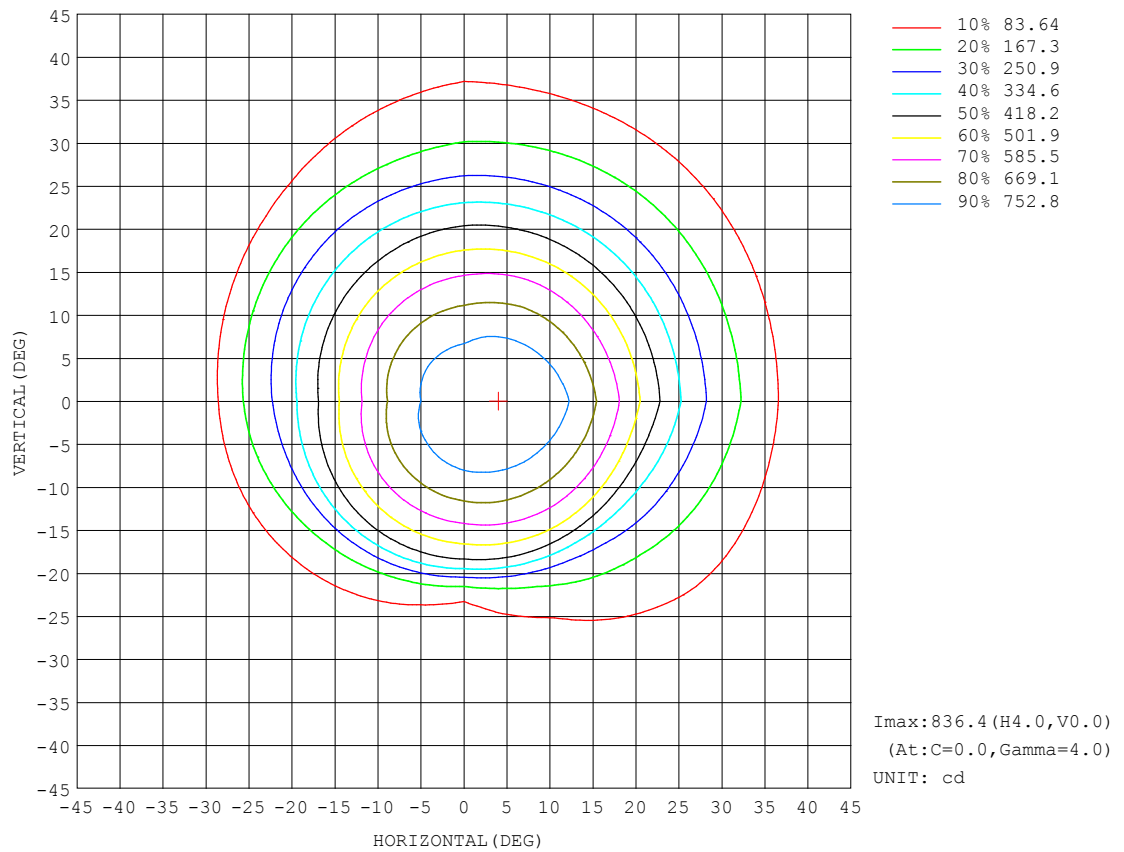


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.15V I:0.5918A P:5.035W PF:0.7003 Freq:59.98Hz Lamp Flux:385.004x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 4110K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

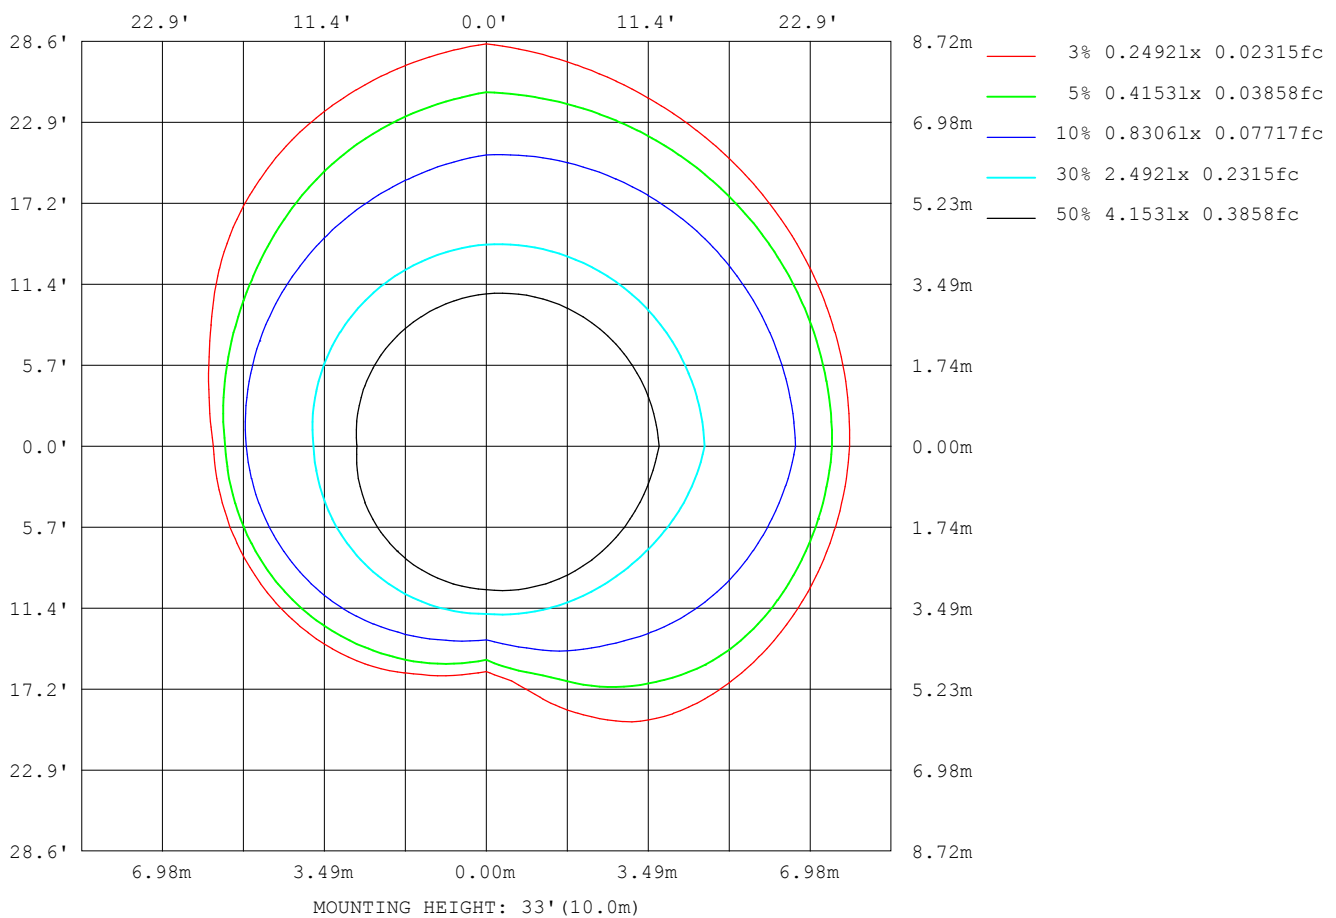

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

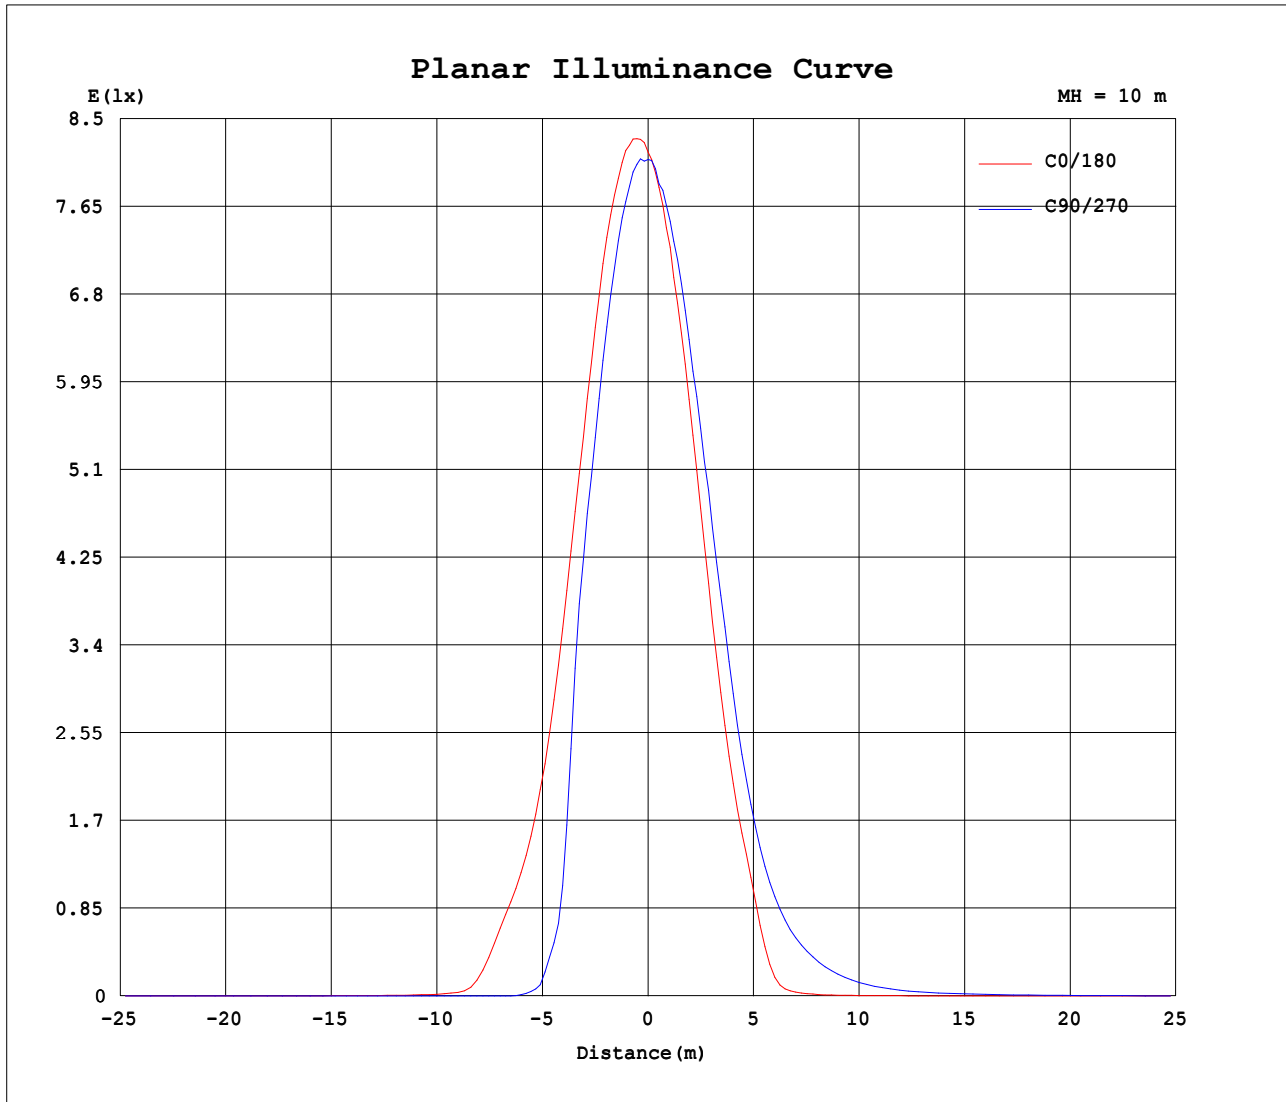


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.15V I:0.5918A P:5.035W PF:0.7003 Freq:59.98Hz Lamp Flux:385.004x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 4110K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

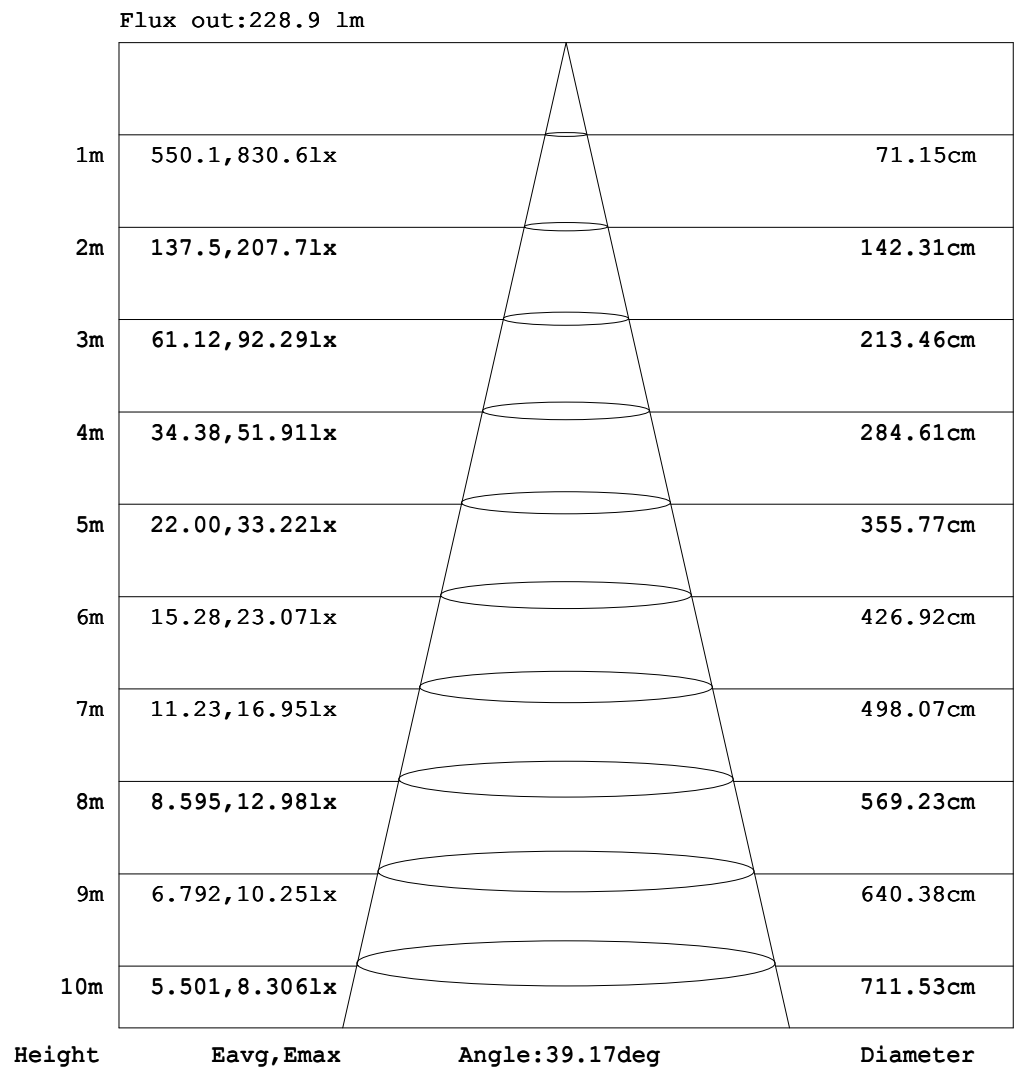

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.15V I:0.5918A P:5.035W PF:0.7003 Freq:59.98Hz Lamp Flux:385.004x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 4110K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	0.63	1.13	1.74	2.38	2.96	3.43	3.77	3.98	4.24	4.16
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.22	0.60	1.11	1.73	2.38	3.01	3.56	4.01	4.32	4.49
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.17	0.46	0.89	1.41	1.99	2.59	3.15	3.65	4.06	4.38
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.10	0.26	0.54	0.92	1.33	1.79	2.23	2.65	2.99	3.26
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.12	0.22	0.42	0.66	0.93	1.20	1.46	1.68	1.86	1.97
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.09	0.14	0.23	0.32	0.45	0.57	0.68	0.76	0.82
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.06	0.10	0.13	0.16	0.18	0.20
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.05	0.05	0.06	0.06	0.05	0.03	0.02	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.09	0.15	0.17	0.21	0.21	0.23	0.20	0.16	0.14	0.09	0.05
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.19	0.26	0.33	0.36	0.38	0.37	0.36	0.34	0.30	0.24	0.17	0.09
-40	0.00	0.00	0.00	0.00	0.09	0.22	0.33	0.45	0.50	0.55	0.58	0.61	0.62	0.64	0.61	0.54	0.41	0.23	0.00
-30	0.00	0.00	0.00	0.00	0.14	0.32	0.50	0.58	0.66	0.76	0.88	1.05	1.27	1.74	2.54	3.46	6.28	7.61	4.25
-20	0.00	0.00	0.00	0.03	0.23	0.41	0.56	0.72	0.86	1.06	1.40	2.02	4.19	13.6	56.7	111	162	248	289
-10	0.00	0.00	0.00	0.08	0.26	0.51	0.68	0.83	1.07	1.43	2.09	4.61	19.3	109	215	405	551	659	711
0	0.00	0.00	0.00	0.10	0.27	0.59	0.74	0.93	1.21	1.70	2.69	7.11	47.3	185	316	485	641	753	817
10	0.00	0.01	0.04	0.15	0.39	0.80	1.24	1.83	2.95	5.17	9.50	18.8	46.2	158	282	422	556	650	696
20	0.00	0.03	0.07	0.16	0.48	0.90	1.52	2.40	3.82	6.55	11.8	20.9	37.5	71.0	152	245	327	393	431
30	0.00	0.04	0.10	0.18	0.46	0.89	1.61	2.49	3.78	5.96	9.76	16.2	26.2	41.0	61.3	87.4	119	150	170
40	0.00	0.05	0.12	0.22	0.44	0.80	1.33	2.19	3.25	4.69	6.75	9.90	14.5	20.8	28.9	38.2	47.7	56.5	63.2
50	0.00	0.05	0.13	0.23	0.37	0.64	1.01	1.51	2.32	3.31	4.51	5.88	7.64	9.77	12.2	15.0	17.7	20.2	22.0
60	0.00	0.06	0.14	0.23	0.36	0.50	0.72	1.03	1.40	1.81	2.46	3.23	4.11	5.01	5.93	6.89	7.73	8.46	9.07
70	0.00	0.06	0.13	0.22	0.33	0.44	0.58	0.73	0.90	1.09	1.34	1.60	1.90	2.17	2.44	2.70	2.95	3.18	3.38
80	0.00	0.06	0.12	0.20	0.28	0.37	0.46	0.57	0.67	0.78	0.90	1.02	1.14	1.26	1.39	1.51	1.63	1.74	1.85
90	0.00	0.06	0.11	0.17	0.23	0.28	0.34	0.39	0.45	0.51	0.56	0.62	0.68	0.73	0.79	0.85	0.90	0.96	1.01
100	0.00	0.05	0.10	0.14	0.18	0.22	0.25	0.27	0.30	0.33	0.35	0.37	0.38	0.40	0.42	0.44	0.46	0.48	0.51
110	0.00	0.05	0.09	0.12	0.14	0.16	0.16	0.16	0.16	0.16	0.15	0.14	0.13	0.10	0.07	0.05	0.02	0.01	0.00
120	0.00	0.04	0.07	0.09	0.10	0.10	0.09	0.08	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.04	0.06	0.07	0.07	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.02	0.01	0.00
140	0.00	0.03	0.05	0.05	0.04	0.02	0.00	0.00	0.00	0.00	0.01	0.08	0.15	0.20	0.23	0.22	0.25	0.23	0.16
150	0.00	0.02	0.03	0.03	0.02	0.00	0.00	0.00	0.00	0.07	0.21	0.39	0.55	0.82	1.07	1.30	1.46	1.52	1.47
160	0.00	0.01	0.02	0.02	0.01	0.00	0.00	0.00	0.06	0.25	0.53	0.89	1.33	1.79	2.22	2.55	2.75	2.84	2.79
170	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.15	0.47	0.88	1.43	2.02	2.58	3.03	3.36	3.51	3.49	3.34
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	0.63	1.13	1.74	2.38	2.96	3.43	3.77	3.98	4.24	4.13

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.15V I:0.5918A P:5.035W PF:0.7003 Freq:59.98Hz Lamp Flux:385.004x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 4110K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.41	4.29	4.11	3.75	3.16	2.46	1.73	1.06	0.58	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	4.59	4.49	4.24	3.76	3.14	2.42	1.70	1.05	0.54	0.19	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-160	4.43	4.15	3.74	3.22	2.61	1.98	1.36	0.83	0.42	0.11	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-150	3.27	3.00	2.66	2.22	1.76	1.30	0.89	0.50	0.22	0.10	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-140	1.86	1.67	1.45	1.17	0.90	0.64	0.40	0.21	0.12	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.76	0.67	0.56	0.43	0.32	0.23	0.14	0.09	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.18	0.16	0.13	0.10	0.06	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.05	0.09	0.13	0.17	0.20	0.23	0.24	0.24	0.22	0.20	0.17	0.14	0.09	0.04	0.00	0.00	0.00	0.00	
-60	0.09	0.18	0.26	0.33	0.38	0.43	0.46	0.47	0.46	0.43	0.40	0.33	0.25	0.16	0.07	0.00	0.00	0.00	
-50	0.21	0.39	0.53	0.64	0.71	0.74	0.75	0.74	0.72	0.68	0.62	0.53	0.44	0.29	0.17	0.03	0.00	0.00	
-40	1.50	2.06	2.15	2.00	1.81	1.55	1.37	1.21	1.08	0.96	0.85	0.75	0.60	0.44	0.25	0.08	0.00	0.00	
-30	25.5	40.2	47.4	43.1	22.1	5.95	3.24	2.19	1.67	1.35	1.12	0.94	0.77	0.58	0.34	0.13	0.00	0.00	
-20	280	218	179	138	107	70.9	16.9	4.60	2.65	1.87	1.43	1.13	0.91	0.67	0.41	0.17	0.00	0.00	
-10	709	648	536	348	227	147	77.4	10.5	4.13	2.45	1.72	1.32	1.03	0.76	0.48	0.20	0.00	0.00	
0	834	792	681	520	342	210	120	19.3	5.19	2.88	1.94	1.45	1.11	0.81	0.51	0.21	0.00	0.00	
10	700	653	553	415	276	174	91.6	17.9	7.87	4.34	2.72	1.87	1.32	0.89	0.54	0.24	0.01	0.00	
20	425	383	313	234	164	104	35.8	15.0	8.15	4.83	3.10	2.09	1.40	0.91	0.54	0.24	0.03	0.00	
30	168	153	131	102	61.4	30.9	18.4	11.1	6.87	4.47	3.04	2.05	1.34	0.90	0.52	0.23	0.04	0.00	
40	57.8	49.4	39.8	30.3	21.9	15.4	10.7	7.38	5.21	3.72	2.59	1.74	1.18	0.80	0.47	0.20	0.05	0.00	
50	20.3	17.9	15.3	12.6	10.1	8.02	6.26	4.87	3.66	2.67	1.87	1.35	0.98	0.66	0.40	0.16	0.05	0.00	
60	8.51	7.82	7.02	6.10	5.19	4.31	3.48	2.72	2.10	1.68	1.35	1.01	0.75	0.52	0.30	0.14	0.06	0.00	
70	3.21	3.01	2.78	2.55	2.32	2.08	1.79	1.53	1.30	1.10	0.91	0.72	0.54	0.36	0.22	0.13	0.06	0.00	
80	1.75	1.65	1.54	1.43	1.31	1.19	1.06	0.94	0.81	0.69	0.58	0.46	0.37	0.28	0.20	0.12	0.06	0.00	
90	0.96	0.90	0.85	0.79	0.73	0.68	0.62	0.56	0.51	0.45	0.39	0.34	0.28	0.23	0.17	0.11	0.06	0.00	
100	0.48	0.46	0.44	0.42	0.40	0.38	0.37	0.35	0.33	0.30	0.27	0.25	0.22	0.18	0.14	0.10	0.05	0.00	
110	0.01	0.02	0.05	0.07	0.10	0.13	0.14	0.15	0.16	0.16	0.16	0.16	0.16	0.14	0.12	0.09	0.05	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.08	0.09	0.10	0.10	0.09	0.07	0.04	0.00	
130	0.01	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.07	0.07	0.06	0.04	0.00	
140	0.22	0.24	0.21	0.21	0.18	0.12	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.05	0.03	0.00	
150	1.53	1.47	1.30	1.06	0.79	0.52	0.36	0.18	0.03	0.00	0.00	0.00	0.00	0.02	0.03	0.03	0.02	0.00	
160	2.89	2.83	2.63	2.29	1.82	1.31	0.84	0.47	0.21	0.01	0.00	0.00	0.00	0.01	0.02	0.02	0.01	0.00	
170	3.59	3.68	3.59	3.23	2.71	2.06	1.40	0.83	0.41	0.12	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	
180	4.41	4.29	4.11	3.75	3.16	2.46	1.73	1.06	0.58	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: