

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	6165.9 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	37.2V x 37.7H
	At 50% of Imax	19.8V x 20.0H
	At 90% of Imax	7.9V x 7.9H

Beam Flux	Total	1000.9 lumens per klm.
	To 10% of Imax	773.0 lumens per klm.
	To 50% of Imax	426.5 lumens per klm.
	To 90% of Imax	85.0 lumens per klm.

Upward LOR	1.4 %
Downward LOR	98.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-03-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.18V I:2.249A P:21.05W PF:0.7687 Freq:59.99Hz Lamp Flux:1784.66x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Brass Spot Light	WEIGHT:
SPEC.:23W 3000K 20°LENS	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:Uplight Shroud

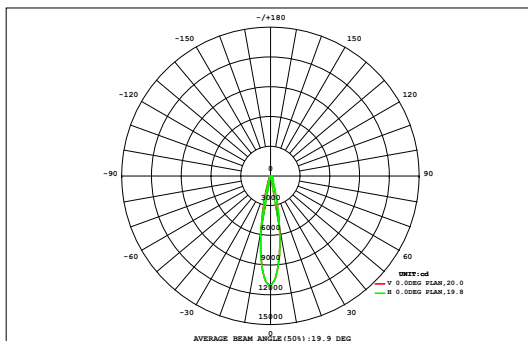

DATA OF LAMP		Eff:84.78lm/W	
MODEL	D0B1-23W-30K-A	Imax (cd)	11004
NOMINAL POWER (W)	23	AVAILABILITY (%)	77.1
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	1376
NOMINAL FLUX (lm)	1784.66	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	1785
TEST VOLTAGE (V)	12	θ @50% (H,V)	20,20DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.49	0.62	0.76	0.92	1.10	1.26	1.41	1.53	1.58	1.57	1.52	1.40	1.25	1.10	0.93	0.76	0.62	0.48	19.3	0.00
27	0.57	0.74	0.93	1.16	1.42	1.67	1.90	2.08	2.18	2.17	2.07	1.88	1.66	1.41	1.16	0.94	0.75	0.57	25.3	0.00
24	0.67	0.89	1.15	1.47	1.84	2.26	2.66	3.00	3.18	3.16	2.96	2.61	2.22	1.82	1.46	1.16	0.90	0.67	34.1	8.13
21	0.77	1.04	1.41	1.86	2.45	3.18	3.95	4.61	5.01	4.97	4.50	3.81	3.07	2.39	1.84	1.41	1.06	0.78	48.1	31.3
18	0.87	1.20	1.68	2.36	3.34	4.63	6.14	7.48	8.32	8.25	7.30	5.87	4.40	3.20	2.31	1.68	1.23	0.89	71.1	57.7
15	0.96	1.37	1.99	2.97	4.56	6.78	9.42	11.9	13.4	13.3	11.6	9.04	6.41	4.32	2.88	1.99	1.40	0.99	105	93.9
12	1.03	1.51	2.31	3.65	6.01	9.45	13.6	17.4	19.5	19.3	16.8	13.0	8.93	5.68	3.55	2.30	1.55	1.07	147	137
9	1.06	1.58	2.51	4.25	7.43	12.1	17.7	22.6	25.3	25.0	21.7	16.7	11.4	7.04	4.14	2.53	1.64	1.10	186	177
6	1.06	1.60	2.60	4.59	8.30	13.9	20.4	25.9	29.0	28.5	24.8	19.1	13.0	7.85	4.45	2.62	1.66	1.09	210	202
3	1.01	1.55	2.52	4.52	8.36	14.2	20.8	26.4	29.4	29.0	25.3	19.5	13.2	7.84	4.37	2.54	1.59	1.03	213	205
0	0.92	1.42	2.25	3.96	7.29	12.6	18.6	23.7	26.4	26.0	22.7	17.4	11.6	6.81	3.83	2.27	1.45	0.92	190	181
-3	0.78	1.21	1.86	3.11	5.58	9.56	14.4	18.6	20.9	20.6	17.8	13.4	8.77	5.23	3.05	1.89	1.21	0.75	149	139
-6	0.62	0.97	1.49	2.29	3.73	6.19	9.34	12.3	13.9	13.7	11.7	8.71	5.78	3.59	2.29	1.49	0.94	0.58	99.6	89.0
-9	0.46	0.73	1.10	1.62	2.40	3.58	5.11	6.67	7.58	7.51	6.46	4.91	3.49	2.38	1.60	1.07	0.68	0.42	57.8	44.8
-12	0.33	0.50	0.75	1.09	1.54	2.08	2.72	3.32	3.70	3.69	3.30	2.70	2.06	1.51	1.04	0.70	0.45	0.29	31.8	11.8
-15	0.22	0.32	0.48	0.68	0.93	1.20	1.51	1.74	1.90	1.90	1.73	1.49	1.16	0.88	0.63	0.43	0.28	0.19	17.7	0.00
-18	0.14	0.20	0.29	0.40	0.52	0.67	0.80	0.90	0.97	0.96	0.89	0.77	0.63	0.48	0.36	0.25	0.17	0.12	9.53	0.00
-21	0.09	0.12	0.16	0.22	0.28	0.35	0.42	0.46	0.49	0.48	0.44	0.39	0.33	0.25	0.19	0.14	0.11	0.08	5.01	0.00
-24	0.09	0.12	0.16	0.22	0.28	0.35	0.42	0.46	0.49	0.48	0.44	0.39	0.33	0.25	0.19	0.14	0.11	0.08	5.01	0.00
-27	0.09	0.12	0.16	0.22	0.28	0.35	0.42	0.46	0.49	0.48	0.44	0.39	0.33	0.25	0.19	0.14	0.11	0.08	5.01	0.00
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27			
Φ t	12.1	17.6	26.2	41.1	67.1	106	151	191	213	210	183	143	99.3	63.8	40.1	26.2	17.7	12.0	1619	---
Φ a	0.00	0.00	3.01	25.1	54.7	94.6	141	182	204	201	174	133	88.1	50.7	23.7	2.67	0.00	0.00	---	1376

one-half-peak spread: U:9.7,D:10.3 , L:10.3,R:9.8


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-03-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.18V I:2.249A P:21.05W PF:0.7687 Freq:59.99Hz Lamp Flux:1784.66x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Brass Spot Light	WEIGHT:
SPEC.:23W 3000K 20°LENS	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:Uplight Shroud

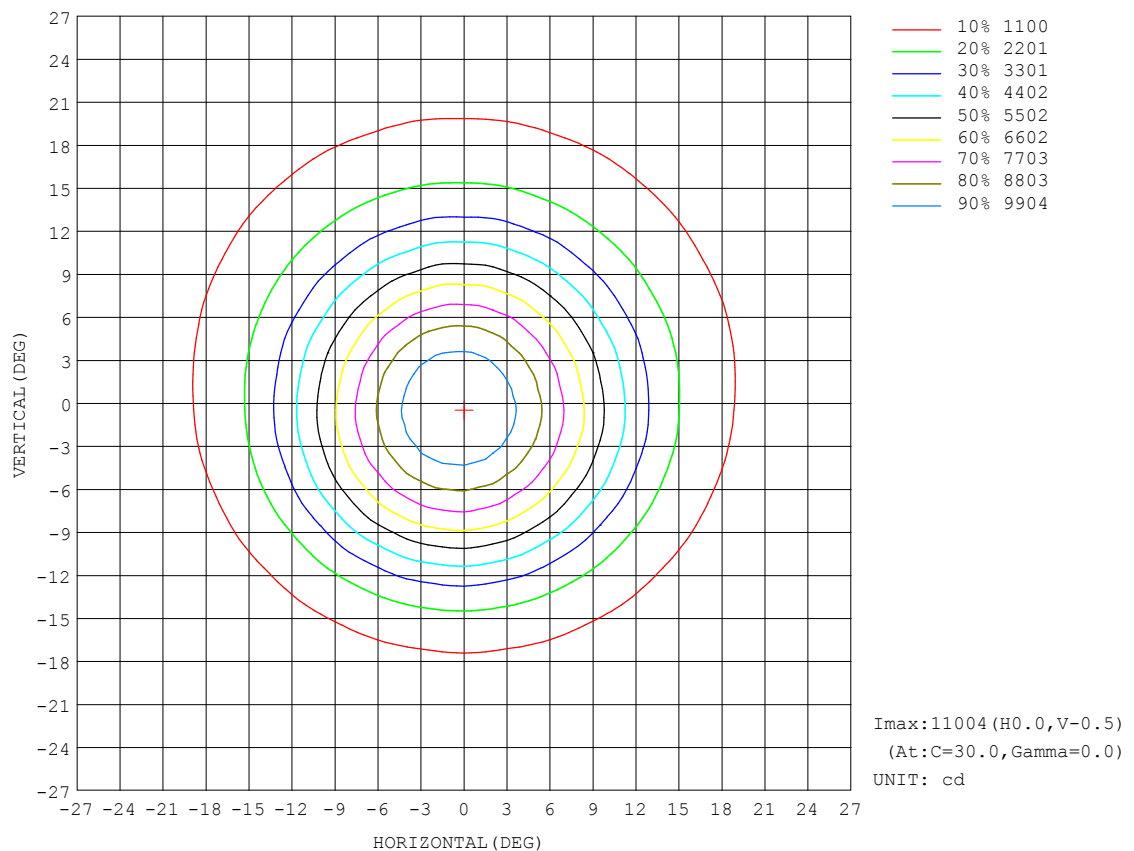


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-03-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.18V I:2.249A P:21.05W PF:0.7687 Freq:59.99Hz Lamp Flux:1784.66x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Brass Spot Light	WEIGHT:
SPEC.:23W 3000K 20°LENS	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:Uplight Shroud

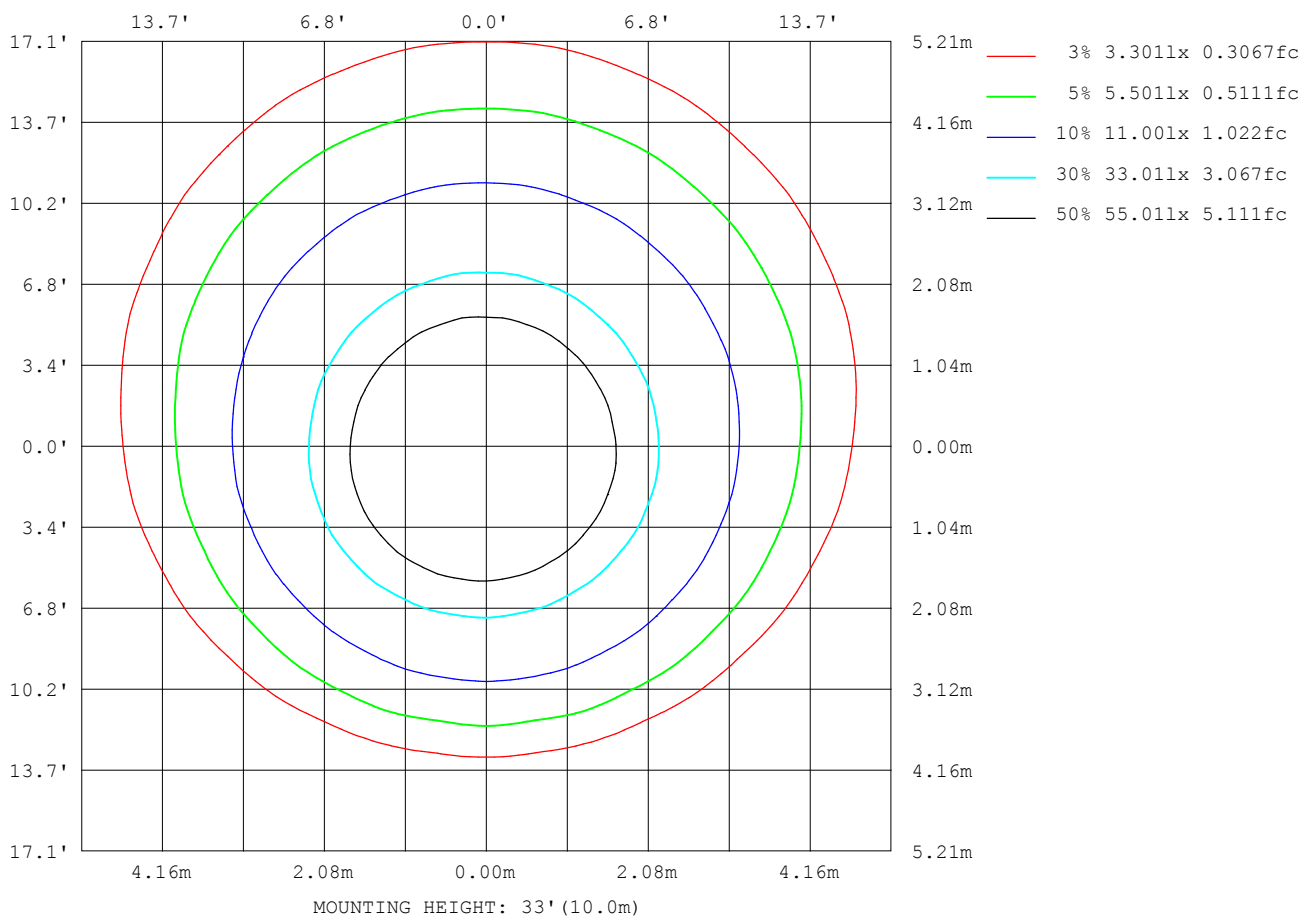

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-03-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

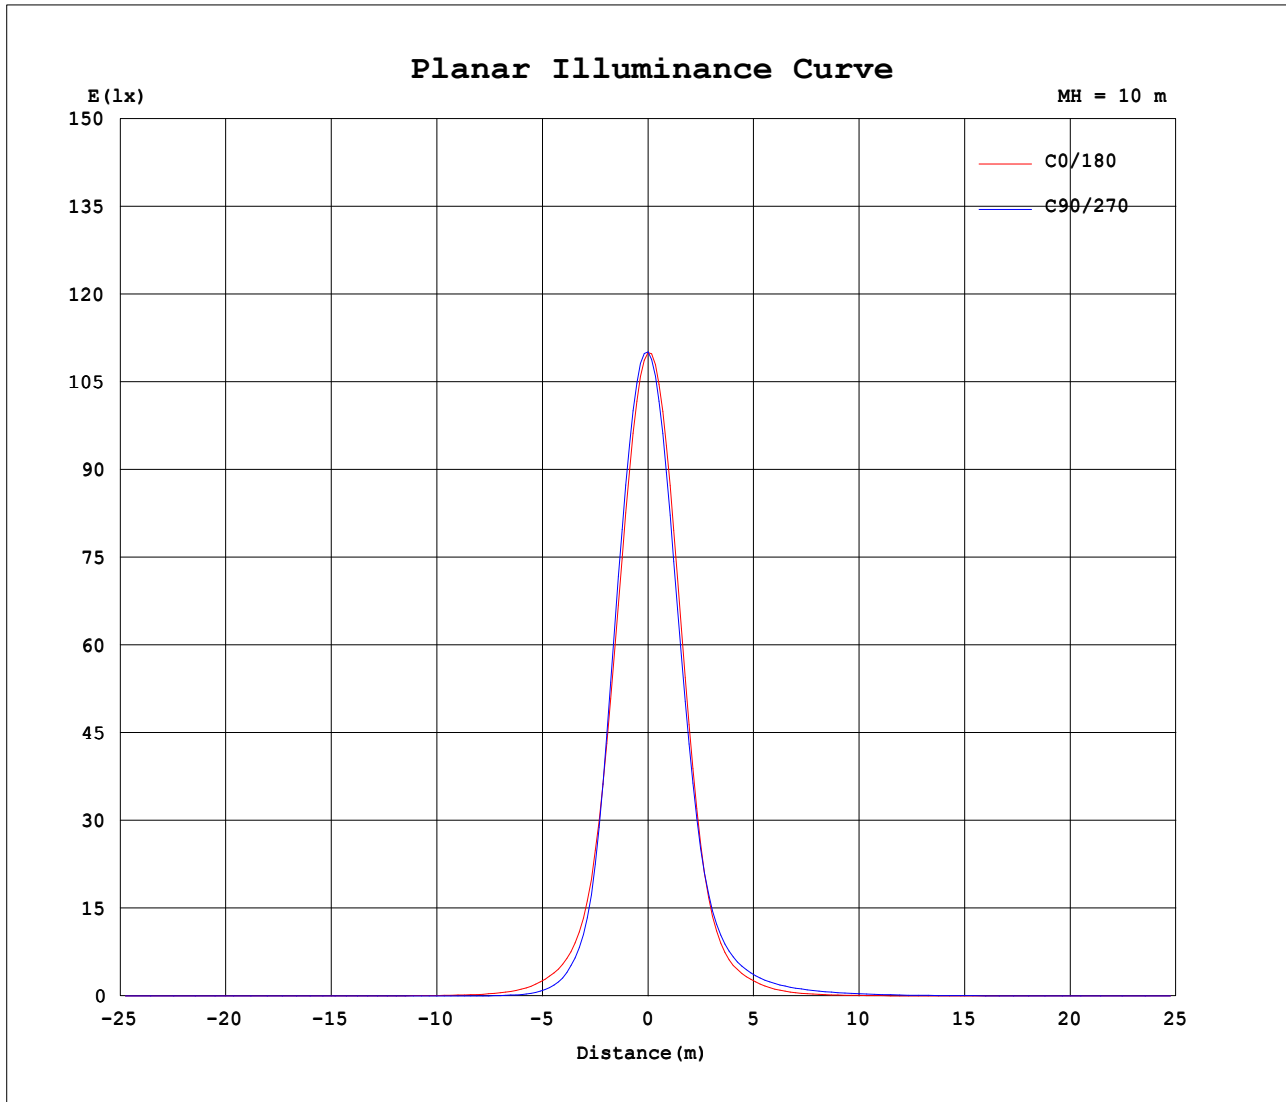


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-03-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.18V I:2.249A P:21.05W PF:0.7687 Freq:59.99Hz Lamp Flux:1784.66x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Brass Spot Light	WEIGHT:
SPEC.:23W 3000K 20°LENS	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:Uplight Shroud

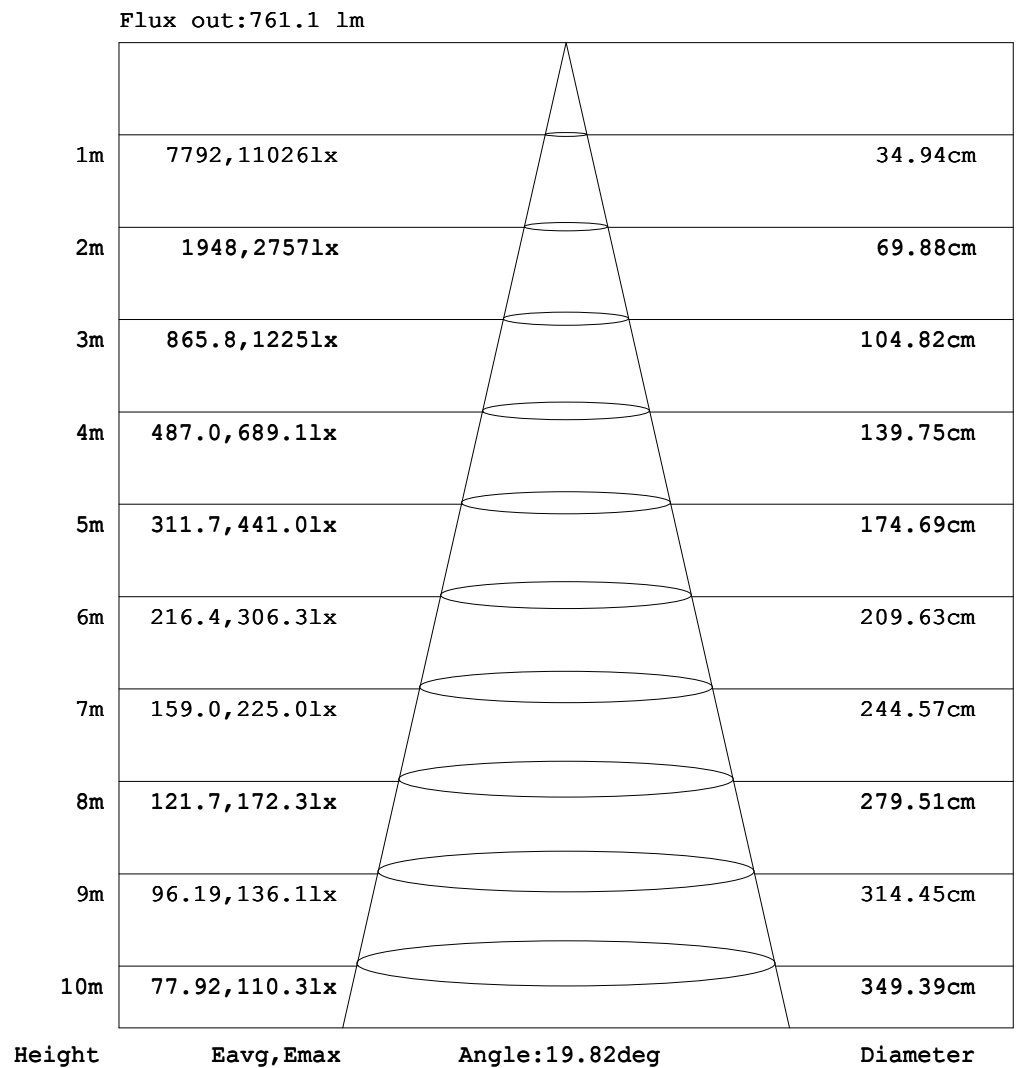

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-03-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:2.249A P:21.05W PF:0.7687 Freq:59.99Hz Lamp Flux:1784.66x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Brass Spot Light	WEIGHT:
SPEC.:23W 3000K 20°LENS	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:Uplight Shroud

Table--1

UNIT: ×10cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.10	0.21	0.45	0.87	1.43	1.93	2.14	1.99	1.74	1.68
-170	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.13	0.27	0.53	0.98	1.54	2.09	2.46	2.62	2.58	2.46	2.39
-160	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.07	0.12	0.21	0.37	0.66	1.07	1.55	1.99	2.32	2.52	2.62	2.65
-150	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.06	0.09	0.14	0.23	0.35	0.55	0.81	1.11	1.39	1.61	1.77	1.81
-140	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.09	0.13	0.18	0.25	0.33	0.43	0.53	0.62	0.68	0.71
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.05	0.07	0.10	0.12	0.14	0.17	0.20	0.22	0.23	0.24
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.09	0.10	0.10
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.04	0.04	0.04
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.01	0.01	0.02	0.02	0.04	0.04	0.07	0.08	0.11	0.14	0.17	0.20	0.22	0.23	0.23	0.24	0.23
-40	0.00	0.00	0.02	0.04	0.07	0.11	0.16	0.24	0.33	0.42	0.49	0.52	0.52	0.51	0.48	0.46	0.45	0.44	0.43
-30	0.00	0.01	0.03	0.08	0.14	0.23	0.35	0.48	0.59	0.67	0.73	0.94	1.39	2.12	2.88	3.56	4.50	5.21	5.56
-20	0.00	0.01	0.05	0.12	0.22	0.35	0.51	0.66	0.78	1.06	1.85	3.14	4.86	8.58	15.9	27.5	41.5	55.7	63.1
-10	0.00	0.02	0.07	0.16	0.29	0.46	0.63	0.80	1.15	2.15	3.78	6.68	13.2	28.1	55.9	115	268	471	562
0	0.00	0.02	0.09	0.19	0.34	0.53	0.71	0.92	1.68	3.19	5.51	10.6	22.0	44.6	89.9	233	570	952	1100
10	0.00	0.02	0.10	0.21	0.37	0.56	0.75	1.07	2.03	3.64	6.46	12.0	23.1	41.7	73.9	143	281	453	528
20	0.00	0.03	0.11	0.22	0.38	0.57	0.75	1.07	1.96	3.49	5.91	10.1	17.2	27.4	41.1	59.5	81.4	101	107
30	0.00	0.03	0.11	0.22	0.37	0.54	0.71	0.93	1.59	2.75	4.38	7.06	10.8	15.6	21.2	27.0	31.8	36.2	37.1
40	0.00	0.03	0.10	0.20	0.33	0.49	0.64	0.80	1.13	1.80	2.87	4.17	6.00	8.21	10.7	13.0	14.9	16.3	16.7
50	0.00	0.03	0.09	0.18	0.28	0.41	0.55	0.68	0.81	1.05	1.50	2.17	2.96	3.82	4.80	5.78	6.56	7.05	7.21
60	0.00	0.02	0.08	0.15	0.23	0.32	0.43	0.54	0.64	0.72	0.82	0.96	1.20	1.50	1.83	2.15	2.43	2.57	2.60
70	0.00	0.02	0.06	0.12	0.18	0.24	0.31	0.39	0.47	0.53	0.58	0.63	0.67	0.71	0.74	0.77	0.79	0.80	0.80
80	0.00	0.02	0.05	0.08	0.12	0.17	0.22	0.26	0.30	0.34	0.37	0.40	0.43	0.46	0.48	0.49	0.50	0.51	0.51
90	0.00	0.01	0.03	0.05	0.08	0.11	0.14	0.16	0.18	0.20	0.21	0.22	0.23	0.24	0.25	0.25	0.26	0.26	0.26
100	0.00	0.01	0.01	0.03	0.04	0.06	0.07	0.08	0.09	0.10	0.11	0.11	0.12	0.12	0.13	0.12	0.12	0.12	0.12
110	0.00	0.01	0.00	0.01	0.01	0.02	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.05	0.04	0.04	0.04	0.04
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.08	0.10	0.10
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.11	0.19	0.32	0.48	0.64	0.74	0.79
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.08	0.17	0.36	0.65	1.02	1.40	1.67	1.83	1.90
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.16	0.35	0.70	1.19	1.69	2.00	2.03	1.93	1.89
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.10	0.21	0.45	0.87	1.43	1.93	2.14	1.99	1.74	1.67

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-03-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:2.249A P:21.05W PF:0.7687 Freq:59.99Hz Lamp Flux:1784.66x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Brass Spot Light	WEIGHT:
SPEC.:23W 3000K 20°LENS	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:Uplight Shroud

Table--2

UNIT: ×10cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.92	2.27	2.54	2.52	2.23	1.72	1.12	0.61	0.29	0.14	0.07	0.04	0.02	0.01	0.00	0.00	0.00	0.00	
-170	2.46	2.57	2.61	2.46	2.10	1.57	1.00	0.55	0.28	0.15	0.08	0.04	0.02	0.01	0.00	0.00	0.00	0.00	
-160	2.62	2.52	2.33	2.01	1.58	1.10	0.68	0.38	0.21	0.12	0.07	0.04	0.02	0.01	0.00	0.00	0.00	0.00	
-150	1.77	1.63	1.41	1.13	0.83	0.57	0.36	0.23	0.15	0.09	0.06	0.03	0.02	0.01	0.00	0.00	0.00	0.00	
-140	0.69	0.62	0.54	0.43	0.33	0.25	0.18	0.13	0.09	0.06	0.04	0.02	0.01	0.01	0.00	0.00	0.00	0.00	
-130	0.23	0.22	0.20	0.17	0.15	0.12	0.10	0.07	0.06	0.04	0.03	0.01	0.01	0.00	0.00	0.00	0.00	0.00	
-120	0.10	0.09	0.09	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.23	0.21	0.20	0.18	0.16	0.13	0.10	0.08	0.05	0.04	0.02	0.03	0.00	0.02	0.00	0.01	0.00	0.00	
-40	0.43	0.43	0.44	0.46	0.49	0.50	0.49	0.44	0.37	0.28	0.20	0.13	0.08	0.05	0.02	0.02	0.01	0.00	
-30	4.99	4.15	3.28	2.57	1.80	1.16	0.82	0.68	0.63	0.54	0.43	0.30	0.19	0.11	0.06	0.03	0.01	0.00	
-20	55.3	40.1	25.5	14.1	7.45	4.20	2.71	1.55	0.93	0.73	0.61	0.47	0.31	0.19	0.11	0.05	0.02	0.00	
-10	447	249	113	56.0	26.2	11.9	5.93	3.37	1.85	1.02	0.75	0.59	0.42	0.26	0.15	0.07	0.02	0.00	
0	908	532	222	91.3	45.7	21.5	9.98	5.08	2.87	1.49	0.86	0.67	0.50	0.32	0.18	0.08	0.02	0.00	
10	441	268	137	74.2	43.0	23.3	11.9	6.27	3.48	1.88	1.00	0.72	0.54	0.35	0.20	0.10	0.03	0.00	
20	99.5	80.1	59.0	41.5	27.6	16.9	9.88	5.66	3.32	1.85	1.01	0.73	0.55	0.36	0.21	0.10	0.03	0.00	
30	36.2	32.0	27.3	21.2	15.3	10.5	6.76	4.16	2.59	1.49	0.89	0.69	0.52	0.35	0.20	0.10	0.03	0.00	
40	16.3	14.8	12.7	10.4	7.91	5.74	3.95	2.69	1.68	1.05	0.77	0.62	0.47	0.31	0.19	0.09	0.03	0.00	
50	6.98	6.43	5.60	4.62	3.66	2.82	2.02	1.39	0.99	0.77	0.65	0.52	0.39	0.26	0.16	0.08	0.03	0.00	
60	2.53	2.37	2.07	1.73	1.40	1.11	0.90	0.77	0.69	0.60	0.51	0.41	0.30	0.21	0.14	0.07	0.02	0.00	
70	0.79	0.77	0.74	0.70	0.67	0.62	0.58	0.54	0.49	0.43	0.36	0.29	0.22	0.16	0.10	0.05	0.02	0.00	
80	0.50	0.49	0.47	0.45	0.42	0.39	0.36	0.33	0.30	0.26	0.23	0.20	0.15	0.11	0.07	0.04	0.01	0.00	
90	0.25	0.24	0.23	0.23	0.21	0.20	0.19	0.18	0.17	0.15	0.14	0.12	0.09	0.07	0.04	0.02	0.01	0.00	
100	0.11	0.11	0.11	0.10	0.10	0.09	0.09	0.09	0.08	0.07	0.07	0.06	0.04	0.03	0.02	0.00	0.01	0.00	
110	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.00	0.01	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.10	0.08	0.06	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.75	0.65	0.50	0.34	0.20	0.11	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	1.86	1.71	1.44	1.07	0.69	0.38	0.18	0.08	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	1.98	2.08	2.05	1.75	1.24	0.73	0.36	0.16	0.07	0.04	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	
180	1.92	2.27	2.54	2.52	2.23	1.72	1.12	0.61	0.29	0.14	0.07	0.04	0.02	0.01	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-03-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: