

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2447.5 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	55.3V x 55.5H
	At 50% of Imax	37.9V x 38.5H
	At 90% of Imax	18.3V x 19.5H

Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	886.1 lumens per klm.
	To 50% of Imax	648.6 lumens per klm.
	To 90% of Imax	194.2 lumens per klm.

Upward LOR	1.4 %
Downward LOR	98.6 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-03-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.10V I:2.557A P:24.26W PF:0.7839 Freq:59.98Hz Lamp Flux:1994.66x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Brass Spot Light	WEIGHT:
SPEC.:23W 4110K 40°LENS	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:Uplight Shroud

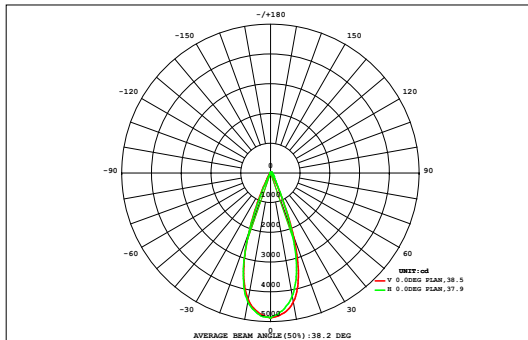

DATA OF LAMP		Eff:82.23lm/W	
MODEL	D7B1-23W-A	Imax (cd)	4882
NOMINAL POWER (W)	23	AVAILABILITY (%)	88.5
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	1766
NOMINAL FLUX (lm)	1994.66	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	1995
TEST VOLTAGE (V)	12	θ @50% (H,V)	39,38DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.11	0.19	0.30	0.44	0.60	0.77	0.92	1.04	1.10	1.10	1.03	0.90	0.74	0.57	0.41	0.27	0.17	0.10	10.7	0.00
45	0.15	0.26	0.42	0.62	0.87	1.14	1.39	1.60	1.71	1.71	1.59	1.37	1.11	0.84	0.59	0.38	0.23	0.13	16.1	0.00
40	0.19	0.34	0.57	0.87	1.26	1.69	2.10	2.42	2.61	2.62	2.44	2.09	1.66	1.21	0.83	0.53	0.31	0.17	23.9	0.00
35	0.23	0.43	0.74	1.19	1.78	2.48	3.27	4.08	4.68	4.70	4.12	3.31	2.50	1.75	1.15	0.70	0.39	0.21	37.7	15.6
30	0.28	0.52	0.94	1.59	2.53	3.96	6.35	9.07	10.9	11.0	9.16	6.43	4.03	2.54	1.56	0.89	0.49	0.25	72.5	59.1
25	0.31	0.61	1.14	2.06	3.80	7.46	13.0	18.0	20.8	20.8	18.1	13.1	7.58	3.87	2.06	1.11	0.57	0.28	135	124
20	0.33	0.67	1.33	2.63	5.90	12.8	20.6	26.1	28.8	28.9	26.4	20.8	13.1	6.12	2.71	1.31	0.64	0.30	199	190
15	0.33	0.69	1.44	3.22	8.48	17.6	26.0	31.2	33.4	33.6	31.6	26.5	18.1	8.85	3.36	1.43	0.66	0.29	247	239
10	0.31	0.67	1.44	3.61	10.1	20.3	28.9	33.7	35.9	36.0	34.1	29.5	21.1	10.6	3.71	1.41	0.61	0.27	272	265
5	0.27	0.60	1.32	3.52	10.2	20.5	29.2	34.1	36.4	36.5	34.6	30.0	21.4	10.6	3.51	1.24	0.53	0.23	275	268
0	0.22	0.49	1.07	2.77	8.29	17.9	26.8	32.3	34.6	34.8	32.8	27.6	18.6	8.43	2.66	0.96	0.41	0.18	251	244
-5	0.16	0.35	0.75	1.77	5.30	12.8	21.2	27.3	30.2	30.4	27.7	21.8	13.0	5.17	1.63	0.64	0.28	0.13	201	194
-10	0.11	0.22	0.47	1.00	2.52	6.61	12.8	18.4	21.4	21.6	18.6	12.9	6.46	2.33	0.88	0.39	0.18	0.08	127	120
-15	0.07	0.13	0.26	0.51	1.02	2.33	4.85	7.93	9.90	9.92	7.91	4.75	2.20	0.90	0.42	0.21	0.10	0.05	53.5	44.2
-20	0.04	0.07	0.13	0.23	0.41	0.70	1.23	1.96	2.54	2.53	1.91	1.16	0.63	0.35	0.18	0.09	0.05	0.04	14.3	2.09
-25	0.04	0.04	0.06	0.09	0.14	0.22	0.32	0.42	0.49	0.48	0.40	0.29	0.19	0.11	0.06	0.04	0.03	0.03	3.45	0.00
-30	0.03	0.03	0.04	0.04	0.05	0.06	0.07	0.08	0.09	0.09	0.07	0.06	0.04	0.04	0.03	0.03	0.03	0.02	0.91	0.00
-35	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.47	0.00
-40	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.47	0.00
-45	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.47	0.00
HORIZONTAL (DEG)																				
Φ t	3.19	6.35	12.4	26.2	63.3	129	199	250	276	277	253	203	132	64.3	25.8	11.7	5.69	2.76	1940	---
Φ a	0.00	0.00	0.00	8.09	51.3	119	190	241	267	268	244	193	122	52.7	8.56	0.00	0.00	0.00	---	1766

one-half-peak spread: U:19.1,D:18.9 , L:19.1,R:19.6


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-03-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.10V I:2.557A P:24.26W PF:0.7839 Freq:59.98Hz Lamp Flux:1994.66x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Brass Spot Light	WEIGHT:
SPEC.:23W 4110K 40°LENS	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:Uplight Shroud

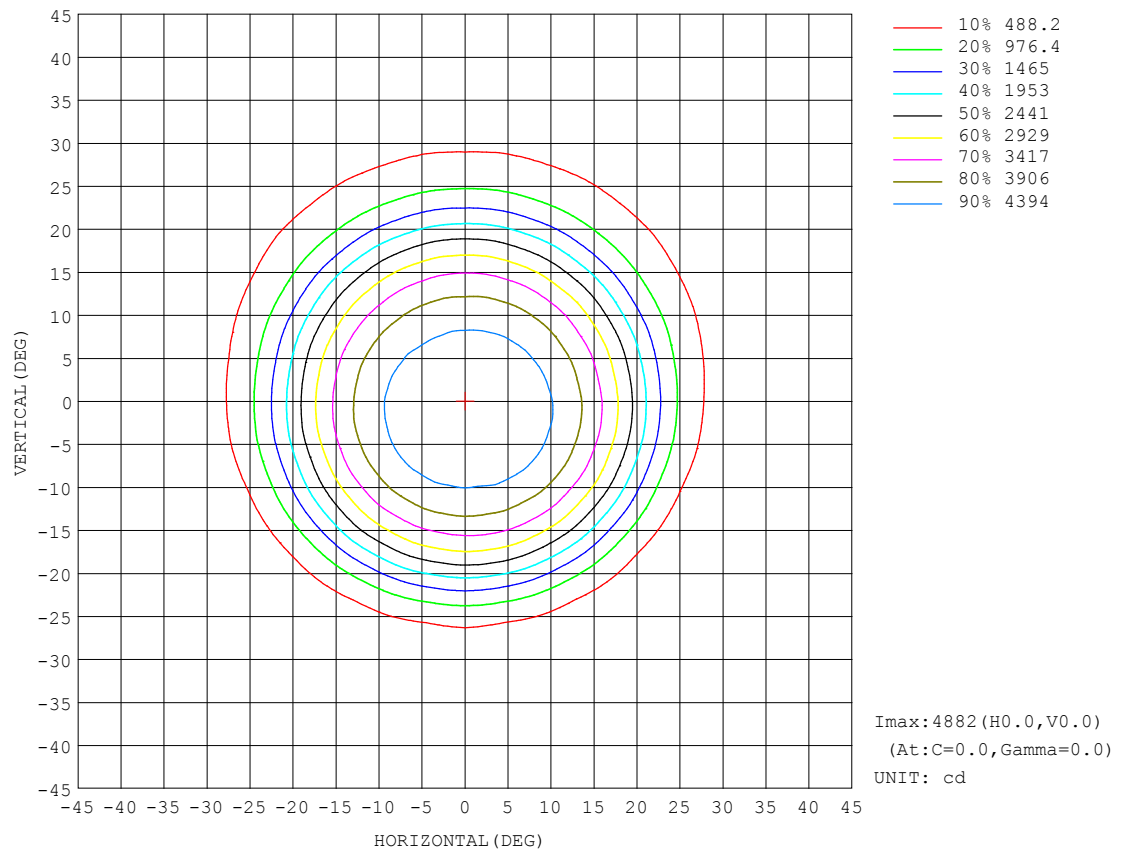


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-03-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.10V I:2.557A P:24.26W PF:0.7839 Freq:59.98Hz Lamp Flux:1994.66x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Brass Spot Light	WEIGHT:
SPEC.:23W 4110K 40°LENS	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:Uplight Shroud

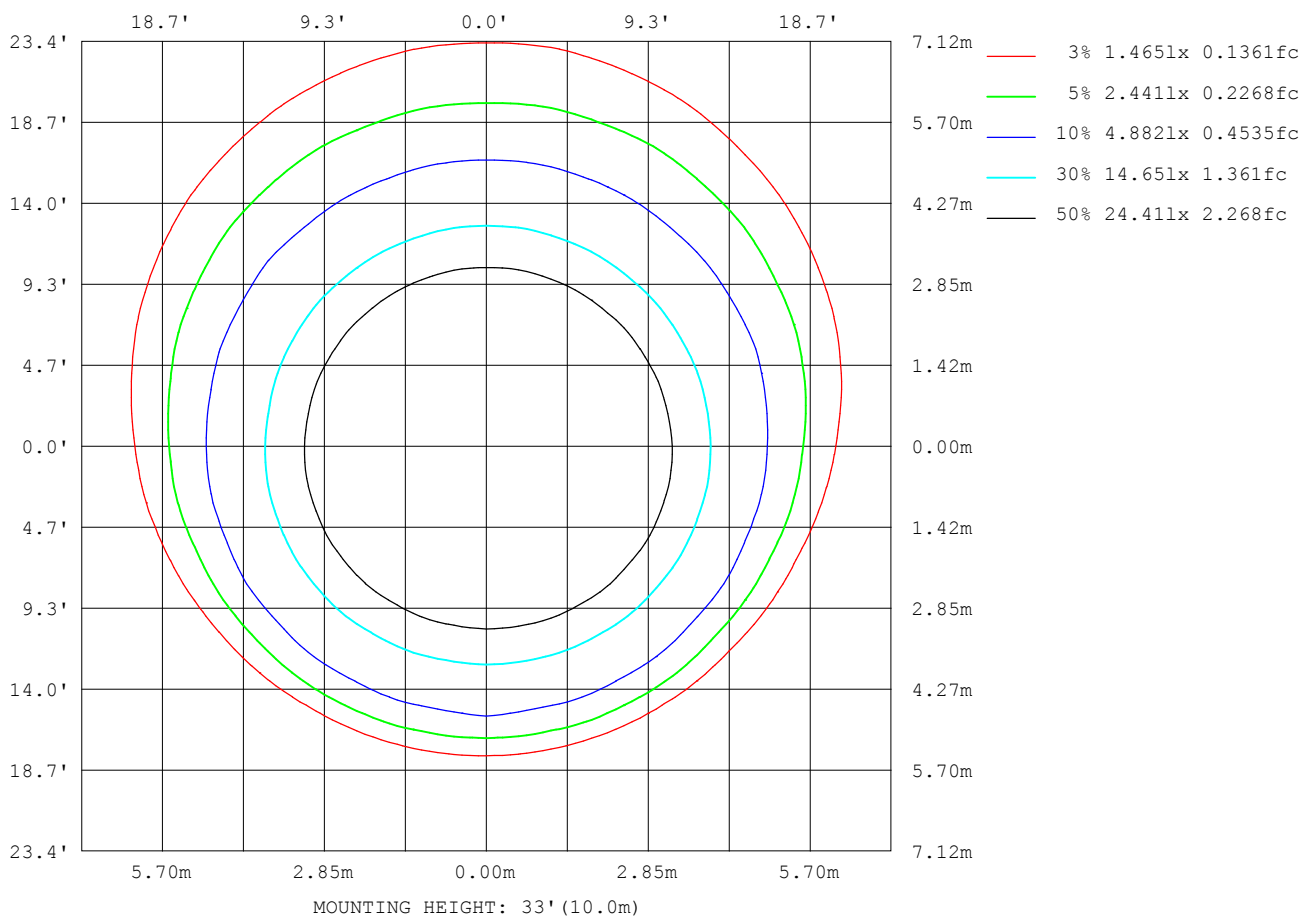

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-03-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

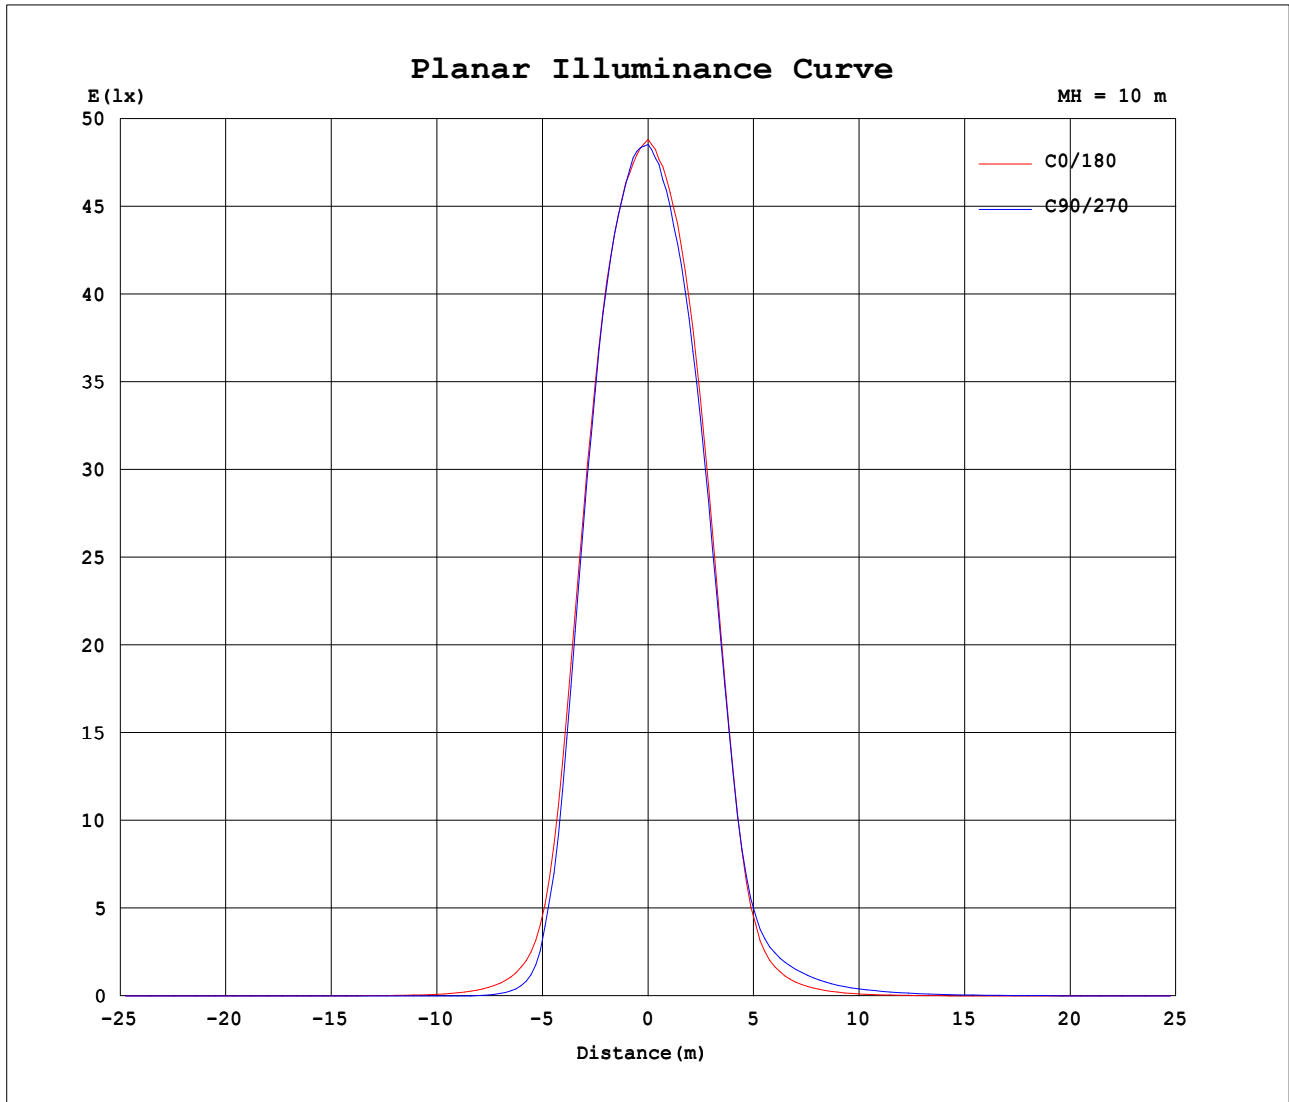


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-03-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.10V I:2.557A P:24.26W PF:0.7839 Freq:59.98Hz Lamp Flux:1994.66x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Brass Spot Light	WEIGHT:
SPEC.:23W 4110K 40°LENS	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:Uplight Shroud

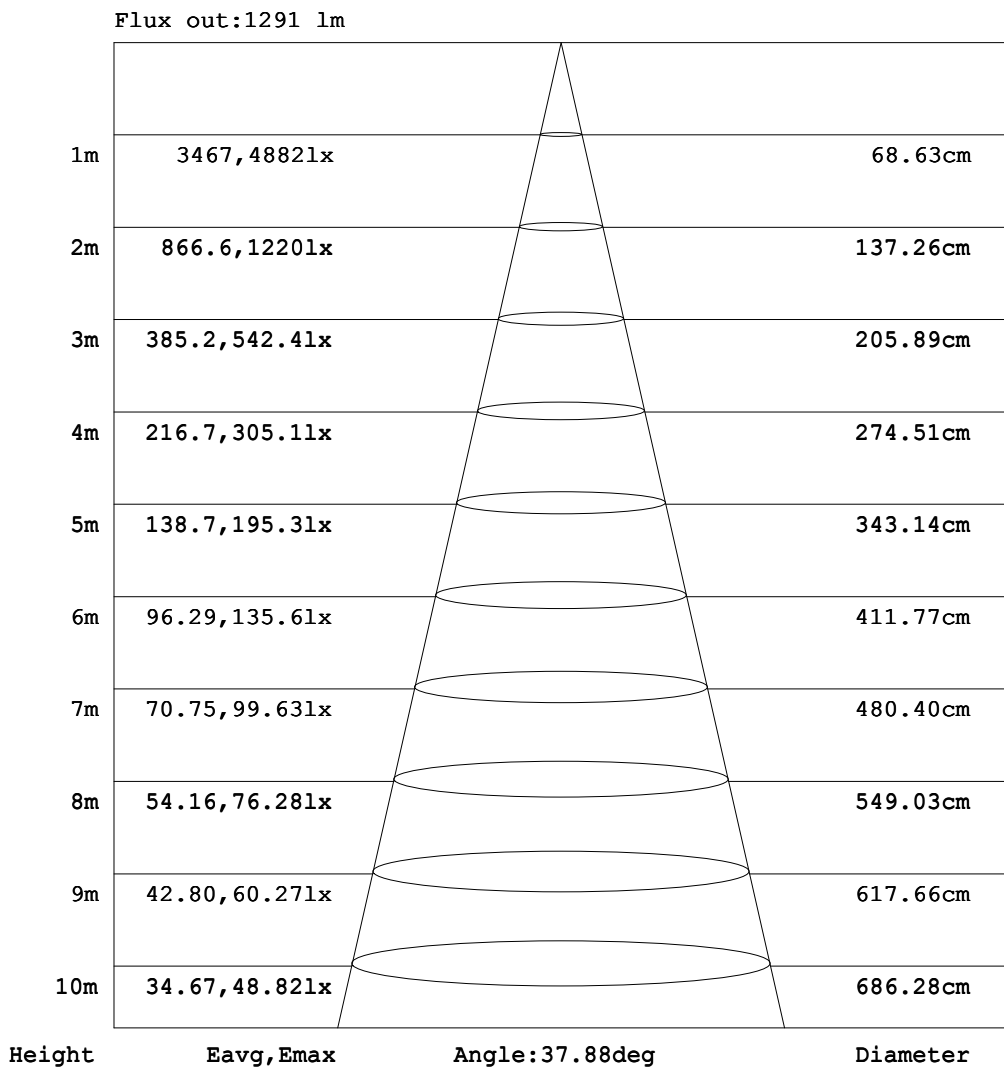

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2026-03-26

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.10V I:2.557A P:24.26W PF:0.7839 Freq:59.98Hz Lamp Flux:1994.66x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Brass Spot Light	WEIGHT:
SPEC.:23W 4110K 40°LENS	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:Uplight Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.64	1.78	4.05	7.47	11.5	15.4	18.6	20.7	22.0	23.4	24.1
-170	0.00	0.00	0.00	0.02	0.06	0.14	0.33	0.84	2.10	4.67	8.03	12.0	16.4	20.5	23.8	25.9	26.5	26.4	26.4
-160	0.00	0.00	0.00	0.04	0.10	0.24	0.47	0.90	1.80	3.50	6.04	9.20	12.7	16.3	19.6	22.3	24.2	25.3	25.7
-150	0.00	0.00	0.00	0.04	0.10	0.21	0.37	0.63	1.17	2.09	3.58	5.59	7.95	10.4	12.8	14.9	16.5	17.7	17.9
-140	0.00	0.00	0.00	0.02	0.07	0.14	0.24	0.45	0.72	1.11	1.70	2.59	3.71	4.99	6.29	7.45	8.38	8.99	9.16
-130	0.00	0.00	0.00	0.01	0.03	0.07	0.17	0.30	0.42	0.59	0.81	1.10	1.44	1.81	2.22	2.64	2.96	3.17	3.25
-120	0.00	0.00	0.00	0.00	0.01	0.02	0.08	0.16	0.22	0.29	0.41	0.54	0.63	0.74	0.86	0.97	1.01	1.08	1.13
-110	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.05	0.06	0.13	0.18	0.21	0.24	0.28	0.35	0.37	0.39	0.43	0.46
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.03	0.02	0.06	0.11	0.11	0.11	0.13	0.14
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.01	0.03	0.01	0.06	0.00	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.02	0.09	0.18	0.30	0.32	0.50	0.52	0.75	0.97	1.27	1.57	1.87	2.05	2.23	2.27	2.24	2.20	2.10
-40	0.00	0.07	0.22	0.50	0.81	1.21	1.75	2.51	3.39	4.21	4.82	5.15	5.16	5.06	4.67	4.42	4.26	4.15	3.98
-30	0.00	0.12	0.41	0.88	1.52	2.37	3.51	4.77	5.86	6.67	7.32	9.83	15.8	27.0	42.4	62.7	92.9	118	130
-20	0.00	0.17	0.61	1.27	2.23	3.58	5.09	6.51	7.87	11.0	20.3	38.4	75.4	144	329	803	1425	1932	2128
-10	0.00	0.21	0.78	1.64	2.87	4.49	6.21	7.91	11.9	23.3	46.2	97.0	201	537	1517	2790	3744	4251	4403
0	0.00	0.24	0.92	1.92	3.34	5.11	6.90	9.20	17.4	34.8	72.6	145	314	874	2164	3503	4327	4713	4882
10	0.00	0.29	1.04	2.13	3.66	5.47	7.32	10.8	20.8	40.2	81.2	154	298	646	1528	2715	3594	4060	4205
20	0.00	0.32	1.10	2.21	3.75	5.55	7.32	10.7	20.0	37.8	70.2	122	207	336	558	946	1518	1961	2126
30	0.00	0.32	1.10	2.17	3.62	5.24	6.90	9.18	15.9	28.2	48.9	80.3	124	180	245	314	370	420	432
40	0.00	0.31	1.05	2.02	3.26	4.70	6.20	7.73	10.9	17.7	28.9	45.0	65.6	89.5	116	140	161	176	180
50	0.00	0.28	0.95	1.78	2.77	3.99	5.24	6.48	7.78	10.1	14.5	21.0	29.5	39.7	50.6	60.8	68.8	73.7	75.0
60	0.00	0.26	0.82	1.48	2.25	3.15	4.15	5.15	6.02	6.88	7.79	9.17	11.4	14.3	17.2	20.1	22.6	23.9	24.3
70	0.00	0.23	0.66	1.16	1.71	2.34	3.02	3.70	4.39	4.96	5.44	5.87	6.26	6.63	6.96	7.21	7.42	7.50	7.49
80	0.00	0.19	0.49	0.84	1.22	1.64	2.07	2.44	2.82	3.15	3.48	3.74	4.00	4.23	4.44	4.55	4.63	4.65	4.65
90	0.00	0.15	0.31	0.54	0.77	1.04	1.31	1.49	1.67	1.83	1.98	2.06	2.13	2.22	2.30	2.30	2.30	2.31	2.33
100	0.00	0.11	0.16	0.29	0.40	0.55	0.70	0.79	0.86	0.94	1.02	1.04	1.06	1.08	1.11	1.08	1.06	1.04	1.03
110	0.00	0.08	0.03	0.11	0.11	0.18	0.26	0.29	0.31	0.33	0.37	0.38	0.38	0.36	0.38	0.35	0.31	0.30	0.32
120	0.00	0.04	0.00	0.02	0.00	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.01
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.35	0.83	1.44	2.09	2.66	3.05	3.18
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.50	1.36	2.75	4.52	6.44	8.21	9.69	10.6	11.0
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.66	1.84	3.90	6.71	9.81	12.8	15.2	16.9	17.8	18.3
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.41	1.36	3.33	6.40	10.1	13.9	17.0	19.1	20.1	20.6	21.1
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.64	1.78	4.05	7.47	11.5	15.4	18.6	20.7	22.0	23.4	24.1

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2026-03-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.10V I:2.557A P:24.26W PF:0.7839 Freq:59.98Hz Lamp Flux:1994.66x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Brass Spot Light	WEIGHT:
SPEC.:23W 4110K 40°LENS	DIM.:	SERIAL No.:1
MFR.: Lumien Enterprise,Inc.	SUR.:	Shielding Angle:Uplight Shroud

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	24.9	25.5	25.9	24.6	21.5	17.3	12.7	8.48	4.96	2.48	1.09	0.49	0.27	0.13	0.01	0.00	0.00	0.00	
-170	26.7	26.7	25.9	23.7	20.3	16.0	11.7	7.80	4.58	2.35	1.09	0.54	0.28	0.15	0.03	0.00	0.00	0.00	
-160	25.4	24.2	22.2	19.5	16.1	12.5	9.02	5.92	3.44	1.78	0.91	0.52	0.28	0.14	0.04	0.01	0.00	0.00	
-150	17.6	16.5	14.8	12.7	10.3	7.88	5.53	3.54	2.08	1.18	0.66	0.39	0.24	0.14	0.04	0.01	0.00	0.00	
-140	8.97	8.35	7.41	6.27	4.97	3.70	2.59	1.73	1.14	0.76	0.48	0.28	0.15	0.09	0.05	0.00	0.00	0.00	
-130	3.17	2.95	2.65	2.24	1.82	1.46	1.14	0.83	0.62	0.46	0.32	0.18	0.11	0.04	0.02	0.00	0.00	0.00	
-120	1.08	1.03	0.99	0.89	0.75	0.66	0.57	0.44	0.31	0.25	0.17	0.10	0.03	0.01	0.00	0.00	0.00	0.00	
-110	0.43	0.40	0.39	0.37	0.30	0.26	0.24	0.19	0.14	0.09	0.06	0.05	0.02	0.00	0.00	0.00	0.00	0.00	
-100	0.13	0.11	0.11	0.11	0.07	0.03	0.04	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00	0.00	
-50	2.05	1.94	1.76	1.59	1.32	1.08	0.77	0.59	0.31	0.28	0.15	0.18	0.02	0.10	0.00	0.06	0.01	0.00	
-40	3.94	3.86	3.88	4.10	4.34	4.44	4.34	3.95	3.26	2.43	1.65	1.04	0.64	0.41	0.11	0.14	0.04	0.00	
-30	114	86.3	56.4	36.5	21.2	11.3	7.26	6.05	5.59	4.84	3.78	2.58	1.61	0.90	0.47	0.26	0.08	0.00	
-20	1947	1427	781	304	127	60.5	31.4	15.2	8.26	6.54	5.42	4.09	2.71	1.58	0.85	0.40	0.11	0.00	
-10	4293	3831	2886	1549	517	182	81.7	38.1	18.2	9.17	6.66	5.21	3.67	2.23	1.20	0.55	0.14	0.00	
0	4741	4411	3623	2284	909	309	135	62.8	29.6	13.9	7.65	6.01	4.36	2.76	1.48	0.69	0.16	0.00	
10	4102	3657	2766	1575	677	301	149	74.8	35.8	17.4	8.88	6.38	4.71	3.04	1.67	0.78	0.19	0.00	
20	1973	1532	961	561	338	202	116	63.6	33.3	17.1	8.92	6.42	4.78	3.11	1.74	0.81	0.21	0.00	
30	423	374	315	241	173	117	74.0	43.4	24.8	13.6	7.85	6.09	4.54	2.98	1.70	0.80	0.21	0.00	
40	175	159	137	112	84.9	60.4	40.2	25.6	15.6	9.37	6.86	5.48	4.04	2.66	1.55	0.75	0.19	0.00	
50	72.9	67.1	58.0	47.1	36.3	26.6	18.6	12.8	8.86	6.93	5.77	4.58	3.37	2.24	1.34	0.65	0.16	0.00	
60	23.5	21.8	18.8	15.7	12.7	10.1	8.20	6.99	6.11	5.32	4.49	3.55	2.60	1.77	1.08	0.53	0.14	0.00	
70	7.37	7.17	6.84	6.46	6.06	5.63	5.22	4.82	4.32	3.74	3.12	2.50	1.87	1.30	0.81	0.39	0.11	0.00	
80	4.53	4.39	4.20	3.98	3.72	3.45	3.19	2.92	2.59	2.29	1.97	1.65	1.26	0.88	0.55	0.24	0.08	0.00	
90	2.23	2.14	2.06	1.97	1.85	1.72	1.64	1.55	1.41	1.26	1.12	0.98	0.75	0.52	0.31	0.10	0.05	0.00	
100	0.97	0.92	0.90	0.87	0.81	0.75	0.73	0.71	0.66	0.59	0.52	0.46	0.33	0.19	0.13	0.01	0.01	0.00	
110	0.25	0.22	0.22	0.21	0.16	0.13	0.15	0.14	0.11	0.11	0.09	0.10	0.08	0.00	0.04	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	3.05	2.67	2.11	1.47	0.86	0.40	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	10.6	9.69	8.20	6.44	4.53	2.77	1.41	0.54	0.14	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	18.0	17.0	15.3	12.8	9.78	6.65	3.87	1.86	0.71	0.18	0.00	0.00	0.02	0.03	0.00	0.00	0.00	0.00	
170	21.3	20.5	19.3	17.1	13.8	10.0	6.29	3.28	1.41	0.75	0.34	0.20	0.13	0.08	0.01	0.00	0.00	0.00	
180	24.9	25.5	25.9	24.6	21.5	17.3	12.7	8.48	4.96	2.48	1.09	0.49	0.27	0.13	0.01	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:ADMIN

Test Date:2026-03-26

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352

Humidity:65.0%

Test Distance:13.563m [K=1.0000]

Remarks: