

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1669.3 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	70.0V x 69.7H
	At 50% of Imax	44.3V x 47.1H
	At 90% of Imax	26.2V x 25.8H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	920.7 lumens per klm.
	To 50% of Imax	648.8 lumens per klm.
	To 90% of Imax	257.8 lumens per klm.
	Upward LOR	1.4 %
	Downward LOR	98.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.18V I:2.404A P:22.48W PF:0.7679 Freq:59.97Hz Lamp Flux:1393.42x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Spotlight	WEIGHT:
SPEC.:23W 4110K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

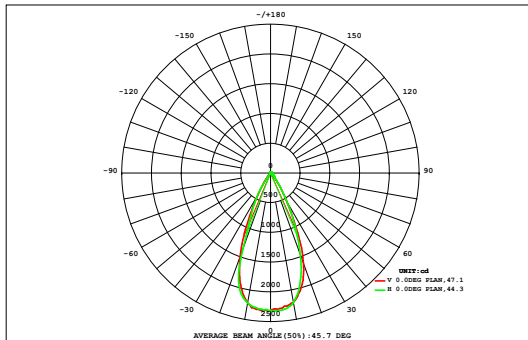

DATA OF LAMP		Eff:61.98lm/W	
MODEL	D9B1-23W-A	Imax(cd)	2326
NOMINAL POWER(W)	23	AVAILABILITY(%)	91.9
RATED VOLTAGE(V)	12	Avai. FLUX(lm)	1280
NOMINAL FLUX(lm)	1393.42	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1393
TEST VOLTAGE(V)	12	θ @50%(H,V)	47,44DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.07	0.11	0.18	0.26	0.36	0.47	0.60	0.71	0.80	0.80	0.72	0.61	0.48	0.36	0.26	0.17	0.11	0.07	7.14	0.00
45	0.09	0.16	0.25	0.38	0.57	0.81	1.08	1.33	1.50	1.52	1.38	1.14	0.86	0.61	0.40	0.26	0.15	0.09	12.6	1.14
40	0.12	0.21	0.36	0.60	0.99	1.50	2.07	2.59	2.94	2.98	2.69	2.21	1.64	1.10	0.67	0.38	0.22	0.12	23.4	16.2
35	0.15	0.28	0.53	0.99	1.72	2.71	3.88	4.93	5.58	5.63	5.07	4.10	2.97	1.96	1.15	0.60	0.30	0.15	42.7	37.7
30	0.19	0.37	0.79	1.58	2.85	4.67	6.65	8.26	9.12	9.19	8.46	6.94	5.00	3.22	1.87	0.95	0.43	0.20	70.7	66.8
25	0.22	0.50	1.13	2.34	4.41	7.20	9.91	11.9	12.9	12.9	12.1	10.3	7.66	4.85	2.76	1.40	0.61	0.25	103	99.9
20	0.25	0.63	1.49	3.19	6.14	9.71	12.7	14.7	15.7	15.7	14.9	13.1	10.3	6.70	3.71	1.87	0.80	0.30	132	129
15	0.27	0.73	1.78	3.95	7.62	11.6	14.6	16.5	17.2	17.2	16.4	14.8	12.1	8.36	4.54	2.26	0.97	0.34	151	148
10	0.28	0.78	1.93	4.37	8.46	12.5	15.5	17.1	17.6	17.5	16.9	15.6	13.1	9.32	5.06	2.49	1.06	0.36	160	157
5	0.26	0.75	1.91	4.33	8.37	12.5	15.5	17.1	17.5	17.4	16.9	15.6	13.1	9.23	5.01	2.46	1.03	0.34	159	157
0	0.22	0.63	1.70	3.82	7.35	11.5	14.8	16.6	17.2	17.1	16.5	15.0	12.1	8.08	4.42	2.18	0.87	0.29	150	148
-5	0.18	0.47	1.32	3.03	5.76	9.26	12.9	15.2	16.1	16.1	15.3	13.2	9.84	6.32	3.55	1.70	0.65	0.22	131	128
-10	0.13	0.31	0.87	2.13	4.07	6.51	9.18	11.7	13.1	13.1	11.9	9.57	6.98	4.51	2.55	1.14	0.42	0.16	98.3	95.3
-15	0.09	0.19	0.47	1.23	2.56	4.18	5.78	7.05	7.74	7.81	7.26	6.07	4.51	2.92	1.51	0.62	0.25	0.10	60.3	57.0
-20	0.06	0.12	0.23	0.52	1.23	2.30	3.37	4.21	4.63	4.68	4.35	3.59	2.56	1.47	0.68	0.30	0.14	0.06	34.5	30.4
-25	0.04	0.07	0.12	0.20	0.38	0.79	1.38	1.93	2.26	2.29	2.03	1.52	0.93	0.49	0.26	0.15	0.08	0.04	14.9	8.15
-30	0.03	0.04	0.07	0.09	0.13	0.17	0.25	0.34	0.40	0.42	0.39	0.30	0.22	0.16	0.11	0.07	0.04	0.02	3.24	0.00
-35	0.02	0.02	0.04	0.05	0.06	0.06	0.06	0.05	0.03	0.03	0.06	0.08	0.08	0.07	0.05	0.03	0.02	0.01	0.81	0.00
-40	0.02	0.02	0.04	0.05	0.06	0.06	0.06	0.05	0.03	0.03	0.06	0.08	0.08	0.07	0.05	0.03	0.02	0.01	0.81	0.00
-45	0.02	0.02	0.04	0.05	0.06	0.06	0.06	0.05	0.03	0.03	0.06	0.08	0.08	0.07	0.05	0.03	0.02	0.01	0.81	0.00
HORIZONTAL (DEG)																				
Φ t	2.68	6.39	15.2	33.1	63.0	98.4	130	152	162	162	153	134	104	69.7	38.6	19.0	8.15	3.13	1356	---
Φ a	0.00	0.00	7.56	28.2	59.0	94.8	127	149	160	160	150	131	101	65.8	33.9	13.1	0.54	0.00	---	1280

one-half-peak spread: U:16.3,D:21.2 , L:15.1,R:17.2


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.18V I:2.404A P:22.48W PF:0.7679 Freq:59.97Hz Lamp Flux:1393.42x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Spotlight	WEIGHT:
SPEC.:23W 4110K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

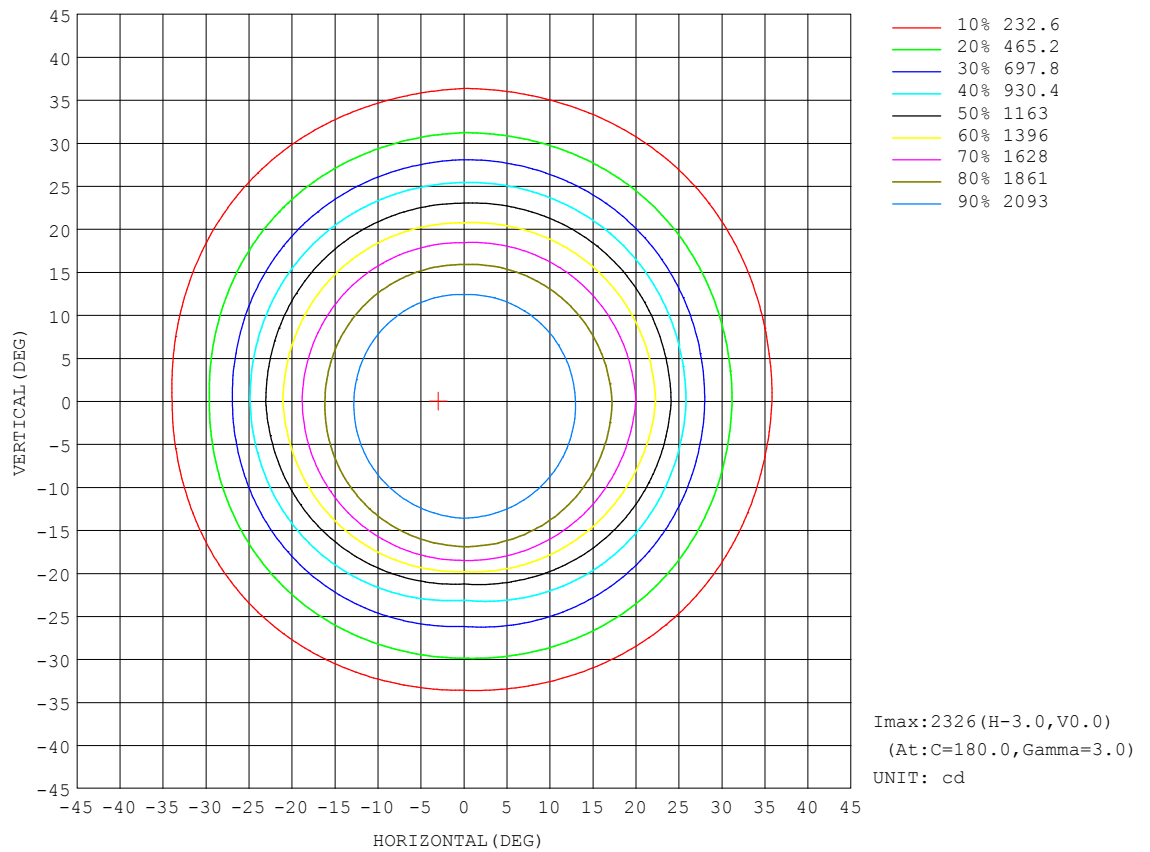


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.18V I:2.404A P:22.48W PF:0.7679 Freq:59.97Hz Lamp Flux:1393.42x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Spotlight	WEIGHT:
SPEC.:23W 4110K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

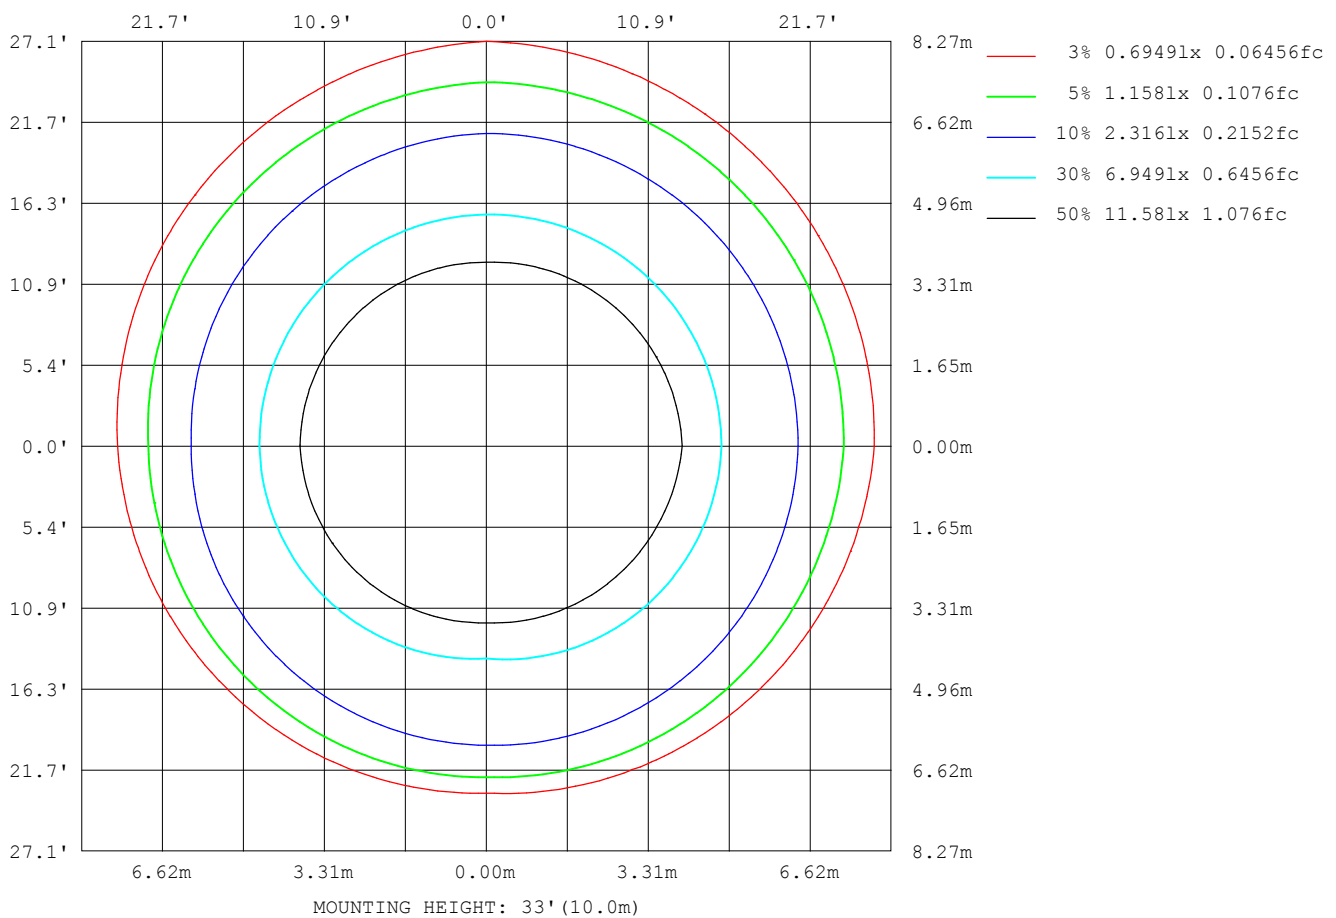

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

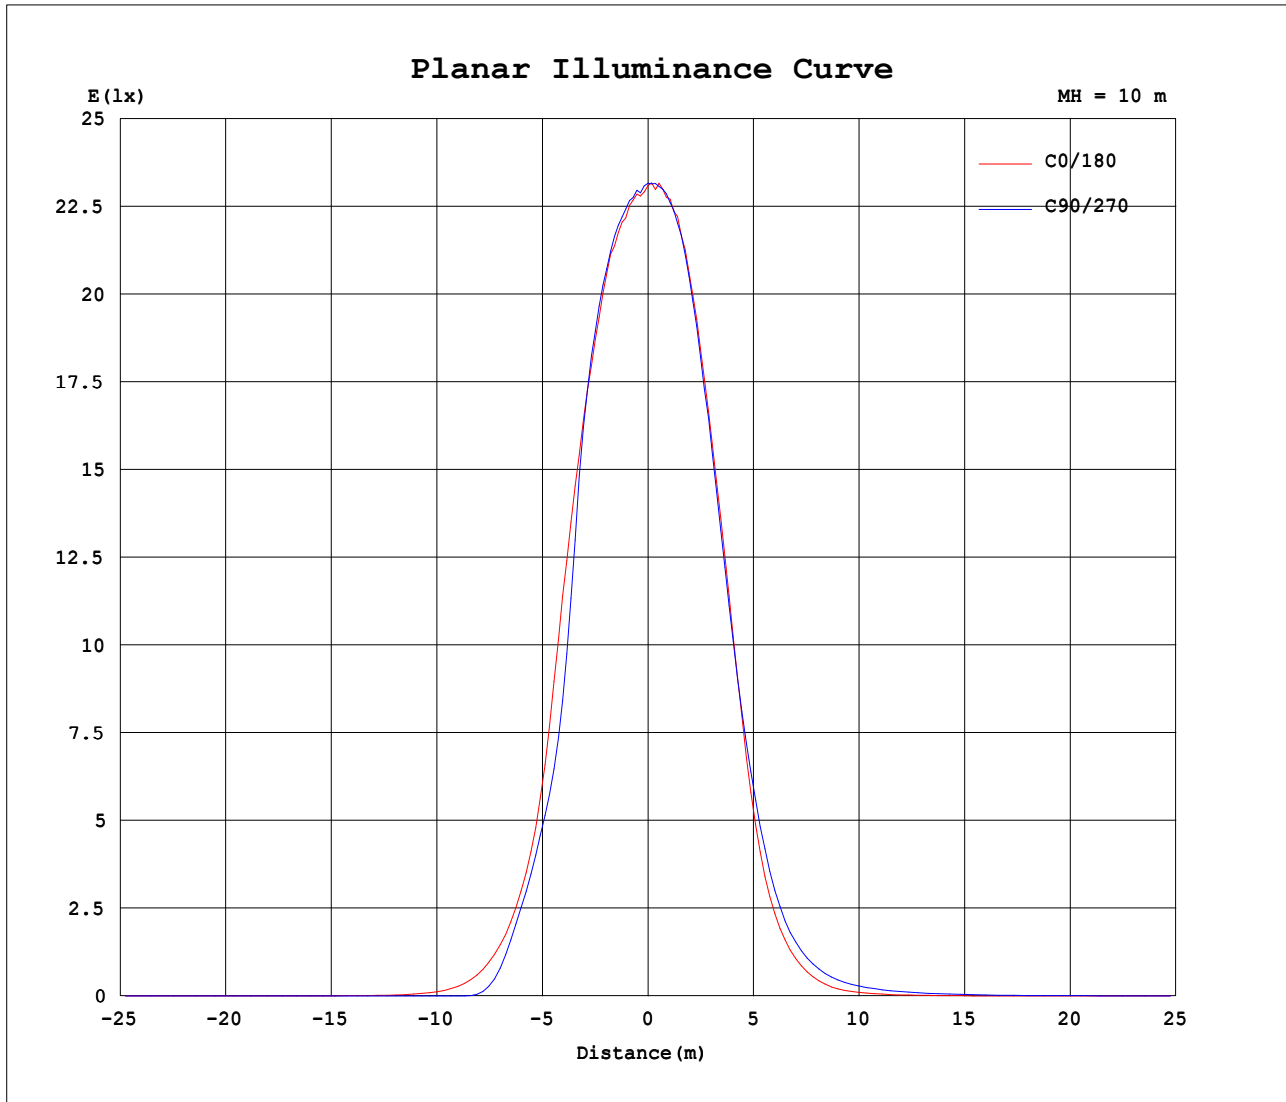


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.18V I:2.404A P:22.48W PF:0.7679 Freq:59.97Hz Lamp Flux:1393.42x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Spotlight	WEIGHT:
SPEC.:23W 4110K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

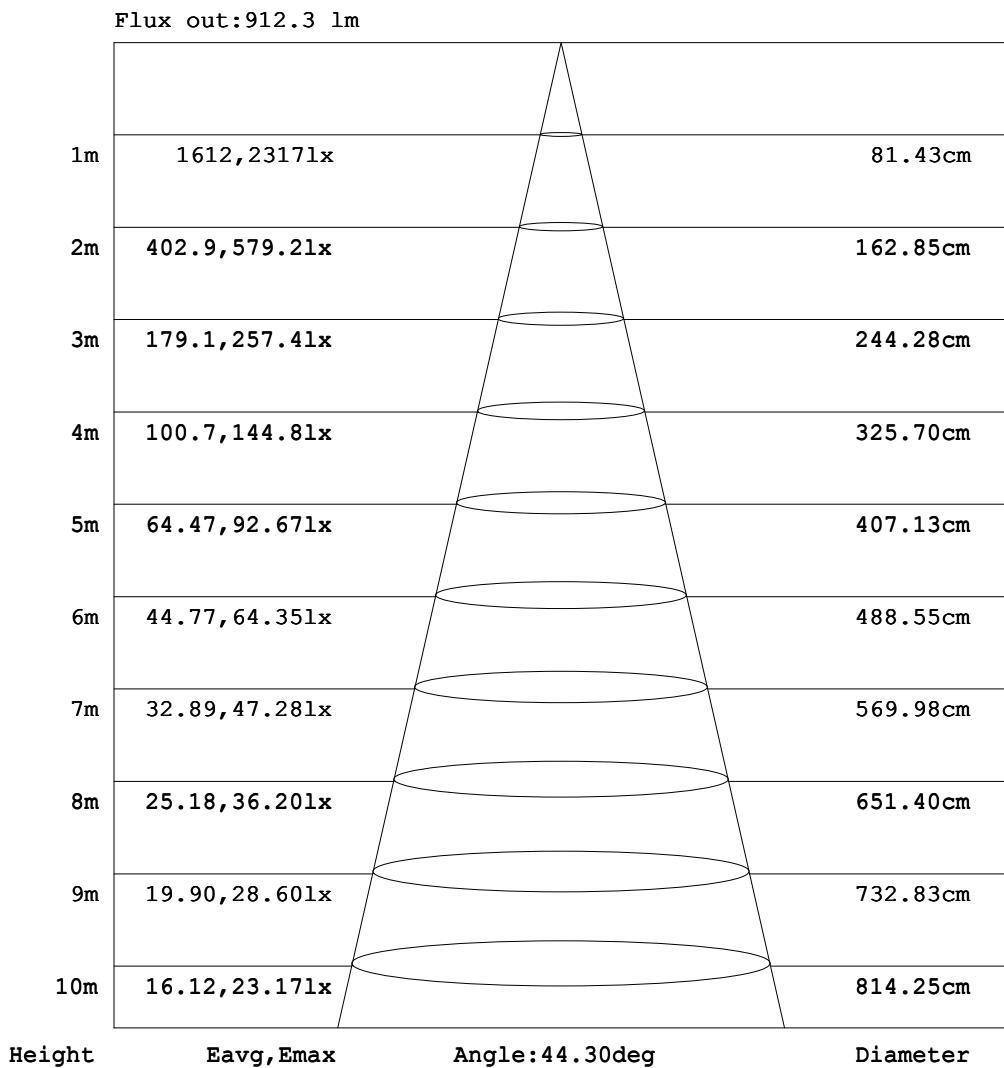

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:2.404A P:22.48W PF:0.7679 Freq:59.97Hz Lamp Flux:1393.42x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Spotlight	WEIGHT:
SPEC.:23W 4110K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.34	1.05	2.27	4.00	5.99	8.05	9.99	11.7	13.2	14.8	16.4	17.1
-170	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.38	1.08	2.27	3.94	5.96	8.10	10.1	12.0	13.7	15.1	16.3	17.1
-160	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.30	0.87	1.83	3.20	4.92	6.83	8.77	10.6	12.2	13.6	14.7	15.5
-150	0.00	0.00	0.00	0.00	0.02	0.04	0.09	0.19	0.54	1.16	2.07	3.27	4.67	6.16	7.64	8.98	10.1	11.0	11.5
-140	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.14	0.27	0.55	1.03	1.68	2.46	3.33	4.25	5.10	5.84	6.41	6.76
-130	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.09	0.15	0.25	0.40	0.63	0.95	1.32	1.71	2.11	2.47	2.75	2.93
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.07	0.11	0.17	0.23	0.31	0.41	0.51	0.65	0.75	0.83	0.90
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.07	0.09	0.11	0.14	0.16	0.18	0.20	0.21
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.01	0.03	0.08	0.11	0.13	0.15	0.17	0.17	0.16	0.14	0.12	0.10	0.07	0.03	0.00
-70	0.00	0.00	0.01	0.11	0.21	0.32	0.40	0.51	0.57	0.60	0.63	0.63	0.60	0.53	0.46	0.36	0.25	0.13	0.00
-60	0.00	0.00	0.11	0.30	0.48	0.71	0.87	1.06	1.17	1.26	1.31	1.28	1.23	1.10	0.94	0.75	0.52	0.26	0.00
-50	0.00	0.00	0.21	0.49	0.83	1.15	1.43	1.72	1.92	2.06	2.13	2.15	2.25	2.39	2.68	2.79	2.52	1.88	1.03
-40	0.00	0.02	0.34	0.74	1.16	1.61	2.07	2.45	2.76	3.15	4.17	6.33	8.60	10.7	12.4	13.1	12.0	9.09	3.61
-30	0.00	0.05	0.43	0.94	1.51	2.11	2.69	3.21	4.09	6.82	11.7	19.1	31.8	63.0	141	259	365	434	458
-20	0.00	0.09	0.52	1.10	1.79	2.53	3.24	4.15	7.14	14.0	26.9	59.7	157	348	592	851	1096	1296	1366
-10	0.00	0.11	0.58	1.25	2.04	2.90	3.78	5.40	11.0	23.1	53.4	145	351	699	1189	1714	2038	2183	2223
0	0.00	0.12	0.61	1.33	2.19	3.15	4.12	6.29	13.4	29.7	75.7	195	437	913	1509	1950	2227	2302	2310
10	0.00	0.14	0.64	1.36	2.26	3.37	4.80	7.55	15.2	31.0	69.6	169	365	733	1248	1694	1996	2162	2211
20	0.00	0.13	0.63	1.32	2.19	3.35	4.94	7.52	13.8	26.0	48.6	101	206	380	650	965	1243	1416	1472
30	0.00	0.11	0.59	1.24	2.03	3.06	4.56	6.75	10.7	18.5	31.1	51.2	85.9	145	228	324	427	509	548
40	0.00	0.09	0.53	1.10	1.75	2.55	3.72	5.39	7.81	11.5	17.9	27.0	38.9	53.6	71.8	93.3	115	134	144
50	0.00	0.09	0.42	0.87	1.44	2.05	2.76	3.79	5.20	7.10	9.67	12.9	17.6	23.3	29.4	35.6	41.4	46.2	49.6
60	0.00	0.09	0.32	0.68	1.07	1.55	2.01	2.57	3.17	3.96	5.03	6.27	7.75	9.33	11.2	12.8	14.5	15.9	16.9
70	0.00	0.09	0.22	0.46	0.73	1.05	1.37	1.73	2.07	2.40	2.77	3.15	3.52	3.89	4.29	4.66	5.01	5.30	5.53
80	0.00	0.09	0.19	0.31	0.44	0.61	0.81	1.00	1.21	1.41	1.63	1.84	2.03	2.22	2.42	2.60	2.77	2.93	3.07
90	0.00	0.09	0.18	0.26	0.35	0.44	0.53	0.61	0.70	0.79	0.88	0.97	1.05	1.14	1.23	1.32	1.40	1.49	1.58
100	0.00	0.08	0.15	0.22	0.27	0.31	0.35	0.38	0.41	0.44	0.46	0.49	0.51	0.53	0.56	0.58	0.61	0.64	0.68
110	0.00	0.07	0.13	0.17	0.19	0.21	0.22	0.22	0.21	0.20	0.18	0.15	0.11	0.06	0.02	0.00	0.00	0.00	0.00
120	0.00	0.06	0.10	0.13	0.13	0.13	0.11	0.08	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.05	0.08	0.09	0.09	0.07	0.01	0.00	0.00	0.00	0.00	0.04	0.10	0.15	0.28	0.39	0.46	0.50	0.49
140	0.00	0.04	0.06	0.06	0.05	0.00	0.00	0.00	0.00	0.09	0.26	0.60	1.05	1.53	2.04	2.52	2.87	3.08	3.10
150	0.00	0.03	0.04	0.04	0.02	0.00	0.00	0.00	0.17	0.54	1.17	2.02	3.06	4.19	5.27	6.19	6.87	7.27	7.35
160	0.00	0.02	0.03	0.02	0.00	0.00	0.00	0.11	0.51	1.27	2.39	3.86	5.49	7.11	8.56	9.74	10.5	11.0	11.1
170	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.26	0.87	1.94	3.48	5.36	7.33	9.18	10.8	12.1	13.2	13.9	14.1
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.34	1.05	2.27	4.00	5.99	8.05	9.99	11.7	13.2	14.8	16.4	17.1

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2025-02-26

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:2.404A P:22.48W PF:0.7679 Freq:59.97Hz Lamp Flux:1393.42x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Spotlight	WEIGHT:
SPEC.:23W 4110K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	17.2	16.5	15.7	14.6	12.9	10.8	8.47	6.11	4.01	2.31	1.14	0.46	0.16	0.00	0.00	0.00	0.00	0.00	
-170	16.8	16.3	15.4	14.1	12.4	10.3	7.99	5.74	3.74	2.18	1.09	0.45	0.15	0.01	0.00	0.00	0.00	0.00	
-160	15.2	14.5	13.5	12.1	10.4	8.44	6.45	4.59	2.95	1.68	0.84	0.35	0.10	0.01	0.00	0.00	0.00	0.00	
-150	11.3	10.7	9.80	8.61	7.24	5.79	4.34	3.00	1.89	1.08	0.54	0.22	0.04	0.02	0.00	0.00	0.00	0.00	
-140	6.59	6.20	5.60	4.85	3.98	3.12	2.30	1.57	0.96	0.56	0.27	0.09	0.03	0.01	0.00	0.00	0.00	0.00	
-130	2.84	2.64	2.35	1.99	1.63	1.25	0.92	0.63	0.40	0.23	0.09	0.05	0.02	0.01	0.00	0.00	0.00	0.00	
-120	0.86	0.80	0.72	0.59	0.49	0.37	0.28	0.18	0.11	0.07	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.20	0.18	0.16	0.14	0.11	0.09	0.07	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.02	0.04	0.06	0.08	0.09	0.09	0.09	0.08	0.07	0.05	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.11	0.21	0.30	0.37	0.43	0.47	0.49	0.48	0.46	0.41	0.35	0.27	0.18	0.09	0.00	0.00	0.00	0.00	
-60	0.22	0.44	0.64	0.81	0.95	1.05	1.10	1.10	1.05	0.95	0.82	0.66	0.49	0.31	0.14	0.00	0.00	0.00	
-50	1.82	2.37	2.51	2.26	1.93	1.81	1.81	1.82	1.78	1.65	1.43	1.17	0.87	0.58	0.32	0.08	0.00	0.00	
-40	11.4	15.8	17.1	15.4	12.3	8.93	5.70	3.37	2.57	2.35	2.09	1.73	1.31	0.88	0.50	0.17	0.00	0.00	
-30	445	387	286	168	82.7	42.8	23.0	12.1	5.80	3.29	2.74	2.30	1.75	1.19	0.67	0.26	0.00	0.00	
-20	1315	1140	903	644	407	201	81.1	33.8	14.6	5.91	3.40	2.81	2.16	1.46	0.84	0.33	0.00	0.00	
-10	2183	2055	1772	1293	783	432	197	72.8	26.9	10.1	4.33	3.22	2.49	1.68	0.95	0.38	0.00	0.00	
0	2279	2214	1993	1628	1034	542	267	104	35.7	12.8	5.02	3.52	2.70	1.81	1.00	0.40	0.00	0.00	
10	2162	2013	1752	1352	816	447	220	89.0	34.9	14.3	6.48	4.24	2.96	1.90	1.06	0.44	0.02	0.00	
20	1435	1287	1017	701	440	250	123	55.6	26.6	12.5	6.78	4.51	2.98	1.86	1.06	0.44	0.04	0.00	
30	521	449	351	254	165	96.9	55.1	31.6	17.4	9.88	6.28	4.16	2.70	1.71	0.97	0.42	0.06	0.00	
40	136	119	97.3	74.8	55.2	39.2	26.4	17.1	11.0	7.39	5.03	3.38	2.25	1.46	0.86	0.36	0.07	0.00	
50	46.2	41.3	35.3	28.9	22.8	17.2	12.6	9.36	6.82	4.93	3.49	2.49	1.77	1.19	0.70	0.29	0.08	0.00	
60	15.8	14.4	12.7	11.0	9.18	7.58	6.09	4.82	3.75	2.95	2.33	1.79	1.34	0.90	0.52	0.21	0.09	0.00	
70	5.28	4.96	4.60	4.20	3.79	3.39	3.01	2.62	2.25	1.91	1.57	1.23	0.91	0.61	0.35	0.21	0.09	0.00	
80	2.92	2.75	2.56	2.37	2.17	1.97	1.77	1.55	1.33	1.13	0.92	0.73	0.58	0.44	0.31	0.19	0.09	0.00	
90	1.49	1.40	1.32	1.23	1.14	1.05	0.97	0.88	0.79	0.70	0.61	0.53	0.44	0.35	0.26	0.18	0.09	0.00	
100	0.64	0.61	0.58	0.56	0.53	0.51	0.49	0.46	0.44	0.41	0.38	0.35	0.31	0.27	0.22	0.15	0.08	0.00	
110	0.00	0.00	0.00	0.02	0.06	0.11	0.15	0.18	0.20	0.21	0.22	0.22	0.21	0.19	0.17	0.13	0.07	0.00	
120	0.03	0.05	0.07	0.08	0.08	0.06	0.05	0.01	0.00	0.01	0.08	0.11	0.13	0.13	0.13	0.10	0.06	0.00	
130	0.59	0.63	0.63	0.55	0.46	0.39	0.33	0.23	0.15	0.08	0.00	0.01	0.07	0.09	0.09	0.08	0.05	0.00	
140	3.26	3.22	3.02	2.65	2.18	1.71	1.22	0.81	0.50	0.29	0.12	0.02	0.00	0.05	0.06	0.06	0.04	0.00	
150	7.57	7.45	7.01	6.25	5.27	4.18	3.08	2.10	1.28	0.72	0.35	0.13	0.00	0.02	0.04	0.04	0.03	0.00	
160	11.4	11.4	11.0	10.1	8.70	7.10	5.39	3.78	2.39	1.32	0.65	0.27	0.06	0.00	0.02	0.03	0.02	0.00	
170	14.5	14.4	13.8	12.9	11.4	9.51	7.39	5.28	3.41	1.96	0.97	0.40	0.13	0.00	0.01	0.01	0.01	0.00	
180	17.2	16.5	15.7	14.6	12.9	10.8	8.47	6.11	4.01	2.31	1.14	0.46	0.16	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: