

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1672.5 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	70.1V x 69.8H
	At 50% of Imax	44.3V x 47.0H
	At 90% of Imax	26.2V x 25.4H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	920.0 lumens per klm.
	To 50% of Imax	647.5 lumens per klm.
	To 90% of Imax	257.6 lumens per klm.
	Upward LOR	1.4 %
	Downward LOR	98.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.18V I:2.400A P:22.45W PF:0.7683 Freq:59.98Hz Lamp Flux:1509.74x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Spotlight	WEIGHT:
SPEC.:23W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

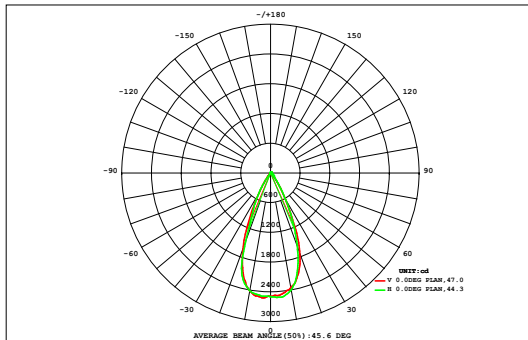

DATA OF LAMP		Eff:67.24lm/W	
MODEL	D9B1-23W-A	Imax(cd)	2525
NOMINAL POWER(W)	23	AVAILABILITY(%)	91.8
RATED VOLTAGE(V)	12	Avai. FLUX(lm)	1386
NOMINAL FLUX(lm)	1509.74	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1510
TEST VOLTAGE(V)	12	θ @50%(H,V)	47,44DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.02	0.03	0.04	0.06	0.08	0.10	0.13	0.15	0.15	0.13	0.10	0.08	0.06	0.04	0.03	0.01	0.01	1.21	0.00
72	0.01	0.02	0.04	0.06	0.10	0.16	0.23	0.29	0.35	0.35	0.29	0.22	0.16	0.10	0.06	0.04	0.02	0.01	2.52	0.00
64	0.01	0.03	0.06	0.11	0.19	0.32	0.50	0.68	0.83	0.83	0.68	0.49	0.31	0.18	0.10	0.05	0.03	0.01	5.41	0.00
56	0.02	0.04	0.08	0.16	0.33	0.62	1.02	1.48	1.87	1.88	1.51	1.04	0.62	0.32	0.16	0.07	0.03	0.01	11.3	0.00
48	0.02	0.04	0.10	0.25	0.57	1.20	2.34	3.86	5.10	5.20	4.08	2.53	1.28	0.58	0.23	0.10	0.04	0.02	27.5	9.44
40	0.02	0.05	0.13	0.35	0.95	2.57	5.91	10.6	14.3	14.5	11.1	6.56	2.97	1.05	0.35	0.12	0.05	0.02	71.6	61.8
32	0.02	0.05	0.15	0.47	1.61	5.21	13.2	23.4	29.8	30.1	24.2	14.2	6.14	1.96	0.51	0.14	0.05	0.02	151	144
24	0.02	0.05	0.16	0.58	2.44	8.71	22.5	36.3	43.3	43.2	36.8	23.9	10.1	3.13	0.68	0.15	0.05	0.02	232	226
	0.02	0.05	0.15	0.62	2.98	11.4	28.6	42.9	48.3	47.8	42.6	30.2	13.0	3.97	0.78	0.14	0.04	0.02	274	268
	0.02	0.04	0.13	0.56	2.84	11.2	28.4	43.1	48.2	47.6	42.8	30.0	12.8	3.83	0.72	0.12	0.04	0.02	272	268
	0.02	0.04	0.11	0.41	2.01	8.27	21.4	36.7	44.3	44.2	37.2	22.8	9.61	2.70	0.51	0.10	0.03	0.02	230	225
-24	0.02	0.03	0.08	0.26	0.99	4.43	12.0	21.2	28.1	28.3	21.9	13.0	5.36	1.33	0.29	0.07	0.03	0.01	137	132
-32	0.01	0.03	0.05	0.14	0.40	1.35	4.58	9.10	12.0	12.2	9.63	5.24	1.75	0.50	0.14	0.04	0.03	0.01	57.2	49.4
-40	0.01	0.02	0.04	0.07	0.17	0.32	0.68	1.58	2.48	2.57	1.80	0.88	0.41	0.17	0.06	0.03	0.02	0.01	11.3	2.57
-48	0.01	0.02	0.03	0.04	0.07	0.11	0.15	0.14	0.08	0.09	0.17	0.16	0.11	0.06	0.04	0.03	0.02	0.01	1.32	0.00
-56	0.01	0.01	0.02	0.03	0.03	0.04	0.04	0.04	0.02	0.02	0.04	0.04	0.03	0.03	0.03	0.02	0.01	0.01	0.46	0.00
-64	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.00	0.00	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.24	0.00
-72	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.13	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.25	0.57	1.37	4.20	15.8	56.0	142	232	279	279	235	151	64.8	20.0	4.73	1.25	0.51	0.22	1487	---
Φ a	0.00	0.00	0.00	0.00	2.58	46.1	134	224	273	272	228	144	55.7	7.05	0.00	0.00	0.00	0.00	---	1386


one-half-peak spread: U:19.3,D:18.1 , L:16.1,R:2NEMA Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.18V I:2.400A P:22.45W PF:0.7683 Freq:59.98Hz Lamp Flux:1509.74x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Spotlight	WEIGHT:
SPEC.:23W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

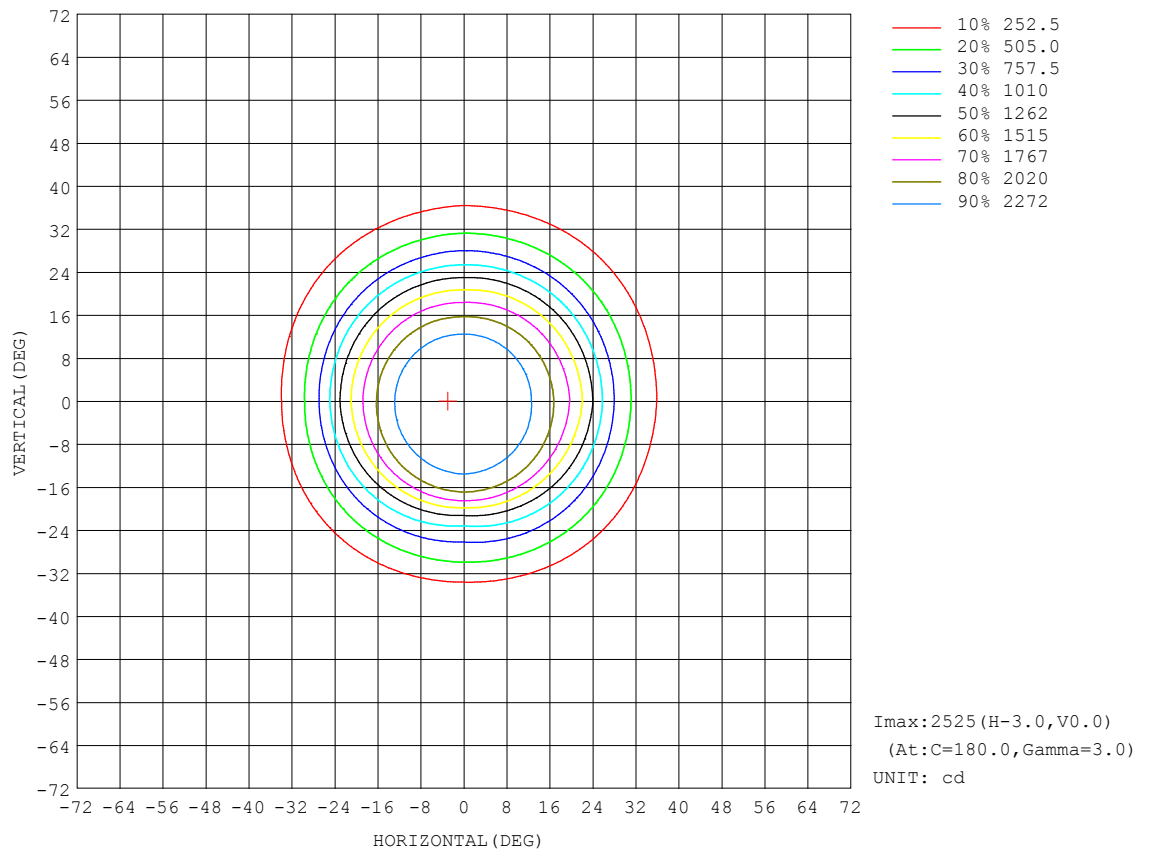


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.18V I:2.400A P:22.45W PF:0.7683 Freq:59.98Hz Lamp Flux:1509.74x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Spotlight	WEIGHT:
SPEC.:23W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

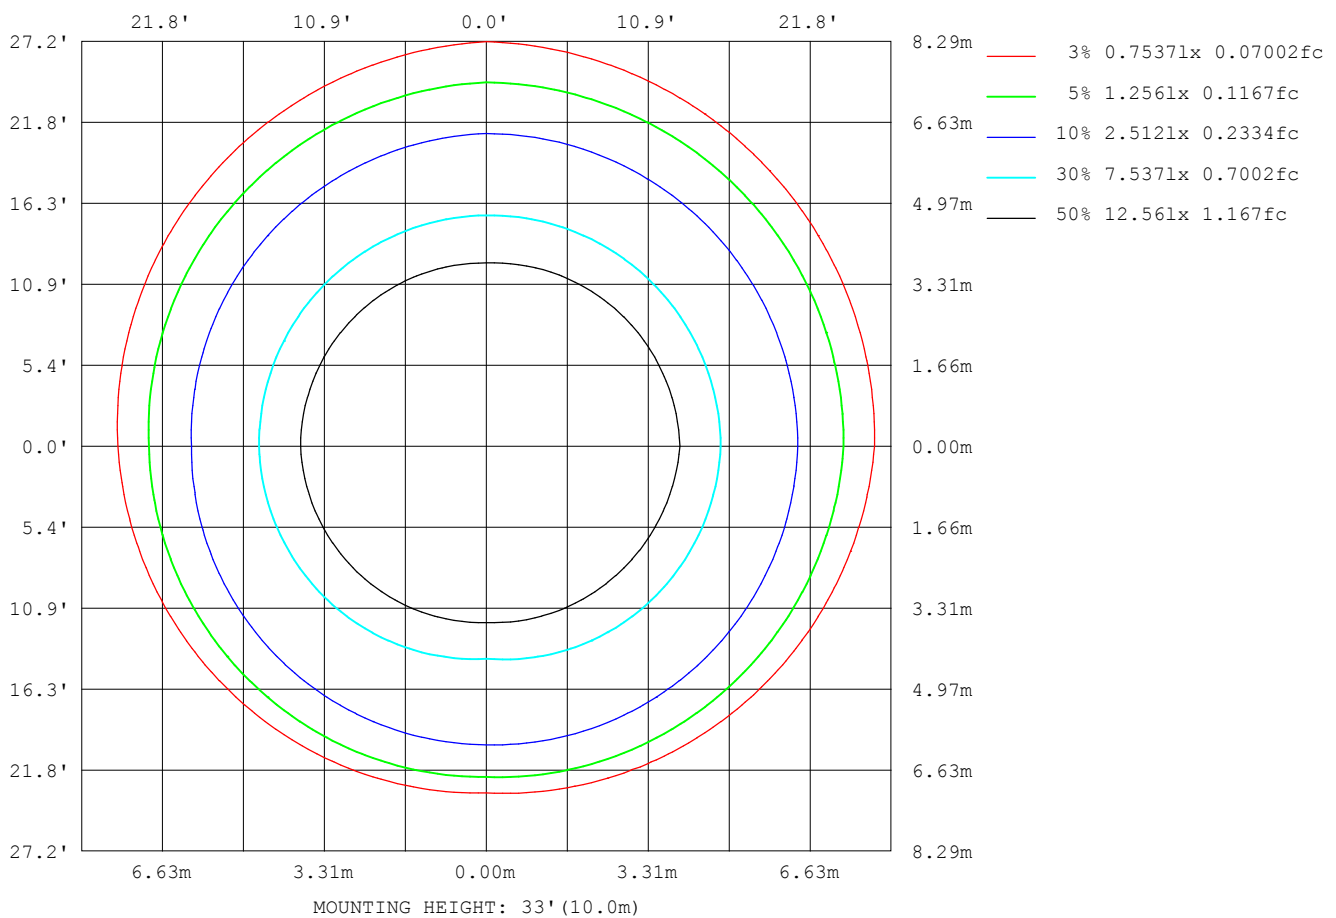

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

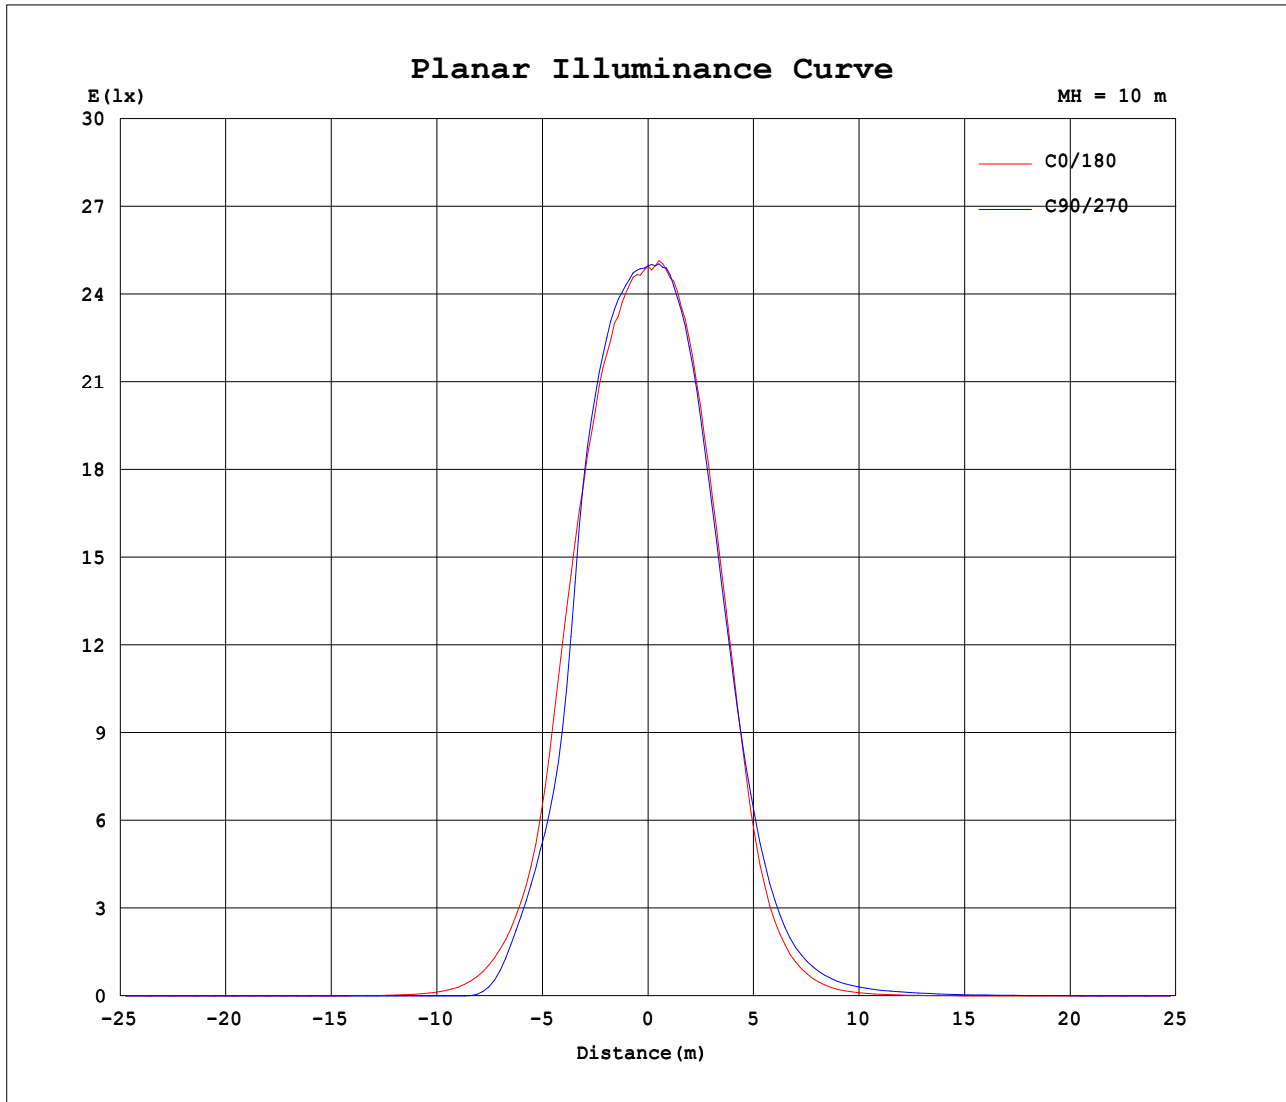


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.18V I:2.400A P:22.45W PF:0.7683 Freq:59.98Hz Lamp Flux:1509.74x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Spotlight	WEIGHT:
SPEC.:23W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

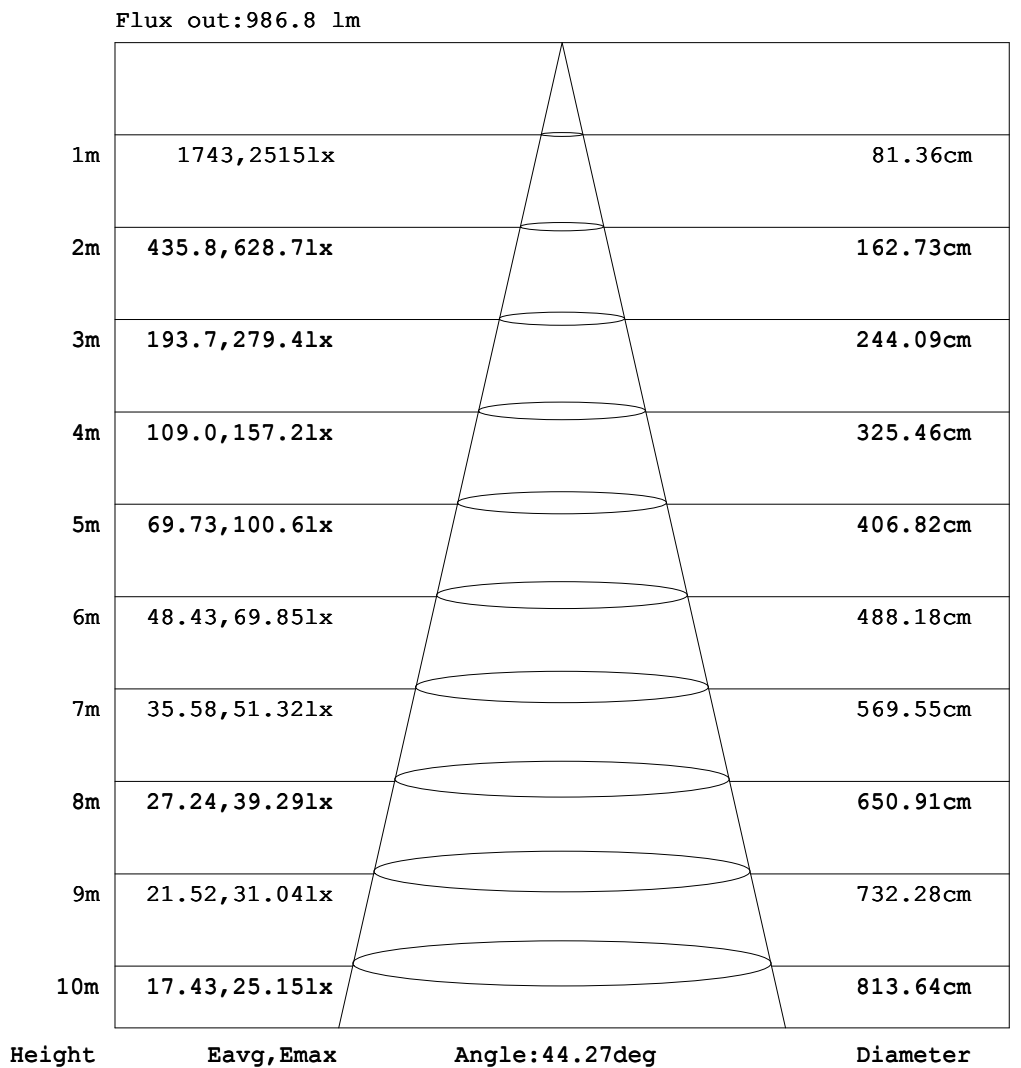

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:2.400A P:22.45W PF:0.7683 Freq:59.98Hz Lamp Flux:1509.74x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Spotlight	WEIGHT:
SPEC.:23W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.41	1.17	2.49	4.32	6.48	8.72	10.8	12.7	14.3	16.1	17.8	18.6
-170	0.00	0.00	0.00	0.00	0.01	0.02	0.07	0.46	1.21	2.50	4.28	6.46	8.75	11.0	13.0	14.8	16.4	17.7	18.5
-160	0.00	0.00	0.00	0.01	0.02	0.04	0.10	0.36	0.98	2.01	3.50	5.34	7.41	9.49	11.5	13.2	14.8	16.0	16.8
-150	0.00	0.00	0.00	0.01	0.02	0.05	0.10	0.22	0.63	1.29	2.28	3.57	5.09	6.70	8.29	9.74	11.0	11.9	12.5
-140	0.00	0.00	0.00	0.00	0.02	0.04	0.09	0.16	0.30	0.64	1.15	1.84	2.70	3.66	4.63	5.56	6.36	6.98	7.36
-130	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.11	0.17	0.28	0.45	0.72	1.07	1.46	1.89	2.31	2.68	2.99	3.19
-120	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.09	0.13	0.19	0.26	0.35	0.46	0.58	0.70	0.82	0.92	1.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.05	0.07	0.09	0.12	0.14	0.16	0.19	0.22	0.25	0.27
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.13	0.16	0.17	0.18	0.18	0.18	0.17	0.14	0.11	0.08	0.04	0.00
-70	0.00	0.00	0.01	0.11	0.24	0.35	0.45	0.54	0.61	0.65	0.68	0.68	0.65	0.58	0.50	0.39	0.27	0.14	0.00
-60	0.00	0.00	0.11	0.32	0.54	0.74	0.94	1.14	1.27	1.37	1.41	1.39	1.32	1.19	1.02	0.81	0.56	0.28	0.00
-50	0.00	0.01	0.26	0.56	0.87	1.23	1.55	1.85	2.07	2.22	2.30	2.33	2.45	2.61	2.96	3.06	2.73	2.03	1.11
-40	0.00	0.03	0.36	0.78	1.25	1.74	2.23	2.64	2.98	3.43	4.52	6.88	9.46	11.8	13.6	14.3	13.1	10.1	4.17
-30	0.00	0.06	0.51	1.00	1.63	2.27	2.89	3.46	4.45	7.42	12.9	20.9	34.7	69.2	155	284	397	473	501
-20	0.00	0.10	0.60	1.19	1.94	2.75	3.52	4.51	7.76	15.4	29.5	65.3	172	380	643	932	1194	1405	1482
-10	0.00	0.12	0.65	1.34	2.22	3.13	4.07	5.86	11.9	25.2	58.4	159	383	762	1298	1864	2220	2373	2416
0	0.00	0.12	0.68	1.42	2.38	3.38	4.44	6.82	14.6	32.5	82.9	212	475	1005	1639	2124	2423	2511	2496
10	0.00	0.14	0.72	1.47	2.45	3.64	5.18	8.21	16.5	33.9	76.0	184	399	796	1361	1842	2177	2349	2399
20	0.00	0.14	0.73	1.43	2.37	3.63	5.35	8.20	15.0	28.4	53.3	111	224	415	702	1050	1349	1532	1587
30	0.00	0.13	0.68	1.33	2.19	3.30	4.92	7.30	11.7	20.1	33.9	55.7	93.6	158	247	354	466	553	593
40	0.00	0.11	0.57	1.17	1.88	2.76	4.02	5.83	8.46	12.6	19.5	29.4	42.3	58.5	78.6	102	125	145	156
50	0.00	0.10	0.48	0.98	1.53	2.21	2.99	4.09	5.65	7.73	10.5	14.1	19.2	25.4	32.1	38.9	45.1	50.4	54.1
60	0.00	0.10	0.34	0.73	1.18	1.66	2.17	2.78	3.44	4.30	5.45	6.83	8.42	10.2	12.0	14.0	15.7	17.2	18.4
70	0.00	0.10	0.24	0.50	0.81	1.15	1.51	1.87	2.23	2.60	3.01	3.41	3.82	4.22	4.65	5.05	5.42	5.74	5.99
80	0.00	0.10	0.21	0.34	0.49	0.68	0.88	1.11	1.34	1.56	1.78	2.00	2.23	2.44	2.65	2.84	3.03	3.20	3.36
90	0.00	0.10	0.19	0.29	0.39	0.48	0.58	0.68	0.77	0.87	0.97	1.06	1.16	1.26	1.36	1.45	1.55	1.65	1.74
100	0.00	0.09	0.17	0.24	0.30	0.35	0.39	0.44	0.47	0.49	0.52	0.54	0.57	0.60	0.62	0.65	0.67	0.71	0.75
110	0.00	0.08	0.14	0.18	0.22	0.23	0.24	0.24	0.24	0.23	0.21	0.18	0.13	0.08	0.04	0.02	0.01	0.00	0.00
120	0.00	0.07	0.11	0.14	0.15	0.14	0.13	0.09	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.06	0.09	0.10	0.10	0.08	0.01	0.00	0.00	0.00	0.01	0.06	0.13	0.22	0.32	0.46	0.56	0.60	0.58
140	0.00	0.05	0.07	0.07	0.06	0.01	0.00	0.00	0.01	0.12	0.34	0.70	1.16	1.70	2.25	2.79	3.17	3.40	3.43
150	0.00	0.03	0.05	0.05	0.02	0.00	0.00	0.01	0.23	0.62	1.29	2.22	3.37	4.57	5.74	6.74	7.49	7.95	8.06
160	0.00	0.02	0.03	0.03	0.00	0.00	0.00	0.15	0.59	1.40	2.63	4.20	5.96	7.71	9.30	10.6	11.5	12.0	12.1
170	0.00	0.01	0.01	0.01	0.00	0.00	0.01	0.33	0.98	2.14	3.78	5.81	7.93	9.95	11.7	13.1	14.3	15.2	15.3
180	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.41	1.17	2.49	4.32	6.48	8.72	10.8	12.7	14.3	16.1	17.8	18.6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:2.400A P:22.45W PF:0.7683 Freq:59.98Hz Lamp Flux:1509.74x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Spotlight	WEIGHT:
SPEC.:23W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	18.7	17.9	17.0	15.9	14.1	11.8	9.29	6.72	4.41	2.57	1.27	0.53	0.13	0.00	0.00	0.00	0.00	0.00	
-170	18.3	17.8	16.8	15.4	13.5	11.2	8.75	6.31	4.13	2.41	1.20	0.50	0.14	0.01	0.00	0.00	0.00	0.00	
-160	16.5	15.8	14.6	13.2	11.3	9.23	7.08	5.03	3.25	1.87	0.93	0.38	0.13	0.02	0.01	0.00	0.00	0.00	
-150	12.3	11.6	10.7	9.40	7.92	6.33	4.74	3.30	2.10	1.19	0.60	0.24	0.07	0.02	0.01	0.00	0.00	0.00	
-140	7.18	6.76	6.10	5.30	4.38	3.43	2.51	1.72	1.07	0.62	0.31	0.14	0.04	0.02	0.00	0.00	0.00	0.00	
-130	3.09	2.87	2.57	2.19	1.79	1.38	1.00	0.69	0.46	0.25	0.13	0.06	0.03	0.01	0.00	0.00	0.00	0.00	
-120	0.95	0.88	0.78	0.66	0.56	0.42	0.31	0.23	0.14	0.09	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	
-110	0.25	0.22	0.19	0.16	0.14	0.12	0.09	0.07	0.05	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.03	0.05	0.07	0.09	0.10	0.11	0.12	0.11	0.10	0.08	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.12	0.23	0.33	0.41	0.48	0.52	0.54	0.54	0.51	0.46	0.39	0.31	0.22	0.13	0.03	0.00	0.00	0.00	
-60	0.25	0.49	0.71	0.89	1.06	1.16	1.22	1.22	1.17	1.05	0.91	0.74	0.55	0.36	0.20	0.03	0.00	0.00	
-50	1.99	2.59	2.79	2.54	2.15	2.00	1.99	2.01	1.98	1.82	1.59	1.29	0.97	0.66	0.37	0.12	0.00	0.00	
-40	12.7	17.4	18.9	17.0	13.6	9.85	6.26	3.74	2.84	2.60	2.31	1.92	1.45	0.99	0.57	0.23	0.00	0.00	
-30	484	419	313	185	91.4	47.3	25.4	13.4	6.46	3.63	3.02	2.53	1.95	1.32	0.76	0.32	0.01	0.00	
-20	1423	1230	979	697	441	221	89.6	37.4	16.1	6.55	3.76	3.09	2.39	1.62	0.93	0.39	0.02	0.00	
-10	2358	2212	1911	1382	846	467	215	80.3	29.7	11.1	4.78	3.55	2.75	1.85	1.06	0.44	0.03	0.00	
0	2461	2349	2134	1735	1112	581	293	115	39.4	14.2	5.55	3.88	2.97	1.99	1.13	0.47	0.03	0.00	
10	2333	2170	1888	1445	880	483	241	97.9	38.3	15.7	7.12	4.66	3.26	2.09	1.19	0.51	0.05	0.00	
20	1549	1384	1096	756	476	273	135	61.2	29.1	13.8	7.45	4.92	3.28	2.04	1.17	0.51	0.07	0.00	
30	565	488	383	277	181	106	60.3	34.5	19.1	10.8	6.87	4.56	2.98	1.88	1.08	0.49	0.07	0.00	
40	148	130	106	82.0	60.3	42.7	28.8	18.7	12.0	8.09	5.51	3.71	2.47	1.63	0.96	0.44	0.08	0.00	
50	50.4	45.0	38.6	31.7	24.9	18.8	13.7	10.2	7.49	5.40	3.83	2.73	1.95	1.32	0.79	0.35	0.09	0.00	
60	17.2	15.7	13.9	11.9	10.0	8.25	6.66	5.26	4.10	3.22	2.55	1.97	1.46	1.01	0.61	0.26	0.10	0.00	
70	5.71	5.38	4.99	4.56	4.12	3.70	3.27	2.87	2.46	2.08	1.72	1.36	1.02	0.71	0.41	0.23	0.10	0.00	
80	3.19	3.00	2.81	2.60	2.38	2.16	1.94	1.71	1.49	1.26	1.03	0.82	0.64	0.48	0.34	0.21	0.10	0.00	
90	1.65	1.55	1.45	1.36	1.26	1.16	1.06	0.97	0.87	0.77	0.68	0.58	0.48	0.39	0.29	0.19	0.10	0.00	
100	0.71	0.67	0.65	0.62	0.60	0.57	0.54	0.52	0.49	0.47	0.44	0.39	0.35	0.30	0.24	0.17	0.09	0.00	
110	0.00	0.01	0.02	0.04	0.08	0.13	0.18	0.21	0.23	0.24	0.24	0.24	0.23	0.22	0.18	0.14	0.08	0.00	
120	0.03	0.06	0.08	0.08	0.09	0.06	0.05	0.03	0.00	0.02	0.09	0.13	0.14	0.15	0.14	0.11	0.07	0.00	
130	0.70	0.75	0.72	0.63	0.54	0.43	0.34	0.25	0.18	0.08	0.02	0.01	0.08	0.10	0.10	0.09	0.06	0.00	
140	3.61	3.57	3.34	2.92	2.42	1.89	1.38	0.91	0.56	0.32	0.14	0.05	0.01	0.06	0.07	0.07	0.05	0.00	
150	8.29	8.15	7.65	6.85	5.80	4.61	3.39	2.32	1.43	0.79	0.39	0.14	0.02	0.02	0.05	0.05	0.03	0.00	
160	12.5	12.5	12.0	11.0	9.52	7.79	5.94	4.16	2.64	1.48	0.72	0.28	0.09	0.00	0.03	0.03	0.02	0.00	
170	15.8	15.7	15.1	14.1	12.5	10.4	8.10	5.81	3.77	2.18	1.07	0.44	0.12	0.00	0.01	0.01	0.01	0.00	
180	18.7	17.9	17.0	15.9	14.1	11.8	9.29	6.72	4.41	2.57	1.27	0.53	0.13	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: