

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1363.7 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of I _{max}	78.5V x 75.5H
	At 50% of I _{max}	48.3V x 49.4H
	At 90% of I _{max}	18.2V x 18.8H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of I _{max}	865.5 lumens per klm.
	To 50% of I _{max}	564.0 lumens per klm.
	To 90% of I _{max}	101.3 lumens per klm.

Upward LOR	1.1 %
Downward LOR	98.9 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-04-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.18V I:0.6635A P:5.476W PF:0.6779 Freq:59.97Hz Lamp Flux:259.126x1 lm		
NAME: LED	TYPE:M4B6-5.5W-30K-R	WEIGHT:
SPEC.:Oblique mouth	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

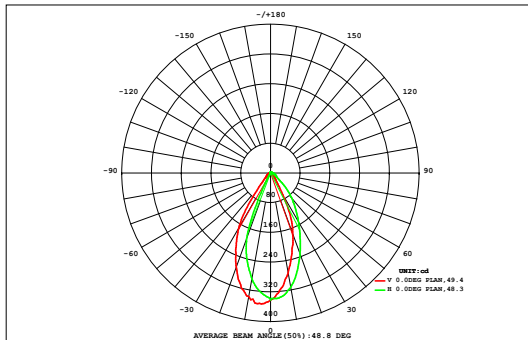

DATA OF LAMP		Eff:47.32lm/W	
MODEL	M4B6-5.5W-30K-R	Imax (cd)	353.4
NOMINAL POWER (W)	5.5	AVAILABILITY (%)	85.9
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	222.6
NOMINAL FLUX (lm)	259.126	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	259.1
TEST VOLTAGE (V)	12	θ @50% (H,V)	49,48DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.02	0.03	0.05	0.08	0.11	0.14	0.16	0.18	0.20	0.20	0.18	0.15	0.12	0.09	0.06	0.04	0.02	0.01	1.84	0.00
72	0.02	0.03	0.05	0.08	0.11	0.14	0.16	0.18	0.20	0.20	0.18	0.15	0.12	0.09	0.06	0.04	0.02	0.01	1.84	0.00
64	0.02	0.04	0.07	0.11	0.15	0.19	0.23	0.27	0.30	0.30	0.27	0.22	0.18	0.13	0.09	0.06	0.03	0.01	2.67	0.00
56	0.03	0.06	0.09	0.14	0.20	0.28	0.37	0.48	0.56	0.56	0.47	0.36	0.26	0.19	0.12	0.07	0.04	0.02	4.30	0.36
48	0.03	0.07	0.11	0.18	0.29	0.46	0.73	1.02	1.25	1.23	0.99	0.70	0.44	0.26	0.16	0.10	0.05	0.02	8.08	5.50
40	0.04	0.08	0.14	0.24	0.43	0.81	1.32	1.82	2.12	2.04	1.62	1.15	0.72	0.39	0.21	0.12	0.06	0.02	13.3	11.5
32	0.04	0.09	0.16	0.30	0.64	1.31	2.24	2.92	3.21	3.03	2.39	1.61	0.97	0.53	0.26	0.13	0.07	0.03	19.9	18.4
24	0.04	0.09	0.18	0.36	0.89	2.08	3.26	4.11	4.52	4.29	3.48	2.29	1.19	0.60	0.30	0.15	0.07	0.03	27.9	26.6
	0.05	0.10	0.18	0.41	1.21	2.79	4.15	5.28	5.80	5.48	4.40	3.00	1.45	0.60	0.30	0.15	0.08	0.03	35.4	34.1
	0.05	0.10	0.18	0.41	1.43	3.20	4.77	6.06	6.59	6.16	4.84	3.28	1.58	0.53	0.25	0.14	0.08	0.03	39.7	38.3
	0.05	0.09	0.17	0.37	1.32	3.02	4.65	5.95	6.44	6.01	4.73	3.15	1.40	0.42	0.21	0.13	0.07	0.03	38.2	36.9
	0.04	0.09	0.15	0.29	0.93	2.26	3.64	4.94	5.37	5.04	4.06	2.49	0.92	0.32	0.18	0.12	0.07	0.02	30.9	29.5
-24	0.04	0.08	0.13	0.22	0.52	1.34	2.17	3.07	3.58	3.35	2.44	1.19	0.45	0.23	0.15	0.10	0.06	0.02	19.1	17.4
-32	0.03	0.06	0.11	0.16	0.27	0.57	0.98	1.14	1.01	0.82	0.61	0.36	0.23	0.16	0.13	0.08	0.05	0.02	6.80	4.14
-40	0.03	0.05	0.09	0.12	0.16	0.23	0.32	0.35	0.21	0.12	0.16	0.16	0.14	0.12	0.10	0.07	0.03	0.01	2.47	0.00
-48	0.02	0.04	0.07	0.09	0.11	0.13	0.13	0.12	0.07	0.06	0.08	0.10	0.10	0.09	0.07	0.05	0.02	0.01	1.36	0.00
-56	0.02	0.03	0.05	0.06	0.07	0.08	0.08	0.06	0.04	0.04	0.05	0.06	0.06	0.06	0.05	0.03	0.01	0.01	0.86	0.00
-64	0.01	0.02	0.03	0.04	0.05	0.05	0.04	0.03	0.01	0.01	0.02	0.03	0.03	0.03	0.02	0.02	0.01	0.00	0.47	0.00
-72	0.01	0.01	0.02	0.03	0.03	0.03	0.02	0.02	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.25	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.55	1.13	1.99	3.61	8.82	19.0	29.3	37.8	41.3	38.7	30.8	20.3	10.3	4.78	2.67	1.55	0.82	0.31	254	---
Φ a	0.00	0.00	0.00	0.39	6.49	17.1	27.6	36.3	39.9	37.4	29.3	18.6	8.15	1.43	0.00	0.00	0.00	0.00	---	223

one-half-peak spread: U:21.1,D:24.5 , L:20.7,R:24.0


NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-04-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.18V I:0.6635A P:5.476W PF:0.6779 Freq:59.97Hz Lamp Flux:259.126x1 lm		
NAME: LED	TYPE:M4B6-5.5W-30K-R	WEIGHT:
SPEC.:Oblique mouth	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

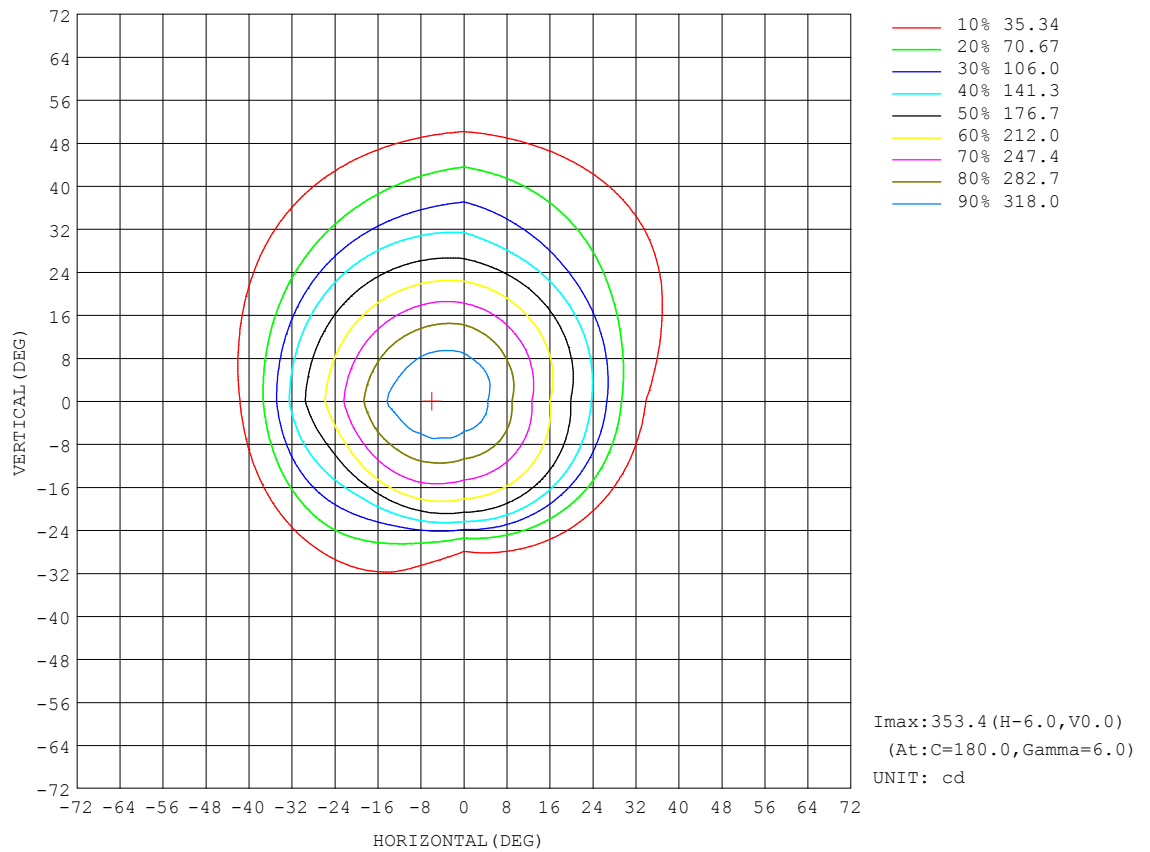


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-04-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.18V I:0.6635A P:5.476W PF:0.6779 Freq:59.97Hz Lamp Flux:259.126x1 lm		
NAME: LED	TYPE:M4B6-5.5W-30K-R	WEIGHT:
SPEC.:Oblique mouth	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

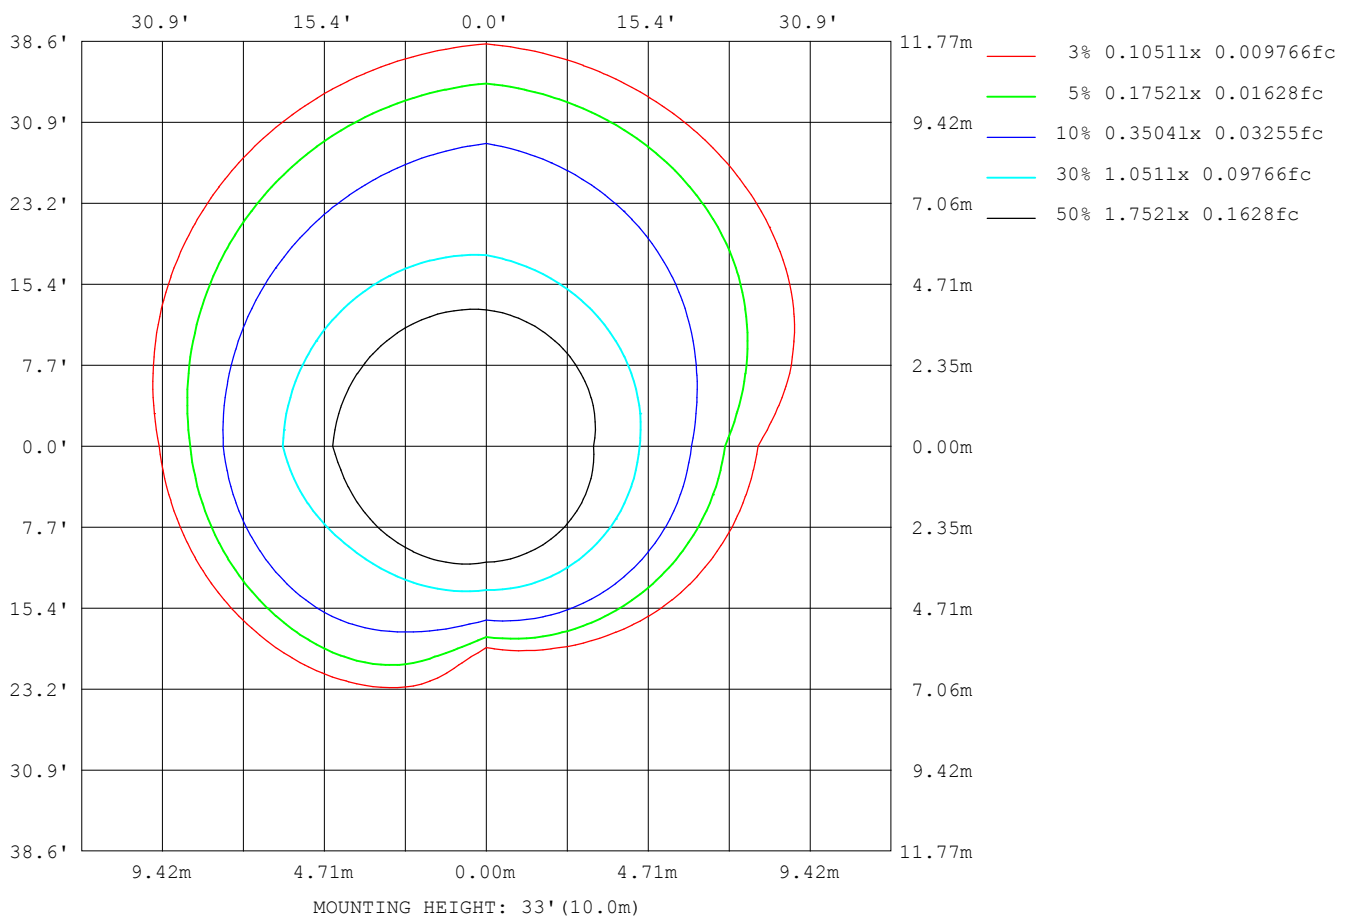

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-04-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

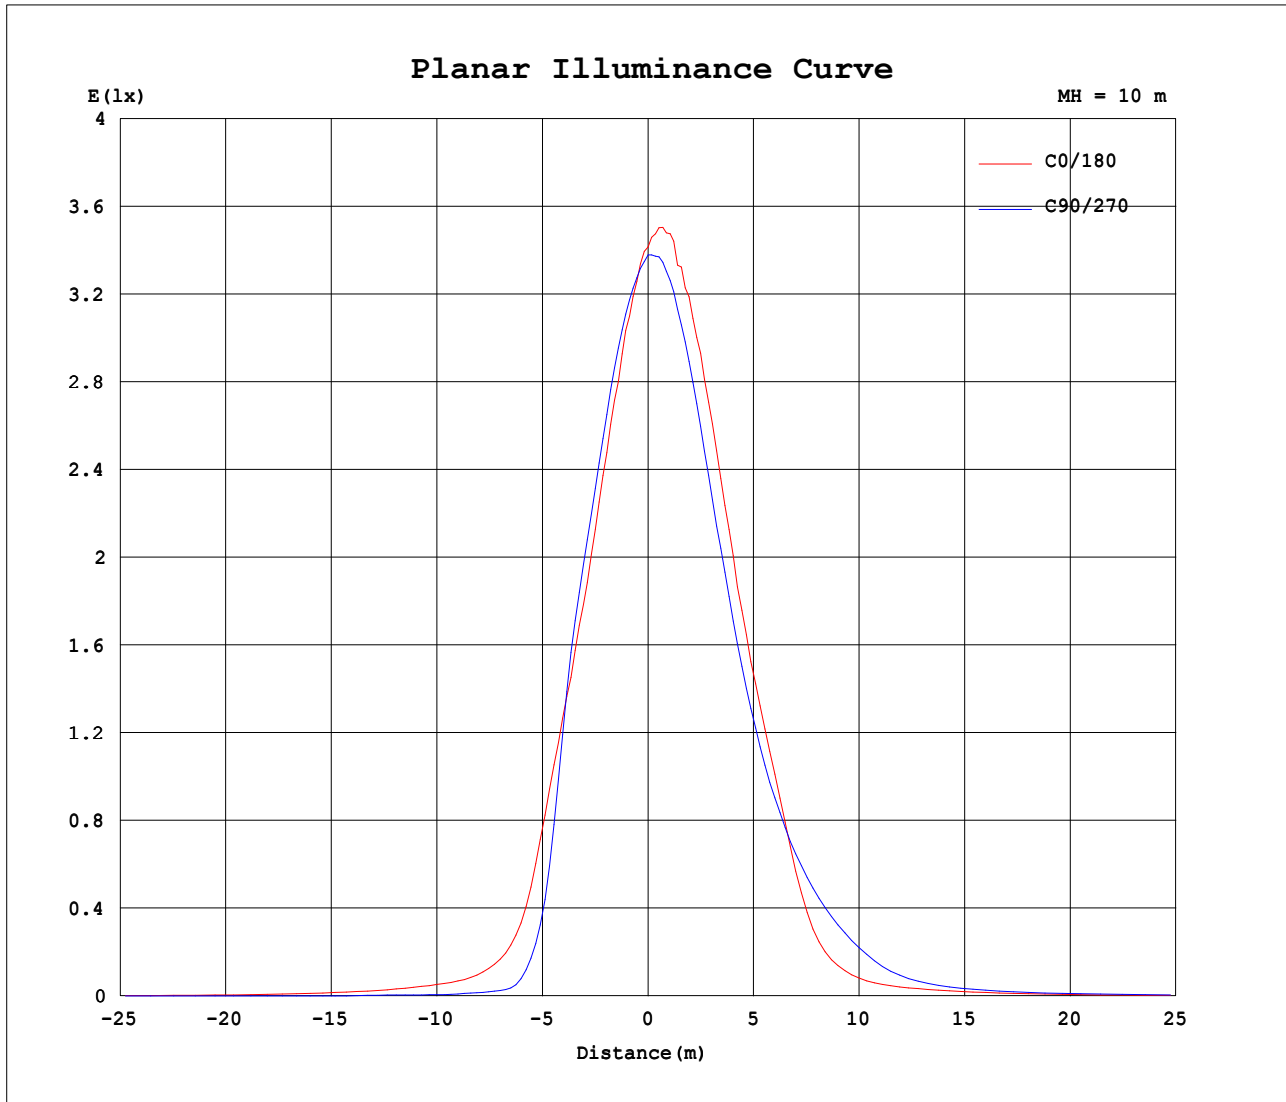


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-04-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.18V I:0.6635A P:5.476W PF:0.6779 Freq:59.97Hz Lamp Flux:259.126x1 lm		
NAME: LED	TYPE:M4B6-5.5W-30K-R	WEIGHT:
SPEC.:Oblique mouth	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

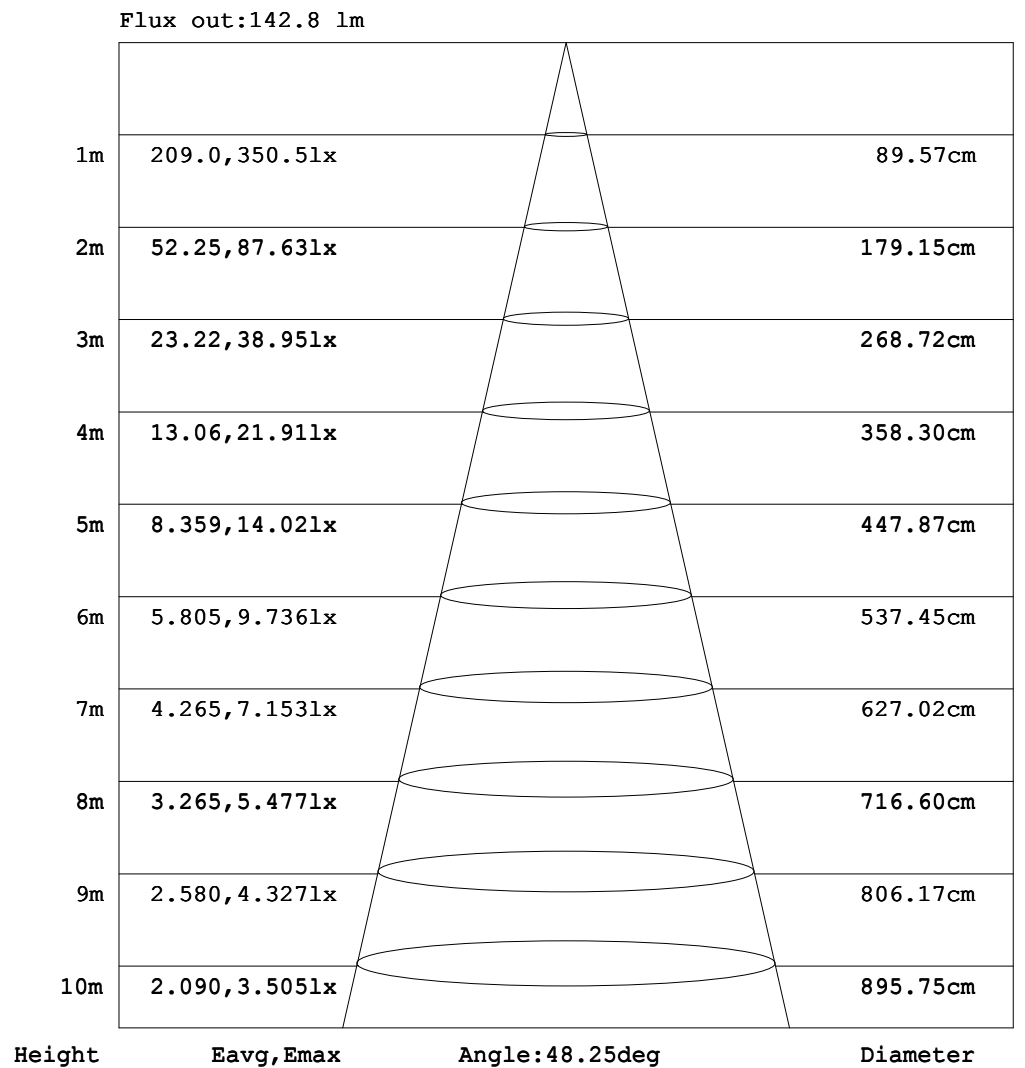

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2020-04-26

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:0.6635A P:5.476W PF:0.6779 Freq:59.97Hz Lamp Flux:259.126x1 lm		
NAME: LED	TYPE:M4B6-5.5W-30K-R	WEIGHT:
SPEC.:Oblique mouth	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.29	0.53	0.79	1.04	1.31	1.56	1.82	2.07	2.26
-170	0.02	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.06	0.16	0.37	0.63	0.91	1.20	1.49	1.77	2.03	2.25	2.46
-160	0.02	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.10	0.17	0.35	0.58	0.85	1.14	1.42	1.68	1.93	2.15	2.33
-150	0.02	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.11	0.17	0.27	0.45	0.66	0.89	1.12	1.34	1.55	1.73	1.88
-140	0.02	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.14	0.21	0.31	0.42	0.57	0.73	0.89	1.03	1.16	1.26
-130	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.07	0.12	0.18	0.25	0.32	0.40	0.49	0.57	0.63	0.69
-120	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.09	0.12	0.16	0.20	0.23	0.26	0.28
-110	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00
-80	0.02	0.10	0.19	0.27	0.34	0.39	0.45	0.50	0.52	0.53	0.52	0.50	0.47	0.42	0.35	0.27	0.19	0.10	0.00
-70	0.02	0.20	0.39	0.58	0.78	0.96	1.14	1.29	1.42	1.51	1.56	1.55	1.48	1.34	1.16	0.92	0.63	0.32	0.00
-60	0.02	0.30	0.60	0.96	1.35	1.73	2.18	2.59	2.95	3.15	3.16	3.07	2.88	2.57	2.22	1.76	1.22	0.63	0.00
-50	0.02	0.39	0.85	1.40	2.04	2.81	3.62	4.20	4.58	4.79	5.05	5.23	5.27	5.06	5.02	4.50	3.73	2.81	1.81
-40	0.02	0.47	1.08	1.85	2.87	4.07	4.99	5.71	6.54	7.45	8.03	8.74	8.98	9.41	9.93	10.0	8.80	6.40	3.00
-30	0.02	0.54	1.31	2.34	3.72	5.17	6.31	7.63	9.07	10.5	11.9	15.1	21.2	30.2	41.0	45.2	41.8	32.9	18.4
-20	0.02	0.61	1.50	2.76	4.53	6.11	7.67	9.68	11.7	14.0	20.3	34.6	64.7	95.4	117	143	175	192	189
-10	0.02	0.65	1.64	3.10	5.14	6.91	8.94	11.4	14.0	19.1	33.8	73.1	128	168	219	262	287	296	289
0	0.02	0.67	1.71	3.28	5.50	7.47	9.84	12.7	15.8	23.2	44.9	104	172	221	269	312	338	352	342
10	0.02	0.69	1.75	3.32	5.51	7.51	9.90	13.0	16.9	25.2	44.4	89.7	152	196	238	275	302	314	312
20	0.02	0.68	1.72	3.19	5.24	7.23	9.38	12.4	16.2	22.8	36.7	60.2	102	148	179	204	223	233	233
30	0.02	0.64	1.61	2.93	4.68	6.65	8.51	10.9	14.0	18.4	26.0	39.5	57.3	80.1	107	130	144	150	150
40	0.02	0.59	1.44	2.55	3.99	5.74	7.40	9.09	11.3	14.1	17.6	22.9	31.0	42.2	54.5	66.3	76.5	84.4	89.7
50	0.02	0.53	1.23	2.14	3.23	4.52	5.99	7.40	8.81	10.2	12.1	14.3	16.8	19.7	23.1	26.8	30.6	33.8	35.9
60	0.02	0.46	0.97	1.67	2.49	3.37	4.36	5.41	6.53	7.61	8.60	9.61	10.6	11.5	12.5	13.5	14.4	15.1	15.5
70	0.02	0.36	0.74	1.18	1.73	2.35	3.00	3.66	4.34	4.99	5.65	6.28	6.87	7.45	8.00	8.47	8.88	9.21	9.48
80	0.02	0.25	0.53	0.80	1.08	1.38	1.69	2.08	2.46	2.85	3.25	3.66	4.05	4.43	4.77	5.09	5.39	5.67	5.92
90	0.02	0.16	0.30	0.44	0.59	0.73	0.87	1.01	1.15	1.29	1.43	1.58	1.72	1.86	2.00	2.14	2.28	2.43	2.57
100	0.02	0.13	0.24	0.32	0.39	0.44	0.44	0.38	0.29	0.19	0.10	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00
110	0.02	0.11	0.19	0.20	0.11	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.03	0.02	0.01	0.00	0.00
120	0.02	0.10	0.13	0.04	0.00	0.00	0.00	0.00	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.02	0.08	0.06	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.02	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.05	0.05	0.06	0.05
150	0.02	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.13	0.26	0.38	0.49	0.59	0.64	0.64
160	0.02	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.23	0.43	0.65	0.83	1.00	1.12	1.21	1.21
170	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.22	0.43	0.69	0.93	1.16	1.37	1.55	1.67	1.68
180	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.29	0.53	0.79	1.04	1.31	1.56	1.82	2.07	2.27

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-04-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:0.6635A P:5.476W PF:0.6779 Freq:59.97Hz Lamp Flux:259.126x1 lm		
NAME: LED	TYPE:M4B6-5.5W-30K-R	WEIGHT:
SPEC.:Oblique mouth	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.33	2.31	2.26	2.09	1.94	1.73	1.46	1.19	0.81	0.53	0.27	0.06	0.00	0.00	0.00	0.00	0.00	0.00	
-170	2.41	2.36	2.27	2.09	1.90	1.69	1.40	1.09	0.78	0.49	0.25	0.05	0.01	0.00	0.00	0.00	0.00	0.00	
-160	2.28	2.18	2.05	1.90	1.71	1.46	1.22	0.92	0.65	0.39	0.19	0.03	0.01	0.00	0.00	0.00	0.00	0.00	
-150	1.83	1.76	1.64	1.49	1.31	1.10	0.89	0.67	0.46	0.26	0.10	0.03	0.01	0.00	0.00	0.00	0.00	0.00	
-140	1.24	1.17	1.09	0.97	0.85	0.70	0.55	0.39	0.24	0.11	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.67	0.64	0.58	0.50	0.42	0.33	0.24	0.14	0.07	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.26	0.23	0.20	0.16	0.12	0.09	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.02	0.03	0.05	0.06	0.06	0.05	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.16	0.31	0.44	0.54	0.62	0.65	0.65	0.62	0.55	0.45	0.34	0.21	0.07	0.00	0.00	0.00	0.00	0.00	
-60	0.49	0.95	1.35	1.69	1.93	2.02	1.98	1.82	1.64	1.39	1.12	0.82	0.52	0.25	0.02	0.00	0.00	0.00	
-50	2.55	3.24	3.79	4.10	3.97	4.14	4.09	3.93	3.61	2.99	2.30	1.70	1.15	0.65	0.23	0.00	0.00	0.00	
-40	4.27	5.26	5.98	6.36	6.78	7.03	6.96	6.22	5.75	5.09	4.10	2.88	1.92	1.14	0.50	0.04	0.00	0.00	
-30	21.0	19.0	16.1	14.2	12.2	10.6	9.81	9.19	8.22	7.01	5.96	4.43	2.81	1.65	0.77	0.14	0.00	0.00	
-20	177	147	103	62.4	33.0	20.6	14.6	12.1	10.7	9.03	7.45	5.83	3.74	2.13	1.01	0.24	0.00	0.00	
-10	273	242	203	153	91.1	42.2	23.2	15.7	13.0	10.9	8.72	6.95	4.56	2.52	1.20	0.30	0.00	0.00	
0	314	273	224	175	127	62.9	30.7	18.9	14.9	12.2	9.59	7.70	5.03	2.73	1.29	0.33	0.00	0.00	
10	292	257	216	172	120	66.4	39.7	26.3	19.1	13.8	10.3	7.91	5.16	2.89	1.42	0.41	0.04	0.00	
20	219	195	164	125	85.2	58.2	40.2	28.5	19.4	13.5	10.1	7.54	4.86	2.84	1.43	0.45	0.07	0.00	
30	138	121	101	80.5	62.1	46.8	34.2	23.3	16.1	12.0	9.24	6.63	4.29	2.60	1.35	0.44	0.10	0.00	
40	82.3	72.9	62.3	51.0	39.6	29.0	21.1	15.8	12.4	9.83	7.48	5.29	3.59	2.26	1.20	0.39	0.13	0.00	
50	33.5	30.1	26.1	22.1	18.6	15.6	13.2	11.0	9.07	7.23	5.50	4.07	2.86	1.84	0.98	0.38	0.14	0.00	
60	14.9	14.1	13.1	12.0	10.9	9.73	8.52	7.26	6.10	4.97	3.93	3.01	2.16	1.39	0.73	0.37	0.15	0.00	
70	9.05	8.55	7.99	7.38	6.72	6.05	5.38	4.71	4.03	3.37	2.71	2.06	1.46	0.95	0.60	0.36	0.16	0.00	
80	5.59	5.24	4.87	4.48	4.07	3.64	3.19	2.75	2.32	1.94	1.58	1.25	0.98	0.75	0.53	0.33	0.15	0.00	
90	2.42	2.28	2.14	2.00	1.85	1.71	1.57	1.43	1.28	1.14	1.00	0.86	0.71	0.57	0.43	0.29	0.14	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.10	0.19	0.29	0.38	0.44	0.44	0.39	0.32	0.24	0.13	0.00	
110	0.00	0.01	0.02	0.03	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.11	0.20	0.19	0.11	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00	0.00	0.00	0.00	0.04	0.13	0.10	0.00	
130	0.04	0.07	0.09	0.10	0.10	0.08	0.06	0.02	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.06	0.08	0.00	
140	0.13	0.19	0.25	0.29	0.30	0.28	0.24	0.18	0.10	0.03	0.00	0.00	0.01	0.00	0.00	0.01	0.06	0.00	
150	0.74	0.80	0.78	0.75	0.68	0.57	0.50	0.40	0.28	0.15	0.04	0.00	0.00	0.00	0.00	0.00	0.04	0.00	
160	1.34	1.38	1.38	1.30	1.22	1.04	0.87	0.66	0.48	0.29	0.13	0.00	0.00	0.00	0.00	0.00	0.03	0.00	
170	1.83	1.89	1.87	1.76	1.63	1.46	1.21	0.93	0.68	0.43	0.21	0.04	0.00	0.00	0.00	0.00	0.01	0.00	
180	2.33	2.31	2.26	2.09	1.94	1.73	1.46	1.19	0.81	0.53	0.27	0.06	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:ADMIN

Test Date:2020-04-26

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352

Humidity:65.0%

Test Distance:13.563m [K=1.0000]

Remarks: