

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	371.9 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	158.1V x 154.0H
	At 50% of Imax	110.0V x 109.0H
	At 90% of Imax	46.1V x 45.7H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	986.7 lumens per klm.
	To 50% of Imax	729.1 lumens per klm.
	To 90% of Imax	170.9 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.14V I:0.4069A P:2.374W PF:0.4807 Freq:59.97Hz Lamp Flux:55.6833x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light RGBWW WEIGHT:	
SPEC.:2.5W 5700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

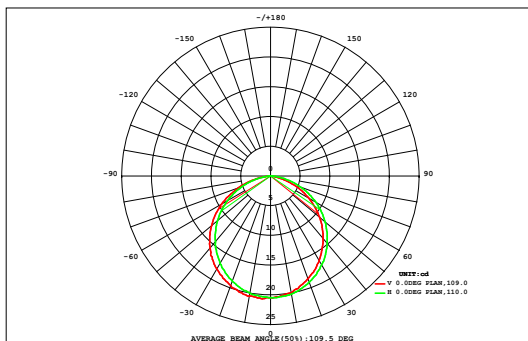

DATA OF LAMP		Eff:23.45lm/W	
MODEL	W9B4-2.5W-A	Imax (cd)	20.71
NOMINAL POWER (W)	2.5	AVAILABILITY (%)	98.6
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	54.91
NOMINAL FLUX (lm)	55.6833	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	55.68
TEST VOLTAGE (V)	12	θ @50% (H,V)	109,110DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.12	0.00
90	0.00	0.00	0.01	0.02	0.04	0.07	0.09	0.10	0.11	0.11	0.09	0.07	0.05	0.03	0.01	0.00	0.00	0.00	0.81	0.65
80	0.00	0.01	0.03	0.06	0.10	0.14	0.17	0.20	0.21	0.21	0.19	0.16	0.12	0.08	0.04	0.01	0.00	0.00	1.72	1.68
70	0.00	0.01	0.04	0.09	0.15	0.21	0.26	0.30	0.32	0.31	0.28	0.24	0.19	0.13	0.07	0.03	0.00	0.00	2.63	2.61
60	0.00	0.02	0.06	0.12	0.20	0.27	0.34	0.38	0.41	0.40	0.37	0.32	0.25	0.17	0.10	0.04	0.01	0.00	3.46	3.44
50	0.00	0.02	0.07	0.15	0.24	0.33	0.41	0.46	0.49	0.48	0.44	0.38	0.30	0.21	0.12	0.05	0.01	0.00	4.17	4.16
40	0.00	0.03	0.09	0.17	0.27	0.37	0.46	0.52	0.55	0.54	0.50	0.43	0.34	0.24	0.14	0.06	0.01	0.00	4.73	4.73
30	0.00	0.03	0.09	0.19	0.30	0.40	0.50	0.56	0.60	0.59	0.54	0.47	0.36	0.26	0.15	0.07	0.02	0.00	5.12	5.12
20	0.00	0.03	0.10	0.20	0.31	0.42	0.52	0.59	0.62	0.61	0.56	0.48	0.38	0.26	0.16	0.07	0.02	0.00	5.32	5.32
10	0.00	0.03	0.10	0.20	0.31	0.42	0.52	0.59	0.62	0.61	0.56	0.48	0.38	0.26	0.16	0.07	0.02	0.00	5.31	5.31
0	0.00	0.03	0.09	0.19	0.29	0.40	0.49	0.56	0.59	0.58	0.54	0.46	0.36	0.26	0.15	0.07	0.02	0.00	5.09	5.09
-10	0.00	0.03	0.08	0.17	0.27	0.37	0.45	0.52	0.54	0.54	0.50	0.43	0.33	0.24	0.14	0.06	0.01	0.00	4.69	4.68
-20	0.00	0.02	0.07	0.15	0.24	0.32	0.40	0.45	0.48	0.47	0.44	0.37	0.29	0.21	0.12	0.05	0.01	0.00	4.11	4.10
-30	0.00	0.02	0.06	0.12	0.20	0.27	0.33	0.38	0.40	0.39	0.36	0.31	0.24	0.17	0.10	0.04	0.01	0.00	3.39	3.37
-40	0.00	0.01	0.04	0.09	0.15	0.20	0.25	0.29	0.31	0.30	0.28	0.23	0.18	0.12	0.07	0.03	0.00	0.00	2.55	2.53
-50	0.00	0.00	0.02	0.06	0.09	0.13	0.17	0.19	0.20	0.20	0.18	0.15	0.11	0.07	0.04	0.01	0.00	0.00	1.64	1.59
-60	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.09	0.10	0.09	0.08	0.07	0.05	0.03	0.01	0.00	0.00	0.00	0.73	0.54
-70	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.00
HORIZONTAL (DEG)																				
Φ t	0.01	0.28	0.97	2.00	3.20	4.41	5.45	6.21	6.56	6.48	5.96	5.07	3.94	2.73	1.59	0.69	0.14	0.00	56	---
Φ a	0.00	0.23	0.93	1.96	3.16	4.37	5.41	6.16	6.51	6.43	5.91	5.02	3.89	2.68	1.54	0.64	0.08	0.00	---	55

one-half-peak spread: U:47.8,D:52.8 , L:43.0,R:47.5


NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.14V I:0.4069A P:2.374W PF:0.4807 Freq:59.97Hz Lamp Flux:55.6833x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light RGBWW WEIGHT:	
SPEC.:2.5W 5700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

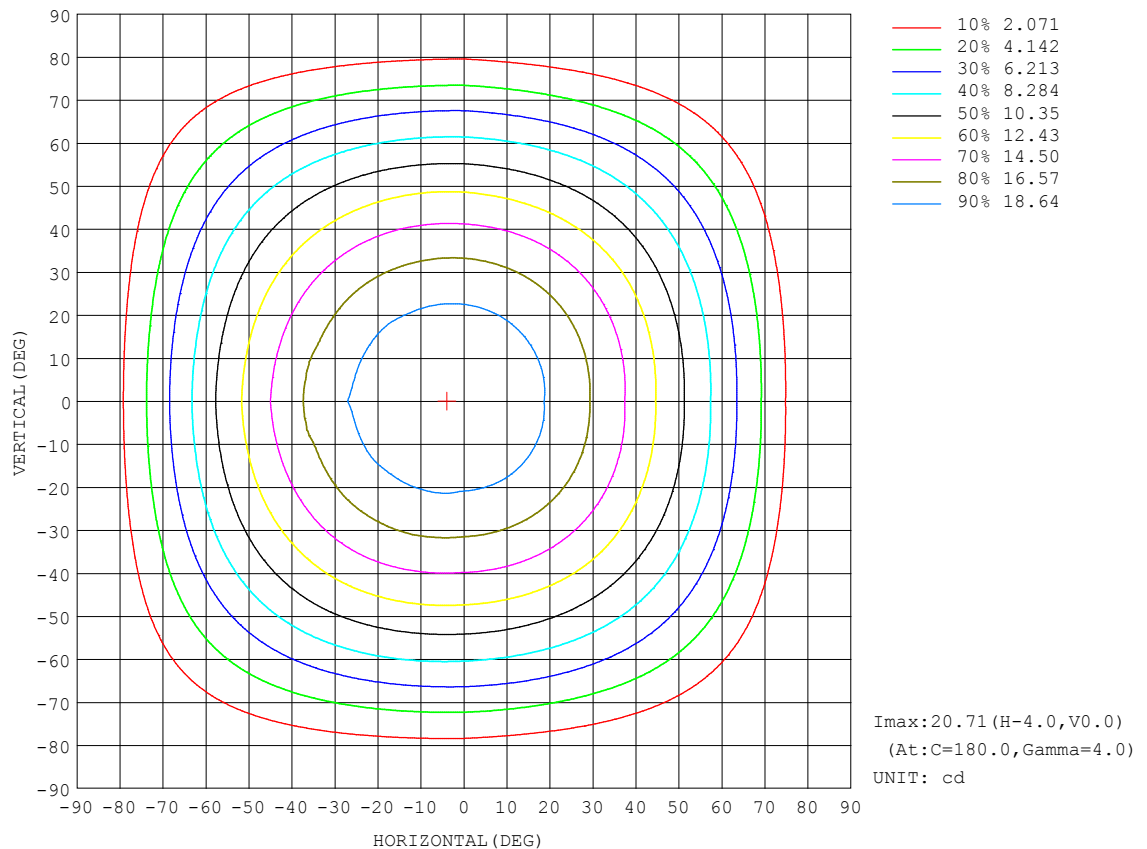


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.14V I:0.4069A P:2.374W PF:0.4807 Freq:59.97Hz Lamp Flux:55.6833x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light RGBWW WEIGHT:	
SPEC.:2.5W 5700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

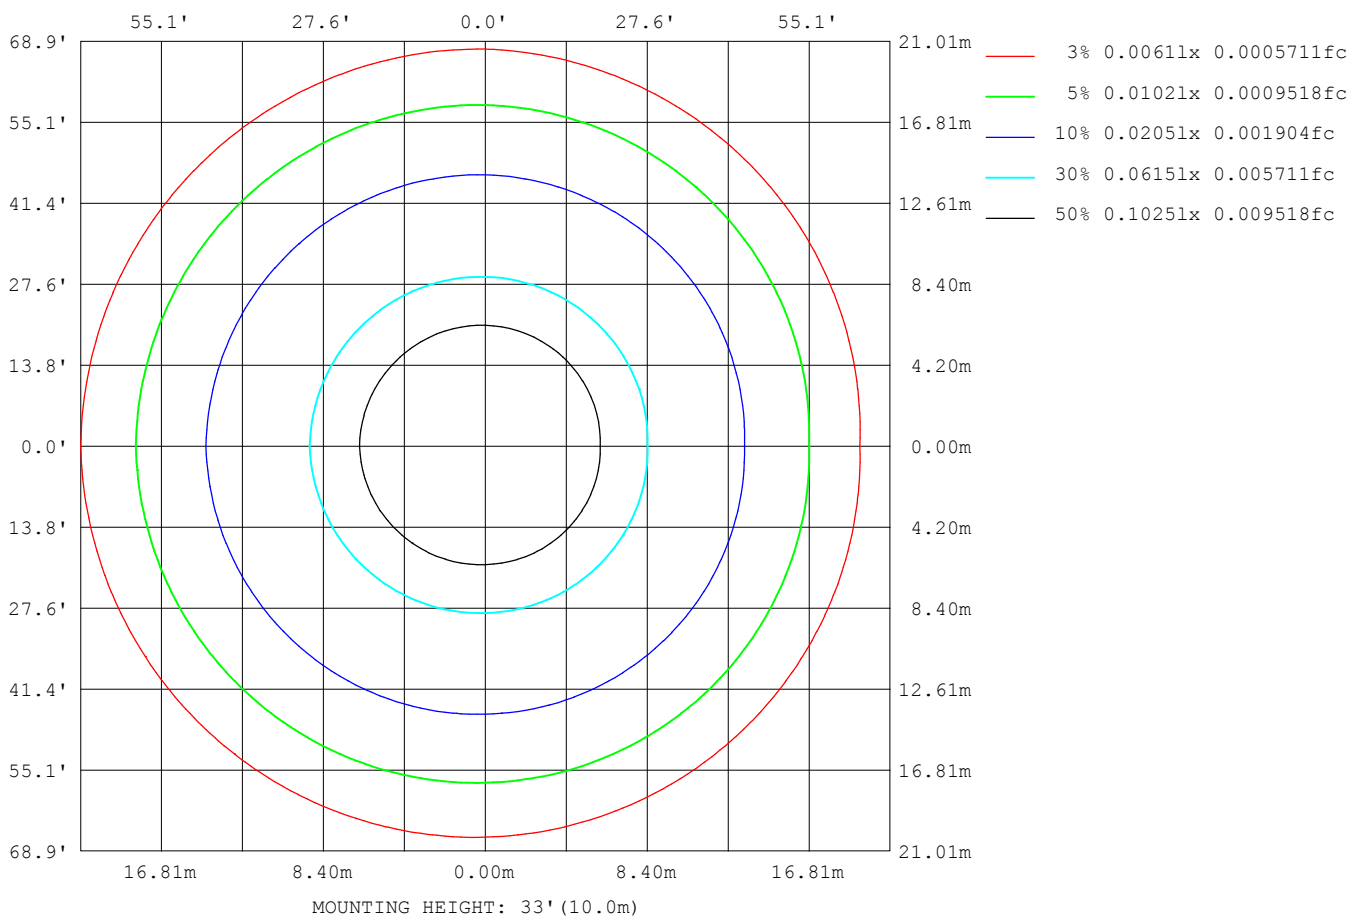

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

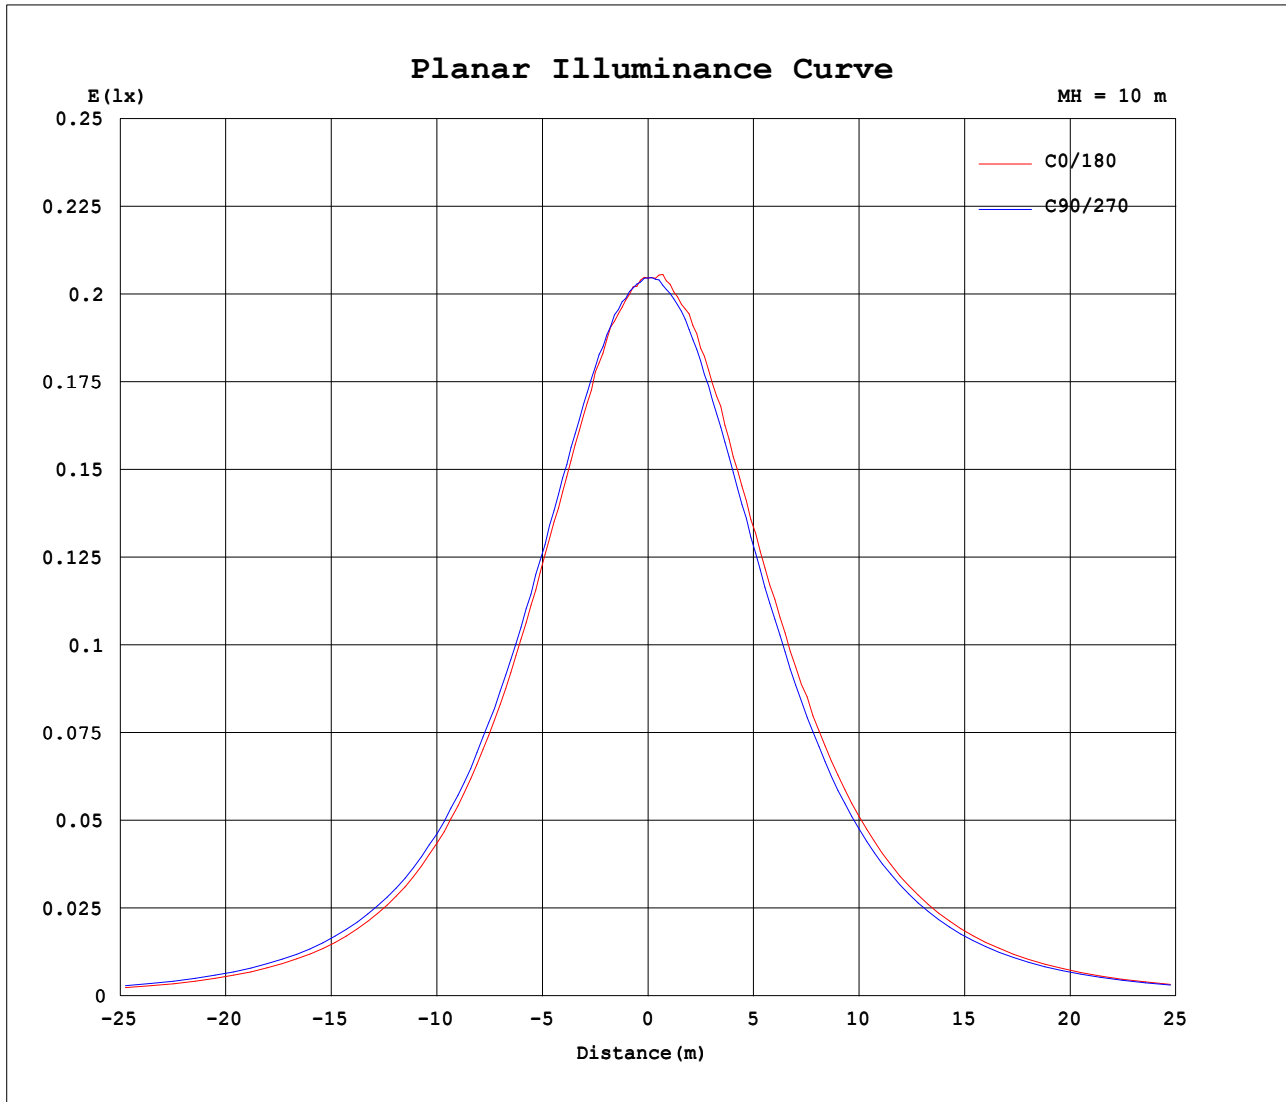


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.14V I:0.4069A P:2.374W PF:0.4807 Freq:59.97Hz Lamp Flux:55.6833x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light RGBWW	WEIGHT:
SPEC.:2.5W 5700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

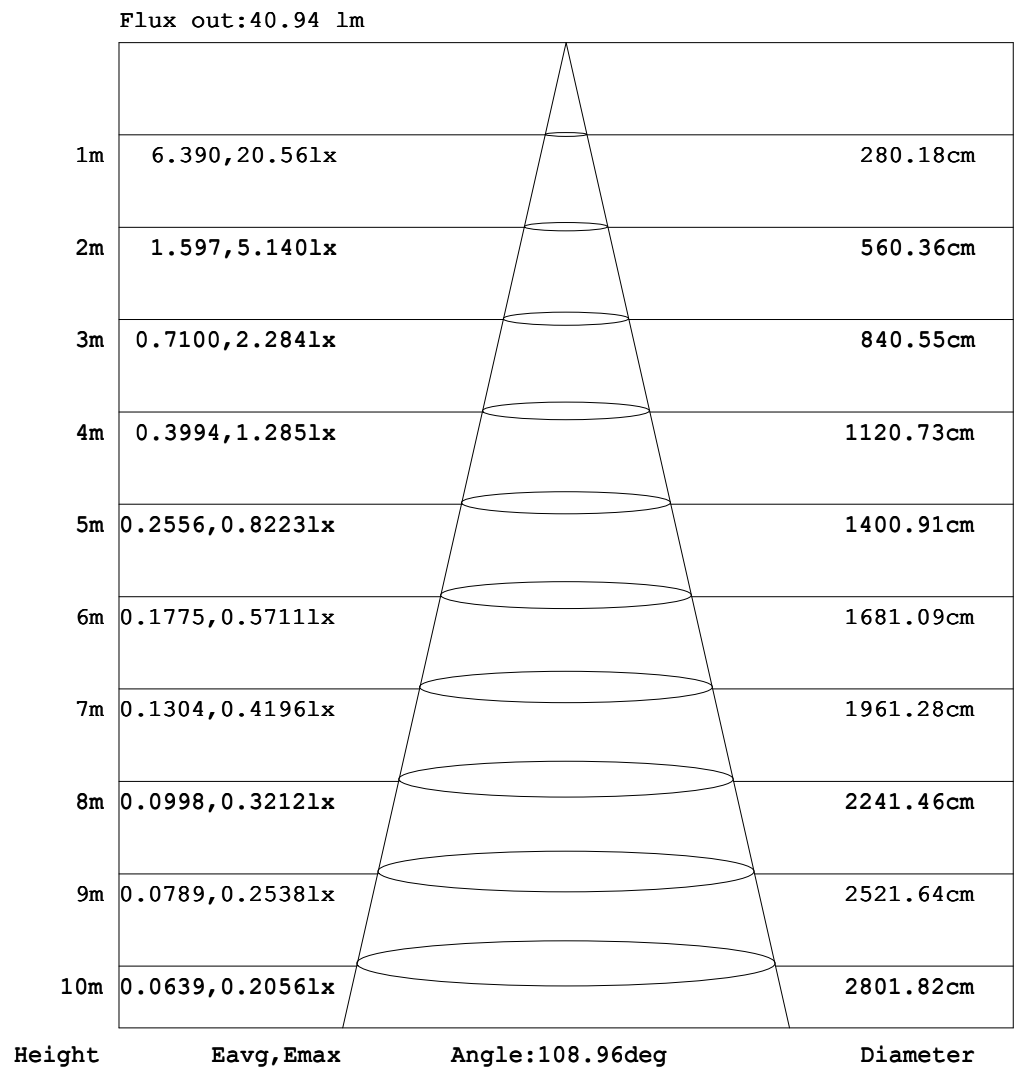

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.14V I:0.4069A P:2.374W PF:0.4807 Freq:59.97Hz Lamp Flux:55.6833x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light RGBWWWEIGHT:	
SPEC.:2.5W 5700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.04	0.17	0.35	0.54	0.73	0.90	1.06	1.20	1.32	1.42	1.49	1.54	1.57	1.57
-70	0.00	0.00	0.00	0.18	0.63	1.13	1.66	2.17	2.66	3.09	3.50	3.86	4.18	4.46	4.65	4.80	4.91	4.96	4.95
-60	0.00	0.00	0.15	0.85	1.68	2.54	3.35	4.13	4.89	5.58	6.18	6.76	7.25	7.66	8.01	8.27	8.40	8.45	8.42
-50	0.00	0.00	0.54	1.59	2.75	3.87	4.98	6.02	7.01	7.98	8.84	9.55	10.2	10.7	11.1	11.4	11.6	11.6	11.6
-40	0.00	0.00	0.92	2.29	3.68	5.08	6.40	7.73	9.01	10.1	11.1	12.0	12.7	13.4	13.8	14.2	14.4	14.5	14.4
-30	0.00	0.05	1.27	2.88	4.48	6.08	7.65	9.21	10.6	11.9	13.0	14.0	14.8	15.6	16.1	16.6	16.8	17.0	17.0
-20	0.00	0.10	1.54	3.30	5.10	6.83	8.63	10.3	11.8	13.2	14.4	15.5	16.5	17.3	18.0	18.4	18.7	18.8	18.8
-10	0.00	0.13	1.71	3.58	5.48	7.34	9.28	11.0	12.6	14.1	15.4	16.6	17.6	18.4	19.0	19.6	19.9	20.1	20.0
0	0.00	0.14	1.78	3.68	5.63	7.54	9.52	11.3	12.9	14.5	15.8	17.1	18.0	19.0	19.6	20.2	20.5	20.6	20.5
10	0.00	0.14	1.72	3.59	5.50	7.36	9.30	11.1	12.6	14.1	15.4	16.6	17.7	18.5	19.1	19.7	20.0	20.2	20.2
20	0.00	0.11	1.55	3.32	5.13	6.87	8.67	10.4	11.9	13.3	14.5	15.7	16.6	17.4	18.1	18.6	18.9	19.0	19.0
30	0.00	0.06	1.29	2.91	4.52	6.15	7.72	9.29	10.7	12.0	13.1	14.1	15.0	15.8	16.4	16.9	17.2	17.3	17.2
40	0.00	0.01	0.95	2.33	3.74	5.15	6.50	7.83	9.12	10.3	11.3	12.1	12.9	13.6	14.1	14.5	14.7	14.9	14.9
50	0.00	0.01	0.56	1.64	2.81	3.96	5.08	6.15	7.16	8.14	9.00	9.76	10.4	10.9	11.4	11.7	11.9	12.0	12.0
60	0.00	0.00	0.18	0.90	1.75	2.63	3.46	4.27	5.04	5.77	6.40	7.00	7.49	7.94	8.26	8.52	8.71	8.82	8.82
70	0.00	0.00	0.02	0.22	0.70	1.22	1.77	2.30	2.81	3.27	3.70	4.10	4.42	4.71	4.95	5.13	5.27	5.34	5.35
80	0.00	0.00	0.00	0.01	0.04	0.11	0.26	0.47	0.68	0.88	1.08	1.26	1.43	1.57	1.70	1.79	1.86	1.91	1.93
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-04-25

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.14V I:0.4069A P:2.374W PF:0.4807 Freq:59.97Hz Lamp Flux:55.6833x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light RGBWW WEIGHT:	
SPEC.:2.5W 5700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	1.49	1.38	1.26	1.12	0.95	0.79	0.63	0.49	0.36	0.24	0.15	0.08	0.02	0.00	0.00	0.00	0.00	0.00	
-70	4.85	4.70	4.48	4.22	3.93	3.57	3.16	2.72	2.24	1.74	1.22	0.70	0.30	0.13	0.04	0.00	0.00	0.00	
-60	8.31	8.14	7.88	7.48	7.02	6.54	5.95	5.29	4.59	3.81	3.01	2.18	1.35	0.55	0.12	0.02	0.00	0.00	
-50	11.5	11.3	10.9	10.5	9.94	9.28	8.52	7.74	6.78	5.82	4.76	3.65	2.53	1.43	0.40	0.05	0.00	0.00	
-40	14.3	14.1	13.7	13.1	12.5	11.7	10.8	9.82	8.69	7.58	6.32	5.00	3.62	2.25	0.94	0.06	0.00	0.00	
-30	16.8	16.5	16.0	15.4	14.7	13.7	12.7	11.5	10.3	8.94	7.57	6.09	4.52	2.94	1.41	0.12	0.00	0.00	
-20	18.6	18.3	17.8	17.1	16.2	15.2	14.1	12.8	11.4	10.00	8.42	6.82	5.19	3.44	1.75	0.24	0.00	0.00	
-10	19.8	19.5	18.9	18.1	17.2	16.1	14.9	13.6	12.2	10.6	8.95	7.33	5.56	3.75	1.96	0.34	0.00	0.00	
0	20.2	20.0	19.2	18.4	17.5	16.4	15.1	13.8	12.3	10.7	9.08	7.42	5.67	3.82	2.00	0.36	0.00	0.00	
10	20.0	19.6	18.9	18.2	17.3	16.2	15.0	13.6	12.2	10.6	8.98	7.35	5.59	3.77	1.97	0.35	0.00	0.00	
20	18.8	18.5	18.0	17.2	16.4	15.3	14.2	12.9	11.5	10.1	8.48	6.86	5.23	3.47	1.78	0.25	0.01	0.00	
30	17.1	16.8	16.3	15.6	14.8	13.9	12.8	11.7	10.4	9.02	7.65	6.16	4.58	2.98	1.44	0.14	0.01	0.00	
40	14.7	14.4	13.9	13.4	12.7	11.9	11.0	9.97	8.84	7.69	6.42	5.09	3.69	2.30	0.98	0.09	0.01	0.00	
50	11.8	11.6	11.2	10.8	10.2	9.48	8.73	7.90	6.95	5.97	4.90	3.76	2.62	1.50	0.45	0.07	0.01	0.00	
60	8.68	8.45	8.13	7.74	7.29	6.78	6.19	5.51	4.78	3.97	3.15	2.29	1.44	0.62	0.17	0.05	0.00	0.00	
70	5.23	5.05	4.82	4.53	4.18	3.81	3.40	2.92	2.41	1.90	1.35	0.81	0.39	0.20	0.08	0.02	0.00	0.00	
80	1.83	1.70	1.56	1.39	1.21	1.02	0.84	0.67	0.52	0.38	0.26	0.17	0.09	0.04	0.01	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-04-25

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks: