

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	402.9 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	148.3V x 145.7H
	At 50% of Imax	105.0V x 104.8H
	At 90% of Imax	45.3V x 48.6H

Beam Flux	Total	999.9 lumens per klm.
	To 10% of Imax	988.8 lumens per klm.
	To 50% of Imax	744.5 lumens per klm.
	To 90% of Imax	197.1 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.14V I:0.4023A P:2.360W PF:0.4831 Freq:59.99Hz Lamp Flux:6.86117x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light RGBWW WEIGHT:	
SPEC.:2.5W BLUE	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

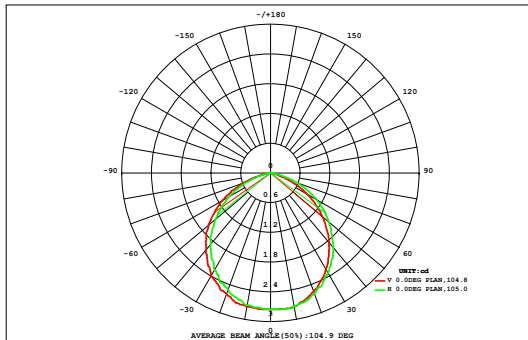

DATA OF LAMP		Eff:2.91lm/W	
MODEL	W9B4-2.5W-A	Imax (cd)	2.764
NOMINAL POWER (W)	2.5	AVAILABILITY (%)	98.8
RATED VOLTAGE (V)	12	Avai. FLUX(lm)	6.782
NOMINAL FLUX(lm)	6.86117	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	6.861
TEST VOLTAGE (V)	12	θ @50% (H,V)	105,105DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.03
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	0.17
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.31	0.30
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.43	0.43
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.53	0.53
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.62	0.62
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.67	0.67
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.70	0.70
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.70	0.70
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.67	0.66
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.60	0.60
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.52	0.52
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.41	0.41
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.29	0.28
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.15
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.01
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HORIZONTAL (DEG)																				
Φ t	0.00	0.02	0.09	0.22	0.38	0.54	0.68	0.79	0.84	0.83	0.77	0.65	0.49	0.32	0.17	0.06	0.00	0.00	7	---
Φ a	0.00	0.01	0.09	0.22	0.37	0.53	0.68	0.78	0.84	0.83	0.76	0.64	0.49	0.32	0.17	0.05	0.00	0.00	---	7

one-half-peak spread: U:27.6,D:45.2 , L:32.3,R:42.1


NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.14V I:0.4023A P:2.360W PF:0.4831 Freq:59.99Hz Lamp Flux:6.86117x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light RGBWW WEIGHT:	
SPEC.:2.5W BLUE	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

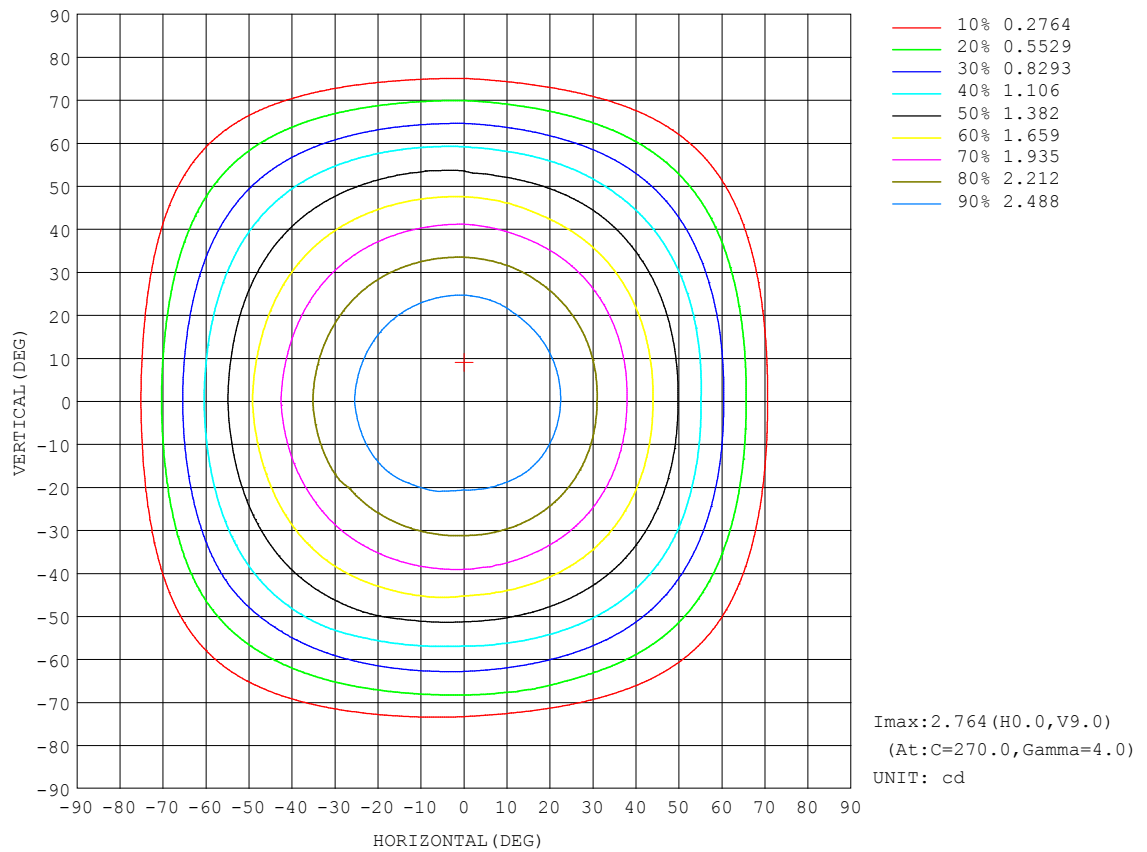


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.14V I:0.4023A P:2.360W PF:0.4831 Freq:59.99Hz Lamp Flux:6.86117x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light RGBWW WEIGHT:	
SPEC.:2.5W BLUE	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

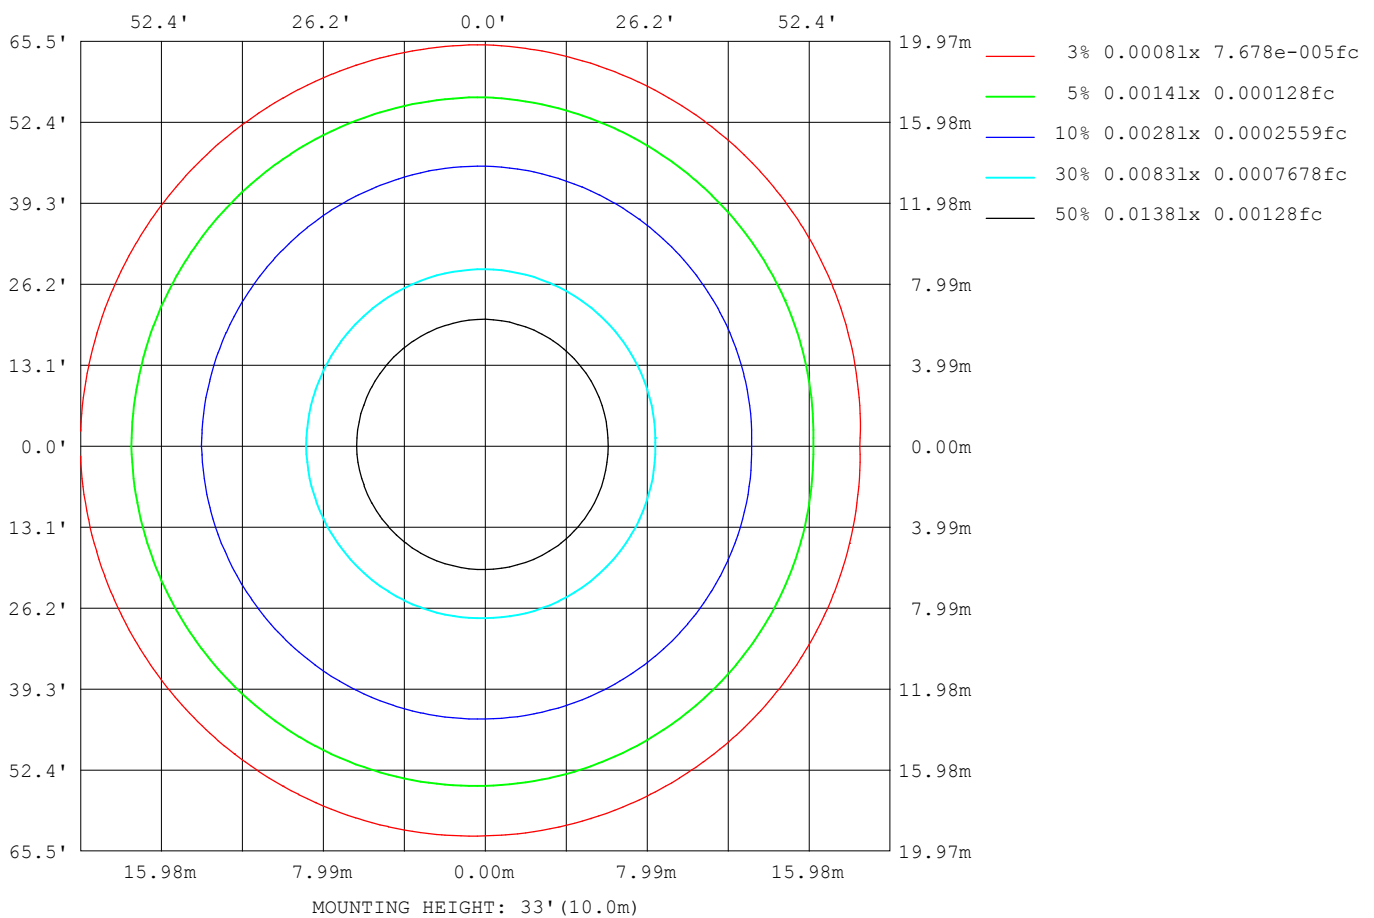

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

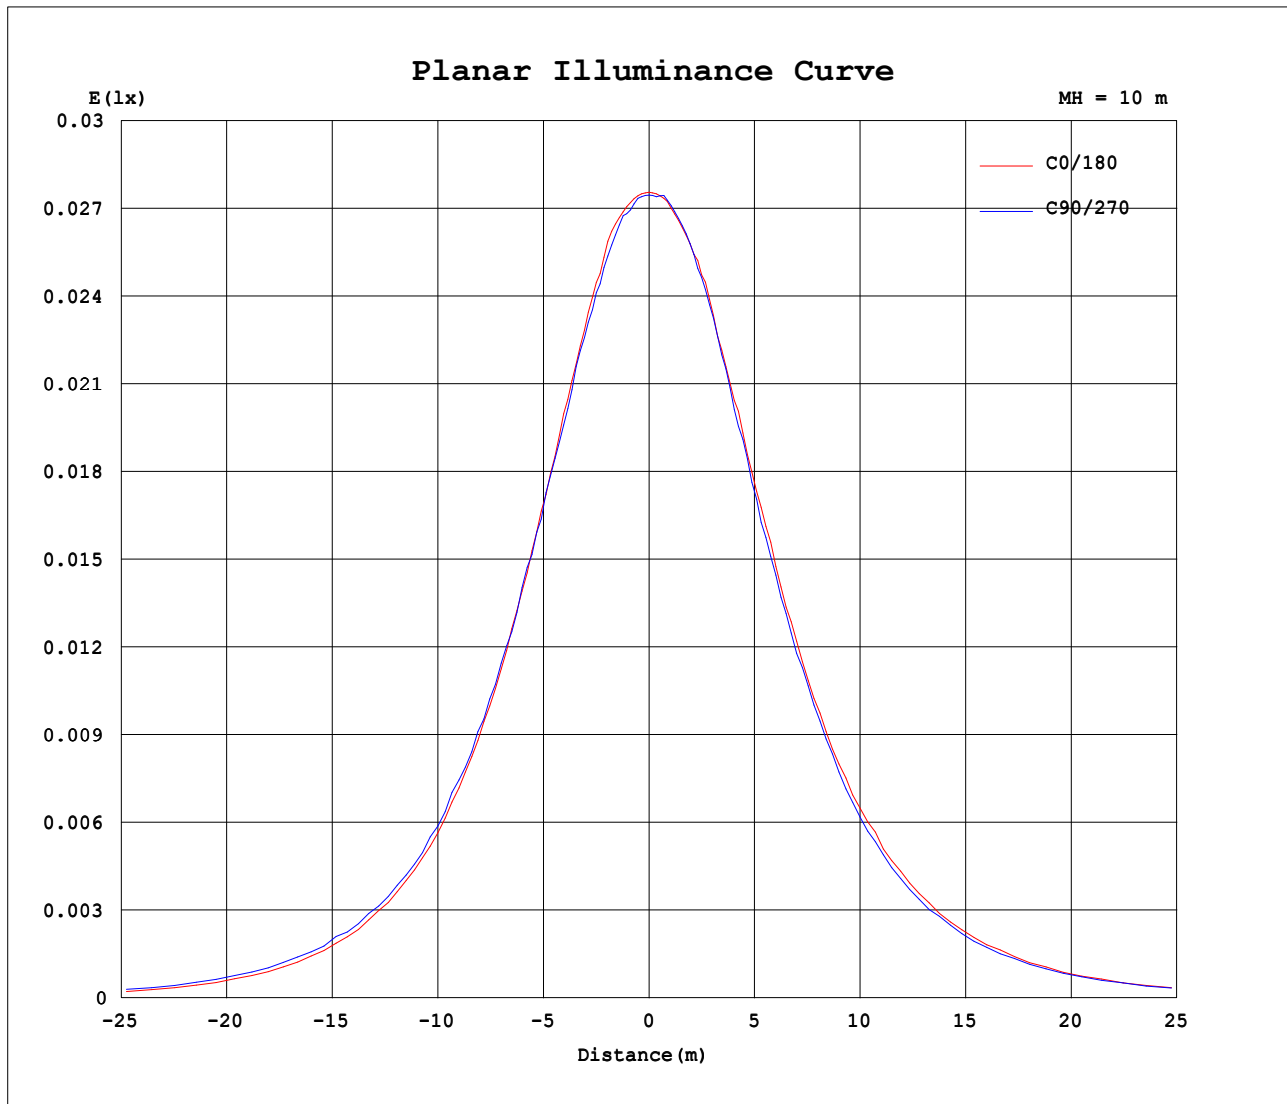


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.14V I:0.4023A P:2.360W PF:0.4831 Freq:59.99Hz Lamp Flux:6.86117x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light RGBWW	WEIGHT:
SPEC.:2.5W BLUE	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

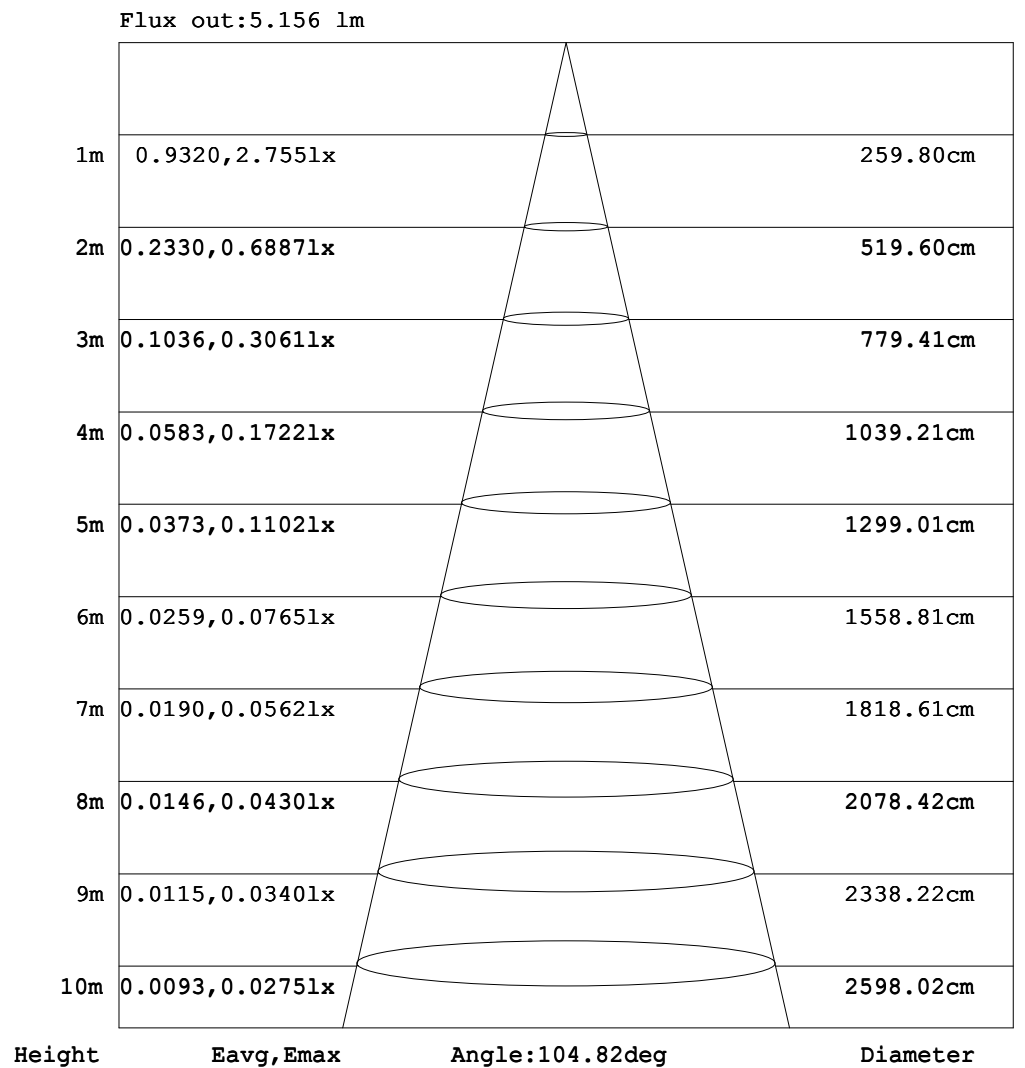

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.14V I:0.4023A P:2.360W PF:0.4831 Freq:59.99Hz Lamp Flux:6.86117x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light RGBWWWEIGHT:	
SPEC.:2.5W BLUE	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.12	0.17	0.25	0.30	0.34	0.37	0.42	0.44	0.45	0.45	0.44
-60	0.00	0.00	0.00	0.00	0.01	0.11	0.22	0.35	0.45	0.54	0.64	0.72	0.79	0.86	0.91	0.93	0.96	0.98	0.98
-50	0.00	0.00	0.00	0.00	0.14	0.30	0.46	0.62	0.76	0.90	1.03	1.13	1.24	1.29	1.38	1.41	1.44	1.46	1.45
-40	0.00	0.00	0.00	0.07	0.28	0.47	0.68	0.86	1.05	1.21	1.35	1.49	1.59	1.70	1.77	1.84	1.86	1.88	1.87
-30	0.00	0.00	0.00	0.15	0.41	0.63	0.86	1.09	1.29	1.47	1.63	1.78	1.90	2.02	2.11	2.17	2.22	2.27	2.27
-20	0.00	0.00	0.00	0.21	0.47	0.73	1.01	1.23	1.47	1.65	1.83	2.00	2.15	2.27	2.38	2.46	2.49	2.51	2.51
-10	0.00	0.00	0.01	0.27	0.55	0.82	1.09	1.34	1.58	1.79	1.96	2.14	2.30	2.43	2.54	2.61	2.67	2.71	2.71
0	0.00	0.00	0.01	0.29	0.58	0.87	1.14	1.38	1.64	1.84	2.03	2.22	2.40	2.50	2.60	2.72	2.74	2.75	2.75
10	0.00	0.00	0.01	0.27	0.55	0.83	1.10	1.35	1.59	1.79	1.97	2.16	2.32	2.45	2.55	2.63	2.70	2.72	2.74
20	0.00	0.00	0.00	0.22	0.48	0.74	1.02	1.25	1.48	1.67	1.85	2.03	2.17	2.30	2.40	2.49	2.53	2.58	2.59
30	0.00	0.00	0.00	0.16	0.42	0.64	0.88	1.11	1.31	1.49	1.66	1.81	1.95	2.06	2.16	2.23	2.28	2.32	2.32
40	0.00	0.00	0.00	0.08	0.29	0.48	0.70	0.89	1.08	1.24	1.40	1.53	1.65	1.74	1.82	1.89	1.95	1.97	1.97
50	0.00	0.00	0.00	0.01	0.16	0.32	0.48	0.65	0.80	0.93	1.08	1.19	1.28	1.37	1.42	1.48	1.52	1.54	1.54
60	0.00	0.00	0.00	0.00	0.01	0.14	0.25	0.38	0.48	0.60	0.69	0.78	0.86	0.92	0.98	1.02	1.05	1.08	1.08
70	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.08	0.16	0.22	0.29	0.35	0.41	0.45	0.48	0.51	0.53	0.54	0.55
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.03	0.03
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-04-25

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.14V I:0.4023A P:2.360W PF:0.4831 Freq:59.99Hz Lamp Flux:6.86117x1 lm																	
NAME: LED LANDSCAPE LIGHT									TYPE:Copper Wall Light RGBWWWEIGHT:								
SPEC.:2.5W BLUE									DIM.:			SERIAL No.:1					
MFR.: EVERFINE									SUR.:			Shielding Angle:					

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.43	0.42	0.40	0.36	0.30	0.25	0.20	0.13	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.96	0.93	0.88	0.83	0.78	0.70	0.61	0.52	0.40	0.30	0.18	0.06	0.01	0.00	0.00	0.00	0.00	0.00	
-50	1.44	1.40	1.35	1.30	1.20	1.13	1.01	0.88	0.76	0.60	0.44	0.28	0.10	0.01	0.00	0.00	0.00	0.00	
-40	1.86	1.83	1.79	1.70	1.60	1.48	1.35	1.19	1.03	0.86	0.67	0.48	0.28	0.06	0.00	0.00	0.00	0.00	
-30	2.25	2.20	2.12	2.04	1.93	1.80	1.63	1.47	1.29	1.09	0.87	0.64	0.41	0.17	0.01	0.00	0.00	0.00	
-20	2.50	2.47	2.42	2.32	2.19	2.03	1.86	1.67	1.46	1.25	1.00	0.76	0.51	0.25	0.01	0.00	0.00	0.00	
-10	2.71	2.66	2.59	2.49	2.35	2.19	2.00	1.80	1.57	1.33	1.10	0.83	0.57	0.30	0.03	0.00	0.00	0.00	
0	2.75	2.75	2.66	2.54	2.41	2.24	2.05	1.84	1.60	1.37	1.11	0.85	0.59	0.32	0.03	0.00	0.00	0.00	
10	2.73	2.69	2.61	2.50	2.37	2.21	2.01	1.82	1.57	1.34	1.10	0.84	0.58	0.30	0.03	0.00	0.00	0.00	
20	2.57	2.51	2.45	2.34	2.22	2.06	1.89	1.69	1.48	1.26	1.02	0.78	0.52	0.26	0.02	0.00	0.00	0.00	
30	2.30	2.26	2.19	2.09	1.98	1.84	1.67	1.50	1.32	1.11	0.89	0.66	0.42	0.19	0.02	0.00	0.00	0.00	
40	1.95	1.92	1.84	1.75	1.64	1.53	1.39	1.25	1.07	0.89	0.70	0.50	0.29	0.07	0.01	0.00	0.00	0.00	
50	1.52	1.48	1.43	1.35	1.28	1.17	1.06	0.93	0.79	0.64	0.47	0.30	0.12	0.03	0.00	0.00	0.00	0.00	
60	1.06	1.02	0.97	0.91	0.84	0.76	0.67	0.56	0.45	0.34	0.21	0.08	0.03	0.00	0.00	0.00	0.00	0.00	
70	0.53	0.50	0.47	0.43	0.37	0.32	0.25	0.17	0.11	0.07	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.03	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEGH(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:ADMIN

Test Date:2023-04-25

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352

Humidity:65.0%

Test Distance:13.563m [K=1.0000]

Remarks: