

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	386.8 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	154.2V x 150.4H
	At 50% of Imax	107.5V x 106.4H
	At 90% of Imax	44.7V x 45.2H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	987.2 lumens per klm.
	To 50% of Imax	728.7 lumens per klm.
	To 90% of Imax	171.3 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.14V I:0.4049A P:2.379W PF:0.4840 Freq:59.99Hz Lamp Flux:16.9632x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light	WEIGHT:
SPEC.:2.5W RED	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

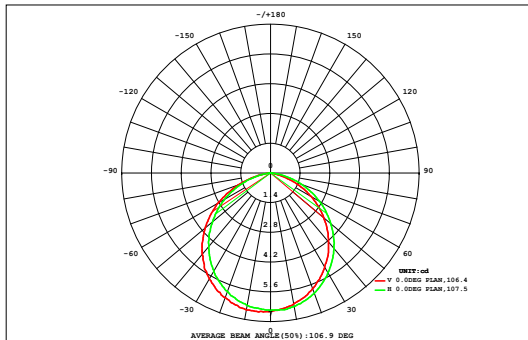

DATA OF LAMP		Eff:7.13lm/W	
MODEL	W9B4-2.5W-A	Imax (cd)	6.562
NOMINAL POWER (W)	2.5	AVAILABILITY (%)	98.7
RATED VOLTAGE (V)	12	Avai. FLUX(lm)	16.75
NOMINAL FLUX(lm)	16.9632	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	16.96
TEST VOLTAGE (V)	12	θ @50% (H,V)	106,107DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
90	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.20	0.14
80	0.00	0.00	0.00	0.01	0.03	0.04	0.05	0.06	0.06	0.06	0.06	0.05	0.03	0.02	0.01	0.00	0.00	0.00	0.49	0.47
70	0.00	0.00	0.01	0.03	0.04	0.06	0.08	0.09	0.10	0.10	0.09	0.07	0.06	0.04	0.02	0.01	0.00	0.00	0.78	0.78
60	0.00	0.00	0.02	0.04	0.06	0.08	0.10	0.12	0.13	0.13	0.11	0.10	0.08	0.05	0.03	0.01	0.00	0.00	1.05	1.05
50	0.00	0.01	0.02	0.04	0.07	0.10	0.13	0.14	0.15	0.15	0.14	0.12	0.09	0.06	0.04	0.02	0.00	0.00	1.29	1.28
40	0.00	0.01	0.02	0.05	0.08	0.12	0.14	0.16	0.17	0.17	0.16	0.13	0.10	0.07	0.04	0.02	0.00	0.00	1.47	1.47
30	0.00	0.01	0.03	0.06	0.09	0.13	0.16	0.18	0.19	0.19	0.17	0.15	0.11	0.08	0.05	0.02	0.00	0.00	1.60	1.60
	0.00	0.01	0.03	0.06	0.10	0.13	0.16	0.19	0.20	0.19	0.18	0.15	0.12	0.08	0.05	0.02	0.00	0.00	1.67	1.67
	0.00	0.01	0.03	0.06	0.10	0.13	0.16	0.19	0.20	0.19	0.18	0.15	0.12	0.08	0.05	0.02	0.00	0.00	1.66	1.66
	0.00	0.01	0.03	0.06	0.09	0.13	0.16	0.18	0.19	0.18	0.17	0.15	0.11	0.08	0.05	0.02	0.00	0.00	1.59	1.59
	0.00	0.01	0.02	0.05	0.08	0.12	0.14	0.16	0.17	0.17	0.16	0.13	0.10	0.07	0.04	0.02	0.00	0.00	1.46	1.46
-30	0.00	0.00	0.02	0.04	0.07	0.10	0.13	0.14	0.15	0.15	0.14	0.12	0.09	0.06	0.04	0.01	0.00	0.00	1.27	1.26
-40	0.00	0.00	0.02	0.04	0.06	0.08	0.10	0.12	0.12	0.12	0.11	0.09	0.07	0.05	0.03	0.01	0.00	0.00	1.03	1.02
-50	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.09	0.09	0.09	0.08	0.07	0.05	0.04	0.02	0.01	0.00	0.00	0.75	0.75
-60	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.46	0.44
-70	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.16	0.10
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.00	0.06	0.26	0.58	0.96	1.35	1.69	1.93	2.04	2.01	1.84	1.55	1.20	0.81	0.46	0.19	0.03	0.00	17	---
Φ a	0.00	0.05	0.25	0.57	0.95	1.34	1.67	1.91	2.02	1.99	1.83	1.54	1.18	0.80	0.45	0.17	0.01	0.00	---	17

one-half-peak spread: U:53.4,D:48.7 , L:46.7,R:51.2


NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.14V I:0.4049A P:2.379W PF:0.4840 Freq:59.99Hz Lamp Flux:16.9632x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light	WEIGHT:
SPEC.:2.5W RED	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

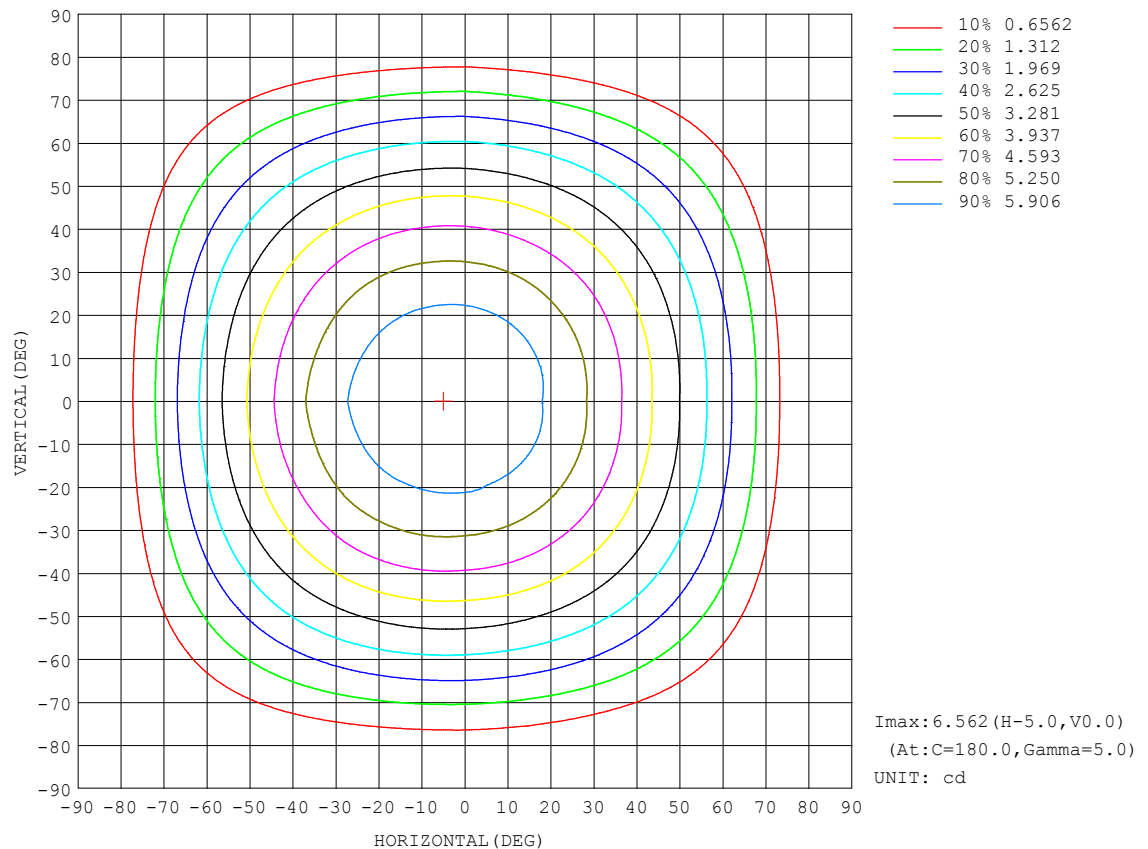


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.14V I:0.4049A P:2.379W PF:0.4840 Freq:59.99Hz Lamp Flux:16.9632x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light	WEIGHT:
SPEC.:2.5W RED	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

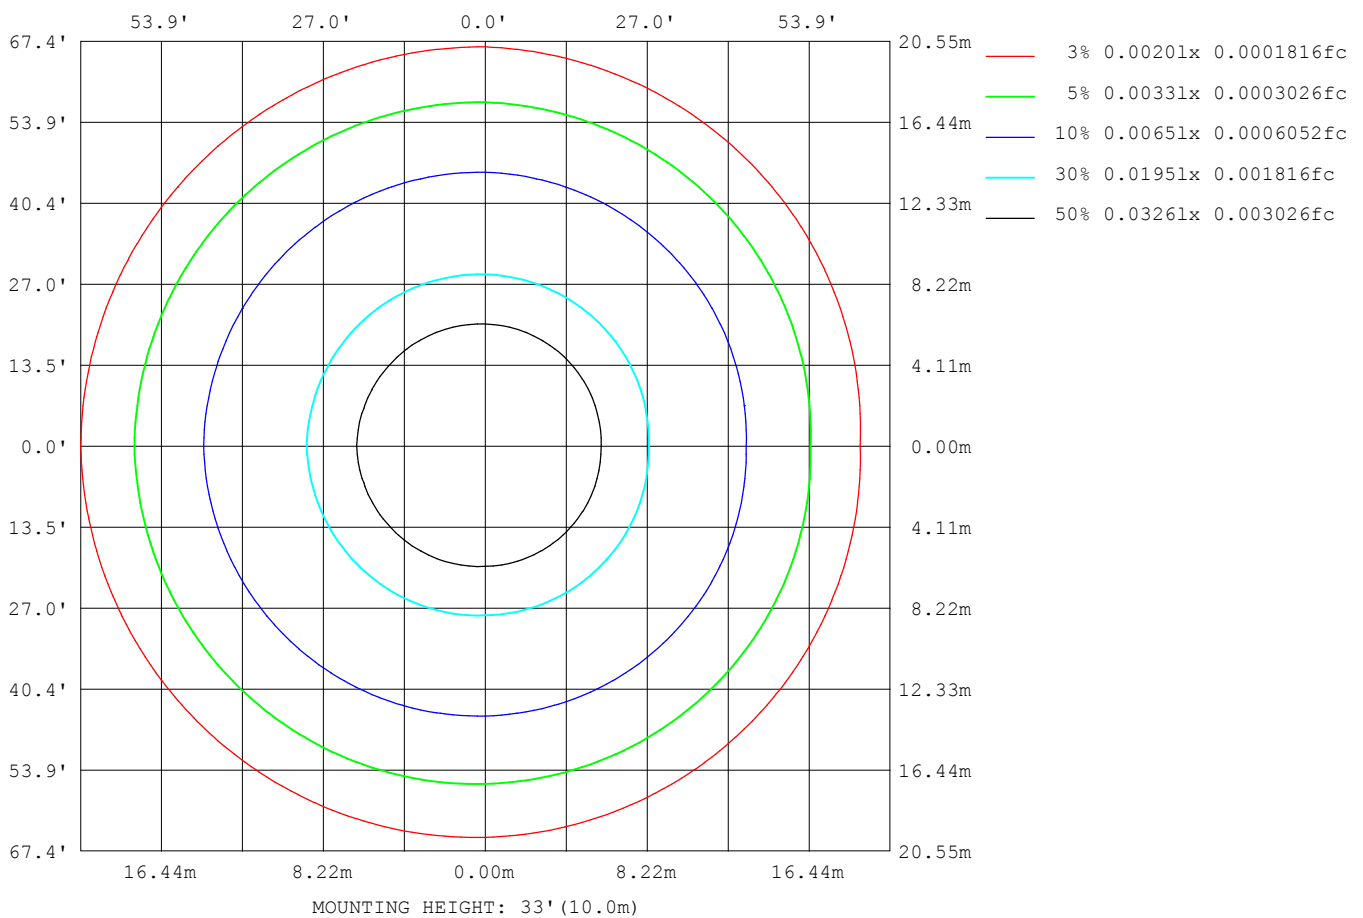

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

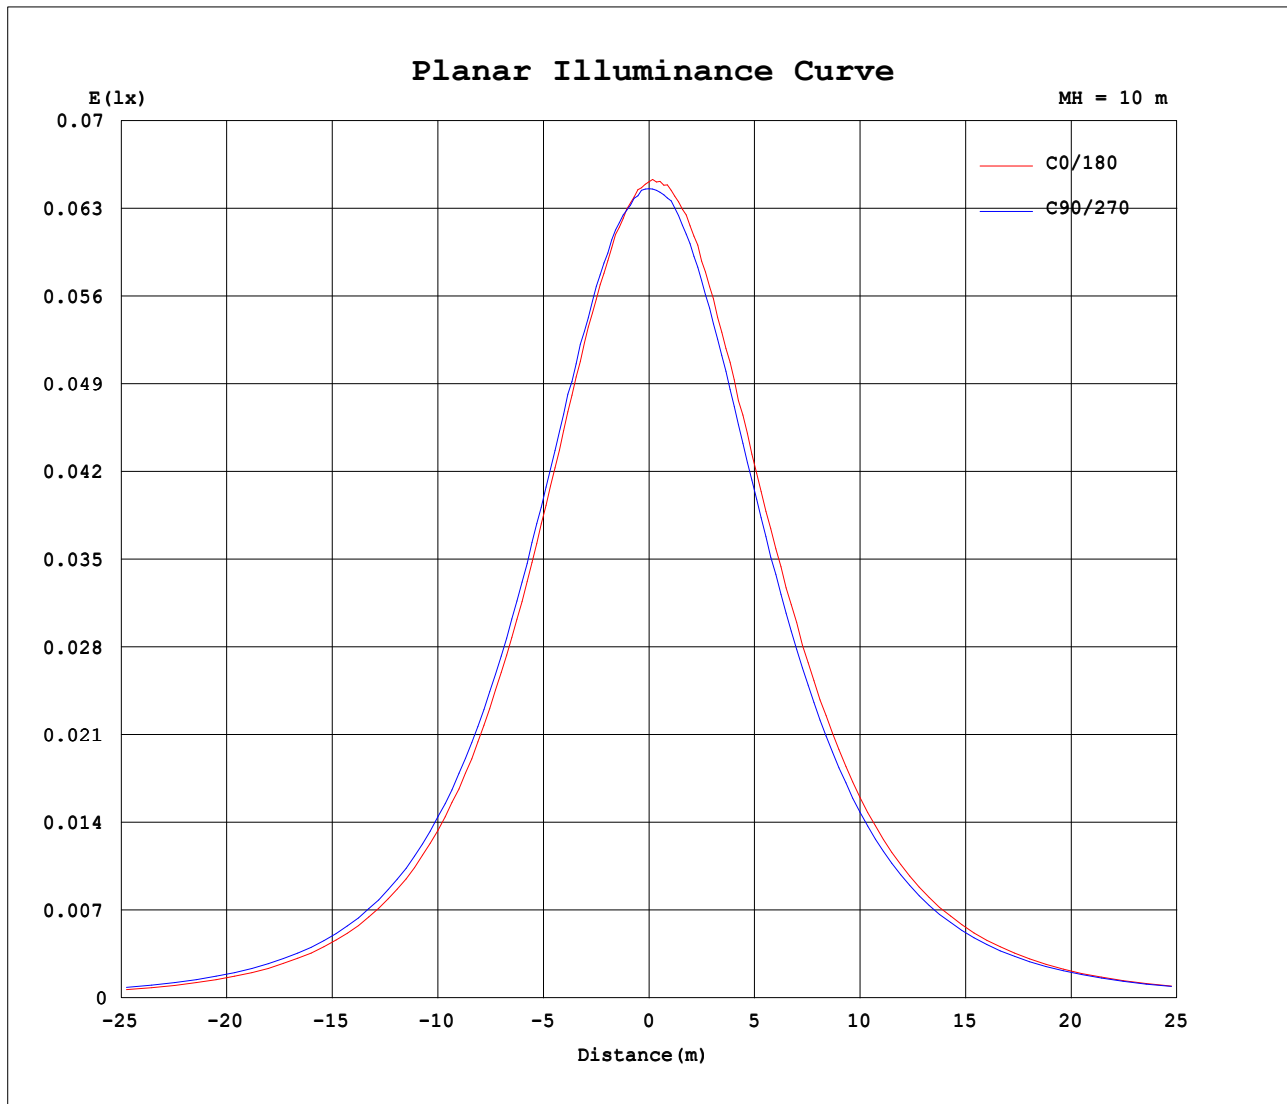


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.14V I:0.4049A P:2.379W PF:0.4840 Freq:59.99Hz Lamp Flux:16.9632x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light	WEIGHT:
SPEC.:2.5W RED	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

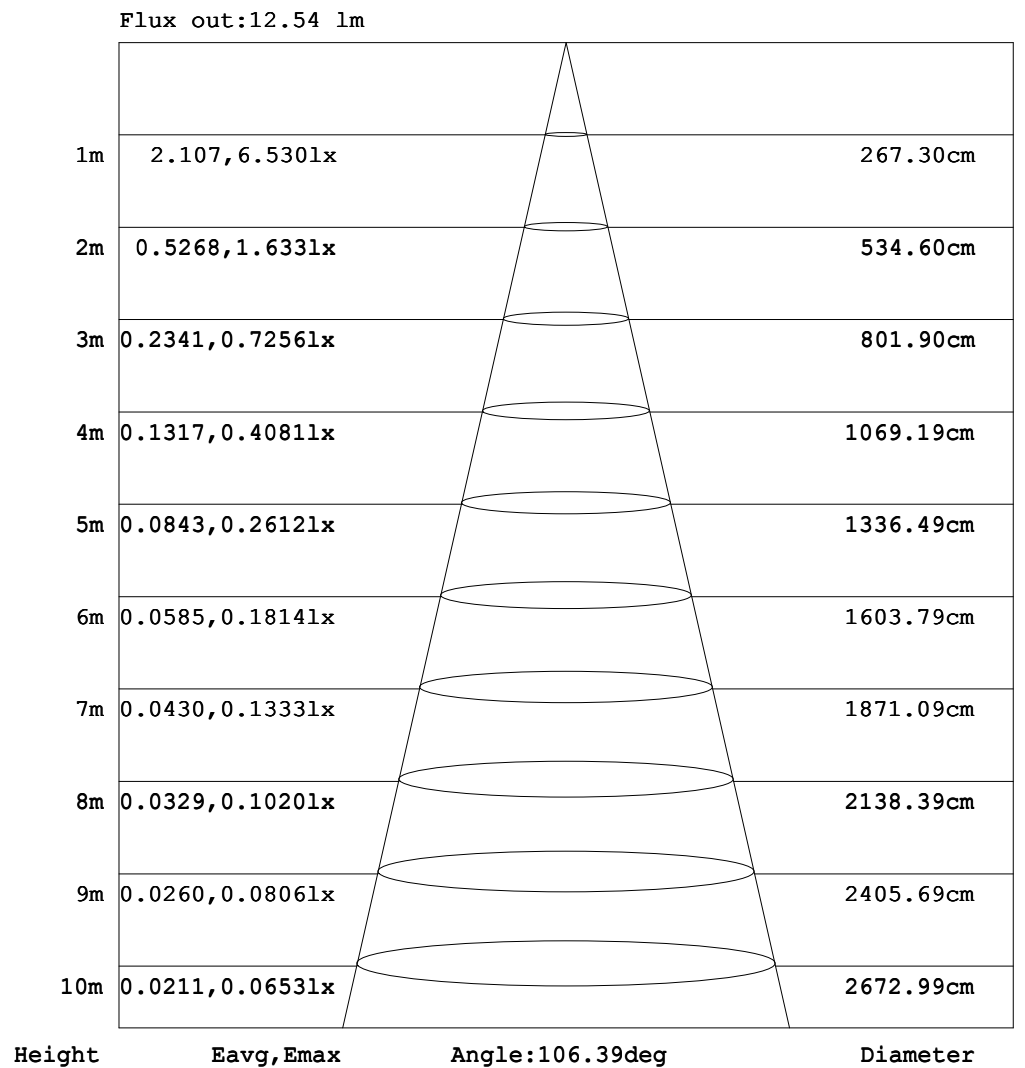

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.14V I:0.4049A P:2.379W PF:0.4840 Freq:59.99Hz Lamp Flux:16.9632x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light	WEIGHT:
SPEC.:2.5W RED	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.08	0.13	0.16	0.20	0.23	0.24	0.25	0.26
-70	0.00	0.00	0.00	0.00	0.00	0.09	0.26	0.44	0.60	0.76	0.88	1.00	1.11	1.22	1.27	1.32	1.35	1.37	1.37
-60	0.00	0.00	0.00	0.03	0.27	0.57	0.83	1.09	1.34	1.56	1.78	1.96	2.13	2.26	2.37	2.46	2.51	2.53	2.51
-50	0.00	0.00	0.00	0.24	0.63	0.99	1.36	1.71	2.04	2.35	2.64	2.87	3.09	3.26	3.40	3.50	3.57	3.59	3.58
-40	0.00	0.00	0.04	0.48	0.93	1.40	1.84	2.27	2.70	3.05	3.39	3.69	3.94	4.15	4.33	4.45	4.53	4.55	4.53
-30	0.00	0.00	0.13	0.67	1.20	1.72	2.25	2.77	3.22	3.64	4.03	4.37	4.67	4.90	5.10	5.24	5.33	5.36	5.34
-20	0.00	0.00	0.22	0.80	1.40	1.98	2.57	3.11	3.63	4.09	4.53	4.90	5.22	5.48	5.69	5.84	5.93	5.98	5.93
-10	0.00	0.00	0.28	0.89	1.52	2.14	2.78	3.36	3.90	4.38	4.85	5.23	5.59	5.85	6.07	6.22	6.33	6.35	6.33
0	0.00	0.00	0.29	0.93	1.57	2.21	2.87	3.47	4.02	4.52	5.01	5.45	5.77	6.05	6.25	6.43	6.54	6.56	6.51
10	0.00	0.00	0.28	0.90	1.53	2.15	2.79	3.37	3.91	4.40	4.87	5.25	5.60	5.87	6.09	6.24	6.35	6.40	6.38
20	0.00	0.00	0.22	0.81	1.41	2.00	2.58	3.14	3.65	4.12	4.56	4.93	5.26	5.52	5.73	5.88	5.99	6.03	6.03
30	0.00	0.00	0.14	0.68	1.22	1.74	2.27	2.80	3.26	3.68	4.07	4.41	4.72	4.96	5.16	5.30	5.40	5.43	5.41
40	0.00	0.00	0.05	0.49	0.96	1.43	1.88	2.31	2.74	3.11	3.45	3.75	4.01	4.22	4.41	4.54	4.62	4.66	4.65
50	0.00	0.00	0.01	0.26	0.66	1.03	1.41	1.75	2.10	2.42	2.71	2.96	3.18	3.35	3.49	3.60	3.68	3.71	3.70
60	0.00	0.00	0.00	0.04	0.30	0.61	0.87	1.15	1.41	1.63	1.86	2.05	2.22	2.37	2.48	2.57	2.63	2.67	2.67
70	0.00	0.00	0.00	0.00	0.02	0.13	0.31	0.50	0.67	0.82	0.97	1.10	1.22	1.32	1.40	1.46	1.50	1.53	1.53
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.07	0.12	0.17	0.23	0.28	0.32	0.36	0.38	0.40	0.41
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-04-25

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.14V I:0.4049A P:2.379W PF:0.4840 Freq:59.99Hz Lamp Flux:16.9632x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light	WEIGHT:
SPEC.:2.5W RED	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.24	0.21	0.18	0.15	0.11	0.08	0.05	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	1.34	1.29	1.23	1.15	1.06	0.93	0.80	0.65	0.52	0.34	0.18	0.08	0.03	0.00	0.00	0.00	0.00	0.00	
-60	2.48	2.43	2.34	2.22	2.07	1.91	1.72	1.51	1.27	1.02	0.76	0.49	0.22	0.05	0.00	0.00	0.00	0.00	
-50	3.54	3.46	3.34	3.20	3.01	2.80	2.55	2.30	2.00	1.68	1.34	0.97	0.60	0.25	0.03	0.00	0.00	0.00	
-40	4.49	4.40	4.26	4.08	3.85	3.59	3.31	2.97	2.62	2.25	1.85	1.42	0.96	0.51	0.09	0.00	0.00	0.00	
-30	5.29	5.18	5.03	4.82	4.56	4.26	3.92	3.53	3.13	2.71	2.25	1.77	1.26	0.75	0.25	0.01	0.00	0.00	
-20	5.90	5.78	5.61	5.38	5.08	4.76	4.36	3.96	3.50	3.04	2.53	2.01	1.48	0.91	0.37	0.01	0.00	0.00	
-10	6.26	6.16	5.96	5.71	5.40	5.04	4.65	4.20	3.73	3.23	2.71	2.16	1.60	1.01	0.43	0.00	0.00	0.00	
0	6.42	6.27	6.07	5.80	5.49	5.12	4.73	4.25	3.78	3.27	2.75	2.21	1.63	1.03	0.44	0.00	0.00	0.00	
10	6.31	6.18	5.98	5.73	5.42	5.05	4.67	4.22	3.74	3.24	2.72	2.17	1.60	1.01	0.43	0.01	0.00	0.00	
20	5.96	5.83	5.65	5.41	5.12	4.79	4.40	3.99	3.53	3.07	2.56	2.03	1.49	0.92	0.37	0.01	0.00	0.00	
30	5.36	5.25	5.09	4.88	4.62	4.31	3.96	3.58	3.17	2.74	2.28	1.79	1.29	0.77	0.26	0.02	0.00	0.00	
40	4.59	4.49	4.35	4.16	3.93	3.66	3.37	3.03	2.68	2.29	1.88	1.45	0.99	0.54	0.11	0.01	0.00	0.00	
50	3.65	3.57	3.45	3.29	3.10	2.89	2.64	2.36	2.06	1.73	1.39	1.02	0.64	0.28	0.05	0.01	0.00	0.00	
60	2.62	2.55	2.44	2.32	2.18	2.00	1.80	1.59	1.34	1.09	0.82	0.54	0.26	0.08	0.02	0.00	0.00	0.00	
70	1.49	1.44	1.37	1.28	1.17	1.04	0.90	0.74	0.58	0.41	0.23	0.13	0.06	0.02	0.00	0.00	0.00	0.00	
80	0.39	0.35	0.32	0.27	0.23	0.19	0.14	0.10	0.06	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-04-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: