


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.08V I:0.4335A P:3.348W PF:0.6392 Freq:59.98Hz Lamp Flux:22.8468x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:MR16 RGBWW	WEIGHT:
SPEC.:3.5W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 6.82 lm/W
MODEL:GO-3.5W-MR16-40-8-RGBTW		I _{max} (cd)	39.08	S/MH (C0/180)	0.53	
NOMINAL POWER (W)	3.5	LOR (%)	100.0	S/MH (C90/270)	0.64	
RATED VOLTAGE (V)	12	TOTAL FLUX (lm)	22.847	η UP, DN (C0-180)	0.0, 52.8	
NOMINAL FLUX (lm)	22.8468	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 47.2	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE (V)	12	η down (%)	100.0	CIBSE SHR MAX	0.65	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

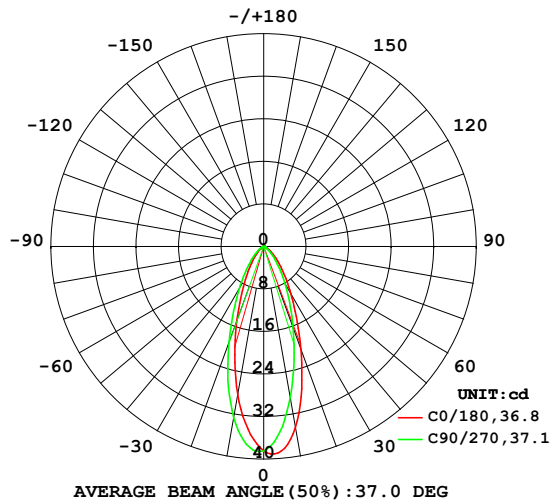

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

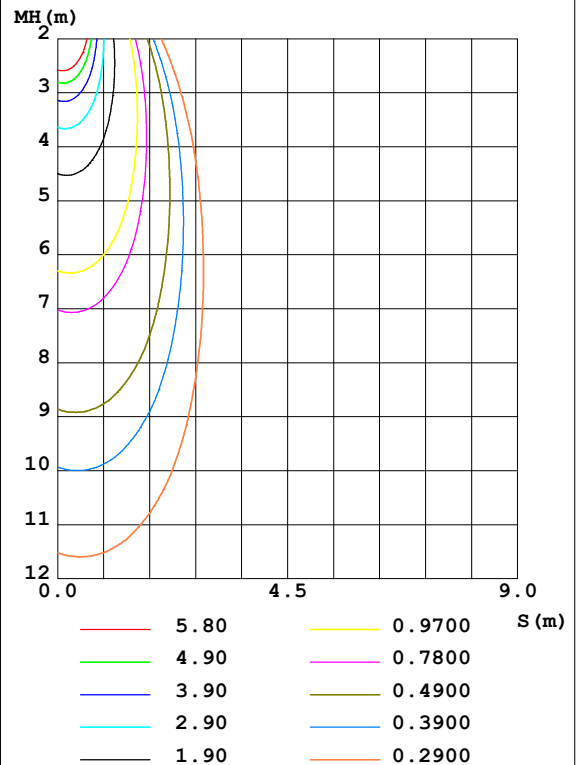

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: ADMIN
Test Date: 2025-05-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity: 65.0%
Test Distance: 13.563m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	34.54	28.81	28.23	32.64					0- 10	3.300	3.300	14.4,14.4
20	20.44	16.18	14.80	19.06					10- 20	6.669	9.969	43.6,43.6
30	10.29	7.989	6.571	9.222					20- 30	5.708	15.68	68.6,68.6
40	5.062	3.537	2.840	4.171					30- 40	3.670	19.35	84.7,84.7
50	2.325	1.510	1.185	1.800					40- 50	2.035	21.38	93.6,93.6
60	0.9759	0.5638	0.4400	0.7369					50- 60	1.005	22.39	98,98
70	0.2970	0.1338	0.1339	0.2299					60- 70	0.3972	22.78	99.7,99.7
80	0	0	0	0					70- 80	0.0628	22.85	100,100
90	0	0	0	0					80- 90	0	22.85	100,100
100	0	0	0	0					90-100	0	22.85	100,100
110	0	0	0	0					100-110	0	22.85	100,100
120	0	0	0	0					110-120	0	22.85	100,100
130	0	0	0	0					120-130	0	22.85	100,100
140	0	0	0	0					130-140	0	22.85	100,100
150	0	0	0	0					140-150	0	22.85	100,100
160	0	0	0	0					150-160	0	22.85	100,100
170	0	0	0	0					160-170	0	22.85	100,100
180	0	0	0	0					170-180	0	22.85	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-05-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.08V I:0.4335A P:3.348W PF:0.6392 Freq:59.98Hz Lamp Flux:22.8468x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:MR16 RGBWW	WEIGHT:
SPEC.:3.5W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

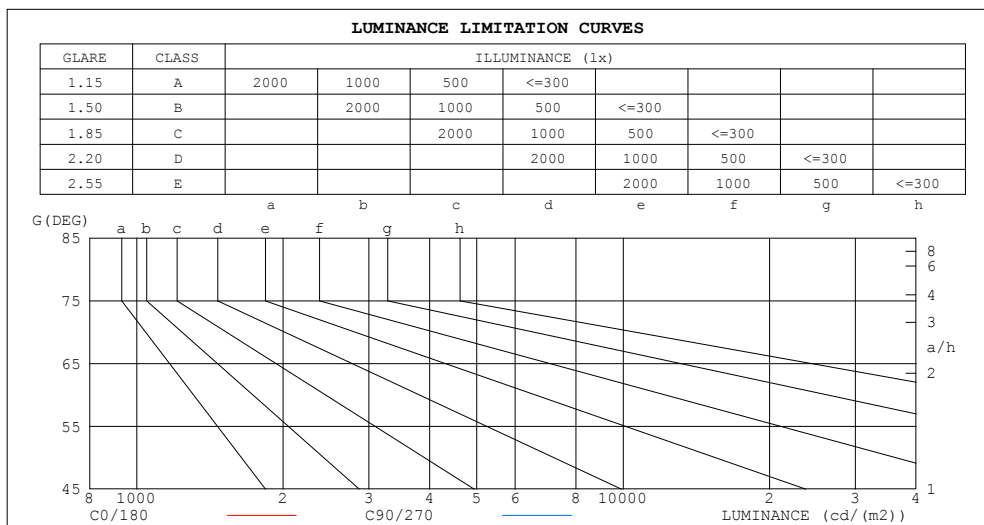

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	0
80	0	0
75	4	0
70	9	4
65	14	7
60	20	11
55	27	16
50	36	23
45	49	33


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-05-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.08V I:0.4335A P:3.348W PF:0.6392 Freq:59.98Hz Lamp Flux:22.8468x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:MR16 RGBWW	WEIGHT:
SPEC.:3.5W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.10	1.08	1.06	1.08	1.06	1.04	1.04	1.02	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.02	.98	.95	1.01	.97	.94	.97	.94	.92	.94	.92	.90	.92	.90	.88	.86
3.0	.95	.90	.86	.94	.89	.85	.91	.87	.84	.89	.85	.83	.87	.84	.81	.80
4.0	.89	.83	.79	.88	.83	.78	.86	.81	.78	.84	.80	.77	.82	.78	.76	.74
5.0	.83	.77	.73	.82	.77	.73	.80	.76	.72	.79	.75	.71	.77	.74	.71	.69
6.0	.78	.72	.68	.77	.72	.68	.76	.71	.67	.74	.70	.67	.73	.69	.66	.65
7.0	.74	.68	.63	.73	.67	.63	.72	.67	.63	.71	.66	.63	.69	.65	.62	.61
8.0	.70	.64	.60	.69	.63	.59	.68	.63	.59	.67	.62	.59	.66	.62	.59	.57
9.0	.66	.60	.56	.65	.60	.56	.65	.59	.56	.64	.59	.56	.63	.59	.55	.54
10.0	.63	.57	.53	.62	.57	.53	.61	.56	.53	.61	.56	.53	.60	.56	.53	.51

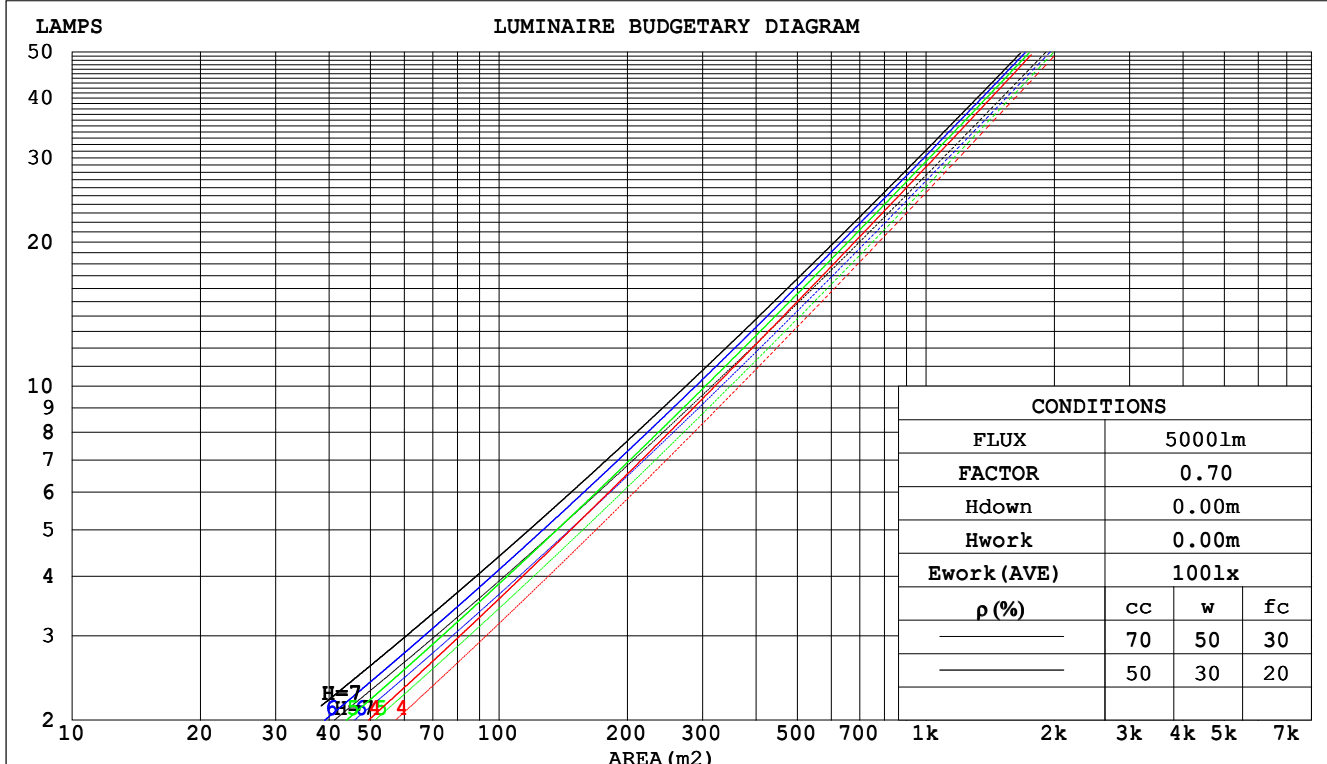

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-05-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:12.08V I:0.4335A P:3.348W PF:0.6392 Freq:59.98Hz Lamp Flux:22.8468x1 lm					
NAME: LED LANDSCAPE LIGHT			TYPE:MR16 RGBWW		WEIGHT:
SPEC.:3.5W BLUE 40°LENS			DIM.:		SERIAL No.:1
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)									
0.0																
1.0	.183	.104	.033	.177	.101	.032	.164	.094	.030	.152	.088	.028	.142	.082	.026	
2.0	.176	.097	.030	.171	.094	.029	.160	.089	.028	.150	.084	.026	.141	.080	.025	
3.0	.168	.089	.027	.163	.087	.026	.154	.083	.025	.146	.080	.024	.138	.076	.024	
4.0	.159	.083	.024	.155	.081	.024	.147	.078	.023	.140	.075	.023	.133	.072	.022	
5.0	.151	.077	.022	.148	.076	.022	.141	.073	.022	.134	.071	.021	.128	.069	.021	
6.0	.144	.072	.021	.140	.071	.020	.134	.069	.020	.129	.067	.020	.124	.065	.019	
7.0	.137	.068	.019	.134	.067	.019	.128	.065	.019	.123	.063	.018	.119	.062	.018	
8.0	.130	.064	.018	.128	.063	.018	.123	.061	.018	.118	.060	.017	.114	.059	.017	
9.0	.124	.060	.017	.122	.059	.017	.118	.058	.016	.114	.057	.016	.110	.056	.016	
10.0	.119	.057	.016	.117	.056	.016	.113	.055	.016	.109	.054	.015	.106	.053	.015	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.172	.157	.144	.147	.135	.124	.100	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.157	.132	.112	.134	.114	.097	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.145	.114	.089	.124	.098	.077	.085	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.135	.099	.072	.116	.086	.062	.080	.060	.044	.046	.035	.026	.015	.011	.009	
5.0	.126	.087	.059	.108	.076	.051	.075	.053	.036	.043	.031	.021	.014	.010	.007	
6.0	.119	.078	.049	.102	.068	.043	.070	.047	.030	.041	.028	.018	.013	.009	.006	
7.0	.112	.071	.042	.096	.061	.036	.067	.043	.026	.039	.025	.015	.012	.008	.005	
8.0	.106	.064	.036	.091	.056	.031	.063	.039	.022	.037	.023	.013	.012	.008	.004	
9.0	.101	.059	.031	.087	.051	.027	.060	.036	.019	.035	.021	.011	.011	.007	.004	
10.0	.096	.055	.027	.083	.048	.024	.057	.033	.017	.033	.020	.010	.011	.006	.003	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2025-05-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.08V I:0.4335A P:3.348W PF:0.6392 Freq:59.98Hz Lamp Flux:22.8468x1 lm										
NAME: LED LANDSCAPE LIGHT					TYPE:MR16 RGBWW			WEIGHT:		
SPEC.:3.5W BLUE 40°LENS					DIM.:			SERIAL No.:1		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	-2.0	-1.0	-1.8	-0.9	-0.7	-3.6	-2.6	-3.4	-2.4	-2.3
3H	-1.9	-1.0	-1.7	-0.8	-0.6	-3.6	-2.7	-3.4	-2.5	-2.3
4H	-2.0	-1.1	-1.7	-0.9	-0.7	-3.7	-2.9	-3.4	-2.6	-2.4
6H	-2.1	-1.3	-1.8	-1.0	-0.8	-3.8	-3.0	-3.5	-2.8	-2.5
8H	-2.1	-1.3	-1.8	-1.1	-0.8	-3.8	-3.1	-3.5	-2.8	-2.6
12H	-2.2	-1.4	-1.8	-1.2	-0.9	-3.9	-3.2	-3.6	-2.9	-2.6
4H 2H	-2.1	-1.2	-1.8	-1.0	-0.8	-3.5	-2.7	-3.3	-2.5	-2.2
3H	-2.0	-1.2	-1.6	-1.0	-0.7	-3.5	-2.8	-3.2	-2.5	-2.3
4H	-2.0	-1.4	-1.7	-1.1	-0.7	-3.6	-3.0	-3.3	-2.7	-2.4
6H	-2.1	-1.5	-1.7	-1.2	-0.8	-3.7	-3.1	-3.4	-2.8	-2.5
8H	-2.2	-1.6	-1.8	-1.3	-0.9	-3.8	-3.2	-3.4	-2.9	-2.5
12H	-2.2	-1.7	-1.8	-1.3	-1.0	-3.8	-3.3	-3.4	-3.0	-2.6
8H 4H	-2.2	-1.6	-1.8	-1.3	-0.9	-3.8	-3.2	-3.4	-2.9	-2.5
6H	-2.3	-1.8	-1.8	-1.4	-1.0	-3.9	-3.4	-3.4	-3.0	-2.6
8H	-2.3	-1.9	-1.9	-1.5	-1.1	-3.9	-3.5	-3.5	-3.1	-2.7
12H	-2.4	-2.0	-1.9	-1.6	-1.1	-4.0	-3.6	-3.5	-3.2	-2.7
12H 4H	-2.2	-1.7	-1.8	-1.3	-0.9	-3.8	-3.3	-3.4	-2.9	-2.6
6H	-2.3	-1.9	-1.9	-1.5	-1.1	-3.9	-3.5	-3.5	-3.1	-2.7
8H	-2.4	-2.0	-1.9	-1.6	-1.1	-4.0	-3.6	-3.5	-3.2	-2.7
Variations with the observer position at spacings:										
S = 1.0H	+ 1.6 / - 2.4					+ 1.7 / - 3.5				
1.5H	+ 2.3 / - 1.9					+ 1.9 / - 2.0				
2.0H	+ 3.3 / - 3.6					+ 2.9 / - 3.9				

CIE Pub.117 Corrected 22.85 lm Total Lamp Luminous Flux. (8log(F/F0) = -13.1)

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2025-05-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.08V I:0.4335A P:3.348W PF:0.6392 Freq:59.98Hz Lamp Flux:22.8468x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:MR16 RGBWW	WEIGHT:
SPEC.:3.5W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	82	74	70	81	74	70	80	74	70	66
0.80	90	83	79	89	83	79	88	82	78	74
1.00	96	89	85	95	89	85	93	89	84	80
1.25	100	94	90	99	94	90	97	92	89	84
1.50	103	98	94	102	97	94	100	96	93	88
2.00	107	102	99	105	101	98	103	99	96	91
2.50	109	104	101	107	103	100	104	101	98	92
3.00	111	107	104	109	105	103	105	103	100	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	109	112	110	108	108	106	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-05-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.08V I:0.4335A P:3.348W PF:0.6392 Freq:59.98Hz Lamp Flux:22.8468x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:MR16 RGBWW	WEIGHT:
SPEC.:3.5W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

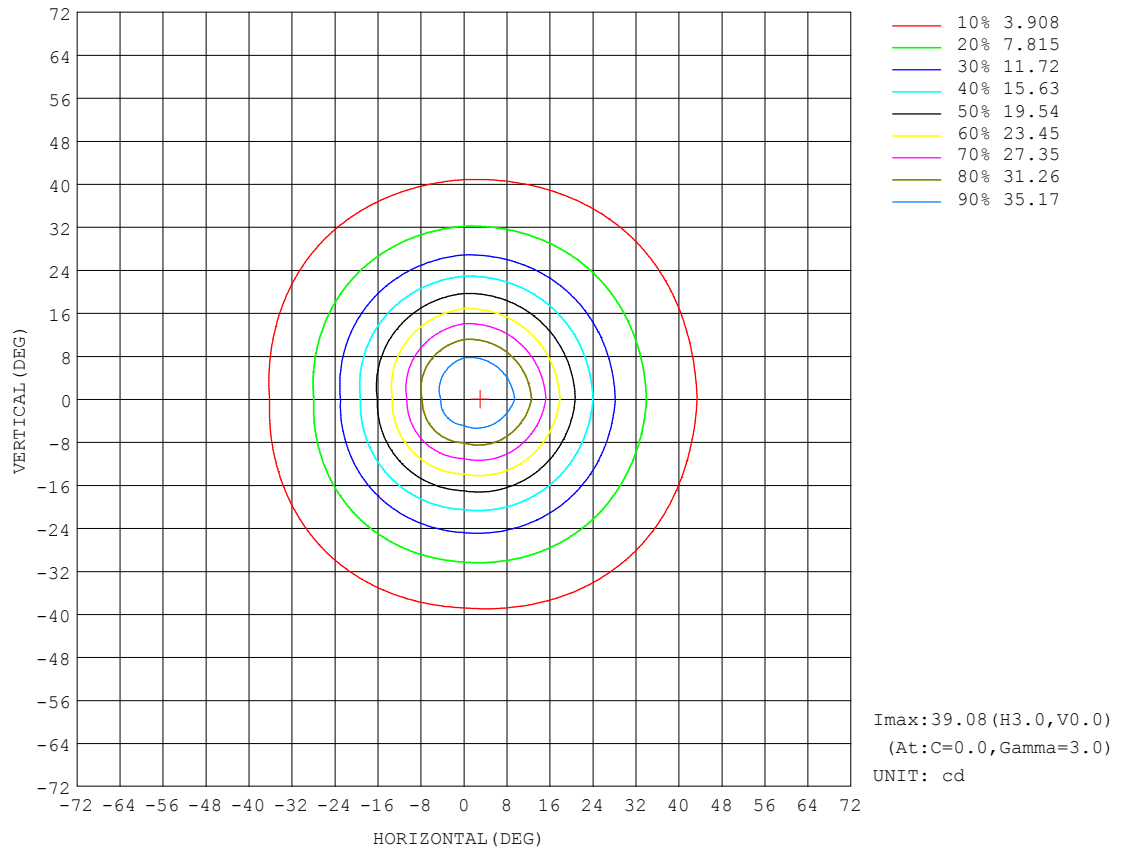


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-05-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.08V I:0.4335A P:3.348W PF:0.6392 Freq:59.98Hz Lamp Flux:22.8468x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:MR16 RGBWW	WEIGHT:
SPEC.:3.5W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

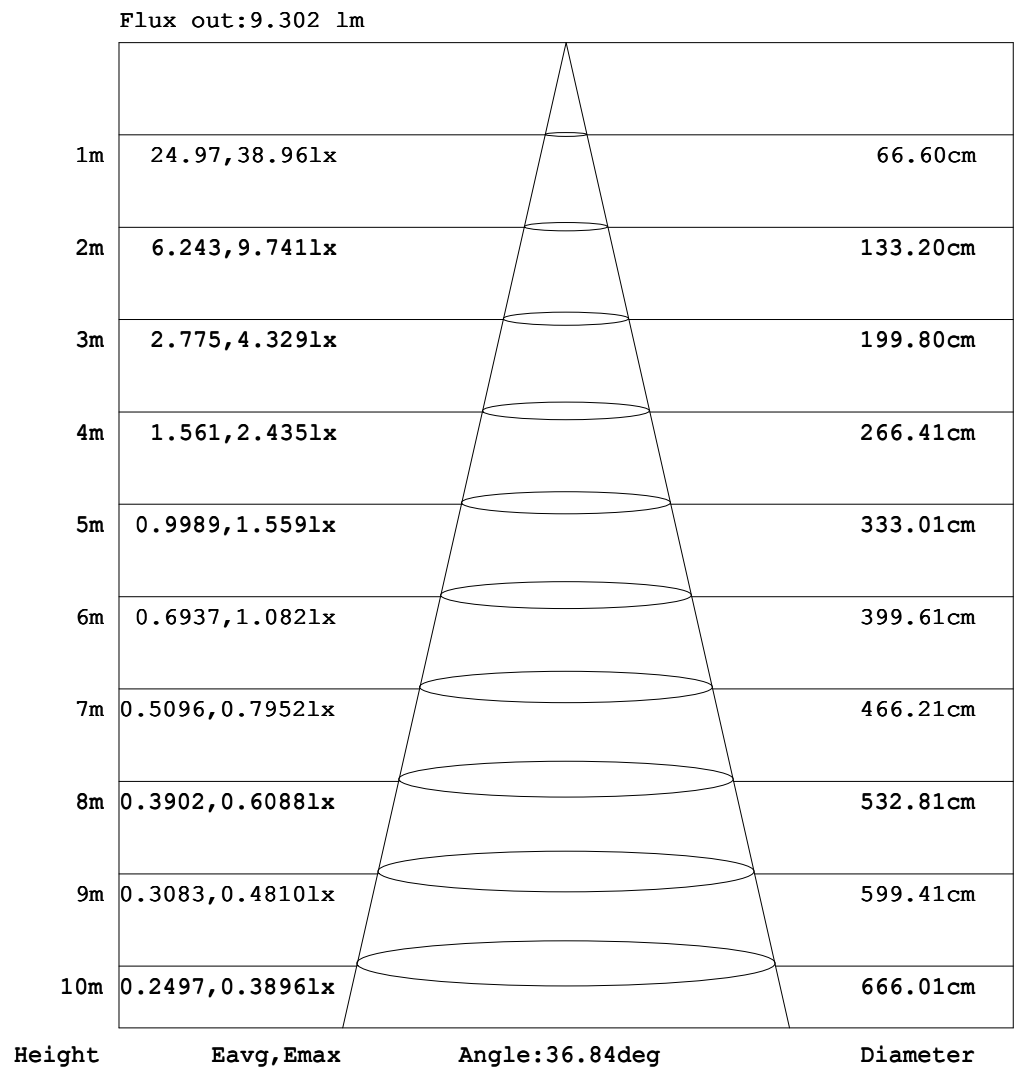


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2025-05-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:12.08V I:0.4335A P:3.348W PF:0.6392 Freq:59.98Hz Lamp Flux:22.8468x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:MR16 RGBWW	WEIGHT:
SPEC.:3.5W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

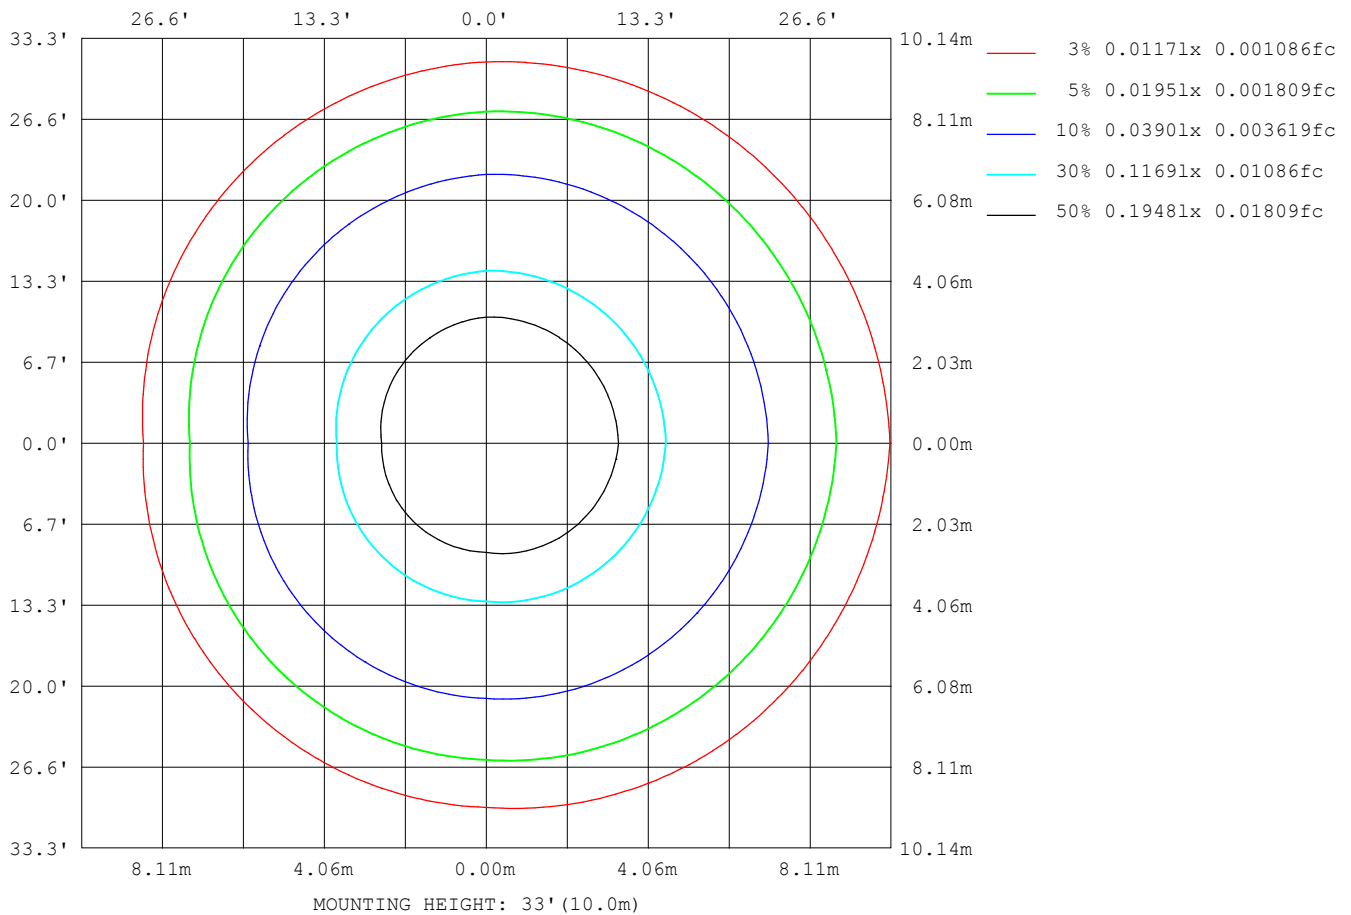

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-05-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:12.08V I:0.4335A P:3.348W PF:0.6392 Freq:59.98Hz Lamp Flux:22.8468x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:MR16 RGBWW	WEIGHT:
SPEC.:3.5W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10
L_0~180 (75) av	2
L_0~180 (85) av	0
L_90~270 (65) av	8
L_90~270 (75) av	1
L_90~270 (85) av	0
L_45 (65) av	9
L_45 (75) av	1
L_45 (85) av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-05-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

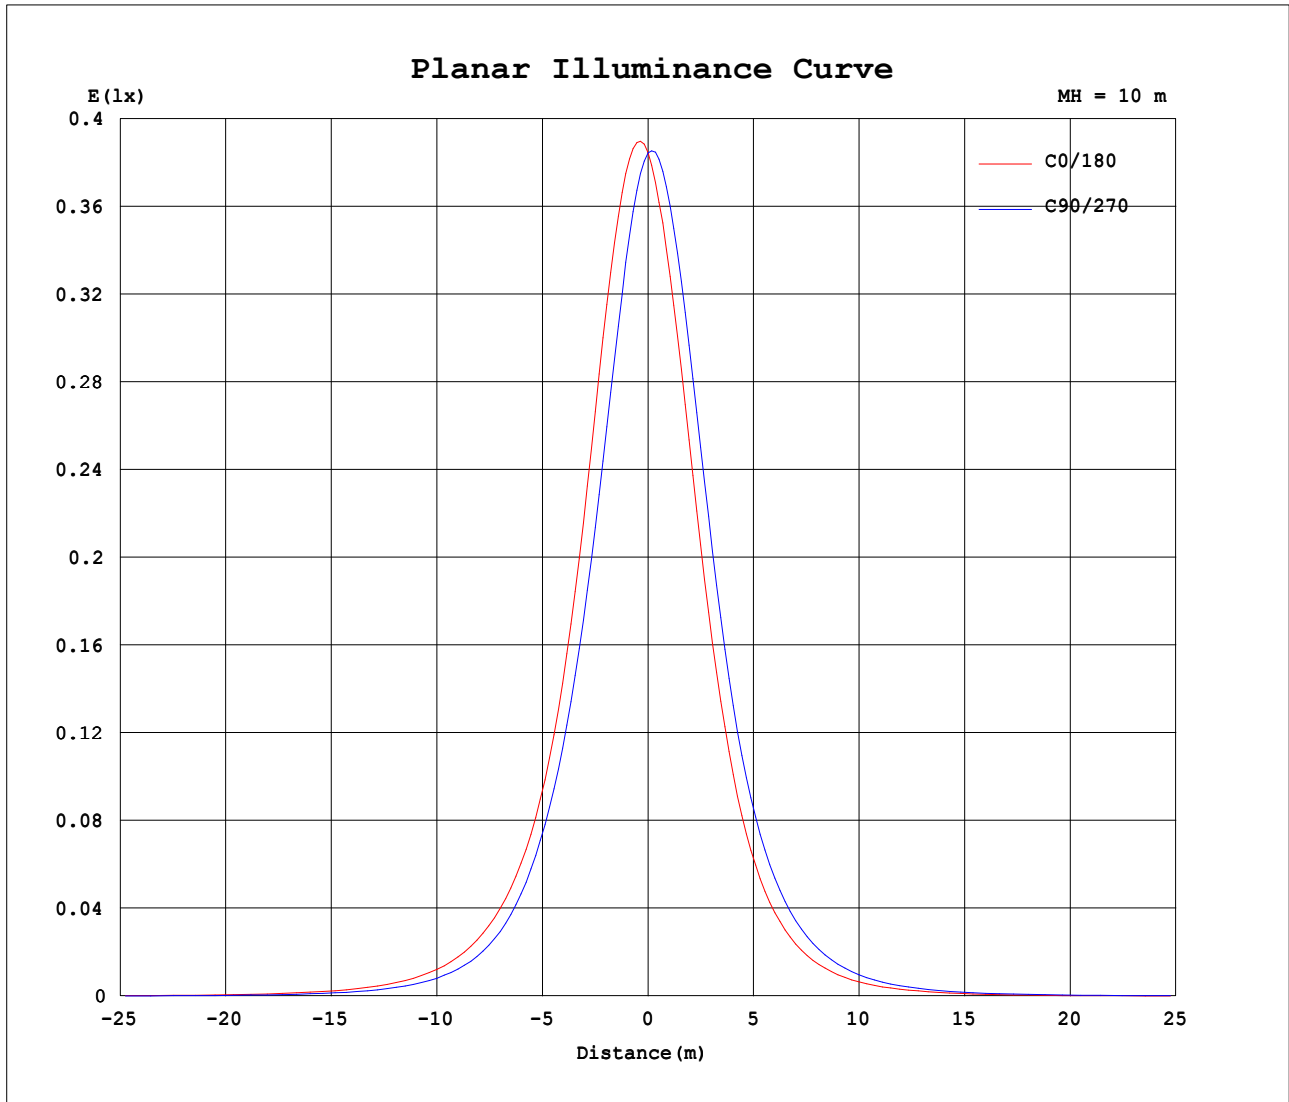

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: ADMIN
Test Date: 2025-05-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity: 65.0%
Test Distance: 13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.08V I:0.4335A P:3.348W PF:0.6392 Freq:59.98Hz Lamp Flux:22.8468x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:MR16 RGBWW	WEIGHT:
SPEC.:3.5W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270															
0	38.5	38.4	38.5	38.4															
5	38.6	35.1	34.4	37.3															
10	34.5	28.8	28.2	32.6															
15	27.7	22.1	21.1	26.0															
20	20.4	16.2	14.8	19.1															
25	14.6	11.6	9.93	13.4															
30	10.3	7.99	6.57	9.22															
35	7.28	5.36	4.31	6.26															
40	5.06	3.54	2.84	4.17															
45	3.44	2.30	1.82	2.75															
50	2.33	1.51	1.18	1.80															
55	1.53	0.91	0.76	1.16															
60	0.98	0.56	0.44	0.74															
65	0.57	0.28	0.26	0.44															
70	0.30	0.13	0.13	0.23															
75	0.10	0.00	0.00	0.07															
80	0.00	0.00	0.00	0.00															
85	0.00	0.00	0.00	0.00															
90	0.00	0.00	0.00	0.00															
95	0.00	0.00	0.00	0.00															
100	0.00	0.00	0.00	0.00															
105	0.00	0.00	0.00	0.00															
110	0.00	0.00	0.00	0.00															
115	0.00	0.00	0.00	0.00															
120	0.00	0.00	0.00	0.00															
125	0.00	0.00	0.00	0.00															
130	0.00	0.00	0.00	0.00															
135	0.00	0.00	0.00	0.00															
140	0.00	0.00	0.00	0.00															
145	0.00	0.00	0.00	0.00															
150	0.00	0.00	0.00	0.00															
155	0.00	0.00	0.00	0.00															
160	0.00	0.00	0.00	0.00															
165	0.00	0.00	0.00	0.00															
170	0.00	0.00	0.00	0.00															
175	0.00	0.00	0.00	0.00															
180	0.00	0.00	0.00	0.00															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2025-05-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks: