


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.11V I:0.3713A P:2.808W PF:0.6244 Freq:59.99Hz Lamp Flux:50.693x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:MR16 RGBWW	WEIGHT:
SPEC.:3.5W RED 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 18.06 lm/W			
LAMP MODEL: LED-3.5W-MR16-40-8-RGBTW		Imax(cd)	87.66	S/MH(C0/180)	0.65
NOMINAL POWER(W)	3.5	LOR(%)	100.0	S/MH(C90/270)	0.64
RATED VOLTAGE(V)	12	TOTAL FLUX(lm)	50.693	η UP,DN(C0-180)	0.2,42.3
NOMINAL FLUX(lm)	50.693	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,57.4
LAMPS INSIDE	1	η up(%)	0.3	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	12	η down(%)	99.7	CIBSE SHR MAX	0.65

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

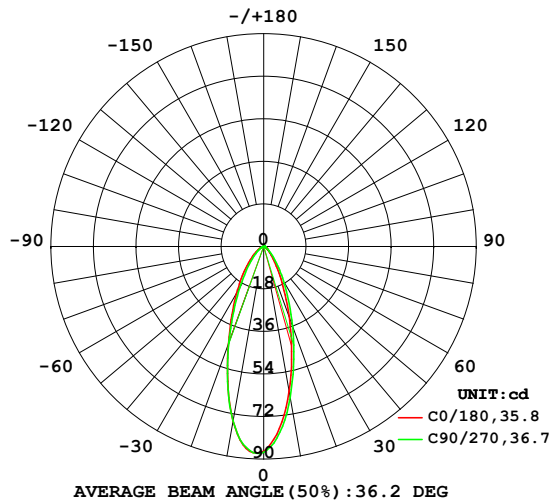

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

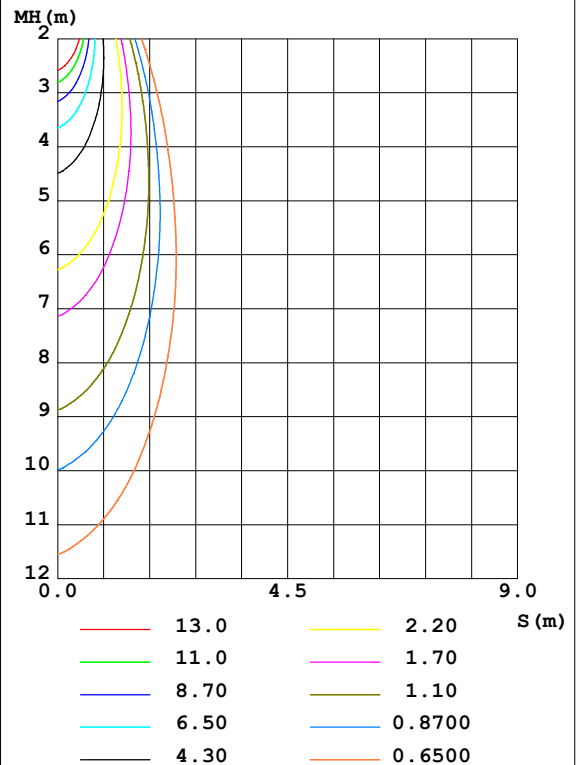

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-05-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	62.26	64.70	74.95	74.85					0- 10	7.407	7.407	14.6,14.6
20	31.68	35.76	43.91	43.17					10- 20	14.73	22.14	43.7,43.7
30	13.02	16.90	23.05	20.34					20- 30	12.39	34.52	68.1,68.1
40	5.324	7.306	11.69	8.990					30- 40	7.847	42.37	83.6,83.6
50	2.402	3.136	5.496	3.956					40- 50	4.393	46.76	92.2,92.2
60	1.149	1.358	2.428	1.751					50- 60	2.293	49.05	96.8,96.8
70	0.5262	0.4496	0.8886	0.7466					60- 70	1.089	50.14	98.9,98.9
80	0.1153	0	0.1238	0.1820					70- 80	0.3732	50.52	99.7,99.7
90	0	0	0	0					80- 90	0.0172	50.53	99.7,99.7
100	0	0	0	0					90-100	0	50.53	99.7,99.7
110	0	0	0	0					100-110	0	50.53	99.7,99.7
120	0	0	0	0					110-120	0	50.53	99.7,99.7
130	0	0	0	0					120-130	0	50.53	99.7,99.7
140	0	0	0	0					130-140	0	50.53	99.7,99.7
150	0.1395	0.1340	0	0					140-150	0.0161	50.55	99.7,99.7
160	0.2678	0.2583	0.1244	0.1245					150-160	0.0524	50.60	99.8,99.8
170	0.2928	0.3185	0.2297	0.2580					160-170	0.0643	50.67	99.9,99.9
180	0.2965	0.3061	0.2965	0.3061					170-180	0.0274	50.69	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-05-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.11V I:0.3713A P:2.808W PF:0.6244 Freq:59.99Hz Lamp Flux:50.693x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:MR16 RGBWW	WEIGHT:
SPEC.:3.5W RED 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

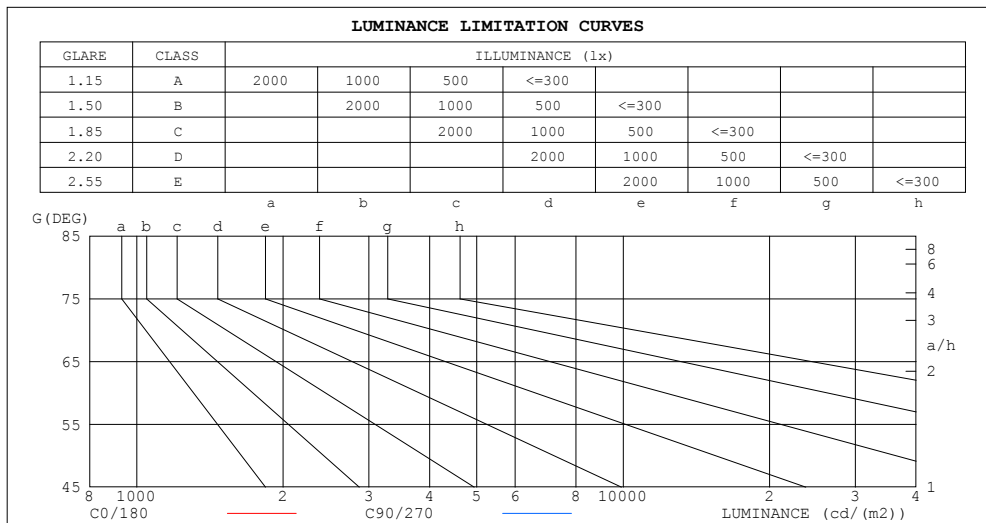

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	0
80	7	0
75	11	8
70	15	13
65	19	19
60	23	27
55	29	35
50	37	49
45	50	67


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-05-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.11V I:0.3713A P:2.808W PF:0.6244 Freq:59.99Hz Lamp Flux:50.693x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:MR16 RGBWW	WEIGHT:
SPEC.:3.5W RED 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.08	1.05	1.08	1.06	1.04	1.04	1.02	1.00	1.00	.99	.97	.97	.95	.94	.93
2.0	1.02	.98	.94	1.00	.96	.93	.97	.94	.91	.94	.91	.89	.91	.89	.87	.85
3.0	.95	.90	.85	.93	.89	.85	.91	.87	.83	.88	.85	.82	.86	.83	.81	.79
4.0	.88	.83	.78	.87	.82	.78	.85	.80	.77	.83	.79	.76	.81	.78	.75	.73
5.0	.83	.77	.72	.82	.76	.72	.80	.75	.71	.78	.74	.71	.77	.73	.70	.68
6.0	.78	.72	.67	.77	.71	.67	.75	.70	.67	.74	.69	.66	.73	.69	.66	.64
7.0	.73	.67	.63	.73	.67	.63	.71	.66	.62	.70	.65	.62	.69	.65	.62	.60
8.0	.69	.63	.59	.69	.63	.59	.68	.62	.59	.66	.62	.58	.66	.61	.58	.57
9.0	.66	.60	.56	.65	.60	.56	.64	.59	.55	.63	.59	.55	.62	.58	.55	.54
10.0	.62	.57	.53	.62	.56	.53	.61	.56	.53	.60	.56	.52	.60	.55	.52	.51

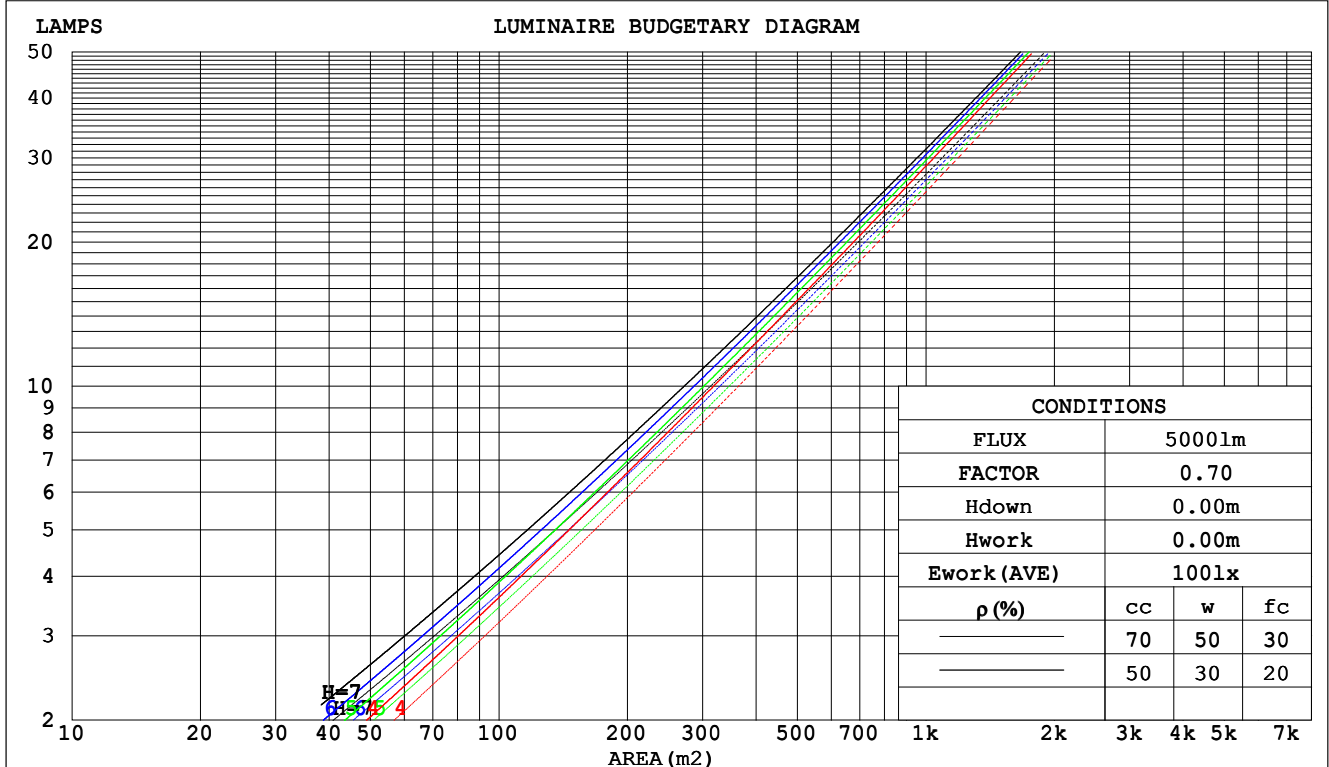

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-05-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:12.11V I:0.3713A P:2.808W PF:0.6244 Freq:59.99Hz Lamp Flux:50.693x1 lm					
NAME: LED LANDSCAPE LIGHT			TYPE:MR16 RGBWW		WEIGHT:
SPEC.:3.5W RED 40°LENS			DIM.:		SERIAL No.:1
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.187	.106	.034	.180	.103	.033	.167	.096	.031	.156	.090	.029	.145	.084	.027	
2.0	.180	.098	.030	.174	.096	.030	.163	.091	.028	.153	.086	.027	.144	.081	.026	
3.0	.170	.091	.027	.166	.089	.027	.156	.085	.026	.148	.081	.025	.140	.077	.024	
4.0	.161	.084	.025	.157	.082	.024	.149	.079	.024	.142	.076	.023	.135	.073	.022	
5.0	.153	.078	.023	.149	.077	.022	.142	.074	.022	.135	.071	.021	.129	.069	.021	
6.0	.145	.073	.021	.142	.071	.021	.135	.069	.020	.130	.067	.020	.124	.065	.019	
7.0	.138	.068	.019	.135	.067	.019	.129	.065	.019	.124	.064	.018	.119	.062	.018	
8.0	.131	.064	.018	.128	.063	.018	.123	.062	.018	.119	.060	.017	.114	.059	.017	
9.0	.125	.060	.017	.122	.060	.017	.118	.058	.017	.114	.057	.016	.110	.056	.016	
10.0	.119	.057	.016	.117	.056	.016	.113	.055	.016	.109	.054	.015	.106	.053	.015	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.174	.160	.146	.149	.137	.126	.102	.094	.087	.059	.055	.051	.019	.018	.016	
2.0	.160	.135	.114	.137	.116	.099	.094	.080	.069	.054	.047	.040	.017	.015	.013	
3.0	.148	.116	.091	.127	.100	.079	.087	.070	.055	.050	.041	.033	.016	.013	.011	
4.0	.138	.101	.074	.118	.088	.064	.081	.061	.045	.047	.036	.027	.015	.012	.009	
5.0	.129	.090	.061	.111	.078	.053	.076	.054	.038	.044	.032	.022	.014	.010	.007	
6.0	.121	.081	.052	.104	.070	.045	.072	.049	.032	.042	.029	.019	.013	.009	.006	
7.0	.115	.073	.044	.099	.063	.038	.068	.044	.027	.040	.026	.016	.013	.009	.005	
8.0	.109	.067	.038	.094	.058	.033	.065	.041	.024	.038	.024	.014	.012	.008	.005	
9.0	.103	.062	.034	.089	.054	.029	.062	.038	.021	.036	.022	.012	.012	.007	.004	
10.0	.099	.057	.030	.085	.050	.026	.059	.035	.018	.034	.021	.011	.011	.007	.004	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2025-05-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:12.11V I:0.3713A P:2.808W PF:0.6244 Freq:59.99Hz Lamp Flux:50.693x1 lm										
NAME: LED LANDSCAPE LIGHT					TYPE:MR16 RGBWW			WEIGHT:		
SPEC.:3.5W RED 40°LENS					DIM.:			SERIAL No.:1		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	-3.2	-2.2	-2.9	-2.0	-1.8	-2.2	-1.2	-2.0	-1.0	-0.9
3H	-2.9	-2.0	-2.6	-1.8	-1.6	-2.0	-1.1	-1.8	-0.9	-0.7
4H	-2.8	-2.0	-2.5	-1.7	-1.5	-2.1	-1.2	-1.8	-1.0	-0.8
6H	-2.8	-2.0	-2.5	-1.8	-1.5	-2.1	-1.3	-1.8	-1.1	-0.8
8H	-2.9	-2.1	-2.6	-1.8	-1.6	-2.2	-1.4	-1.9	-1.1	-0.9
12H	-2.9	-2.2	-2.6	-1.9	-1.6	-2.2	-1.5	-1.9	-1.2	-0.9
4H 2H	-3.1	-2.2	-2.8	-2.0	-1.8	-2.2	-1.3	-1.9	-1.1	-0.9
3H	-2.7	-2.0	-2.4	-1.7	-1.4	-2.0	-1.2	-1.6	-1.0	-0.7
4H	-2.6	-1.9	-2.2	-1.6	-1.3	-2.0	-1.3	-1.6	-1.0	-0.7
6H	-2.6	-2.0	-2.2	-1.7	-1.3	-2.0	-1.4	-1.6	-1.1	-0.7
8H	-2.6	-2.1	-2.2	-1.7	-1.4	-2.1	-1.5	-1.7	-1.2	-0.8
12H	-2.7	-2.2	-2.3	-1.8	-1.4	-2.1	-1.6	-1.7	-1.2	-0.9
8H 4H	-2.7	-2.1	-2.3	-1.8	-1.4	-2.0	-1.5	-1.6	-1.1	-0.8
6H	-2.7	-2.2	-2.2	-1.8	-1.4	-2.1	-1.7	-1.7	-1.3	-0.8
8H	-2.7	-2.3	-2.2	-1.9	-1.4	-2.2	-1.8	-1.7	-1.3	-0.9
12H	-2.7	-2.4	-2.3	-2.0	-1.5	-2.2	-1.9	-1.7	-1.4	-0.9
12H 4H	-2.7	-2.2	-2.3	-1.8	-1.4	-2.1	-1.6	-1.7	-1.2	-0.8
6H	-2.7	-2.3	-2.2	-1.9	-1.4	-2.2	-1.8	-1.7	-1.3	-0.9
8H	-2.7	-2.4	-2.3	-2.0	-1.5	-2.2	-1.9	-1.7	-1.4	-0.9
Variations with the observer position at spacings:										
S = 1.0H	+ 1.3 / - 1.9					+ 1.6 / - 2.2				
1.5H	+ 1.6 / - 1.3					+ 2.4 / - 1.8				
2.0H	+ 2.1 / - 1.8					+ 3.0 / - 2.6				

CIE Pub.117 Corrected 50.69 lm Total Lamp Luminous Flux. (8log(F/F0) = -10.4)

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2025-05-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:12.11V I:0.3713A P:2.808W PF:0.6244 Freq:59.99Hz Lamp Flux:50.693x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:MR16 RGBWW	WEIGHT:
SPEC.:3.5W RED 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	81	74	69	81	74	69	80	73	69	65
0.80	89	82	78	89	82	78	87	81	77	73
1.00	95	88	84	94	88	84	92	88	83	79
1.25	100	94	89	98	93	89	96	92	88	83
1.50	103	97	93	101	96	93	99	95	92	87
2.00	106	101	98	105	100	97	102	98	95	90
2.50	108	104	100	107	103	100	103	100	98	91
3.00	110	106	103	108	105	102	105	102	100	93
4.00	113	109	107	110	108	105	107	104	103	95
5.00	114	111	109	112	109	107	108	106	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-05-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.11V I:0.3713A P:2.808W PF:0.6244 Freq:59.99Hz Lamp Flux:50.693x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:MR16 RGBWW	WEIGHT:
SPEC.:3.5W RED 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

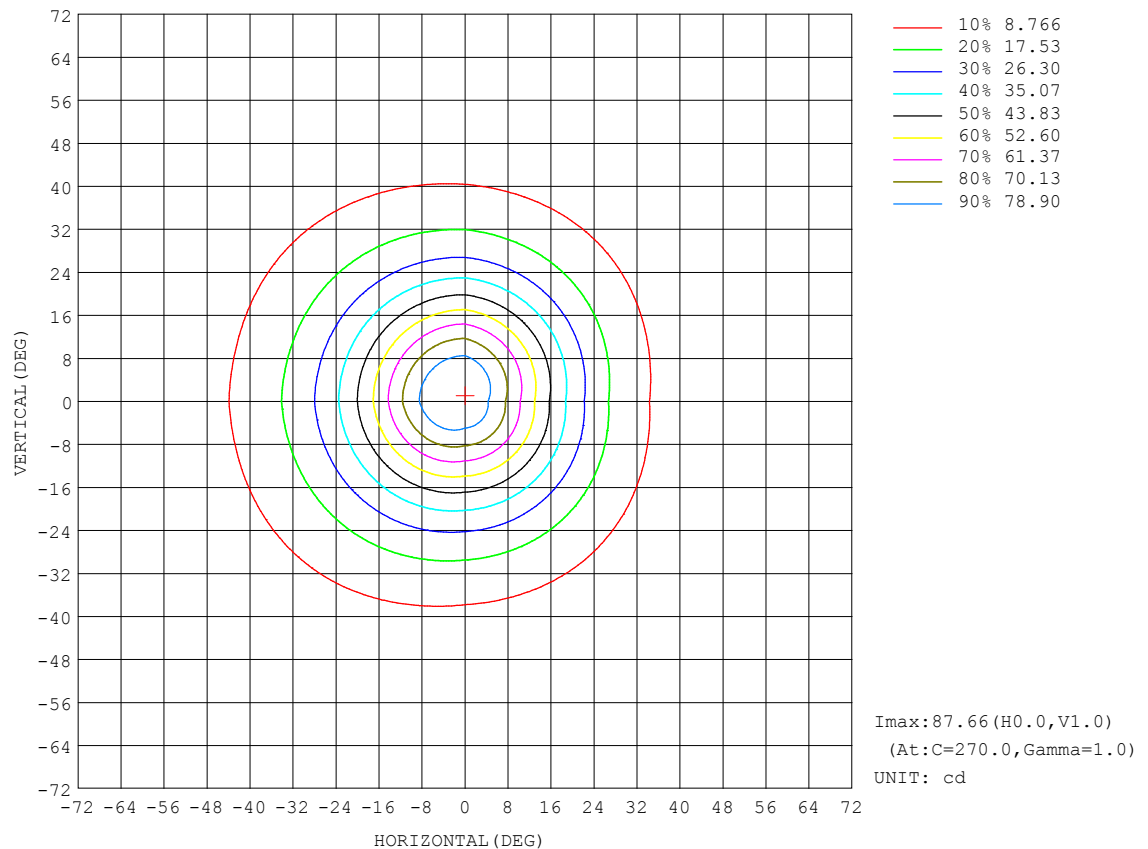


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-05-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.11V I:0.3713A P:2.808W PF:0.6244 Freq:59.99Hz Lamp Flux:50.693x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:MR16 RGBWW	WEIGHT:
SPEC.:3.5W RED 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

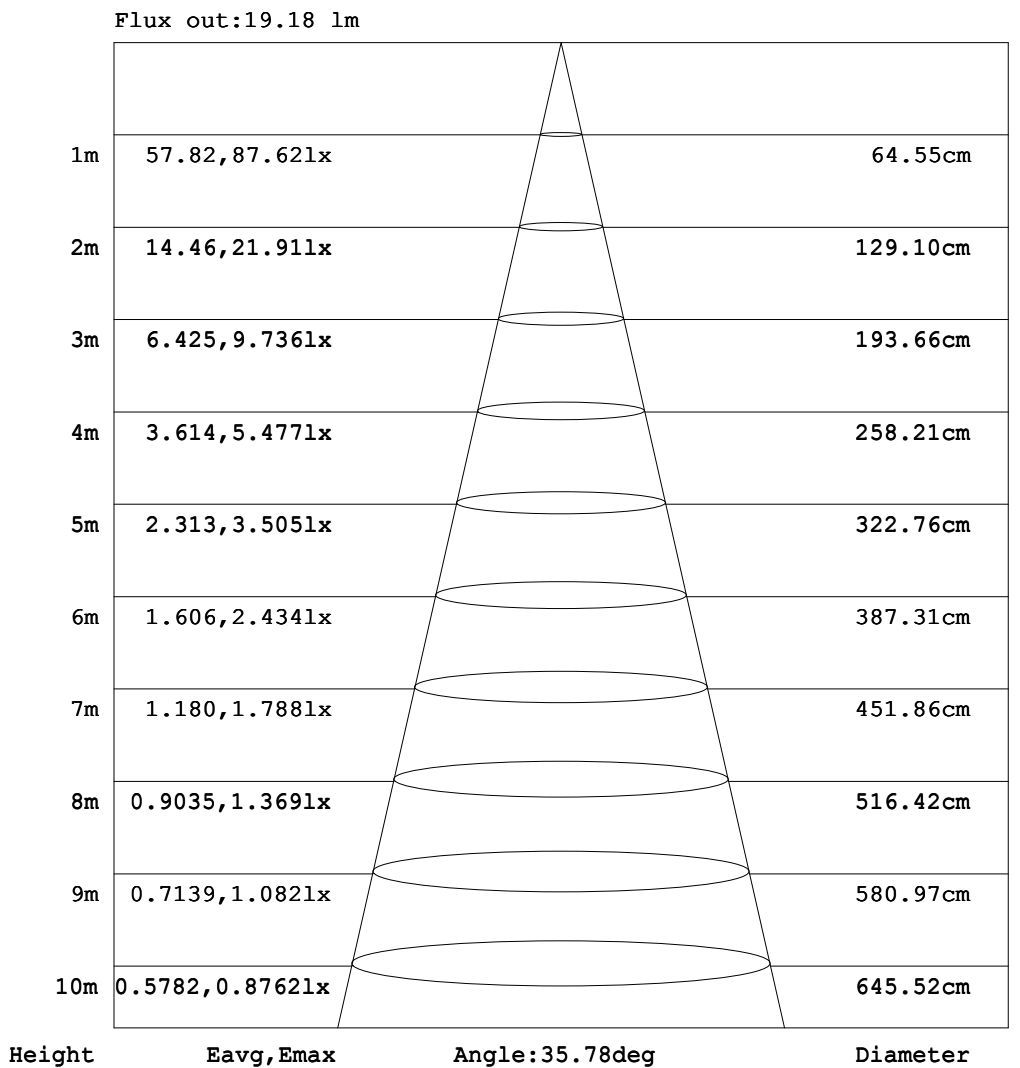


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-05-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:12.11V I:0.3713A P:2.808W PF:0.6244 Freq:59.99Hz Lamp Flux:50.693x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:MR16 RGBWW	WEIGHT:
SPEC.:3.5W RED 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

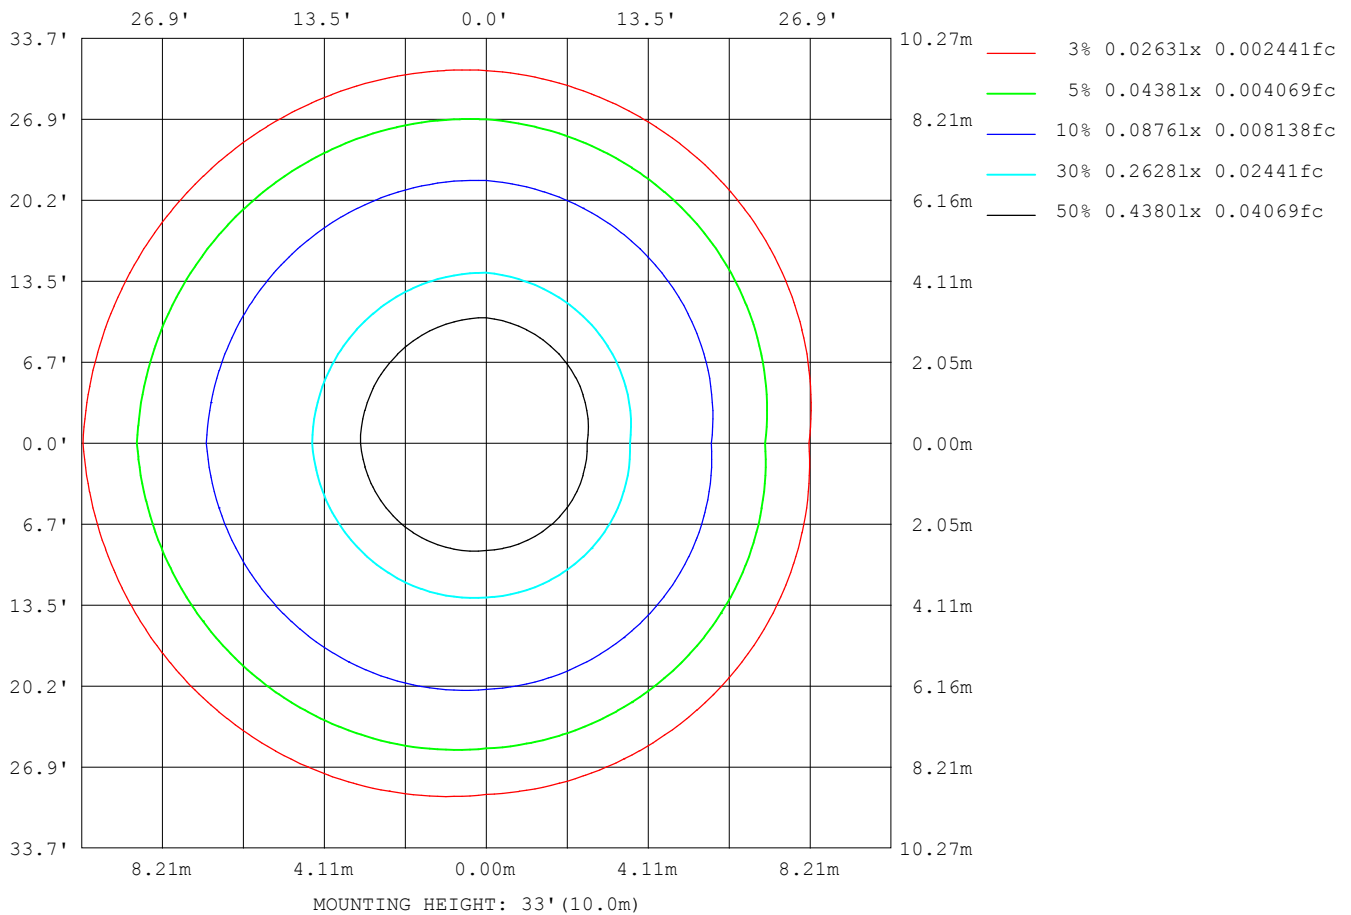

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-05-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:12.11V I:0.3713A P:2.808W PF:0.6244 Freq:59.99Hz Lamp Flux:50.693x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:MR16 RGBWW	WEIGHT:
SPEC.:3.5W RED 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	27
L_0~180 (75) av	14
L_0~180 (85) av	0
L_90~270 (65) av	23
L_90~270 (75) av	12
L_90~270 (85) av	0
L_45 (65) av	25
L_45 (75) av	13
L_45 (85) av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-05-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

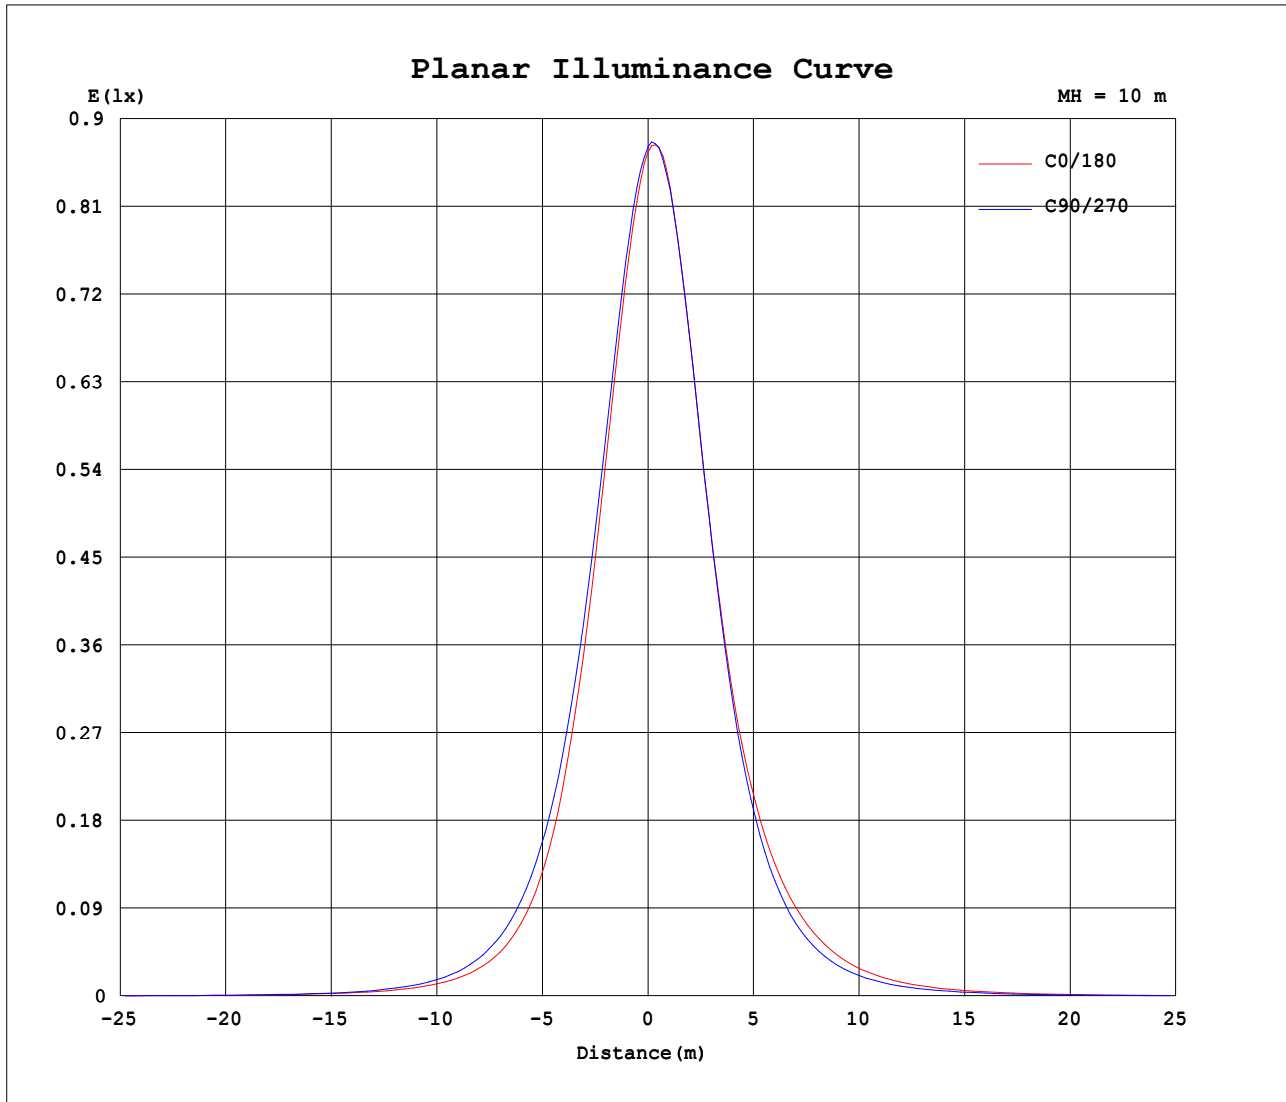

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: ADMIN
Test Date: 2025-05-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity: 65.0%
Test Distance: 13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.11V I:0.3713A P:2.808W PF:0.6244 Freq:59.99Hz Lamp Flux:50.693x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:MR16 RGBWW	WEIGHT:
SPEC.:3.5W RED 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270															
0	86.6	87.1	86.6	87.1															
5	77.2	79.0	85.8	85.3															
10	62.3	64.7	74.9	74.8															
15	46.0	49.4	59.0	59.2															
20	31.7	35.8	43.9	43.2															
25	20.5	24.9	31.8	30.0															
30	13.0	16.9	23.1	20.3															
35	8.22	11.2	16.6	13.6															
40	5.32	7.31	11.7	8.99															
45	3.55	4.76	8.06	5.98															
50	2.40	3.14	5.50	3.96															
55	1.66	2.02	3.69	2.65															
60	1.15	1.36	2.43	1.75															
65	0.80	0.82	1.51	1.15															
70	0.53	0.45	0.89	0.75															
75	0.30	0.21	0.45	0.41															
80	0.12	0.00	0.12	0.18															
85	0.00	0.00	0.00	0.00															
90	0.00	0.00	0.00	0.00															
95	0.00	0.00	0.00	0.00															
100	0.00	0.00	0.00	0.00															
105	0.00	0.00	0.00	0.00															
110	0.00	0.00	0.00	0.00															
115	0.00	0.00	0.00	0.00															
120	0.00	0.00	0.00	0.00															
125	0.00	0.00	0.00	0.00															
130	0.00	0.00	0.00	0.00															
135	0.00	0.00	0.00	0.00															
140	0.00	0.00	0.00	0.00															
145	0.03	0.06	0.00	0.00															
150	0.14	0.13	0.00	0.00															
155	0.16	0.20	0.05	0.00															
160	0.27	0.26	0.12	0.12															
165	0.29	0.29	0.19	0.16															
170	0.29	0.32	0.23	0.26															
175	0.30	0.31	0.28	0.29															
180	0.30	0.31	0.30	0.31															

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-05-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: