

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Aluminum 12W Essential Uplight

Directional, Integrated Non-Modular, Aluminum, Essential Series Uplight, 12W, 2700K (585 Lm) & 3000K (614 Lm), 10-15V




FINISHES



SPECIFICATIONS

Electrical / Power: 12W / 14.9 VA / 10-15V	Weight: 1.22 lb
Construction / Body: Aluminum	Dimming:
Lens / Gaskets:	Ambient Operating Temperature: -4°F- 122°F (-20°C-50°C)
Wiring: 6' Lead Wire	Control:
LED Life: 50,000 Hrs	Warranty: Housing Warranty: 10 Years; Finish Warranty: 5 Years; LED Warranty: 10 Years
Installation Requirements: Remote low voltage power supply/transformer required	LED Engine: Lumens: 585 / CRI: 80+

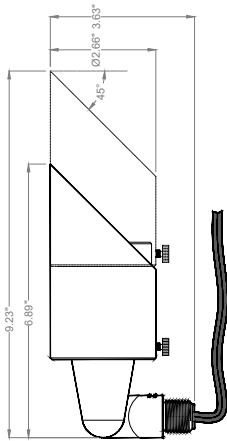

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Aluminum 12W Essential Uplight

Product Line Drawings

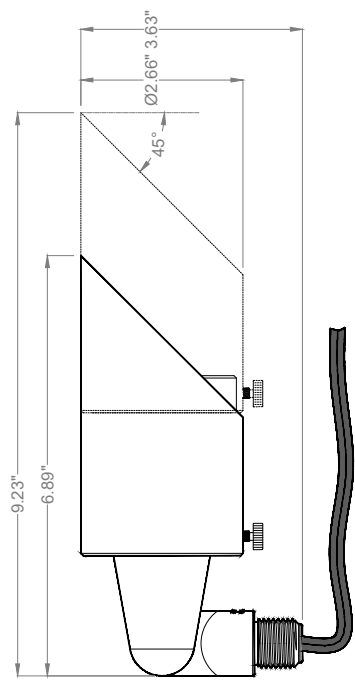

Standard Included Accessories



1/2" Threaded 8" Stake
with ADJ Collar

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Ordering Guide

Instructions: Steps 6–10 continue on the following pages. Please complete the full ordering guide.

LumienLighting.com
REV 09042026

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 8-10 continue on the following pages. Please complete the full ordering guide.

07 Mounts

	ASD-JBX-002-(BK/BZ) 1/2" Threaded J-Box		ASD-MNT-001-(BK/BZ) 1/2" Threaded Base
	ASD-MNT-025-(BK/BZ) 1/2" Threaded Single-Point Tree Mount		PSD-STK-8-018 1/2" Threaded 8" Stake with ADJ Collar
	SSSD-STK-12-002 1/2" Threaded 12" Trident Stake with 5" Plate		PSD-STK-15-005 1/2" Threaded 15" Commercial Stake
	SSD-MNT-021-(BK/BZ) 1/2" Threaded Gutter Mount Bracket		SSSD-MNT-005XL-BK 1/2" Threaded Tree Mount, 2.5" X 6"
	SSSD-MNT-005-BK 1/2" Threaded Tree Mount, 1.5" X 4"		SSSD-STK-6-007 1/2" Threaded 6" Trident Stake with 3" Plate
	SSSD-STK-6-003 1/2" Threaded 6" Mini Stake		SSSD-STK-6-002 1/2" Threaded 6" Trident Stake with 5" Plate
	PSD-STK-12-001 1/2" Threaded 12" Stake		

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 9–10 continue on the following pages. Please complete the full ordering guide.

08 Secondary Mounts

	ASD-MNT-004-(BK/BZ) 1/2" Threaded T-Mount		ASD-MNT-003-(BK/BZ) 1/2" Threaded L-Mount
	ASD-STM-4-020-(BK/BZ) 1/2" Threaded 4" Riser		ASD-STM-ADJ-008-(BK/BZ) 1/2" Threaded ADJ 16-25" Riser
	ASD-STM-24-007-(BK/BZ) 1/2" Threaded 24" Riser		ASD-STM-16-006-(BK/BZ) 1/2" Threaded 16" Riser
	ASD-STM-8-005-(BK/BZ) 1/2" Threaded 8" Riser		

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

Input Power	12W
Color Temperature (CCT)	30K
Color Rendering Index (Ra)	80+
Beam Angle	70
Max. Candlepower	633.1 cd
Delivered Lumens	614 lm
Efficacy	60.1lm/W

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I1-D3A1	70	27K	80+	12W	No		14.9		585
I2-D3A1	70	30K	80+	12W	No		15.0		614

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.